MILITARY SPECIFICATION

# RELAY, GENERATOR EQUALIZER BUS, TYPE A-1

This specification has been approved by the Departments of the Army, the Navy, and the Air Force.

## 1. SCOPE

1.1 This specification covers one type of generator equalizer bus relay, designated type A-1.

## 2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications, drawings, and publications, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

| | |
|---|---|
| MIL-D-5028 | Drawings and Data Lists; Preparation of (for Engines, Accessories and other Auxiliary Equipment) |
| MIL-E-5272 | Environmental Testing, Aeronautical and Associated Equipment, General Specification for |
| MIL-M-7911 | Marking, Identification of Aeronautical Equipment, Assemblies, and Parts |
| MIL-P-6064 | Packaging of Lightweight Aircraft Accessories |
| MIL-W-5088 | Wiring, Aircraft, Installation of |
| JAN-S-44 | Shock-Testing-Mechanism for Electrical-Indicating Instruments (2-1/2 and 3-1/2 Inch, Round, Flush-Mounting, Panel-Type) |

DRAWINGS

Air Force-Navy Aeronautical

| | |
|---|---|
| AN659 | Terminal - Electrical, Crimp Style, Copper |
| AN3179 | Inductor - 30 Volt Laboratory Test |

PUBLICATIONS

Air Force-Navy Aeronautical Bulletin

| | |
|---|---|
| No. 143 | Specifications and Standards; Use of |

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:05Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Components.- The relay shall consist of the necessary housing, bracket, contact points, jumpers, etc.

3.2 Materials.-

3.2.1 Protective treatment.- When materials are used in the construction of the relay that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.2.2 Selection of materials.- Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with ANA Bulletin No. 143, except as provided in the following paragraph.

3.2.2.1 Standard parts.- Standard parts (MS, AN, or JAN) shall be used wherever they are suitable for the purpose, and shall be identified on the drawing by their part numbers. Commercial utility parts such as screws, bolts, nuts, cotter pins, etc, may be used, provided they possess suitable properties and are replaceable by the standard parts (MS, AN, or JAN) without alteration, and provided the corresponding standard part numbers are referenced in the parts list and, if practicable, on the contractor's drawings. In the event there is no suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

3.3 Design and construction.-

3.3.1 Design.- The relay shall be of compact design and shall conform to figure 1.

3.3.2 The relay shall be so constructed that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service.

3.3 The relay shall be so constructed that adjustments and repairs can be easily made by the personnel of operating units and overhaul bases.

3.3.4 Attitude.- The relay shall be constructed to insure proper operation when mounted in any position.


3.3.5 Mounting.-

3.3.5.1 Bracket.- When brackets are used, they shall be an integral part of the relay housing or shall be securely attached thereto in a manner to prevent any movement between the relay and the mounting bracket in service use.

3.3.6 Terminal studs.- All terminal studs on the relay to which external connections are made shall be designed to prevent rotation of the stud when installing and removing terminals.



Source: https://assist.dla.mil -- Downloaded: 202610-17T07:05Z
Check the source to verify that this is the current version before use.

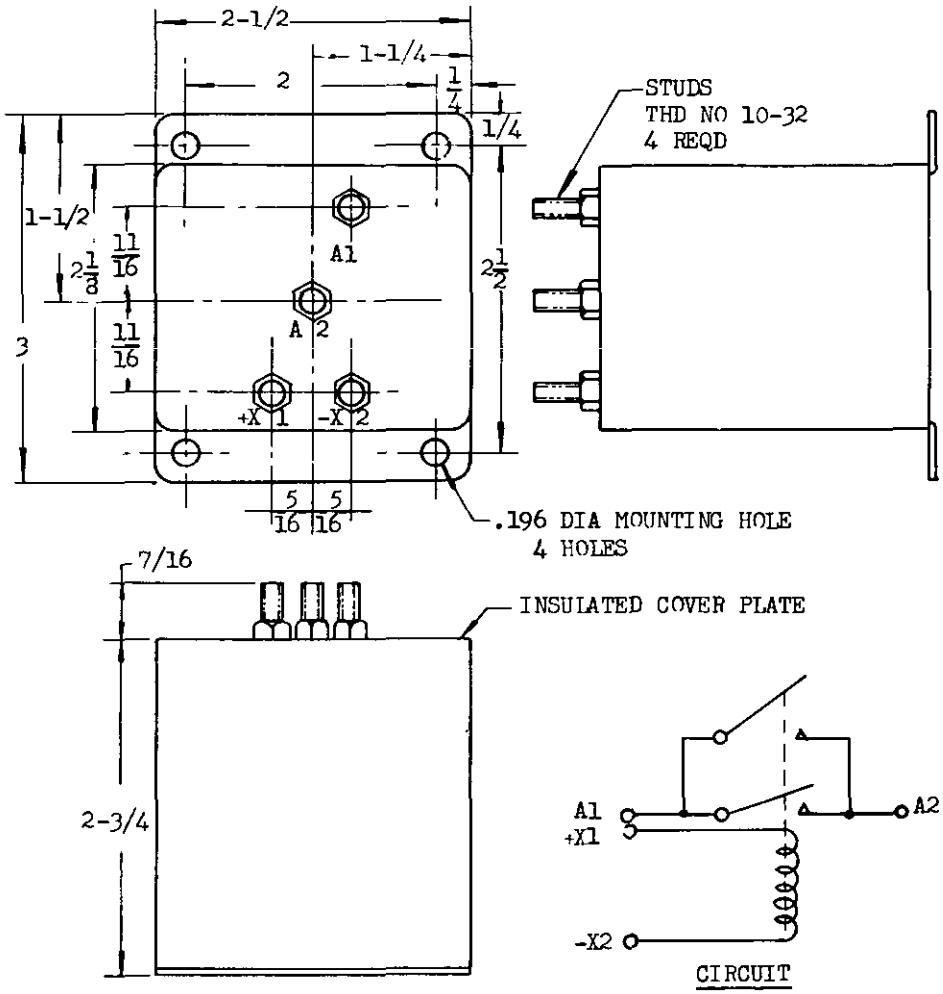


DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES:
FRACTIONS ±1/64, DECIMALS ±.010

FIGURE 1. Relay dimensions



Source: https://assist.dla.mil -- Downloaded: 202610-17T07:05Z
Check the source to verify that this is the current version before use.

3.3.7 Adjustment.- All adjustments for satisfactory operation of the relay shall be made by the manufacturer before delivery to the procuring activity. The relay shall operate satisfactorily in service for 1,000 hours without further adjustments.

3.3.8 Current-carrying members.-

3.3.8.1 Spring members.- The use of springs as current-carrying members shall be avoided whenever practicable.

3.3.8.2 Jumpers.- When used, jumpers shall be securely fastened to their respective members and must not depend upon solder alone for mechanical strength. Stiffness resulting from soldering shall be avoided. Length of jumpers shall be such that no mechanical interference or electrical shorting shall occur.

3.3.9 Contact points.- The contact points shall be securely fastened to their respective stationary and movable current-carrying members.

3.3.10 Contact alinement.- The movable contacts shall be self-alined with the stationary contacts and shall be positive in operation.

3.3.11 Creepage and clearance distance.- The minimum creepage distance between current-carrying parts and ground shall be 1/8 inch, and the minimum spacing between current-carrying parts and any other portion of the relay other than suitable insulating material and also between current-carrying parts of opposite polarity shall be 1/16 inch.

3.3.12 Contact gap.- The total contact gap shall be not less than 1/16 inch.

3.3.13 The relay shall conform to the following detail requirements:

| | | |
|---|---|---|
| (a) | Maximum operating voltage | 29V |
| (b) | Pick up voltage | 20V ±2 |
| (c) | Drop out voltage | 12V ±2 |
| (d) | Rated load at 3V | |
| | (1) Resistive - 5 amp | |
| | (2) Inductive - 3 amp | |
| (e) | Coil current | Max 0.1 amp |
| (f) | Minimum operating period | 3 Hours |
| (g) | Minimum operating cycles | 10,000 |
| (h) | Maximum weight | 12 Ounces |
| (i) | Rated duty | Continuous |
| (j) | Nominal coil voltage | 24-28V |
| (k) | Dimensions | See figure 1 |

3.4 Interchangeability.- All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of Specification MIL-D-5028.

3.5 Performance.-

3.5.1 The relay shall meet the performance requirements of Section 4 under paragraphs headed as follows:

(a) Examination of product
(b) Insulation
(c) Pick-up voltage
(d) Drop-out voltage
(e) Coil current
(f) Contact millivolt drop
(g) High temperature
(h) Low temperature



Source: https://assist.dla.mil -- Downloaded: 202610-17T07:05Z
Check the source to verify that this is the current version before use.

(i) Humidity cycling
(j) Corrosion resistance
(k) Additional cycles
(l) Explosion proof
(m) Overload
(n) Sand and dust
(o) Fungus
(p) Coil temperature rise
(q) Altitude operation
(r) Altitude cycles
(s) Inductive load
(t) Shock
(u) Vibration
(v) Acceleration

3.6 Markings.-

3.6.1 Terminal markings.- Terminals shall be durably and legibly marked as specified in figure 1.

3.7 Identification of product.-

3.7.1 Nameplate.- A nameplate, permanently and legibly marked with the following information, shall be securely fastened to each relay. The information marked in the spaces provided on the nameplate shall be in accordance with Specification MIL-M-7911.

RELAY, GENERATOR EQUALIZER BUS
TYPE A-1 (For 28V dc sys)
Specification MIL-R-6463A
Manufacturer's Part No.
Manufacturer's Serial No.
Order No.
Stock No.
Manufacturer's name or trade-mark
U.S. Property

3.7.2 Identification marking.- Parts and subassemblies of relays which require replacement during normal maintenance shall be marked with the manufacturer's part number and the manufacturer's name or trade-mark where practicable.

3.8 Workmanship.- The relay, including all parts and accessories, shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, and sharp edges; accuracy of dimensions, thoroughness of soldering, wiring, and riveting; alinement of parts and tightness of assembly screws, and bolts, etc.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Classification of tests.- The inspection and testing of relays shall be classified as follows:

(a) Qualification tests: Qualification tests are those tests accomplished on samples submitted for qualification as a satisfactory product.

(b) Inspection tests: Inspection tests are those tests accomplished on relays manufactured and submitted for acceptance under contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:05Z
Check the source to verify that this is the current version before use.

4.2 Test conditions.-

4.2.1 Temperature.- Unless otherwise specified, the relay shall be tested at an ambient temperature of 25° ±5°C, and at the discretion of the manufacturer, the Inspection tests may be conducted at any ambient temperature in excess of 20°C.

4.2.2 Pressure.- Unless otherwise specified, the relay shall be tested at atmospheric pressure.

4.2.3 Cable size.- Cables used in any of the specified load tests shall be of an applicable size as specified in Specification MIL-W-5088 determined by the rated load of the relay. Paralleling of cable is permissible, provided that the rating of the combined cable does not exceed the rated resistive load of the relay.

4.2.4 Power supply.- For all Qualification tests, aircraft generators shall be used as a source of power. For Inspection tests, any suitable power source may be used.

4.3 Qualification tests.-

4.3.1 Prior qualification.- Unless otherwise specified by the procuring activity, relays which have not previously passed a Qualification test, or which have passed the Qualification test and have been modified in any manner, shall satisfactorily pass a Qualification test prior to the acceptance of any relay.

4.3.2 Sampling instructions.- Qualification test samples shall consist of 4 relays. Samples shall be identified as required and forwarded to the activity responsible for qualification, designated in the letter of authorization from the qualifying activity. (See paragraph 6.2.)

4.3.3 Tests.- The Qualification tests shall consist of the Inspection tests and the following tests and, in addition, these tests may at the option of the activity responsible for qualification be supplemented with tests under actual service conditions.

4.3.3.1 Allocation of samples for Qualification tests.- The four relays submitted for Qualification shall be tested as follows:

| Test group I<br>relay No. 1 | Test group II<br>relay No. 2 |
|---|---|
| Examination of product | Examination of product |
| Insulation | Insulation |
| Pick-up voltage | Pick-up voltage |
| Drop-out voltage | Drop-out voltage |
| Coil current | Coil current |
| Contact millivolt drop | Contact millivolt drop |
| High temperature | Overload |
| Low temperature | Sand and dust |
| Humidity cycling | Fungus |
| Corrosion resistance | |
| Additional cycles | |
| Explosion proof | |

| Test group III<br>relay No. 3 | Test group IV<br>relay No. 4 |
|---|---|
| Examination of product | Examination of product |
| Insulation | Insulation |
| Pick-up voltage | Pick-up voltage |
| Drop-out voltage | Drop-out voltage |
| Coil current | Coil current |
| Contact millivolt drop | Contact millivolt drop |



Source: https://assist.dla.mil -- Downloaded: 202640-17T07:05Z
Check the source to verify that this is the currentversion before use.

| Test group III<br>relay No. 3 (cont) | Test group IV<br>relay No. 4 (cont) |
|---|---|
| Coil temperature rise | Shock |
| Altitude operation | Vibration |
| Altitude cycles | Acceleration |
| Inductive load | |

4.3.3.2 High temperature.- The relay shall be subjected to an ambient temperature of 71°C for a period of 5 hours while carrying rated resistive load at maximum operating voltage. At the completion of the 5-hour period and with the relay at this temperature, the relay shall be subjected to the tests specified for Pick-up voltage, Drop-out voltage, Contact millivolt drop, and Insulation, and shall meet the requirements specified herein.

4.3.3.2.1 Low temperature.- The relay shall be subjected to an ambient temperature of -55°C for a period of 5 hours. At the end of the 5-hour period and with the relay at this temperature, the relay shall be subjected to the tests specified for Pick-up voltage, Drop-out voltage, Contact millivolt drop, and Coil current. The relay shall meet the requirements specified for Pick-up voltage, Contact millivolt drop, and Drop-out voltage. The Coil current shall not exceed 1-1/2 times the actual coil current at maximum operating voltage. (These tests shall be accomplished in the sequence listed in a minimum amount of time to prevent excessive heating of the coil.) The relay shall then be tested intermittently for pick-up and drop-out voltages until it attains room temperature. The voltage characteristics after this test shall be in accordance with the applicable voltages specified for Pick-up voltage, Drop-out voltage, and Contact millivolt drop.

4.3.3.3 Humidity cycling.- Humidity cycling shall be in accordance with Humidity tests, Procedure I, of Specification MIL-E-5272 for a period of 15 cycles. Immediately after removal from humidity, the relay shall be subjected to and shall satisfactorily meet the requirements for Pick-up voltage, Drop-out voltage, Contact millivolt drop, and Insulation and shall satisfactorily operate for 1/10 of the minimum operating cycles specified at rated resistive load and maximum operating voltage without sticking or welding of the contacts.

4.3.3.4 Corrosion resistance.- The relay shall be subjected to a continuous salt spray corrosion test in accordance with Salt spray tests, Procedure I, of Specification MIL-E-5272 for 50 hours, except that the relay shall not be cleaned prior to the salt spray. At the completion of the salt spray, it shall be subjected to and shall satisfactorily pass the tests specified for Pick-up voltage, Drop-out voltage, and Contact millivolt drop, and shall satisfactorily operate for 1/10 of the minimum operating cycles specified in Section 3, at rated resistive load and maximum operating voltage without welding of the contacts.

4.3.3.5 Explosion proof.- The relay shall be subjected to tests in accordance with Explosion proof tests, Procedure I, of Specification MIL-E-5272. The relay shall meet the requirements specified herein.

4.3.3.6 Overload.- The contacts of the relay shall be made to make and break two times their rated resistive load at maximum operating voltage for 50 operations. The "on" period shall be 0.2 second ±25 percent and the "off" period shall be 3 seconds ±3 percent. There shall be no failure.

4.3.3.7 Sand and dust.- The relay shall be subjected to a sand-laden air stream test in a chamber as specified in Sand and dust tests, Procedure I, of Specification MIL-E-5272.

4.3.3.7.1 After being subjected to the Sand and dust test, and immediately after the relay has attained a room temperature of 20° to 30°C, it shall satisfactorily pass the tests specified herein for Pick-up voltage, Drop-out voltage, and Contact millivolt drop, and shall satisfactorily operate for 1/10 of the minimum operating cycles at rated resistive load and maximum operating voltage without sticking or welding of the contacts.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:05Z
Check the source to verify that this is the current version before use.

4.3.3.8 Fungus.- The relay shall be subjected to Fungus tests, Procedure I, of Specification MIL-E-5272. Following the test, the relay shall satisfactorily pass the tests specified herein for Pick-up voltage, Drop-out voltage, and Contact millivolt drop and shall satisfactorily operate for 1/10 of the minimum operating cycles at rated resistive load and maximum operating voltage without sticking or welding of the contacts.

4.3.3.9 Coil temperature rise.- The relay shall be suspended in still air by a non-heat-conducting material attached to the mounting base so that the relay is no closer than 1 foot to any heat-conducting surfaces. The relay shall be subjected to rated resistive load using 6-foot lengths of cable size 16 in accordance with and applicable terminals conforming to Drawing AN659. The maximum operating voltage shall be applied to the coil terminals for a period of 3 hours. The temperature rise of the coil shall not exceed 95°C as measured by the resistance method. Immediately after this test, the relay shall be subjected to the tests specified for Pick-up voltage, Drop-out voltage, Contact millivolt drop, and shall meet the requirements specified herein.

4.3.3.10 Altitude operation.- The relay shall be subjected to the maximum operating voltage across the coil with rated resistive load through the contacts at a pressure equivalent of 50,000 ±2,000 feet, for the minimum operating period. Immediately after this period and with the relay at the specified pressure, it shall be subjected to the test specified for Insulation. There shall be no failure as a result of this test.

4.3.3.11 Altitude cycles.- The relay shall be subjected to 1/20 of the minimum operating cycles specified, at rated resistive load and maximum operating voltage at a pressure equivalent of 50,000 ±2,000 feet. There shall be no failure.

4.3.3.12 Inductive load.- The relay shall be subjected to 1/10 of the minimum operating cycles specified in Section 3 at a pressure equivalent of 50,000 ±2,000 feet, at maximum operating voltage and rated inductive load consisting of the proper inductor or inductors shown on Drawing AN3179. The minimum "on" period shall be 1/2 second and the maximum "off" period shall be 2-1/2 seconds. The complete test shall be conducted without mechanical or electrical failure of the relay, and at the completion of the test, the relay shall be subjected to and shall satisfactorily pass the test specified for Insulation.

4.3.3.13 Shock.- The relay shall be subjected to Shock tests, Procedure I, of Specification MIL-E-5272. A deceleration of 25g shall be obtained. The relay shall be checked, first with no voltage across the coil and then with the maximum operating voltage across the coil, to determine the ability of the contacts to remain in the proper position under impact. When the contacts of the relay being tested are in the open position, they shall remain sufficiently open so that a sensitive relay with a 10 millisecond pick-up value will not be energized. When the contacts of the relay being tested are in the closed position, they shall remain sufficiently closed so that a sensitive relay with a 2-millisecond drop-out time will remain in the energized position. The shock mechanism in accordance with Specification JAN-S-44, altered for relay mounting, is suitable for conducting the test.

4.3.3.14 Vibration.- The relay shall be subjected to vibration consisting of simple harmonic motion having an amplitude of approximately 0.03 inch (maximum total excursion of 0.06 inch) and a frequency varied uniformly between the approximate limits of 10 to 55 cps. The entire cycle of frequencies shall be accomplished in approximately 1 to 10 minutes. The relay shall be mounted in the position most likely to cause malfunctioning and vibrated continuously for a period of 3 hours. If mounting in more than one position is considered likely to cause malfunctioning, the relay shall be vibrated for 3 hours in each likely position. A test lamp or other suitable indicating device shall be connected across the contacts during the test. When the relay is operated with the specified pick-up voltage across the coil, the contacts shall remain in the energized position. The contacts of the relay shall remain in the deenergized position with no voltage across the coil. There shall be no mechanical failure.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:05Z
Check the source to verify that this is the current version before use.

4.3.3.15 Acceleration.- The relay shall be subjected to an acceleration force of 10g. The time required to attain the 10g acceleration shall be not more than 2 seconds. The relay shall be mounted in the position most likely to cause malfunctioning and shall be accelerated for a minimum of 1 minute. During this test, the contacts of the relay shall remain in the deenergized position with no voltage across the coil and shall remain in the energized position when the coil voltage is the specified pick-up voltage. A test lamp or other indicating device shall be connected across the contacts while the relay is undergoing this test to determine the ability of the relay contacts to remain in the proper position.

4.3.3.16 Coil current.- The maximum operating voltage shall be applied to the coil terminals and the current flow determined. It shall not exceed 0.1 amp.

4.4 Inspection tests.- The Inspection tests shall consist of Individual tests and Sampling tests.

4.4.1 Unless otherwise specified, contractor's records of all inspection work and tests, giving the results of tests required to determine compliance with the requirements and tests specified herein, shall be kept complete and shall be available to the Government representative at all times. The record or report of inspection and tests shall be signed or approved by a responsible person specifically assigned by the contractor. Contractors not having laboratory testing facilities satisfactory to the Government shall engage the services of a commercial testing laboratory capable of conducting tests to determine compliance with all the requirements and tests in the specification, and acceptable to the Government.

4.4.2 Individual tests.- Each relay shall be subjected to the following tests. In addition, each relay shall be subjected to any other test specified herein which the Inspector considers necessary to determine compliance with the requirements of this specification.

4.4.2.1 Examination of product.- Each relay shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, and marking.

4.4.2.2 Pick-up voltage.- The relay shall be tested to determine that the contacts close when a potential of 20 ±2V is applied. A suitable indicating device shall be used to determine that the contacts operate satisfactorily.

4.4.2.3 Contact millivolt drop.- The potential drop across the contacts shall not exceed 20mv at 1 amp 3V dc. This drop shall be determined from terminals A1 and A2.

4.4.3 Sampling tests.- Five relays shall be selected at random from each lot of 500 or fraction thereof on the order and subjected to the following tests. A lot shall consist of relays manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

4.4.3.1 Drop-out voltage.- Maximum operating voltage as specified in Section 3 shall be applied to the holding coil terminals. The voltage shall then be reduced. The relay shall release to the deenergized position when the voltage has been reduced to 12 ±2V. A suitable device shall be used to determine that the contacts operate satisfactorily.

4.4.3.2 Additional cycles.- The relay shall be subjected to sufficient additional cycles at rated resistive load to make the total number of cycles, to which the relay has been subjected in all tests, equal to the minimum operating cycles required. There shall be no failure. (For Inspection tests, the relay shall satisfactorily operate for the minimum operating cycles at rated resistive load. Previous altitude cycling is not required.)

4.4.3.3 Insulation.- A potential of 1,000V rms, commercial frequency, shall be applied between the terminals and the other exposed metal parts for a period of 60 seconds. There shall be no failure as a result of this test.



Source: https://assist.dla.mil -- Downloaded: 202640-17T07:05Z
Check the source to verify that this is the currentversion before use.

4.4.4 Rejection and retest.- When tests are specified on a quantity of relays that are selected as representative of a certain lot, and one or more of this number fails to meet the specified tests, additional relays of the lot represented shall be tested immediately to determine the extent of failure. Individual performance tests shall not be interrupted unless the defect is of such a nature that it will seriously affect the performance or safe use of the relay.

4.5 All parts, specimens, or assemblies destroyed in making tests required by this specification and drawings, to determine compliance with the specification and drawings, shall be in addition to the quantity specified in the contract or purchase order and shall be furnished without increasing the cost of the contract or order.

## 5. PREPARATION FOR DELIVERY

5.1 Application.- The requirements specified herein apply only to direct purchases by or direct shipments to the Government.

5.2 Packaging.- The relay shall be packaged and packed for shipment in accordance with group X of Specification MIL-P-6064 in a type II, class I container.

5.3 Marking of shipments.- Marking shall be in accordance with the requirements of Specification MIL-P-6064 and as specified herein.

5.3.1 Interior package.- Each interior package shall be marked with the following information:

RELAY, GENERATOR EQUALIZER BUS,
TYPE A-1
Specification MIL-R-6463A
Manufacturer's Part No.
Manufacturer's Serial No.
Order No.
Stock No.
Date of Manufacture
Quantity
Manufacturer's name or trade-mark
Name of Contractor (if not the same as manufacturer)

IF IN STORAGE AFTER (SPECIFY DATE)*, THE RELAY SHALL BE TESTED AND INSPECTED BEFORE USE.

* This date shall be 18 months from the date of inspection.

## 6. NOTES

6.1 Intended use.- The type A-1 relay covered by this specification is intended for use in aircraft as a means of remotely controlling the making and breaking of generator equalizer circuits.

6.2 Provisions for Qualification tests.- In the procurement of products requiring qualification, the right is reserved to reject bids on products that have not been subjected to the required tests and found satisfactory for inclusion on the Military Qualified Products List. The attention of suppliers is called to this requirement, and manufacturers are urged to communicate with the Commanding General, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio; the activity responsible for qualification, with a copy to the Bureau of Aeronautics, Navy Department, Washington 25, D.C.; and arrange to have the products that they propose to offer to the Army, the Navy, or the Air Force, tested for qualification in order that they may be eligible to be awarded contracts or



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:05Z
Check the source to verify that this is the current version before use.

orders for the products covered by this specification. Information pertaining to qualification of products covered by this specification may be obtained from the above designated activity responsible for qualification.

6.3 Definitions.-

6.3.1 Maximum operating voltage.- The maximum operating voltage is the maximum voltage at which it is anticipated that the relay will be required to operate.

6.3.2 Pick-up voltage.- Pick-up voltage is the minimum voltage of a relay at which the energized function will be completed.

6.3.3 Drop-out voltage.- Drop-out voltage is the voltage at which a relay will release to its deenergized position.

6.3.4 Rated resistive load.- Rated resistive load is the current load in a resistive circuit which the relay will safely make or break and carry.

6.3.5 Rated inductive load.- Rated inductive load is the current load in a highly inductive circuit which the relay will safely make or break.

6.3.6 Coil current.- Coil current is the current which flows through the coil when maximum operating voltage is applied.

6.3.7 Minimum operating period.- Minimum operating period is the shortest time for which the relay is expected to operate satisfactorily.

6.3.8 Minimum operating cycles.- Minimum operating cycles is the minimum number of operations which the relay is capable of performing under the conditions specified.

6.3.9 Resistive load cycle.- The resistive load cycle shall be such that the "on" time is 1/2 second and the "off" time is 1/2 second.

6.3.10 Detail specifications and drawings are intended to cover any or all portions of these tests and details which are considered necessary but not otherwise specified.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army - Transportation Corps
Navy - Bureau of Aeronautics
Air Force



Source: https://assist.dla.mil -- Downloaded: 202640-17T07:05Z
Check the source to verify that this is the currentversion before use.