MILITARY SPECIFICATION

SWITCH, ACCELERATION, ATOMIC WEAPON: M54

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of switch entitled Switch, Acceleration, Atomic Weapon: M54, are used in the Lance warhead Section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-S-6872	- Soldering Process, General Specification For.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-331	- Fuze and Fuze Components, Environmental and Performance Tests For.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components.
MIL-STD-1235	- Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1460	- Soldering of Electrical Connections and Printed Wiring Assemblies, Procedure For.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

THIS DOCUMENT HAS 12 PAGES

DRAWINGS

ORDNANCE CORPS

8879250 - Acceleration Switch, M54.
8879252 - Connector Cable Subassembly.
8879268 - Switch, Acceleration M54 Outline and Mounting Details.
ET-8879250 - Equipment Tabulation for Acceleration Switch M54.

PUBLICATIONS

PICATINNY ARSENAL

QAI-PA-1 - Quality Assurance Instructions for Reporting Data on Nuclear Weapons.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The switch shall comply with all requirements specified on the drawings (dwgs) 8879250 and 8879472, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. A six letter serial code shall be assigned to the item. Serial codes required on these items shall be obtained by means of a letter addressed to: Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTENTION: SARPA-QA-T-M. The letter of request shall include:

a. Exact nomenclature of the item as specified on the applicable drawing.
b. Name of the contractor.
c. Contract number or procurement request order number.
d. Number of serial codes required (unused code numbers shall be returned).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

3.5 Seal integrity. The switch shall have a helium leakage rate not greater than 1 x 10^{-7} atmosphere cubic centimeters per second (atm cc/sec) for pre-environmental tests. For post-environmental tests, the switch shall have a helium leakage rate not greater than 1 x 10^{-6} atmosphere cubic centimeters per second (atm cc/sec). The seal integrity test shall be performed as specified in 4.4.1.

3.6 Function. The switch shall perform in the order indicated in 3.6.1, through 3.6.5 when tested as specified in 4.4.2.

3.6.1 Current (potentiometer circuit). The potentiometer circuit shall withstand a direct current (dc) of 6 ± 0.5 milliamperes (ma) when applied for 15 minutes minimum without damage to the circuit. Testing shall be in accordance with 4.4.2.1.

3.6.2 Resistance (potentiometer circuit). The circuit resistance shall be 5000 ohms ± 5%.

3.6.3 Rated resistance (potentiometer circuit). The rated resistance output is proportional to the total resistance of the potentiometer (within the effective G range of the switch) and shall be as specified when the switch is positioned at the angles indicated in the tabulation. Variables reading of the rated resistance output shall be recorded using the test codes in Table I.

Table I

Effective G Range	Angle Deg (°)	Angle Min (')	Rated Resistance Ratio	Test Codes (see 3.10)
+0.46	27	23	0.700 to 0.760	035003
+0.25	14	29	0.595 to 0.655	035004
0.00	0	0	0.470 to 0.530	035005
-0.25	345	31	0.345 to 0.405	035006
-0.46	332	37	0.240 to 0.300	035007

3.6.4 Contact position. The contacts shall remain open between any angle ranging from 0°0' to 27°23' (0.00 to +.46g) and 0°0' to 332°37' (0.00 to -.46g). The contacts shall close at any angle ranging from 28°02' to 39°03' (+.47 to +.63g) and from 320°57' to 331°58' (-.63 to -.47g).

3.6.5 Contact load. The voltage drop between contacts, in the closed position (see 3.6.4) shall be 0.3 volts dc maximum with an input of 28 ± 1 vdc and a direct current of 120 ± 5 ma applied 2 ± 1 second. Variables reading of the angle, at which contact closure occurs and the voltage drop shall be recorded using test code 055001 and 055002 (see 3.10).

3.7 Circuit resistance. The resistance between the terminals listed in Table II shall be 0.10 ohm, maximum, when tested as specified in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Table II
(M54 only)

Connector Terminal From	Connector Terminal To	Test Codes
A	B	036001
G	H	036002
L	M	036003
M	N	036004
N	P	036005
R	S	036006

3.8 Insulation resistance. The resistance between the electrically isolated terminals listed below and case shall be 20 megohms, minimum, when tested as specified in 4.4.4.

Used terminals: A,D,E,G,K,L and R.
Unused terminals: C,T and U.

Unused terminals shall be connected together and tested as one terminal.
Leads: Orange, Blue, Green, Black, White and Red.

3.9 Environmental testing. The switch shall comply with MIL-STD-810, visual inspection and failure criteria, section 3. The switch shall also comply with 3.6.4 before and after each environmental test. Testing shall be as specified in 4.4.5. Tests shall be conducted in the order specified.

3.9.1 Acceleration. The switch shall withstand an acceleration force of 40g minimum for 5 + 1 seconds without evidence of external damage (see 6.5). After testing as specified in 4.4.5.1, the switch shall be tested for compliance with 3.6.4.

3.9.2 Operational vibration. The switch, first set at 39°03' (+.63g) and then set at 331°58' (-.63g) shall be vibrated for 3 minutes at each setting to the vibration motion having the following properties without evidence of external damage (see 6.5).

Power spectral density: 0.01 gravity units squared per Hertz (Hz) (g^2/Hz).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Root mean square (rms) (overall): 3.46g minimum, attenuation, outside flat portion is 12db/octave between 50 and 100 Hz and 1000 and 2000 Hz. Total envelope is between 50 and 2000 Hz.
Tolerance level is + 1.5db between 50 and 1000 Hz and ± 3.0db between 1000 and 2000 Hz.

While being tested as specified in 4.4.5.2, the switch contacts can open but for not more than 30 milliseconds.

3.9.3 Transportation vibration. The switch shall withstand vibrations along each of its three mutually perpendicular axes (see Figure 1) without evidence of external damage (see 6.5). The vibration spectrum is specified in Table III.

Table III

Frequency (Hz)	Input Double Amplitude (da) Gravity Units (g)	Time Duration (Minutes)
5-10	0.8 da	9
10-15	0.4 da	9
15-80	5.0 g	9
80-115	5.0 g	9
115-500	5.0 g	9

After testing as specified in 4.4.5.3, the switch shall be tested for compliance with 3.6.4.

3.9.4 Low temperature. The switch shall withstand a temperature of -65 ± 5 degrees Fahrenheit (°F) for 4 hours or until the switch and fixture temperature has stabilized (see 6.4), without evidence of external damage (see 6.5). After testing as specified in 4.4.5.4, the switch shall be tested for compliance with 3.6.4.

3.9.5 High temperature. The switch shall withstand a temperature of +165 ± 5°F for four hours or until the switch and fixture temperature has stabilized (see 6.4) without evidence of physical damage (see 6.5). After testing as specified in 4.4.5.5, the switch shall be tested for compliance with 3.6.4.

3.9.6 Humidity. The switch shall withstand one 14-day humidity cycle at temperatures ranging between -65 ± 5°F and +165 ± 5°F without evidence of physical damage (see 6.5). After testing as specified in 4.4.5.6, the switch shall be tested for compliance with 3.6.4.

3.10 Test codes. The contractor shall provide data feedback on punch cards in conformance with Quality Assurance Instruction QAI-PA-1. The data required to be coded, and the code numbers, are specified in the applicable paragraphs in this section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

3.11 Soldering. All soldering shall comply with the requirements specified in MIL-STD-1460 and MIL-S-6872 as applicable.

3.12 Workmanship.

3.12.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.12.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.12.3 Burrs. Parts shall be free from burrs.

3.12.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.12.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

3.12.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 24 complete assemblies (see dwg 8879250) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table IV. Tests shall be conducted in order specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Table IV

First article inspection and tests

Inspection or Test	
1.	Classification of characteristics (see 4.3.2.1)
2.	Seal integrity (see 3.5)
3.	Function (see 3.6)
4.	Circuit resistance (see 3.7)
5.	Insulation resistance (see 3.8)
6.	Acceleration (see 3.9.1)
7.	Operational vibration (see 3.9.2)
8.	Transportation vibration (see 3.9.3)
9.	Low temperature (see 3.9.4)
10.	High temperature (See 3.9.5)
11.	Humidity (see 3.9.6)
12.	Seal integrity (see 3.5)

Upon completion of above tests, each switch shall be tested for compliance with 3.6.1, 3.6.2, 3.6.4, 3.6.5, 3.7 and 3.8.

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation. The formation of an inspection lot and related functions shall be in accordance with Section 5, MIL-STD-105. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision.

4.3.1.1 Inspection lot. An inspection lot shall be the quantity of parts, subassemblies, or assemblies from the same lot, which are submitted to inspection for Government acceptance.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table V and Table VI), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Table V
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Table VI
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Connector-cable subassembly (see dwg 8879252).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Incorrect overall length (see dwg 8879259)	Gage
102.	Misorientation of keyway	Gage
103.	Inability of connector to engage with mating connector	Gage/Manual
*104.	Improper or insufficient soldering (see 3.11)	Visual
*105.	Wires improperly connected to terminals	Visual
*106.	Wire buss missing or improper	Visual
*107.	Improper color of insulation	Visual
*108.	Insufficient or improper potting	Visual
*109.	Components missing or improper	Visual
*110.	Components improperly assembled	Visual
111.	Plug missing	Visual
112.	Evidence of poor workmanship (see 3.12)	Visual

*To be performed before next assembling operation obscures the characteristics being inspected.

Minor: None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

4.3.2.1.2 Acceleration switch (see dwg 8879250).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Incorrect diameter of mounting hole (4) (see dwg 8879268)	Gage
102.	Mislocation of mounting hole (4) (see dwg 8879268)	Gage
103.	Incorrect space between end of cup shield and connector (see dwg 8879268)	Gage
104.	Improper or insufficient soldering (see 3.11)	Visual
105.	Component missing or improper	Visual
106.	Component damaged or loose	Visual
107.	Components improperly assembled	Visual
108.	Solder missing or improper over screw(s)	Visual
109.	Terminal missing on header	Visual
110.	Protective finish damaged exposing base metal	Visual
111.	Marking missing, improper or illegible	Visual
112.	Evidence of poor workmanship (see 3.12)	Visual
113.	Objective evidence relative to material missing or improper (see 3.1)	Visual
114.	Serialization missing or improper (see 3.4)	Visual
Minor:	None defined.	

4.3.2.1.3 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Major:

101. Preservation, packaging and packing not in accordance with MIL-STD-1169.....Visual

102. Marking not in accordance with MIL-STD-1169.....Visual

Minor:

201. Evidence of poor workmanship (see 3.12).....Visual

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Seal integrity	Major
b. Function (except 3.6.5)	Major
c. Low temperature	Major
d. High temperature	Major
e. Circuit resistance	Major
f. Insulation resistance	Major

None of these tests are considered destructive and samples so tested may be returned to the lot.

4.3.3.1 Seal integrity, function (except 3.6.5), circuit resistance, insulation resistance, low temperature and high temperature. Each switch shall be tested in accordance with 4.4.1 through 4.4.4, 4.4.5.4 and 4.4.5.5. If any item fails to comply with 3.5 through 3.8, 3.9.4 and 3.9.5, the item shall be rejected and removed from the lot.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL). Els for assemblies are listed on the Equipment Tabulation, ET-8879250. When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).

b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Seal integrity. The switch shall be placed into the chamber of a mass spectrometer and the chamber evacuated to 0.2 micron maximum. After evacuation, readings shall be observed for one minute minimum to determine compliance with 3.5.

4.4.2 Function. The switch shall be functioned as specified in 4.4.2.1 through 4.4.2.5.

4.4.2.1 Current (potentiometer circuit). The current between terminals F and J shall be measured with suitable device to determine compliance with 3.6.1.

4.4.2.2 Resistance (potentiometer circuit). The resistance between terminals F and J shall be measured with a suitable device to determine compliance with 3.6.2. The test current shall be 10 ma maximum.

4.4.2.3 Rated resistance (potentiometer circuit). The fixture used for this test shall be capable of measuring angles from 0 degrees (°), 0 minutes ('), through 360° ± 10 seconds. The switch shall be mounted to the fixture and positioned so that its sensitive axis is orientated as illustrated in Figure 2. While rotating the switch at the angles indicated in Table I, the resistance output between terminals F and J and terminals J and K shall be evaluated for compliance with 3.6.3 by using a suitable measuring device (Ratio Box). Reading shall be taken after resistance measuring device has reached a steady state.

4.4.2.4 Contact position. The switch shall be mounted on the same fixture and positioned in the same manner described in 4.4.2.3. A suitable measuring device shall be used to determine compliance with 3.6.4. Switch closure shall be observed while excitation is in progress.

4.4.2.5 Contact load. The switch shall be mounted on the same fixture described in 4.4.2.3 and positioned at 0° 00' and 180° 00'. A suitable measuring device shall be used to determine compliance with 3.6.5.

4.4.3 Circuit resistance. The resistance, between terminals indicated in Table II, shall be measured with a suitable device to determine compliance with 3.7. The test current applied shall be 10 ma maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

4.4.4 Insulation resistance. The resistance of the terminals specified in 3.8 shall be measured with a suitable device to determine compliance with 3.8. The test potential applied shall be 500 + 50 vdc and 5 ma, maximum.

4.4.5 Environmental testing (see 3.9).

4.4.5.1 Acceleration. The switch shall be mounted on an approved fixture capable of being oriented as illustrated in Figure 2. The mounted switch then shall be secured to an approved centrifuge and subjected to 40 g minimum for 5 + 1 seconds. After acceleration, the switch shall be tested for compliance with 3.6.4.

4.4.5.2 Operational vibration. The switch shall be mounted on an approved fixture and oriented as described in 4.4.2.3. The mounted switch, then shall be secured on an approved vibrator. While being subjected to the vibration motion in 3.9.2, a suitable measuring device shall be used to evaluate compliance with 3.9.2.

4.4.5.3 Transportation vibration. The switch shall be mounted on a fixture capable of being orientated in its three axes. The mounted switch then shall be secured to an approved vibrator and subjected to the vibration spectrum in Table III. After removal from the vibrator, the switch shall be tested for compliance with 3.6.4.

4.4.5.4 Low temperature. The switch shall be placed into a testing chamber and the temperature lowered to -65 + 5°F and maintained at this temperature for 4 hours or until the switch and fixture temperature is stabilized (see 6.4). After temperature stabilization, the switch shall be removed from the chamber, and within 2 minutes maximum, tested for compliance with 3.6.4. When the temperature of the switch has returned to ambient, it shall be tested again for compliance with 3.6.4.

4.4.5.5 High temperature. The switch shall be placed into a testing chamber and the temperature raised to +165 + 5°F and maintained at this temperature for 4 hours or until the switch and fixture temperature is stabilized (see 6.4). After stabilization, the switch shall be removed from the chamber, and within 2 minutes, maximum, tested for compliance with 3.6.4. When the temperature of the switch has returned to ambient, it shall be tested again for compliance with 3.6.4.

4.4.5.6 Humidity. The switch shall be tested in accordance with MIL-STD-331, Test 105. The test shall be completed on Monday at 0800 hours of the third week. After humidity, the switch shall be tested for compliance with 3.6.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The switch shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.1.2 Level C. The switch shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.2 Packing.

5.2.1 Levels A and C. The switch shall be packed in accordance with the applicable instructions contained in MIL-STD-1169(MU).

5.3 Marking. Marking shall be in accordance with MIL-STD-1169(MU).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.

b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1, and 3.10 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T.

6.4 Temperature stabilization. The temperature is considered stabilized when the greatest peaks (both highest and lowest) continually observed over 5 minutes min. do not exceed the nominal temperature plus tolerance specified.

6.5 External damage. A defect, such as obliterated markings, damaged finish (exposing base metal), split or cracked insulation, bent or loose pins, that is detectable by visual observation.

6.6 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-2030 dated 15 February 1971 and amendment 7 dated 1 May 1975.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. 1135-A212

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

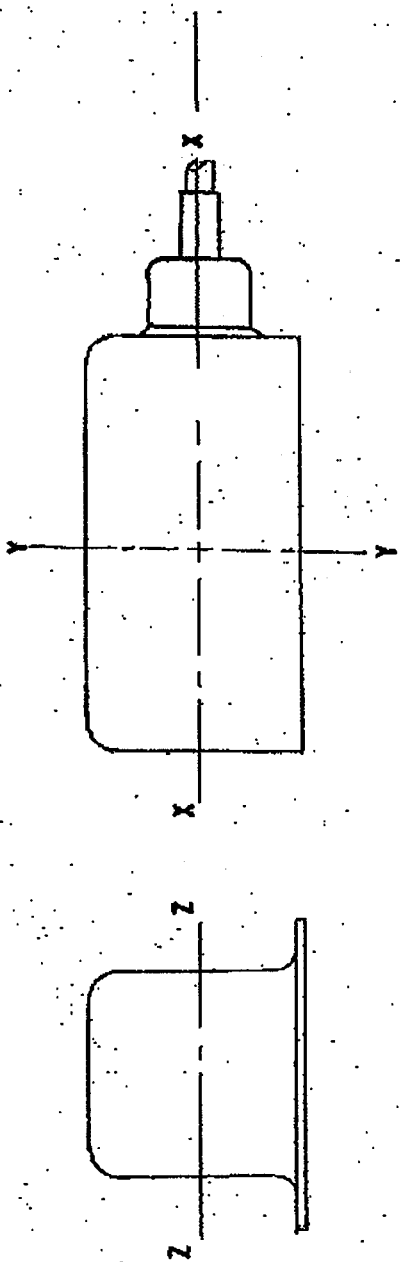


Figure 1

Source: https://assist.dla.mil -- Downloaded
Check the source to verify that this is the cu




Figure 2

Source: https://assist.dla.mil -- Downlo
Check the source to verify that this is th