MIL-M-45424D (MU)
AMENDMENT 2
20 JUNE 1973
SUPERSEDING Amendment 1
26 December 1972

MILITARY SPECIFICATION

MINE, ANTI-PERSONNEL, M18A1
PARTS FOR

This Amendment forms a part of Military Specification MIL-M-45424D (MU) dated 17 August 1970.

*Page 2, Paragraph 2 - Delete from PUBLICATIONS: "ET-8885262 - Equipment Tabulation Number".

*Page 10, Paragraph 4.3.4 - Delete in its entirety and substitute:

"4.3.4 Inspection Equipment. - The inspection equipment required to perform the examinations and tests prescribed in this section is identified under the "Method of Inspection" headings in 4.3.2 (see 6.3)."

Page 12, Paragraph 4.3.5.1 - Add the following:

"18. Diameter of well cup recess, min. ..... Gage 01029"

Paragraph 4.3.5.2 - Add the following:

"13. Depth of locking lug cutouts ..... Gage 02017"

Page 16, Paragraph 5.2 - Delete in its entirety and substitute the following:

"5.2 Packing

5.2.1 Level C. - The parts for Mine, Anti-Personnel, M18A1 shall be packaged in accordance with MIL-STD-1169. The following additional packing requirements shall apply for the items specified.

5.2.1.1 Case Assembly (dwg. 8800918). - Thirty (30) case assemblies shall be packed leg end down in a corrugated fiberboard box with interior half-slotted partitions assembled to form 30 individual cells in a five (5) by three (3) arrangement, two (2) layers per box. A plain corrugated fiberboard pad shall be placed on the bottom of the box, between layers and on the top layer of cells. The inside dimensions of the box shall be approximately 26 by 11 1/4 by 11 1/2 inches in depth, Style RSC. Cell

FSC: 1345

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:57Z
Check the source to verify that this is the current version before use.

size shall be approximately 8 1/2 by 2 1/16 by 5 1/2 inches in depth. Plain pads shall be approximately 25 7/8 by 11 3/8 inches.

5.2.1.2 Cover (dwg. 8800916). - Thirty (30) covers shall be packed on edge in a corrugated fiberboard box. Box size shall be approximately 10 3/4 by 8 7/8 by 4 1/4 inches in depth.

5.2.1.3 Shipping Plugs (dwg. 8857210). - Shipping plugs shall be bulk-packed, 2000 per fiberboard box, except that one partial box of 1840 plugs will be required when a full truckload shipment to one destination is made in accordance with the suggested trailer loading instructions in Section 6. Box size shall be approximately 14 1/4 by 9 3/4 by 11 inches in depth, inside dimensions.

5.2.1.4 Cup Well (dwg. 8837133). - Cup wells shall be bulk-packed in quantities of 13,000 per fiberboard box, except that one partial box of 7,480 cup wells will be required when shipped as a full truckload to one destination in accordance with palletization and truck-trailer loading instructions. Box size shall be approximately 17 by 15 3/4 by 11 3/8 inches in depth, inside dimensions.

5.2.1.5 Fiberboard boxes shall be Type CF, Class Domestic, Variety SW, Grade 200 minimum. Boxes and closure shall comply with 3.5.2 of MIL-STD-1169. Minor changes in box dimensions are permissible to provide a better pack."

Paragraph 5 - Add the following:

"5.3 Palletization (see 6.4). - Shipping containers shall be palletized on wooden pallets conforming to NN-P-71, Type I, 2-way flush design. Palletized boxes shall be strapped with not less than four (4) flat steel straps positioned approximately 10 inches from the ends of the load on two (2) adjacent sides so that cross strapping results. Two (2) straps shall be positioned to the pallet stringers and pass under the pallet deckboards and boxes; remaining two (2) straps shall pass under the boxes and between the deckboards (see Figure I). Edge protectors consisting of folded pieces of double faced fiberboard approximately 4 x 4 inches shall be placed between the strap and the fiberboard box edge. Pallet size shall be approximately 39 by 39 by 5 inches overall dimensions. Strapping shall conform to QQ-S-781, Type I or II, Class A or B minimum 5/8 inch by .020 inch thickness.

5.3.1 Case Assembly and Covers. - Twelve (12) boxes of case assemblies and 12 boxes of covers shall be palletized as illustrated in Figure I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:57Z
Check the source to verify that this is the current version before use.

5.3.2 Shipping Plugs and Cup Wells. - Seventeen (17) boxes of shipping plugs and three (3) boxes of cup wells for a total of 33,840 each shall be placed on one (1) pallet. Boxes shall be positioned to form interlocking layers whenever possible. No box shall extend more than one (1) inch from any edge of the deckboards.

5.4 Marking

5.4.1 Boxes. - The boxes shall be marked in accordance with MIL-STD-1169, Level C shipments.

5.4.2 Pallet Loads. - Box arrangements on each pallet shall permit the marking on one or more boxes to be visible on each of two (2) sides of the pallet load."

*Page 17, Paragraph 6.2 - Delete in its entirety and substitute:

"6.2 Inspection Code Numbers. - The five digit code numbers assigned to the inspections herein are to facilitate future data collection and analysis by the Government. They should be cited as references on drawings of equipment designs submitted by the contractor to the Government for approval (see 6.3.3)."

*Paragraph 6.3 - Delete in its entirety and substitute:

"6.3 Inspection Equipment Designs. - Inspection equipment designs are of two types - Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs are designated by drawing numbers under the "Method of Inspection" headings in Section 4. Design responsibility for all other inspection equipment is assigned to the contractor. The contractor need not furnish any design when a complete Government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.3.2 and 6.3.3 should he elect to do so.

6.3.1 SIE Designs. - SIE designs may consist of any of the following:

a. Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.
b. A source control drawing or a specification control drawing as defined in MIL-STD-100.
c. An envelope drawing, as defined in MIL-STD-100, which establishes the criteria which a detail design shall meet. When envelope drawings are specified, the contractor shall prepare designs which comply with the criteria therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:57Z
Check the source to verify that this is the current version before use.

6.3.2 Contractor Designs. - Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public.) Contractor designs shall include appropriate operating instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and evaluation by the Government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment or with SIE designs if not otherwise covered thereby (see 6.3.1.c). Designs shall be of the category and form (per MIL-D-1000) specified in the Contract Data Requirements Lists (DD Form 1423). The contractor is referred to MIL-HDBK-204, "Inspection Equipment Design" for guidance. The specification number and the applicable five-digit defect code number (or other specific identifying information) from Section 4 of this specification shall be referenced on each contractor design, together with the component or assembly drawing number and revision letter to which the specific design applies.

6.3.3 Submission of Designs for Approval. - Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval to Picatinny Arsenal, ATTN: SMUPA-QA-A-M, Dover, New Jersey 07801 in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements List (DD Form 1423) or in the contract. Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will normally be accomplished within one month after receipt."

Add Paragraph 6.4:

"6.4 Shipment by Truck-Trailer. - It has been found in practice that the boxed components are most economically transported in good condition when palletized as specified in 5.3 and loaded into 40 or 45 foot truck trailers in accordance with Figure 2. A full load for the above size trailers will contain assembly parts for 16,920 mines (16,920 case assemblies and covers; 33,840 shipping plugs and cup wells).

*Asterisk indicates changes in addition to, or differing from, Amendment 1.

Custodian:
Army-MU

Preparing Activity:
Army-MU

Project Number: 1345-A-019

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:57Z
Check the source to verify that this is the current version before use.

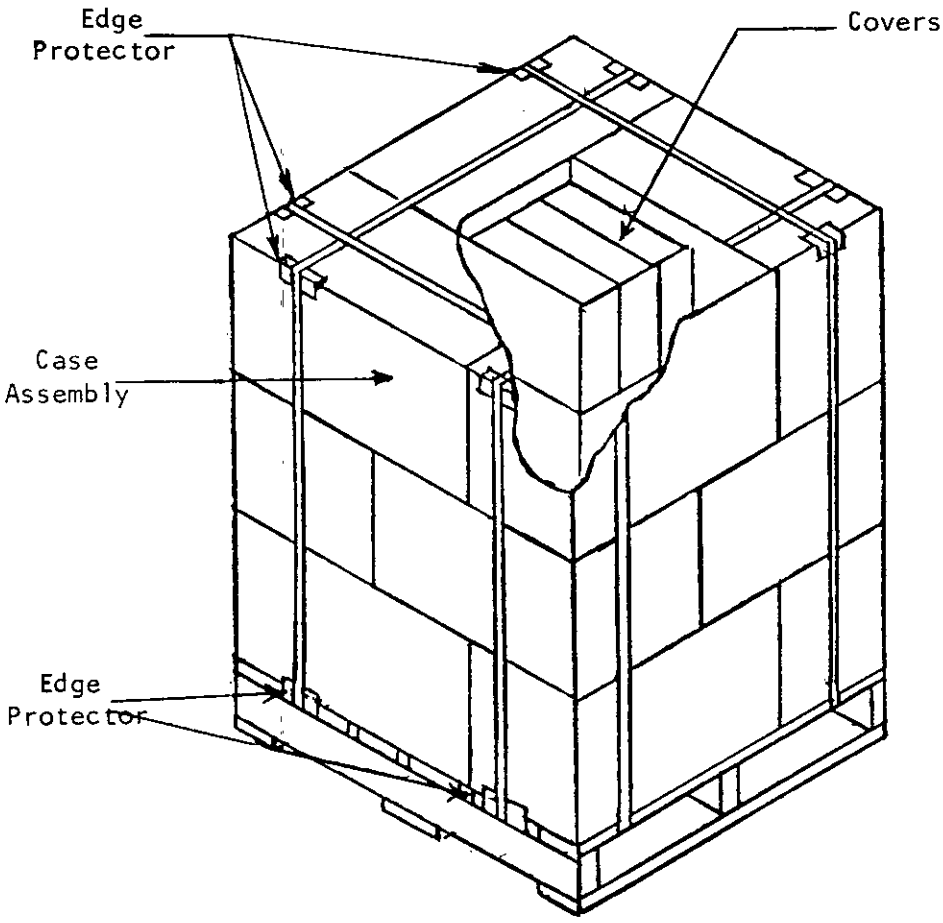


Figure 1.-Method of Palletizing for Mine, AP, M18A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:57Z
Check the source to verify that this is the current version before use.

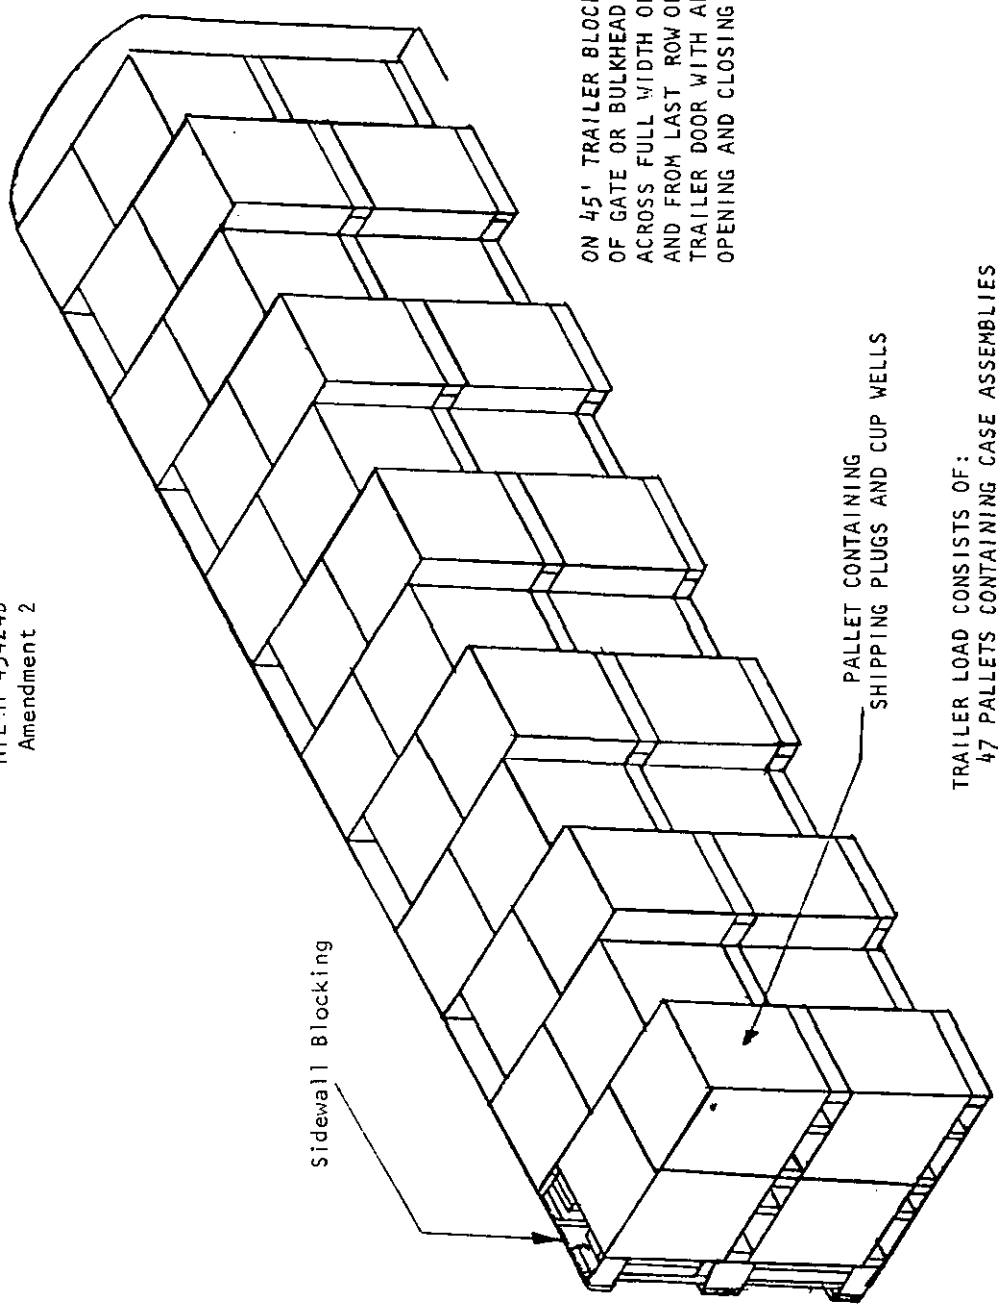


Figure 2.-ARRANGEMENT OF PALLETIZED MINE PARTS ON TRACTOR-TRAILER

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:57Z
Check the source to verify that this is the current version before use.