MIL-G-58083A
1 June 1967
SUPERSEDING
MIL-G-58083(MO)
1 February 1965

MILITARY SPECIFICATION

GENERATOR, TACHOMETER, FOUR-POLE, SCREW-MOUNTED

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of four-pole alternating current tachometer generator, designed for screw mounting.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| QQ-C-320 | Chromium Plating (Electrodeposited) |
| QQ-N-290 | Nickel Plating (Electrodeposited) |
| QQ-P-416 | Plating, Cadmium (Electrodeposited) |
| QQ-Z-325 | Zinc Coating, Electrodeposited, Requirements for |

MILITARY

| | |
|---|---|
| MIL-P-116 | Preservation, Methods of |
| MIL-M-3171 | Magnesium Alloy, Processes for Pretreatment and Prevention of Corrosion on |
| MIL-C-5015 | Connectors, Electric, "AN" Type |
| MIL-E-5272 | Environmental Testing, Aeronautical and Associated Equipment, General Specification for |
| MIL-C-5541 | Chemical Films and Chemical Film Materials for Aluminum and Aluminum Alloys |
| MIL-L-6082 | Lubricating Oil; Aircraft Reciprocating Engine (Piston) |
| MIL-I-6868 | Inspection Process, Magnetic Particle |
| MIL-I-7098 | Indicators, Tachometer, Electric, Magnetic Drag Type, Aircraft, General Specification for |
| MIL-S-7742 | Screw Threads, Standard, Optimum Selected Series: General Specification for |

FSC 6620

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:00Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MIL-A-8625 | Anodic Coatings, for Aluminum and Aluminum Alloys |
| MIL-M-45202 | Magnesium Alloys, Anodic Treatment of |

STANDARDS

MILITARY

| | |
|---|---|
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-130 | Identification Marking of U. S. Military Property |
| MIL-STD-143 | Specifications and Standards, Order of Precedence for the Selection of |
| MIL-STD-440 | Soldering Techniques for Standard Type Solder Terminals |
| MIL-STD-794 | Parts and Equipment, Procedures for Packaging and Packing of |
| MIL-STD-838 | Lubrication of Military Equipment |
| MS33540 | Safety Wiring, General Practices for |
| MS33586 | Metals, Definition of Dissimilar |
| MS87015 | Generator, Tachometer, Four-Pole, Screw-Mounted |

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

| | |
|---|---|
| AND10005 | Mounting Pad and Drive -- Aircraft Tachometer |

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Generator design.--Generator design shall be in accordance with MS87015. Output voltage shall be three-phase, having a frequency of 2 cycles per revolution of the drive shaft. Generator shall withstand a steady 20g load applied along any of the three principal mutually perpendicular axes when mounted on a type I drive assembly shown on AND10005. It shall operate at any speed up to 2,500 revolutions per minute (rpm) and in any mounted position. Weight shall not exceed 2.1 pounds.

3.1.1 First article.--Unless otherwise specified (see 6.3), as soon as practicable after award of contract or order, the first production line item shall be subjected to inspection and testing (see 4.2.1) to determine conformance with this specification. Approval of the first article by the procuring activity shall not relieve the contractor of his responsibility to supply generators conforming to this specification. Any change or deviation from the approved first article shall be subject to prior approval of the contracting officer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

3.2 Materials.--Materials shall be as specified herein. When specifications and standards are not specifically designated, selection of materials and processes shall be in accordance with MIL-STD-143. All materials and component parts shall be new and unused.

3.3 Construction.--The generator shall be so constructed that no parts will work loose in service and will withstand the normal shocks, vibrations, and such other conditions as are incident to shipping, storage, installation, and service without failure. Design and construction shall accommodate to the utmost the ease of disassembly, reassembly, and service maintenance with tools and items normally available.

3.3.1 Standard parts.--AN or MS standard parts shall be used wherever they are suitable for the purpose, and shall be identified on the drawings by their part numbers. Commercial parts such as screws, bolts, nuts, cotter pins, etc., may be used provided they possess suitable properties and are replaceable by AN or MS standard parts without alteration.

3.3.2 Interchangeability of parts.--Components shall be interchangeable (without requiring modification for replacement) with similar components furnished under the same contract or order.

3.3.3 Threaded parts.--Screw threads 0.60-inch diameter or larger shall be in accordance with MIL-S-7742. Screws shall be secured with safety wire in accordance with MS33540.

3.3.4 Soldering.--Soldering shall be in accordance with MIL-STD-440.

3.3.5 Dissimilar metals.--Unless components are suitably protected against electrolytic corrosion, contact between dissimilar metals shall be avoided. Dissimilar metals are defined in MS33586.

3.3.6 Finishes and protective coatings.--Materials exposed to environmental conditions conducive to corrosion in normal service life, shall be protected against corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. Finishes and protective coatings which will crack, chip or scale, or are affected by extremes of atmospheric or environmental conditions, shall not be used. When protective finishes are required, the parts shall be treated as follows:

3.3.6.1 Aluminum alloy.--Aluminum alloy parts shall be covered with an anodic film conforming to MIL-A-8625. Small holes, threads, and case inserts need not be anodized. Aluminum alloys which do not anodize satisfactorily shall be coated with a chemical film in accordance with MIL-C-5541.

3.3.6.2 Magnesium alloy.--Magnesium alloy parts shall be treated in accordance with type IV of MIL-M-3171. When abrasion resistance is a factor, anodic treatment in accordance with MIL-M-45202 shall be used.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

3.3.6.3 Iron and steel.--Iron and steel parts shall be chromium-plated in accordance with QQ-C-320, or nickel-plated in accordance with QQ-N-290, or cadmium-plated in accordance with QQ-P-416, or zinc-plated in accordance with QQ-Z-325, as applicable. Parts in a confined space, in the presence of organic material, shall be tin-cadmium-plated.

3.3.6.4 Fungus treatment.--Materials which are nutrients for fungi shall be treated with a fungicidal agent. (If the parts are used in a hermetically sealed enclosure, fungicidal treatment is not required.)

3.4 Details of components.--

3.4.1 Oil seal.--An oil seal capable of preventing engine oil leakage in excess of 2 cubic centimeters per hour when under pressure of 1 psi shall be provided at the drive end, as near the face of the mounting flange as possible.

3.4.2 Drain holes.--Three .10-inch drain holes shall be provided to prevent engine oil from entering the rotor or stator section.

3.4.3 Shaft.--Drive shaft shall conform to MS87015. The rotational play about its longitudinal axis shall not exceed 6 angular degrees. The shaft shall be provided with a shear section which will fail within the torque limits of 35 to 45 inch-pounds. The shaft drive end shall have a Rockwell C-30 to C-40 hardness. If shaft is straightened after heat treat, it will be necessary to check the shaft for cracks caused by straightening. (see 4.4.6).

3.4.4 Stator lock.--The stator assembly shall have a locking means to prevent rotation between the stator or case and the end housing. A press fit shall not be relied upon as the sole means to prevent relative movement between the stator and the housing of the generator.

3.4.5 Rotor.--The magnet may be pressed onto the rotor shaft; however, a press fit shall not be relied upon as the sole means to prevent relative movement between the magnet and the shaft.

3.4.6 Electrical connector.--Size and type of connector shall be as specified on MS87015, and shall conform to MIL-C-5015 except that the insert shall be of a resilient polychloroprene base compound and the receptacle shall be protected against corrosion and the effects of high temperature. The electrical connector shall be grounded to the housing of the generator.

3.4.7 Electrical connections.--The three leads from the generator windings shall be connected to B, A, and C pins of the electric connector in such a manner that when the generator drive shaft is rotated in a counterclockwise direction (as viewed looking at the shaft end of the generator) the generator output phase sequence will be B, A, C. The lead connected to pin C of the connector shall be grounded to the housing of the generator.



Source: https://assist.dla.mil -- Downloaded: 202610-23T00:00Z
Check the source to verify that this is the current version before use.

3.4.8 Mounting nut.--The swivel mounting nut shall run up tightly, and shall rigidly hold the generator before binding or other interference occurs between the mating shafts.

3.5 Performance.--The generator shall perform satisfactorily when subjected to the tests specified in section 4 of this specification.

3.6 Lubrication.--Lubrication shall be accomplished in accordance with MIL-STD-838, except the selection of lubricants used shall be approved by the procuring activity.

3.7 Identification of product.--

3.7.1 Nameplate.--Generator and its components shall be identified in accordance with MIL-STD-130.

3.7.2 Manufacturer's part number.--The manufacturer's part number on the nameplate shall be identical with the manufacturer's engineering production drawing number, including applicable dash numbers if the drawing number is tabulated and covers more than one part.

3.8 Workmanship.--The generator including all parts and accessories, shall be free from all defects which could affect proper functioning in service. Particular attention shall be given to neatness and thoroughness of soldering, wiring, impregnation of coils, marking of parts and assemblies, welding, brazing, plating, painting, riveting, machine screw assemblies, and freedom of parts from burrs and sharp edges, or any other damage or defect that could make the part or equipment unsatisfactory for the function intended.

3.8.1 Cleaning.--The generator shall be thoroughly cleaned of loose, spattered, or excess solder, resin flash that may crumble, metal chips, and other foreign matter. Whenever possible, the cleaning shall take place before the parts are assembled. Cleaning processes shall have no deleterious effect on the parts.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.--Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of examinations and tests.--Examinations and tests shall be classified as (1) first article and (2) conformance.



Source: https://assist.dla.mil -- Downloaded: 202610-23T00:00Z
Check the source to verify that this is the current version before use.

4.2.1 First article.--The first production-line generator (see 3.1.1) shall be subjected to all tests specified in 4.5.1 through 4.5.16.

4.2.2 Conformance.--Conformance examinations and tests shall be classified as (1) individual and (2) sampling.

4.2.2.1 Individual.--Each generator shall be subjected to the following:

(a) Examination of product with respect to materials, workmanship, and markings.
(b) Continuity and resistance (see 4.5.2).
(c) Phase rotation (see 4.5.3).
(d) Voltage (see 4.5.4).

4.2.2.2 Sampling.--Sampling tests shall be conducted as specified in 4.3.

4.3 Sampling.--Sampling shall be in accordance with Plan A or B as specified (see 6.2). Generators selected shall have first passed the individual tests (see 4.2.2.1).

4.3.1 Plan A.--If Plan A is specified, generators shall be selected at random in accordance with the following schedule:

| Quantity offered for acceptance | Quantity selected for testing |
|---|---|
| First 15 | 2 |
| Next 50 | 1 |
| Next 75 | 1 |
| Next 100 | 1 |
| Each additional 200 or fraction thereof | 1. |

Each generator selected shall be subjected to the following tests:

(a) Vibration (see 4.5.5).
(b) Insulation (see 4.5.6).
(c) Oil leakage (see 4.5.7).

4.3.2 Plan B.--Four generators shall be selected at random from the first 15 produced on the contract or order, and shall be subjected to the following tests, in the order listed:

(a) Tests specified in 4.3.1.
(b) Low temperature (see 4.5.8).
(c) High temperature (see 4.5.9).



Source: https://assist.dla.mil -- Downloaded: 202610-23T00:00Z
Check the source to verify that this is the current version before use.

(d) Temperature rise (see 4.5.10).
(e) Acceleration (see 4.5.11).
(f) Short circuit (see 4.5.12).
(g) Overspeed and reverse operation (see 4.5.13).

Note.--Generators which have been subjected to Plan B tests shall not be delivered on contract.

4.4 Test conditions.--

4.4.1 Ambient temperature.--Unless otherwise specified, all tests shall be made at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately 25° C.). If atmospheric pressure or temperature differs materially from these values, allowance shall be made for the differences from the specified condition.

4.4.2 Vibration stand.--The vibration stand shall consist of a device which will vibrate at any desired frequency between 5 and 250 cps, and shall be capable of subjecting the generators to vibration along each of any set of three perpendicular axes.

4.4.3 Voltages.--All voltages specified herein are root mean square (rms) values. Voltmeters shall be free from frequency errors. If the voltmeter draws appreciable current, the specified loads shall be so adjusted that the combined voltmeter and loads will form a balanced load equivalent to the specified load.

4.4.4 Tachometer indicator.--Indicator used in conducting tests shall be a magnetic drag-type electric tachometer in accordance with MIL-I-7098.

4.4.5 Standard load.--A standard load shall consist of three 40-ohm wye-connected resistors (see fig. 1).

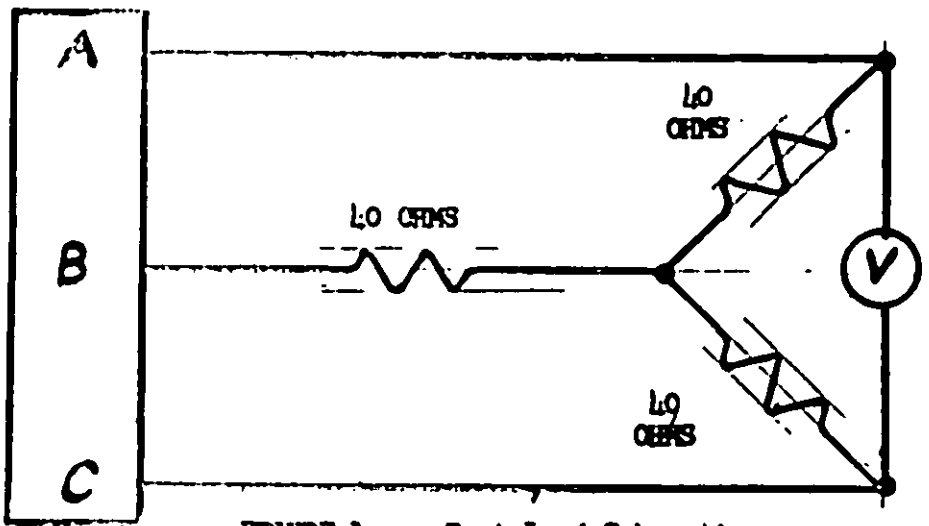



FIGURE 1. -- Test Load Schematic.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

4.4.6 Shaft.--If shaft has been straightened after heat-treatment (see 3.4.3), it shall be checked for cracks in accordance with MIL-I-6868.

4.5 Test methods.--

4.5.1 Examination of product.--Each generator shall be examined externally to determine conformance with all requirements of the specification not covered by tests.

4.5.2 Continuity and resistance.--The windings of the generator shall be checked for continuity between the A, B, and C pins of the electric connector, and between each of the A, B, and C pins and the generator case. There shall be no evidence of discontinuity. The resistance between each pair of pins of the MS87015 generator shall be measured and each two shall be within plus or minus 1.0 ohm of each other.

4.5.3 Phase rotation.--The generator shall be connected to an indicator conforming to MIL-I-7098. The terminals A, B, and C shall be connected to the indicator terminals A, B, and C, respectively. The indicator shall show a positive reading when the generator drive shaft is rotated in a counter-clockwise direction, as viewed looking at the shaft end of the generator.

4.5.4 Voltage.--With the generator connected to a standard load, and operating at 1,250 rpm, output voltage shall not exceed 21 volts when measured at the generator terminals. With the generator connected to two tachometer indicators in parallel, or to a load of three 20-ohm wye-connected resistors, and operating at 300 rpm, output voltage shall not be less than 3.5 volts.

4.5.5 Vibration.--The vibration test shall be conducted in accordance with Procedure II of MIL-E-5272. The frequency range shall be 5 to 250 cps. The generator shall be connected to a standard load and operated at the 1,250 rpm. At the end of the test period, the generator shall be inspected thoroughly for any damage or defects resulting from the vibration tests. The difference between the average of the three terminal voltages of the generator measured before vibration and after vibration shall not be more than 0.2-volt.

4.5.6 Insulation.--Five hundred volts ac at a commercial frequency shall be applied between any pin of the electric connector and any metal part of the generator case for 5 seconds. The C lead shall be disconnected from the housing of the generator for this test. There shall be no breakdown of insulation.

4.5.7 Oil leakage.--The generator shall be operated at 1,250 rpm with the shaft in a horizontal position and with one of the drain holes located at the bottom. While operating at this speed, the drive shaft end shall be subjected to an oil pressure of 1 psi using oil conforming to MIL-L-6082, at a temperature of 120° C., plus or minus 5° C. The amount of oil leakage shall be determined at the end of 1 hour after the first drop of oil appears at the drain hole. This oil leakage shall not exceed 2 cubic centimeters for the 1-hour period. If no oil appears at the drain hole after 1 hour of operation, the test shall be considered complete.



Source: https://assist.dla.mil -- Downloaded: 202640-23T00:00Z
Check the source to verify that this is the currentversion before use.

4.5.8 Low temperature.--The low-temperature test shall be in accordance with Procedure II of MIL-E-5272. At the end of the 48-hour period, and while the generator is still at the low temperature, the torque required to rotate the generator shaft shall be measured and shall not exceed 12 inch-pounds. At the end of the 24-hour period, the torque shall again be measured and shall not exceed 8 inch-pounds. After the chamber has been returned to room temperature and the generator saturated at room temperature for a minimum period of 4 hours, it shall be subjected to, and shall meet the requirements of, the tests listed in 4.2.2.1. There shall be no damage which could adversely affect the subsequent operation.

4.5.9 High temperature.--The high-temperature test shall be in accordance with Procedure II of MIL-E-5272, except as specified herein. The generator shall be made to operate two indicators (see 4.4.4) conforming to MIL-I-7098 at a generator speed of 1,400 rpm, and the output voltages shall be noted. The generator shall then be subjected to a temperature of 90° C., plus or minus 2° C., for 4 hours, and while still at this temperature, shall operate continuously the same indicators at the same generator speed. The average voltage output at the high temperature shall not differ more than 2 volts from the average voltage output at room temperature. No damage to any part of the generator shall result from this test.

4.5.10 Temperature rise.--The direct-current resistance between one pair of the generator terminals shall be measured. The generator shall then be mounted on a driving head with the shaft horizontal in a location where there is no circulation of the air except the thermal current caused by the heat dissipated by the generator. The generator shall be connected to three 20-ohm wye-connected resistors and operated at 1,250 rpm for 1 hour. The direct-current resistance between the same terminals of the generator shall again be determined. The temperature rise (T-t), calculated by the following equation, shall not exceed 48° C.

$$T - t = \left(\frac{R}{r} - 1\right)(234.5 + t)$$

where:

T = the final temperature of the winding, Centigrade.

t = the ambient temperature and the temperature of the winding at the start of the test, Centigrade.

r = the direct-current resistance of the winding at the temperature "t" measured between two terminals.

R = the direct-current resistance at the temperature "T" measured between the same two terminals.



Source: https://assist.dla.mil -- Downloaded: 202610-23T00:00Z
Check the source to verify that this is the current version before use.

4.5.11 Acceleration.--The generator drive shaft shall be coupled to a motor which starts with an initial acceleration of 400 revolutions per second (rps), then the generator shall be subjected to this acceleration for 500 applications. The final speed of the motor on each run shall be 1,000 to 1,800 rpm. No damage to any part of the generator shall result from this test.

4.5.12 Short circuit.--The generator shall be connected to the standard load and operated at 1,250 rpm, to determine the three terminal voltages. The generator shall then be short-circuited 5 times for a 1-second period each time across all three of the generator terminals, with a 5-second interval between short circuits. After the generator has cooled to room temperature, the three terminal voltages shall again be determined, with the generator operating at 1,250 rpm and with the standard load connected across the terminals. The average of the three voltages measured after the short-circuiting shall not differ by more than 1.0 volt from the average of the three voltages measured before the short-circuiting.

4.5.13 Overspeed and reverse operation.--The generator shall be connected to the standard load and operated at 1,250 rpm, to determine the three terminal voltages. The generator shall then be operated with the same load at 2,500 rpm for 5 minutes, and then in the reverse direction at 1,250 rpm for 1 minute. After the generator has cooled to room temperature, it shall be operated with the standard load at 1,250 rpm in the normal direction, and the terminal voltages shall be measured. The change in the average of the terminal voltages shall not be more than 0.33-volt.

4.5.14 Endurance.--Endurance test shall consist of connecting the generator to the standard load and operating it at 1,250 rpm to determine the three terminal voltages. The generator shall then be operated for 300 hours under this condition. After the generator has cooled to room temperature, the three terminal voltages shall again be measured. The average of the three generator voltages measured before the endurance test, minus the average voltage measured after the endurance test, shall not exceed plus or minus 0.6-volt. No screw or other part shall have become loosened or damaged as a result of this test.

4.5.15 Humidity.--The humidity test shall be in accordance with Procedure I of MIL-E-5272, except that the cycle shall be repeated a sufficient number of times to extend the total time of test to 120 hours (5 cycles). At the end of the 120-hour (5-cycle) period, and within 1 hour after the generator has been removed from the chamber, it shall be subjected to, and shall meet the requirement of, the test specified in 4.5.2. Examination for corrosion and other deterioration shall be made between 24 and 48 hours after completion of the humidity exposure. There shall be no evidence of corrosion or other deterioration which could affect subsequent operation of the generator.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

4.5.16 Salt spray.--The generator, with external connections made to simulate installed conditions, shall be subjected to the salt spray tests in accordance with Procedure I of MIL-E-5272. At the end of this test, and within 1 hour after the generator has been removed from the chamber, the generator shall be subjected to, and shall meet the requirements of, the tests specified in 4.5.2 and 4.5.6. Examination for corrosion and other deterioration shall be made between 24 and 48 hours after completion of the salt spray exposure. There shall be no evidence of corrosion or other deterioration which could affect subsequent operation of the generator.

4.6 Inspection of preparation for delivery.--Preservation and packaging, and packing, shall be inspected for conformance with section 5 of this specification.

## 5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.--Generators shall be preserved and packaged in accordance with MIL-STD-794, level A or C as specified (see 6.2). For level A packaging, the preservation shall conform to method II of MIL-P-116.

5.2 Packing.--Packing shall be in accordance with MIL-STD-794, level A, or B, or C, as specified (see 6.2).

5.3 Marking.--In addition to any special marking required by the contract or order, marking shall be in accordance with MIL-STD-129.

## 6. NOTES

6.1 Intended use.--Generator is intended for use on reciprocating engines to generate electrical signals for transmission to indicators conforming to MIL-I-7098.

6.2 Ordering data.--Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Whether sampling Plan A or B is to be used (see 4.3).
(c) Level of preservation and packaging, and level of packing required (see 5.1 and 5.2).
(d) Whether special marking is required (see 5.3).

6.3 Provisions for first-article inspection tests.--First-article inspection tests in accordance with 4.2.1 should be required of all manufacturers. Acceptance will be made only for such products which have been submitted in accordance with this specification and pronounced satisfactory by the procuring activity.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

Custodians:

Army -- AV
Air Force -- 71

Review activity:

Army -- AV
Air Force -- 71

User activity:

Army -- AV
Navy -- CG

Preparing activity:

Army -- AV

Code C

Project No. 6620-0163-1



Source: https://assist.dla.mil -- Downloaded: 202610-23T00:00Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

**INSTRUCTIONS**

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 OCT 84 1426

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:00Z
Check the source to verify that this is the current version before use.