MILITARY SPECIFICATION

RADIAC REPAIR FACILITY (MOBILE), AN/MDM-1( )

1. SCOPE.

1.1 This specification covers an AN/MDM-1( ), Mobile Radiac Repair Facility, intended to perform all the functions of a fixed facility. This facility provides the capacity and capabilities for the maintenance, repair, calibration, wipe-testing and decontamination of all types of radiac equipment. It is entirely self-sustaining and provides facilities (shelter, food, and so forth) for four men operating independently for a period of ten days.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-E-489 - Enamel, Alkyd, Gloss (for Exterior and Interior Surfaces).

MILITARY

MIL-T-1712 - Tent, General Purpose, Medium, Fire, Water, Weather, and Mildew-Resistant Treated, Olive Drab, Complete.

MIL-C-4751 - Casters, Rigid and Swivel, Precision Heavy Duty, and Shock, Absorbing.

MIL-T-10579 - Trailer, Cargo, 1/4 Ton, 2W, M100 and Chassis, Trailer, 1/4 Ton, 2W, M115.

STANDARDS

MILITARY

MS51353 - Winch, Drum, Vehicle Mounting-Basic, Mechanically Driven, 20,000 Lb. Capacity.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

OFFICIAL CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Official Classification Committee, 1 Park Ave. at 33rd. Street, New York 16, N.Y.)

3. REQUIREMENTS

3.1 General requirements.- The general requirements necessary to accomplish the scope of this specification shall be as follows:

3.1.1 A commercial type walk-in van, with cab over engine, mounted on a 1-1/2 ton chassis equipped with forward controls, dual rear wheels, and a front mounted "Vehicle mounting drum winch (Basic) mechanically driven, 20,000 pounds capacity" shall be provided. This vehicle shall provide an equipment maintenance and storage area (see figures 1, 2, 3, and 4). The chassis frame shall extend far enough beyond the front of the van so as to accept the mounting of the winch between the front bumper and van.

3.1.1.1 The vehicle transmission shall be provided with a power takeoff output which can be manually engaged or disengaged from within the cab (part of the forward controls).

3.1.2 A Military type 1/4 ton trailer, conforming to MIL-T-10579, modified to house and transport radioactive matter for calibration purposes, calibration jigs and heavy tools shall be provided (see figures 5, 6 and 7).

3.1.3 A mono-rail for calibration purposes shall be provided (see figure 6).

3.1.4 Two large covers which can be attached to each side of the body shall be provided. One shall be used as a shelter area for personnel assigned to the vehicle and the other shall provide an area for contamination tests and decontamination work (see figure 8).

3.2 Construction.-

3.2.1 Cab and body.- The cab and body shall be constructed of high tensile steel with subassemblies bolted, arc welded and securely riveted into a unit assembly. The cab shall be integral with body load space with minimum inside dimensions 144 inches long by 88 inches wide by 78 inches high.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:04Z
Check the source to verify that this is the current version before use.

3.2.1.1 Side posts shall be formed in "Z" sections of 16 gauge steel located on 18-1/2 inches maximum centers with a minimum of 9 posts to each side.

3.2.1.2 The two front corner posts shall be formed in 6 inch radius of 18 gauge steel.

3.2.1.3 The two rear corner posts shall be formed as a square corner assembly of 10 gauge steel.

3.2.1.4 Cross bars with tapered end channels shall be constructed of 11 gauge steel with six full length bars located on 29 inch maximum centers and a short cross bar between the dual wheels.

3.2.1.5 There shall be eleven roof cross ribs located on 12-1/2 inch maximum centers. Nine ribs shall be flange channels of 18 gauge steel and two "Z" shaped of 14 gauge steel.

3.2.1.6 There shall be three rub rails on each side extending the full length of the body. One at the roof crown, one at the belt line and one at the floor line. Rub rail at belt line shall be hat shaped of 16 gauge steel. The floor line rub rail shall be of 12 gauge steel.

3.2.1.7 Side skirt panels shall be of 18 gauge steel and shall extend from floor line rub rail to top of cab step.

3.2.1.8 The rear skirt panel shall be of 14 gauge steel diamond tread and shall extend from floor line to rear bumper step.

3.2.1.9 Side sheets shall be of 22 gauge steel. One sheet shall extend from roof crown to belt line and one shall extend from belt line to floor line.

3.2.1.10 The roof sheets shall be 22 gauge steel.

3.2.1.11 The interior ceiling shall be lined with an aluminum sheet of 0.040 inch thickness, with embossed ribbed reinforcements running lengthwise, and installed with sheet metal screws.

3.2.1.12 The interior sides shall be lined with aluminum sheets of 0.040 inch thickness and installed with sheet metal screws.

3.2.1.13 The interior ceiling and walls shall be completely insulated with 2 inch fiber glass.

3.2.1.14 The floor shall be 1-1/8 inch finished oak, tongue and grooved, covered with 1/4 inch plywood. The floor shall be further covered with heavy duty battleship linoleum.

3.2.1.15 Roof crowns (sides, front and rear) shall be 6 inch radius with roof rub rail formed into crown of 18 gauge steel.

3.2.1.16 Wheel housing shall be square, constructed of 14 gauge steel, and dimensions shall not exceed 6 inches in height by 44 inches in length with the minimum distance between housing not to be under 41 inches.

3.2.1.17 There shall be two rear doors, constructed of 18 gauge high strength steel and lined with 0.040 inch aluminum lining fastened with sheet metal screws. Each door shall be equipped with a window approximately 12 inches by 18 inches. The doors shall be mounted with continuous piano type hinges and equipped with a heavy duty van type lock with padlock provisions. Door opening shall be approximately 44-1/2 inches and fasteners provided to hold doors open. Each door shall be insulated with 2 inch fibre glass.

3.2.1.18 The rear bumper shall be a wrap around type, 2 inches by 6 inches channel shaped of 3/16 inch thickness steel, securely mounted to chassis frame and equipped with a Military type pintle hook.

3.2.1.19 The vehicle winch shall be mounted forward of the front of the van body and aft of the front bumper. It shall be mounted in such a manner as to withstand the rated pull of the winch plus 1500 pounds without causing warping, bending or any other type distortion to the chassis frame of the vehicle.

3.2.1.20 The front bumper shall be a wrap around type channel shaped of 3/16 inch thickness steel. It shall be securely attached to the chassis frame. It shall be equipped with two tow type hooks securely attached to the top of the bumper where the bumper attaches to the chassis frame members.

3.2.1.21 The rear step shall be of 14 gauge steel diamond tread, extending from rear skirt panel to rear edge of the bumper.

3.2.1.22 Cab doors (right and left) shall be constructed of 18 gauge steel with glass windows in upper section and equipped with locking provisions to hold doors in both open and closed position. Doors shall be a folding type, folding inwards into step well, hinged at rear end of door opening and mounted with a continuous type piano hinge.

3.2.1.23 Cab door step wells shall be constructed of 14 gauge steel diamond tread.

3.2.1.24 A storage compartment shall be constructed in the cab extending the full width above the windshield. This compartment shall be approximately 10 inches high with a door and latch.

3.2.1.25 The cab floor shall be constructed of 14 gauge steel diamond tread and hinged at the rear end for chassis service.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:04Z
Check the source to verify that this is the current version before use.

3.2.1.26 Seats shall be provided for a driver and a helper. Seats shall be a spring type seat cushion with padded back covered in "Naugahyde" or similar type material. Seat assembly shall have a hinged back and shall be mounted on a tilt forward type pedestal with seat height adjustment and finger tip forward and backward adjustment.

3.2.1.27 The engine cover shall be insulated and hinged for engine service.

3.2.1.28 All body parts shall be cleaned in a phosphate type cleaner and shall be thoroughly coated with zinc chromate primer before and after assembly.

3.2.2 Van interior.- The interior of the van shall be utilized as a repair and storage area. It is intended to contain all facilities and equipment necessary for the repair of radiac equipment and storage space for batteries, test equipment, repair parts and any other items necessary for the operation of the facility. Figures 3 and 4 show the arrangement and equipment requirements. Should the contractor find it necessary to re-arrange the equipment, approval shall be obtained from the procuring agency prior to such re-arrangement.

3.2.2.1 Maintenance area.- The left side of the van shall be utilized as the maintenance area (see figure 3).

3.2.2.1.1 The battery storage drawers shall be 20 gauge steel, approximately 5-1/2 inches wide by 4-1/2 inches high by 22 inches deep equipped with a handle and catch to prevent drawers opening when vehicle is in motion.

3.2.2.1.2 The 5-drawer cabinets shall be 20 gauge steel, approximately 15 inches wide by 20-3/4 inches high by 22-3/4 inches deep. Each drawer shall be equipped with a handle and catch to prevent drawers opening when vehicle is in motion. Cabinets shall be installed in a manner to afford approximately 6 square feet of work space per man.

3.2.2.1.3 The work bench shall be constructed of 3/4 inch plywood and mounted on the cabinets. The bench shall be approximately 26-1/2 inches wide, covered with formica, an aluminum beading and extend the entire length of the load space.

3.2.2.1.4 The overhead storage cabinets shall be constructed of suitable material, mounted flush with the ceiling and extend downward with an appropriate hood or shield to deflect fluorescent lighting onto the work bench area. The cabinet shall be approximately 18 inches high by 14 inches deep and shall be divided into four equal compartments. Cabinet doors may either be hinged at the top with a piano type hinge and a catch at the bottom or be of a sliding type.

3.2.2.2 The work counter and storage area.- The right side of the van shall be utilized as a work counter and storage area (see figure 4).

3.2.2.2.1 The work counter shall be constructed of 3/4 inch plywood and installed approximately 38 inches above the floor space. The counter shall be approximately 21-1/2 inches wide, covered with a formica top, an aluminum beading and extend the entire length of the load space.

3.2.2.2.2 Adjustable metal shelving of 18 gauge steel, with common posts and side panels, beaded front posts and box flanged shelves shall be provided. This shelving shall provide storage space for approximately 50 pieces of small radiac equipment and individual bins shall be approximately 6 inches wide by 8-1/2 inches high by 14 inches deep. Shelving shall be capable of withstanding a weight load of 450 pounds.

3.2.2.2.3 Metal storage compartments to be mounted on the scaler compartment shall be 18 gauge steel. Two compartments shall be approximately 10 inches wide by 10 inches high by 19 inches deep and one approximately 11-1/2 inches wide by 10 inches high by 19 inches deep.

3.2.2.2.4 Metal storage drawers shall be installed beneath the work counter and mounted on the storage compartments and scaler compartment. Drawers shall be 18 gauge steel, equipped with a handle and catch to prevent drawers opening when vehicle is in motion. Four drawers shall be approximately 5-1/2 inches wide by 3-1/2 inches high by 17-3/4 inches deep. The center drawer shall be approximately 8-3/8 inches wide by 3-1/2 inches high by 17-3/4 inches deep.

3.2.2.2.5 Metal storage compartments shall be installed alongside the scaler compartment. Compartments shall be 18 gauge steel and approximately 10 inches wide by 10 inches high by 19 inches deep.

3.2.2.2.6 The safe shall be a 3-tumbler combination approximately 18 inches wide by 30-1/2 inches high by 16-3/8 inches deep.

3.2.2.2.7 Storage cabinet number 1 shall be 18 gauge steel and equipped with a handle and suitable catch to prevent door opening when vehicle is in motion. This cabinet shall be approximately 18 inches wide by 6-1/2 inches high by 16-3/8 inches deep.

3.2.2.2.8 Storage cabinet number 2 shall be 18 gauge steel, approximately 20-7/8 inches wide by 37 inches high by 16-3/8 inches deep, equipped with a

Source: https://assist.dla.mil -- Downloaded: 202640-19T16:04Z
Check the source to verify that this is the current version before use.

lock, handle and a catch to prevent door opening when vehicle is in motion.

3.2.2.2.9 The sink and faucet shall be a standard make. The sink may be either round or square but shall not exceed 12 inches in width, 14 inches in length, nor 7 inches in depth.

3.2.2.2.10 The circuit breaker shall be a square D, QO circuit breaker, load-center, 4 pole surface mount, QO4S-115Amp.

3.2.2.2.11 The frequency meter shall be a 3-1/2 inch round type with a range of 58 to 62 cycles. It shall have a bakelite flange and shall be flush mounted.

3.2.2.2.12 The voltmeter shall be an alternating current (a.c.), 3-1/2 inch round type with a range of 0-150 volts. It shall have a bakelite flange and shall be flush mounted.

3.2.2.2.13 The blower and air filter system provided shall be capable of providing sufficient fresh filtered air for a crew of four when the vehicle is operating in a contaminated area.

3.2.3 Exterior (see figures 1 and 2).-

3.2.3.1 The scaler compartment shall be constructed of 14 gauge steel, completely sealed inside, with the outside opening covered with a 14 gauge steel door. The door shall be hinged at the top with a piano type hinge and protected with a watertight gasket. The compartment shall be approximately 30-1/2 inches wide by 16 inches high by 22 inches deep. The door shall have a padlock and a suitable catch to hold the door in an open position.

3.2.3.2 Removable work tables shall be constructed of 3/4 inch plywood, covered with formica and enclosed with an aluminum beading. Tables shall be approximately 26 inches long and 16 inches wide. Provisions shall be made for mounting tables at the rub rail. When not in use tables are removed and stored in the van under the work bench.

3.2.3.3 The wipe test equipment storage compartment shall be constructed of 14 gauge steel, approximately 26 inches wide by 11-1/4 inches high by 22 inches deep, extending inward and shall be completely sealed. The door shall be hinged on the side with a piano type hinge and equipped with a padlock.

3.2.3.4 The 40 gallon fresh water tank shall be installed with adequate plumbing to the sink and an outside connection for washing down contaminated areas and equipment (see figures 2 and 8).

3.2.3.5 An iron ladder shall be provided and attached to the side of the cab.

3.2.3.6 The gasoline motor-generator storage compartment shall be constructed of 14 gauge steel, approximately 28 inches wide by 19 inches high by 22 inches deep, extending inward on the left side of the van. The door shall be hinged at the bottom with a piano type hinge and equipped with a padlock (see figure 5).

3.2.3.7 The winch shall be equipped with a jaw clutch, which shall be operated outside the van, to permit free spooling.

3.2.3.7.1 The winch drive assembly shall be protected by means of a "shear-pin" which shall shear before the cable parts or damage is done to the gear assembly of the winch. The shear-pin shall be located in such a place to be easily replaced in a minimum amount of time with a minimum amount of tools.

3.2.3.7.2 The power input to the winch shall be shaft coupled from the power take-off output of the transmission.

3.2.4 Electrical system and lighting.- The vehicle shall be equipped with a 12 volt and a 115 volt electrical system.

3.2.4.1 Fluorescent lights shall be installed beneath the overhead storage cabinet to provide adequate lighting over the entire work bench area. These lights shall be operated by the 115 volt electrical system and individually controlled at each position with a toggle switch mounted on the cabinet hood or shield.

3.2.4.2 A 2-conductor, number 4 insulated-number 6 neutral, electrical cable shall be provided for service entrance. Other wiring for the 115 volt electrical system shall be 2-conductor, romex-number 14 cable with solid ground wire.

3.2.4.3 Duplex electrical outlets shall be installed above the work bench, work counter, and in the scaler compartment. Outlets above the workbench shall be installed approximately 6 inches apart and those above the work counter approximately 32 inches apart. One outlet shall be located in the scaler compartment. These outlets shall be a.c., duplex 3-wire, 120 volt, "U" grounded receptacles.

3.2.4.4 Two flush mounted dome lights, approximately 6 inches square, shall be installed in the ceiling; one to be located 4 feet from the rear of the cab area and one 4 feet forward of the rear doors. These lights shall operate on both the 12 volt and 115 volt systems; the 12 volt system to be controlled from the cab area and the 115 volt system from the load space area.

3.2.4.5 Two spotlights shall be installed on the top rear of the vehicle. These lights shall operate on the 115 volt electrical system and be adjustable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:04Z
Check the source to verify that this is the current version before use.

3.2.4.6 Two duplex, recessed, 3-wire, 120 volt, "U" ground, a.c. plug-in receptacles, with waterproof covers, shall be installed in each side of the van below the load space rub rail. One set shall be located approximately 3 feet from the rear of the cab and one set approximately 3 feet from the rear of the vehicle (see figure 4).

3.2.4.7 A single, recessed, 3-wire, 120 volt, "U" ground, a.c. plug-in receptacle, with a waterproof cover, shall be installed in the right rear skirt as the service entrance cable (see figure 8).

3.2.4.8 All electrical cables and fixtures provided and installed shall be Underwriter's Laboratory (UL) approved and meet all safety requirements.

3.2.5 Vehicle equipment.- The vehicle shall be equipped with the following:

(a) A 200 to 250 horsepower (hp.), V-8 Engine.
(b) Four speed forward, one speed reverse, manual shifting transmission with power take-off output.
(c) Winch, drum, vehicle mounting-basic, mechanically driven, 20,000 pounds capacity in accordance with MS 51353.
(d) Two large rectangular, bus type, rear view mirrors, one mounted on each side of the cab.
(e) Safety glass throughout.
(f) A ventilator and heavy duty heater.
(g) A standard air cleaner.
(h) A 12 volt, 50 ampere battery.
(i) A 12 volt, 60 ampere generator.
(j) Shock absorbers for all wheels.
(k) Two constant speed, heavy duty, electric windshield wipers.
(l) Class "A" turn signals for front and rear.
(m) Front springs with 1900 pound load capacity.
(n) Rear springs with 5000 pound load capacity.
(o) 800 by 19.5, 6 ply tires and tubes.
(p) Repair wheel, with tire and tube mounted, and carrier.
(q) A portable 12 volt emergency light.
(r) A pursuit type siren mounted on the top of the cab.
(s) An extra jumper seat.
(t) Four padded work bench stools with height adjustment and adjustable back.
(u) A two-burner electric hot plate.
(v) A 4-cycle, 2500 watt, 115 volt, 60 cycle, a.c. motor-generator.
(w) Standard headlights, tail lights, and reflectors.

3.3 Trailer.- The trailer shall be a modified 1/4 ton Military type cargo trailer and chassis conforming to MIL-T-10579. Figures 5, 6 and 7 show the outline and general dimensions of the modified trailer in the closed and open position with a mono-rail attached. Approximate dimensions shall be as shown. Detail requirements shall be as follows:

3.3.1 Trailer springs, axle and wheels shall be removed and relocated approximately 16 inches to the rear. This is necessary to support the 500 pound lead radioactive source container to be mounted in the rear of the trailer.

3.3.2 To facilitate trailer leveling and mobility, the landing leg shall be removed and a heavy-duty shock-absorbing caster wheel assembly substituted. This assembly shall be adjustable and conform to applicable portions of MIL-C-4751 (see figures 5 and 6).

3.3.3 A 1/4 inch aluminum bracing plate, approximately 7 inches by 13 inches shall be attached to each corner of the trailer body and extend to the edge of the trailer side flanges.

3.3.4 Corner posts and framing to support the trailer roof and outer covering side panels shall be 90 degree angle, 1-1/2 inches by 1-1/2 inches by 1/4 inch aluminum. Corner posts shall be inserted through an opening in the side flanges and secured to the bracing plates and trailer sides.

3.3.5 The roof shall be constructed of a single 1/8 inch aluminum sheet with a 3 inch pitch and extend the length and width of the trailer body.

3.3.6 Side panels shall be 1/8 inch aluminum, hinged with a piano type hinge approximately 2 inches below the roof line and curbed at the bottom to over-lap trailer side flanges. Panels to be equipped with an inside locking bolt and an outside finger type screw fastener at each end with provisions made to hold them in an open position.

3.3.7 The sliding rear panel shall be curved at the bottom to over-lap the rear trailer flange and be completely removable. It shall be equipped with an outside finger type screw fastener at each end and a padlock.

3.3.8 The front panel shall be 1/8 inch aluminum, hinged with a piano type hinge and curved at the bottom to over-lap the front trailer flange. The front panel shall be equipped with an outside finger type screw fastener at each end and a padlock, with provisions made to hold it in an open position.

3.3.9 Electrical outlets shall be recessed, 3-wire, a.c., 120 volt, "U" ground, plug-in receptacles with waterproof covers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:04Z
Check the source to verify that this is the current version before use.

3.3.10 A frame and a quarter-inch steel platform to support the radioactive source container shall be constructed and attached to the trailer floor (see figure 7).

3.3.10.1 The frame shall be approximately 26 inches by 40 inches and be welded to the floor at the rear of the trailer. It shall extend the width of the trailer.

3.3.10.2 The quarter-inch steel platform shall be approximately 15 inches by 16 inches and be attached to the frame with four steel legs and bracings. The platform shall be mounted approximately 15-1/2 inches above the floor and flush with the rear of the trailer.

3.3.10.3 Framing, legs and bracings shall be 90 degree angle, 1-1/2 inches by 1-1/2 inches by 1/4 inch steel and be constructed in a manner to assure rigid support for the container.

3.3.11 The inner covering shall be as depicted in figures 6 and 7. This covering shall extend approximately 12 inches above the trailer body and be constructed of 90 degree angle, 1-1/2 inches by 1-1/2 inches by 1/4 inch aluminum framing with covering panels of 1/8 inch sheet aluminum. The center panel shall be approximately 10-1/2 inches wide and be flush with the rear inner edge of the trailer. The inner covering shall be constructed so that the radioactive source container may be removed with a minimum of effort. Side panels shall be hinged with a piano type hinge and equipped with a handle. Provisions shall be made for storing mono-rail sections on inner covering side panels.

3.3.12 The front inner covering panel serves as the calibration control panel (see figure 7).

3.3.12.1 Elapsed timers.- The two elapsed time meters shall be for 110-125 volt, 60 cycle, a.c. and record operating time in 0.1 hour steps to 9999.9 hours. They shall be a self-starting, automatic reset, 3-1/2 inch round type and shall be flush mounted in the control panel.

3.3.12.2 Voltmeter.- The voltmeter shall be a 60 cycle, a.c., 3-1/2 inch round type with a range of 0-150 volts. It shall have a bakelite flange and be flush mounted in the control panel.

3.3.12.3 Dual timer.- The dual timer shall be for both preset and elapsed time operation. When used as a preset timer it shall automatically stop the counting after any time interval between two seconds and sixty minutes in one second increments and in the elapsed time operation it shall indicate elapsed time up to sixty minutes in one second increments. It shall be flush mounted in the control panel and U. L. approved for 110-125 volt, 60 cycle, a.c.

3.3.12.4 Indicator lights.- The indicator lights shall be panel mounted 11/16 inch, 105-125 volt, pilot lights with green, red and amber, respectively, faceted lens caps. Indicator lights shall be operated by the toggle switch.

3.3.12.5 Control levers.- The radioactive source container is controlled by these levers. They shall be 1/2 inch aluminum rods extending from the control panel to the container and shall be equipped with a handle and a fixture for attaching to the container controls.

3.3.12.6 Telescope.- The telescope shall be a one draw tube terrestrial type, 1-5/16 inches in diameter with brass draw tube, black crackle finish, focus control, mounting holder on pan-head and lens cover. It shall be mounted above the control panel and shall be adjustable.

3.3.12.7 Levels.- Two 2 inch levels shall be attached to the inner covering above the control panel to facilitate leveling the trailer and mono-rail for calibration purposes. These levels shall form a 90 degree angle, with one facing to the rear and the other to the side.

3.3.13 An opening, approximately 6-1/2 inches by 11 inches, shall be made in the rear inner covering panel to provide access to the radioactive source. This opening shall be centered in the rear covering panel (see figure 7).

3.4 Mono-rail.- The mono-rail shall be constructed as shown on figure 6. It shall be 1/8 inch aluminum casing, approximately 1-3/4 inches by 4 inches by 18 feet, and shall be constructed so that it may be disassembled and stored inside the trailer. The mono-rail shall be supported at the front by a support attached to the rear of the trailer outer covering and at the rear by two adjustable legs.

3.4.1 Front support.- The front support shall be constructed of 1/8 inch aluminum casing approximately 1-5/8 inch by 3-7/8 inches by 18-3/8 inches. It shall be centered in the rear outer covering panel and extend approximately 8-1/4 inches above the trailer roof (see figure 7).

3.4.2 Rear support.- The rear support shall be constructed of 1/8 inch aluminum pipe and a boot type supporting fixture. The pipe shall be in two sections, each approximately 59 inches long, with the first section being approximately 1-5/8 inches and the second section 1-1/4 inches in circumference. The second section shall be drilled every 6-1/2 inches on center to furnish a means to adjust the height of the mono-rail. The supporting fixture shall be constructed of 1/8 inch aluminum casing, approximately 1-7/8 inches by 4-1/8 inches by 7 inches. The fixture shall be designed so that it may be securely mounted on the mono-rail and have a swivel type solid brass attachment for side adjustment.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:04Z
Check the source to verify that this is the current version before use.

3.4.3 Carriage.- The carriage shall be constructed of 1/8 inch aluminum casing, approximately 8 inches by 14 inches by 1-7/8 inches with 1 inch rollers securely mounted in each end. These rollers shall be installed so that the carriage, when mounted, will fit snugly on the mono-rail with a minimum amount of free play. The equipment support attached to the carriage shall be 1/2 inch copper tubing.

3.5 Shelter and work areas.- Two large covers shall be provided, as shown on figure 8, to serve as a shelter for personnel assigned and as an outside work area. Shelter covers shall be attached to the sides and bottom of the van by metal fasteners.

3.5.1 Dimensions.- Dimensions shall be as shown on figure 8.

3.5.2 Material.- The material utilized in fabrication shall be a light weight, good grade, commercial quality material, entirely suitable for its intended use and shall be fire, water, weather and mildew resistant.

3.5.3 Doors.- Door openings shall be approximately 3 feet by 6 feet.

3.5.4 Fabrication.- The cover and doors shall be fabricated in accordance with MIL-T-1712.

3.5.5 Fasteners.- Fasteners, designed to fasten easily and to securely hold the shelter cover in place, shall be permanently attached to the sides and bottom of the van.

3.6 Painting.- The exterior and interior of the truck and trailer shall be finished with medium gray gloss enamel conforming to class A or B of TT-E-489.

3.7 Marking.- Registration numbers, including letters designating the using service shall be as specified (see 6.1).

3.8 Workmanship.- The entire facility shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, burrs and sharp edges; thoroughness of soldering, welding, painting, wiring, alignment of parts and tightness of assembly screws and bolts.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection.- Quality conformance inspection shall consist of the examination and tests specified in 4.2.1 and 4.2.2 to determine conformance with the requirements of this specification. Each facility shall be tested as specified herein.

4.2.1 Examination.-

4.2.1.1 Visual.- Visual examination shall include the following:

(a) Examination for presence and conformance to the drawings or detail specifications herein. For example, the presence of items listed in 3.2.5, specific ratings for electrical cables, parts and equipment, spotlights and other equipment specified in section 3.
(b) Examination for defects in workmanship as evidenced by such items as nonconformance of welds (including gross distortion resulting from inadequate fixtures or techniques), loose screws and bolts, presence of heavy burrs, and signs of forced fits or wedging-in of parts not conforming to design purposes.

4.2.1.2 Dimensional.- Dimensional examination shall include inspection for conformance of the facility to mandatory gross minimum dimensions and sizes or positioning of parts.

4.2.1.3 Functional.- Inspection involving manipulation or use of the other senses (tactile, and so forth) but without use of special equipment or instrumentation shall be effected as primary functional examination. Included in this examination shall be such items as basic electrical functional checks (headlights, spotlights, turn signals, and so forth), manipulation of mechanical devices and elementary performance inspection (heater and air filter functioning, and so forth).

4.2.2 Tests.- Testing shall normally be limited to determining conformance of the facility to perform its intended purpose.

4.2.2.1 The vehicle and trailer shall be subjected to a road test for a distance sufficient to determine that the parts function properly, and that all parts are properly adjusted. During the test, turning, steering, and braking operations shall also be evaluated. The vehicle shall meet State vehicle inspection requirements.

4.2.2.2 The winch shall be tested to assure that it meets the provisions of MS51353.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

5.1 Domestic shipment and early equipment installation.-

5.1.1 Basic equipment or item.-

5.1.1.1 Preservation and packaging.- Preservation and packaging shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity and until early installation and may conform to the suppliers commercial practice when such meets these requirements.

5.1.1.2 Packing.- Packing shall be accomplished in a manner which will insure acceptance by common carrier at the lowest rate and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules and Regulations or other carrier regulations as applicable to the mode of transportation and may conform to the suppliers commercial practice when such meets these requirements.

5.1.1.3 Marking.- Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, Federal stock number of manufacturer's part number, contract or order number, contractor's name and destination.

5.2 Domestic shipment and storage or overseas shipment.- The requirements and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 6.1).

(5.2.1 The following provides various levels of protection during domestic shipment and storage or overseas shipment, which may be required when procurement is made by a Government activity (see 6.1).

5.2.1.1 Preservation, packaging, packing and marking.- The facility shall be preserved and packaged level A or C, packed level A, B, or C and marked in accordance with MIL-E-17555.)

6. NOTES

6.1 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Registration number applicable (see 3.7).
(c) Preservation, packaging, packingor marking requirements other than those required by 5.1 (see 5.2).

Notice.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Preparing activity:
Navy - Ships
(Project 6665-N118Sh)

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

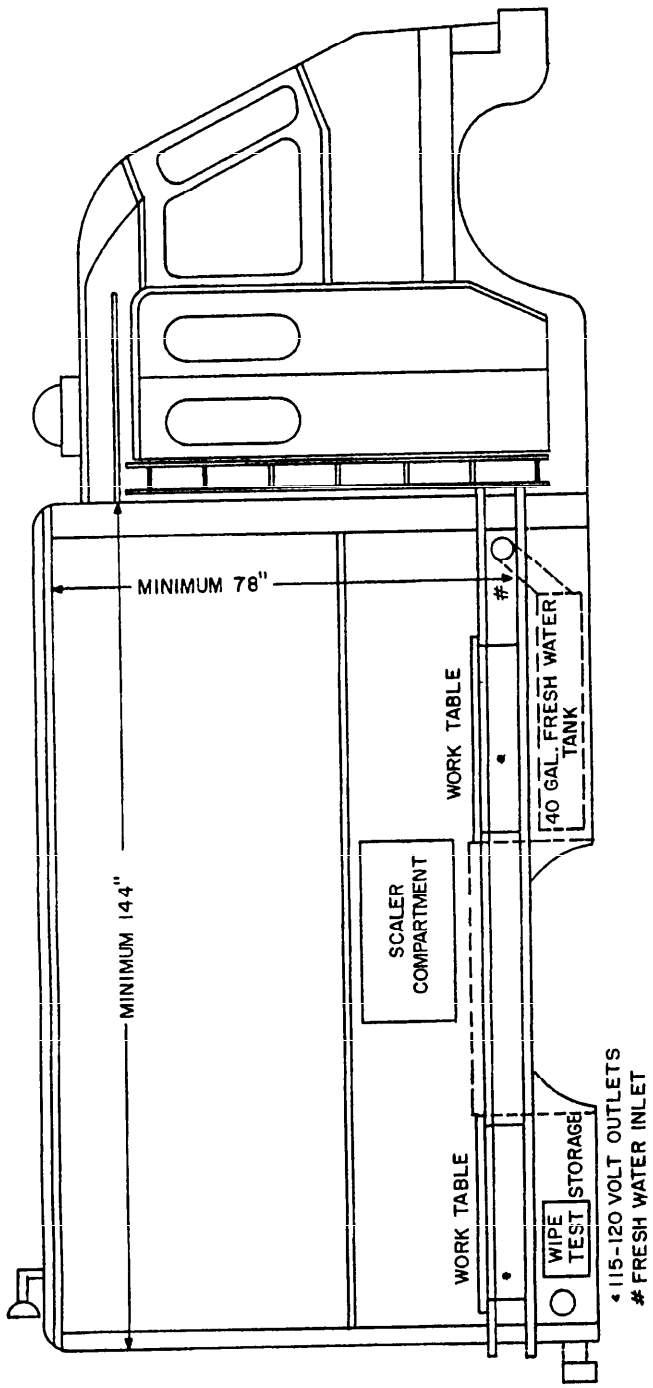


Figure 1 - MOBILE RADIO REPAIR FACILITY
(Pictorial Arrangement and equipment requirements)
(Right side of Vehicle)

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

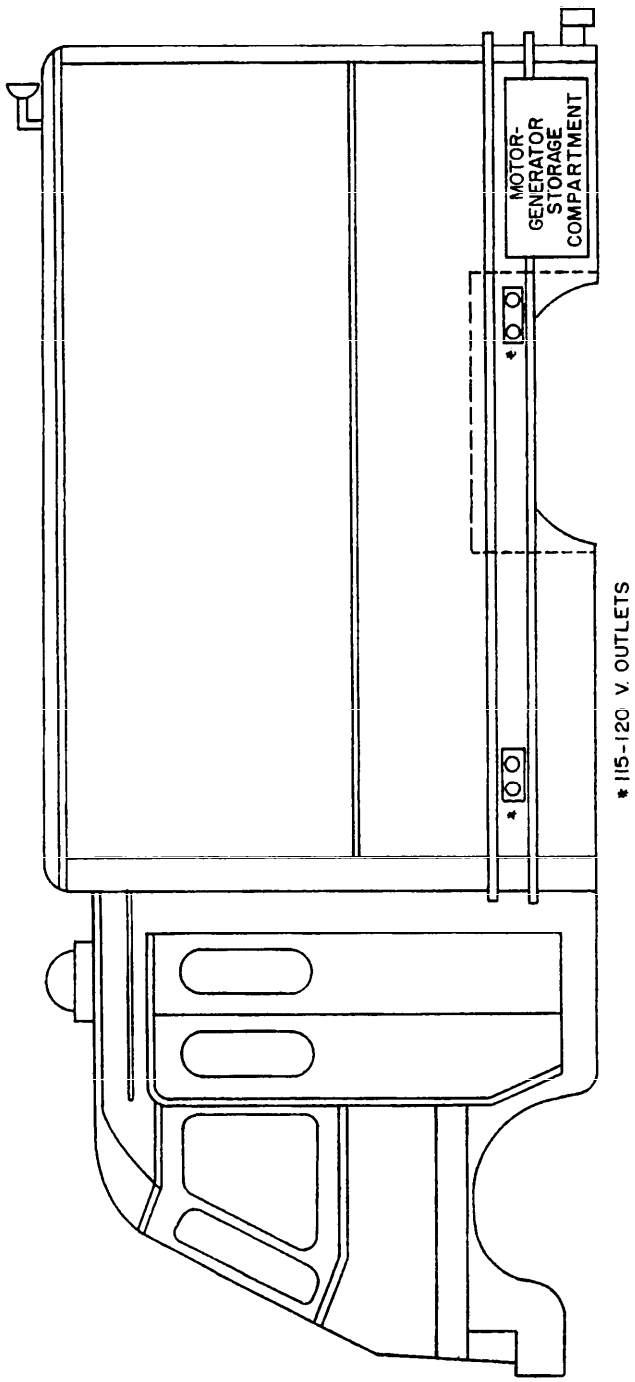


Figure 2 - MOBILE RADIAC REPAIR FACILITY
(Pictorial Arrangement and equipment requirements)
(Left side of Vehicle)

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:04Z
Check the source to verify that this is the current version before use.

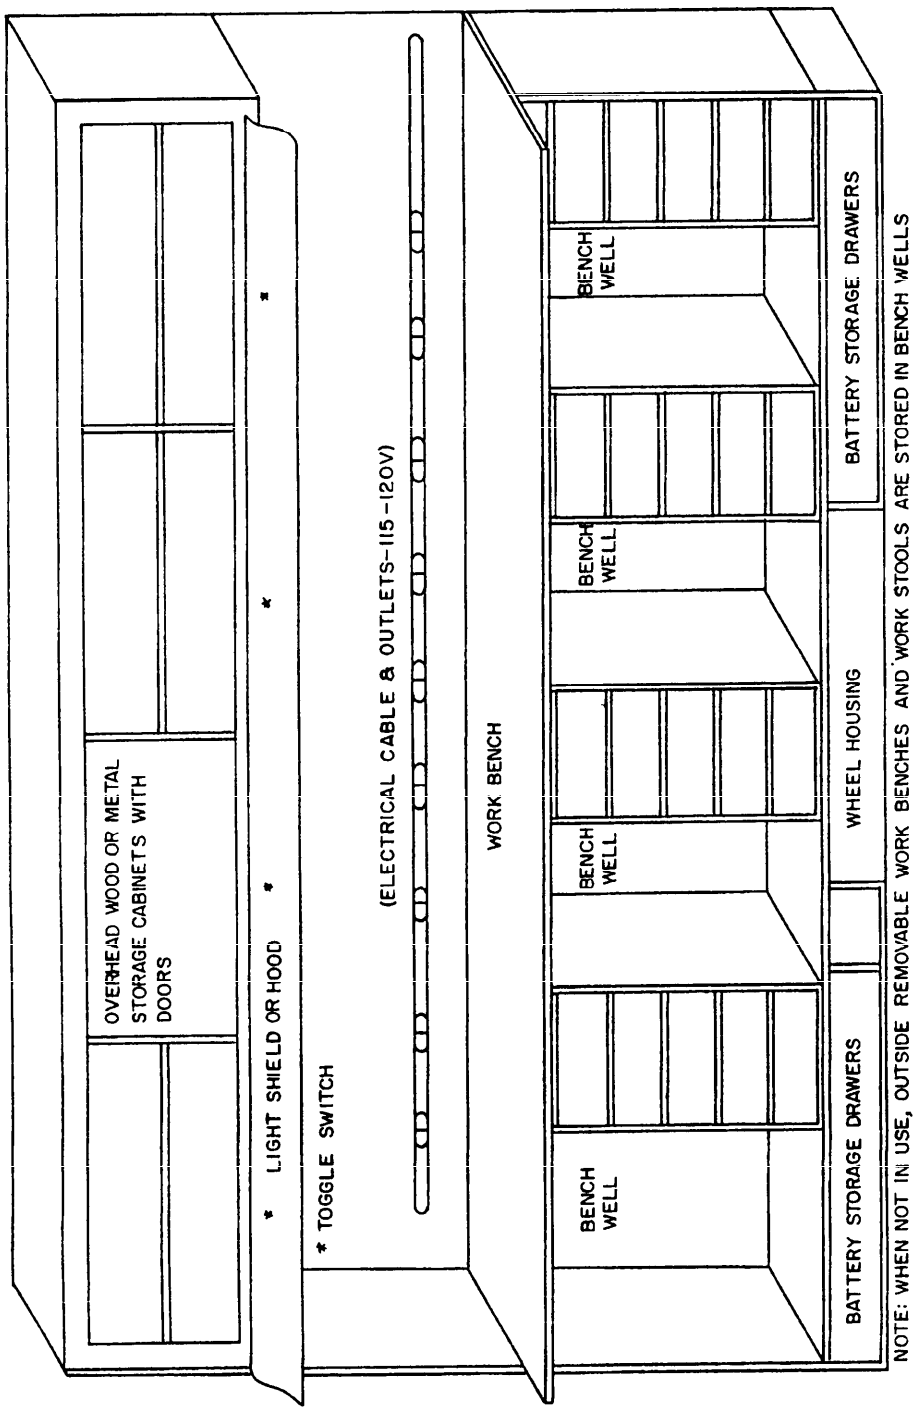


Figure 3 - MOBILE RADIAC REPAIR FACILITY
(Pictorial Arrangement and equipment requirements)
(Left side of Van)

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

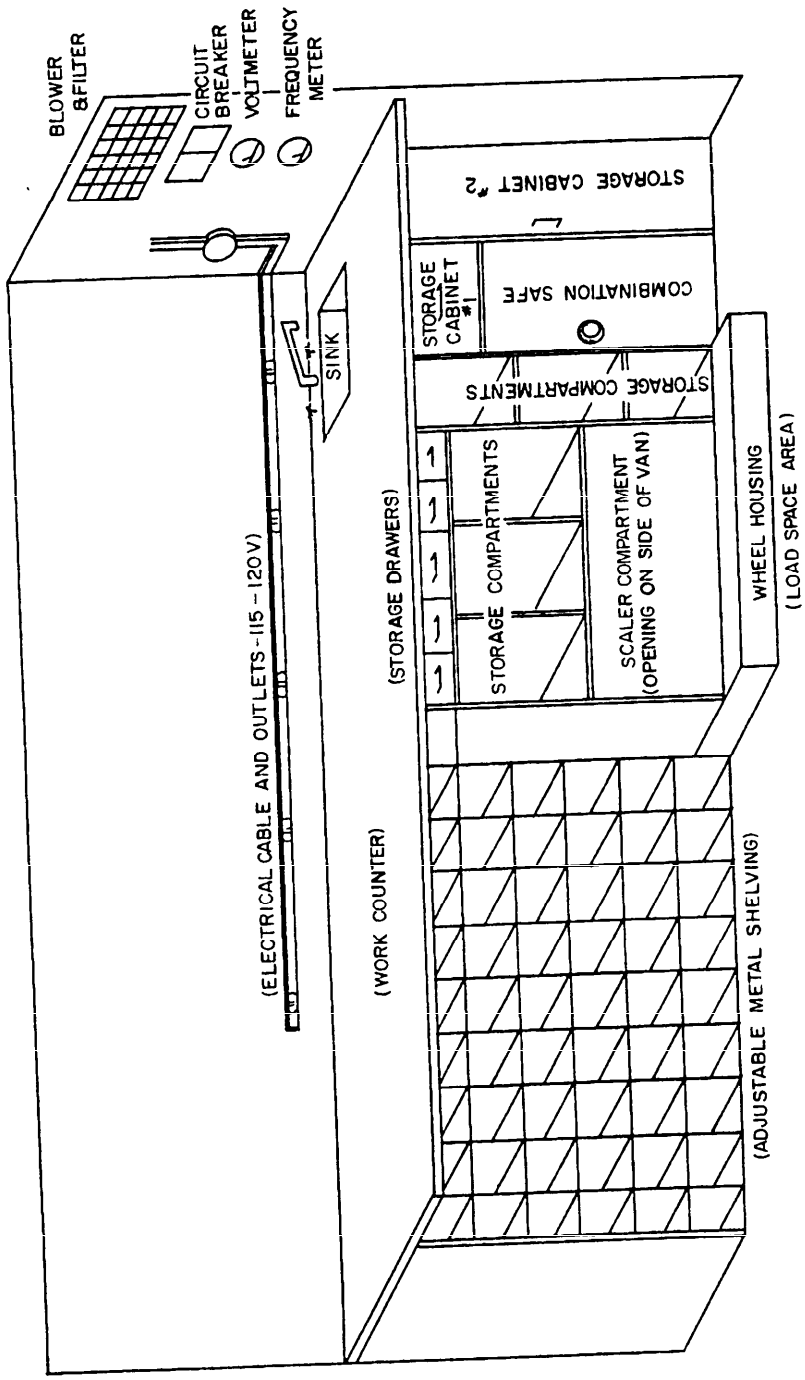


Figure 4 - MOBILE RADIAC REPAIR FACILITY
(Pictorial Arrangement and equipment requirements)
(Right side of Van)

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

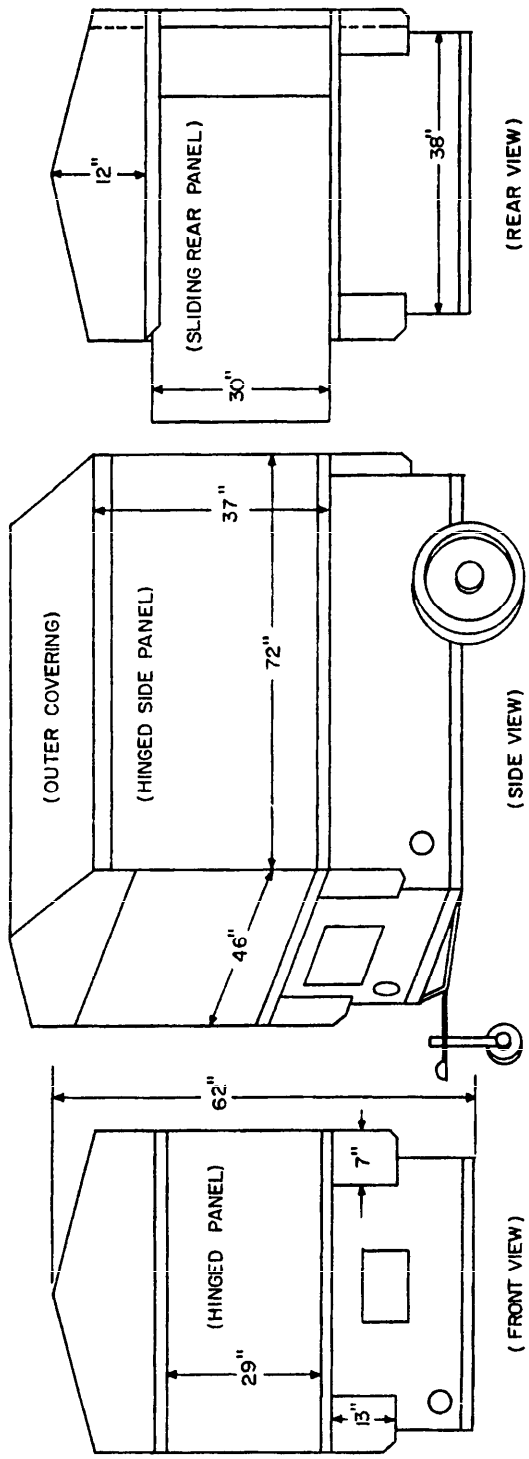


Figure 5 - CALIBRATION TRAILER (CLOSED)
(General Outline and Dimensions)

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

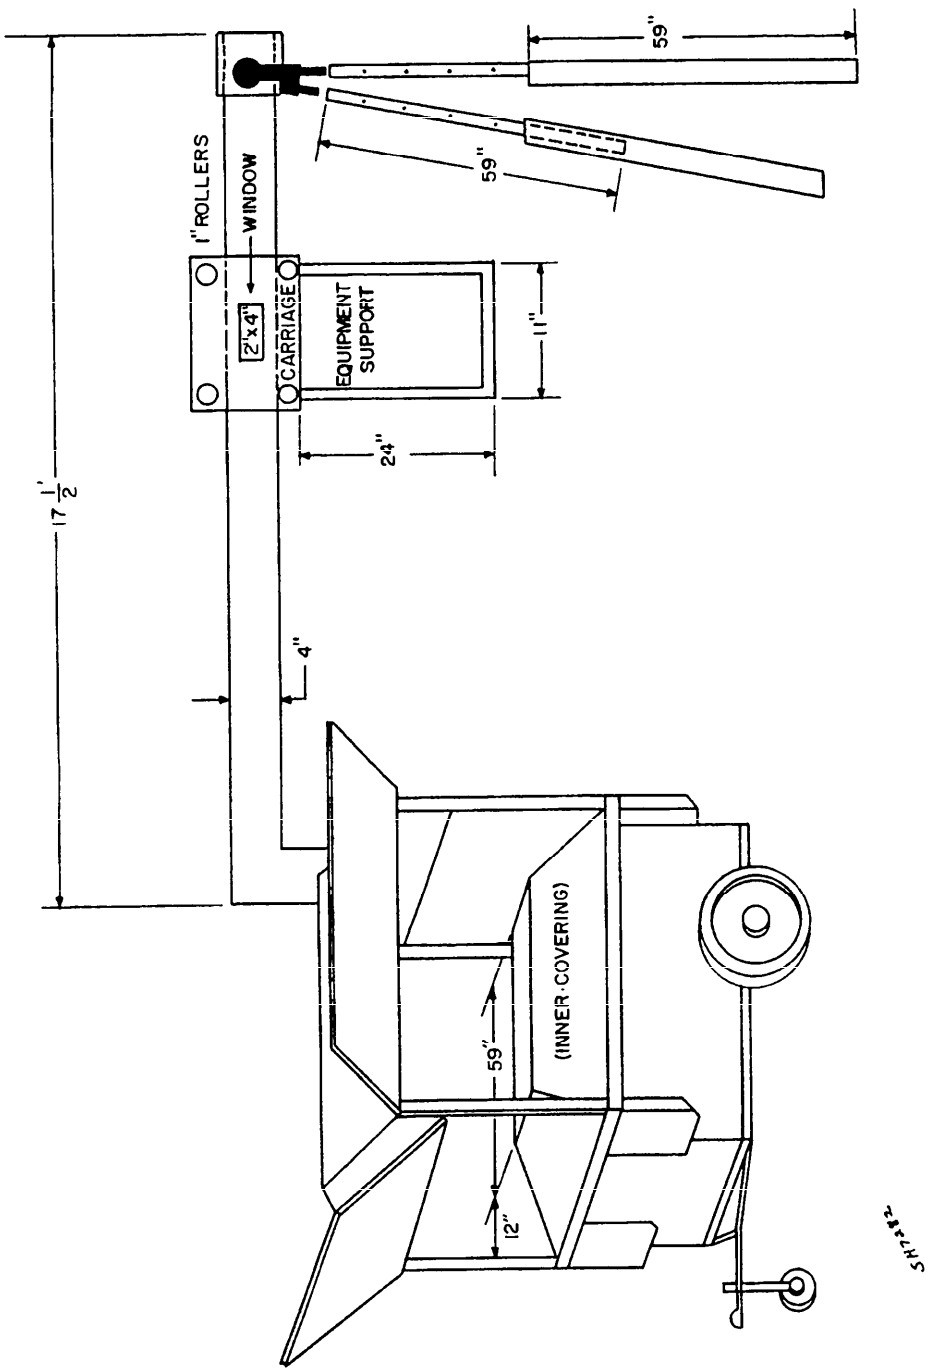


Figure 6 - CALIBRATION TRAILER OPEN WITH MONO-RAIL
(General Outline and Diemnsions)

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:04Z
Check the source to verify that this is the current version before use.

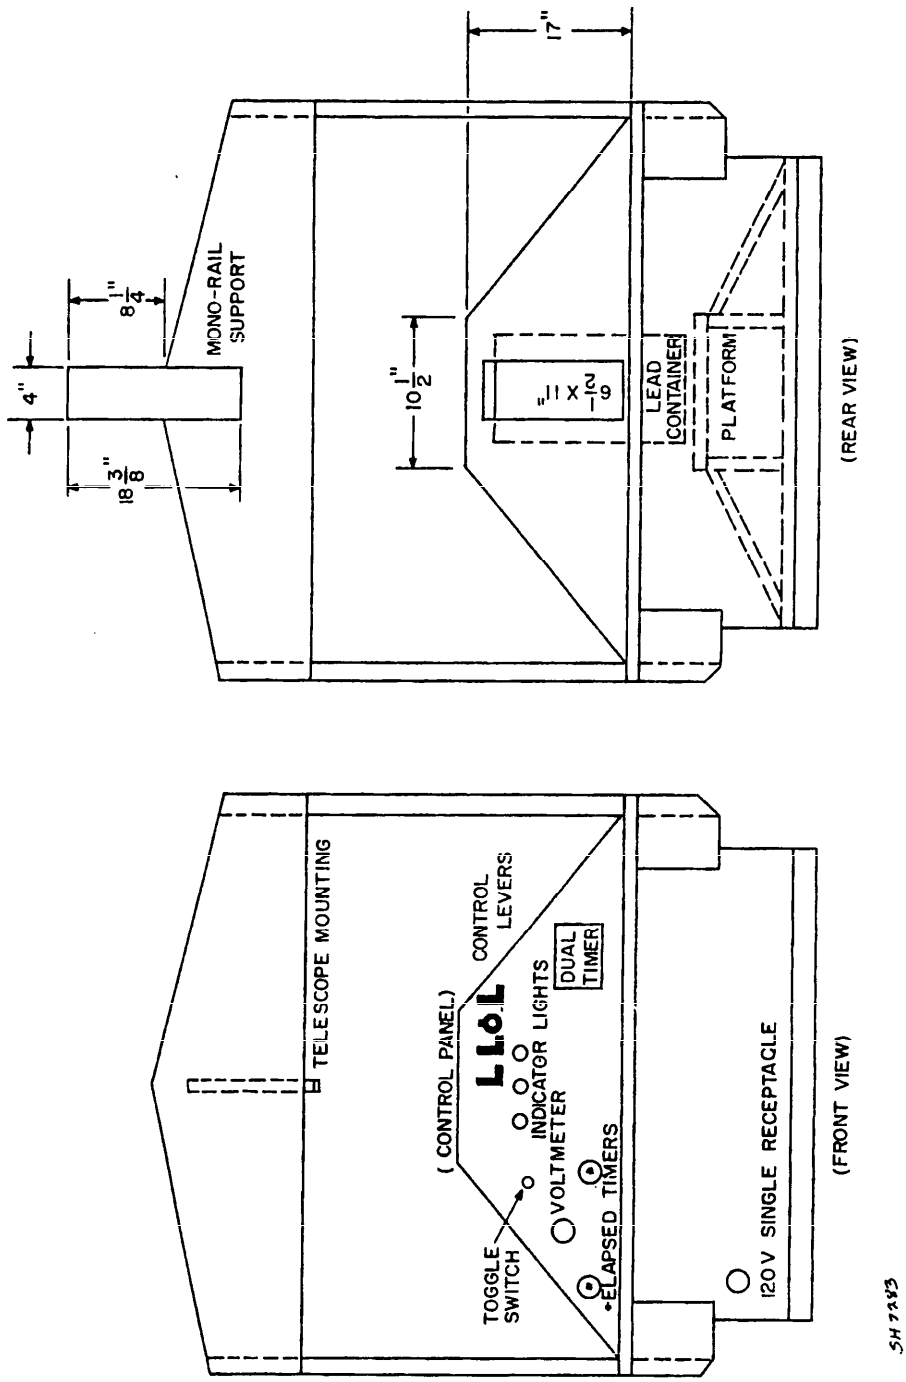


Figure 7 - TRAILER WITH MONO-RAIL ATTACHED.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

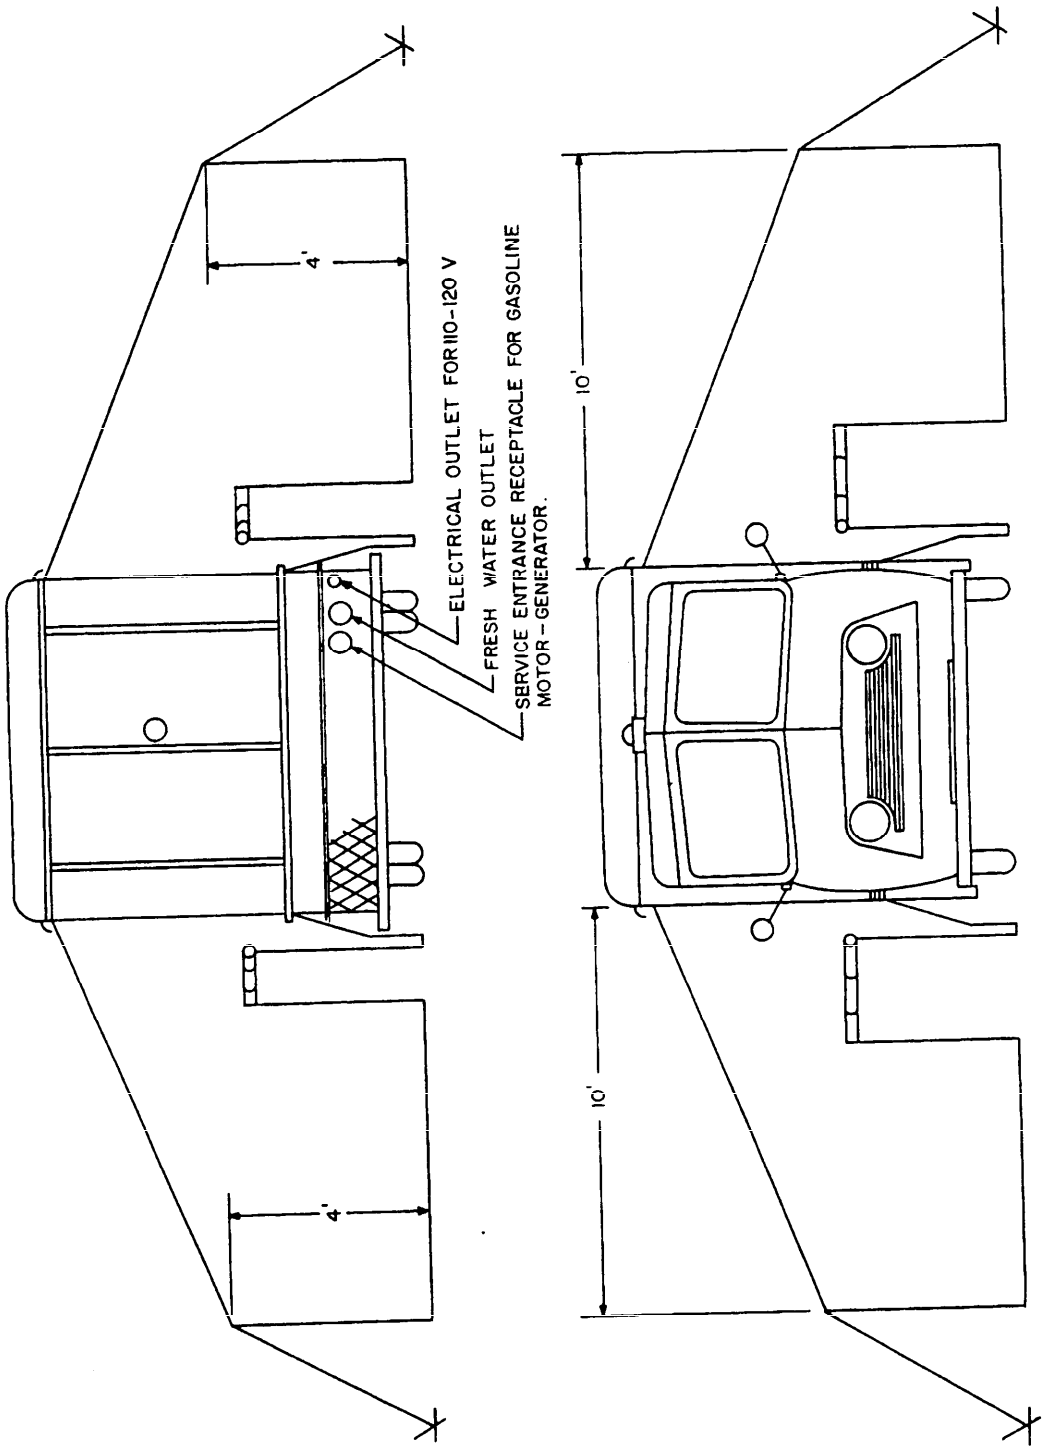


Figure 8 - RECEPTICLE FOR GASOLINE MOTOR-GENERATOR.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:04Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET
NAVSHIPS-4863 (8-61)

BUDGET BU. NO. 45-R309

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Bureau of Ships

This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost.

Comments and the return of this form will be appreciated.

Fold on dotted lines on reverse side, staple in corner, and send to Bureau of Ships, Specifications and Standardization Branch, Washington 25, D.C.

SPECIFICATION

ORGANIZATION	CITY	STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A DIRECT GOVERNMENT CONTRACT ☐ OR A SUBCONTRACT ☐

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   a. GIVE PARAGRAPH NUMBER AND WORDING

   b. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID.

3. IS THE SPECIFICATION RESTRICTIVE? ☐ YES ☐ NO IF THE ANSWER IS "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification.)* PLACE THIS FORM AND PAPERS IN AN ENVELOPE AND SEND TO THE BUREAU.

SUBMITTED BY *(Print name and activity)*	DATE

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:04Z
Check the source to verify that this is the current version before use.

Fold

DEPARTMENT OF THE NAVY
BUREAU OF SHIPS
WASHINGTON 25, D.C.

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

CHIEF, BUREAU OF SHIPS
SPECIFICATIONS AND STANDARDIZATION BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON 25, D. C.

Fold

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:04Z
Check the source to verify that this is the current version before use.