GG-C-860B
July 20, 1978
SUPERSEDING
Int. Fed. Spec. GG-C-00860A(DSA-DM)
July 3, 1969 and
Fed. Spec. GG-C-860
July 25, 1957

FEDERAL SPECIFICATION

CURING UNIT, DENTURE, TWO STAGE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers a two-stage, automatically controlled curing unit, suitable for processing plastic denture material.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bid or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-N-281	- Nickel-Copper-Alloy, Forgings, Plates, Rods, Shapes, Sheets, Strips, and Wire.
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Federal Standards:

Fed. Std. 66	- Steel, Chemical Composition and Hardenability.
Fed. Std. No. 123	- Marking for Shipment.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

FSC 6520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Philadelphia, PA, Atlanta, Chicago, Kansas City, MO, Houston, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-M-7298 - Manual, Technical, Commercial Equipment.
MIL-L-10547 - Liners, Case, and Sheet, Overwrap; Water-Vaporproof, or Waterproof, Flexible.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bid or request for proposal shall apply.

American National Standards Institute (ANSI) Standard:

C73.11 - Plugs and Receptacles, General Purpose, 125 Volts, 15 Amperes, 2-Pole, 3-Wire, Grounding Type.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

Underwriters' Laboratories (UL) STANDARD:

UL-1262 - Standard for Safety, Laboratory Equipment.

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 1285 Walt Whitman Road, Melville, LI, NY 11746; 207 East Ohio Street, Chicago, IL 60611; or 1655 Scott Blvd., Santa Clara, CA 95050.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fire and casualty hazards.

3.1.1 The contractor shall submit proof, prior to delivery, that the items to be delivered under the contract conform to the applicable requirements of UL-1262. Proof shall consist of one of the following:

a. UL label affixed to the product, provided the contractor agrees to have Underwriters' Laboratories, Inc. forward a copy of the UL report directly to the Contracting Officer, upon the latter's request.

b. Laboratory report from a nationally recognized independent laboratory. If an independent laboratory is used, it must be adequately equipped and competent to determine compliance with UL standards. The Government reserves the right to require a facilities report and to conduct a facilities survey. Any laboratory report submitted shall include actual test methods, data taken, and results of tests. Detailed findings of examinations necessary to determine compliance shall also be included. The test report shall also have a section that describes the test sample in such a way that the report can be used to insure identity of production items with the test sample. This section shall be supplemented with construction information such as materials used, spacings between electrical components, types of bushings, photographs, wiring diagrams, sketches, and parts list, all appropriately identified. Compliance with this paragraph does not excuse compliance with all other requirements of the contract and specifications.

3.2 Materials. Materials shall conform to the applicable specifications and requirements specified herein. Materials not specifically designated shall be of high commercial quality throughout, and shall be entirely suitable for the intended purpose.

3.2.1 Nickel-copper alloy. The chemical composition of the nickel-copper alloy shall conform to QQ-N-281, class A.

3.2.2 Corrosion-resistant steel. Corrosion-resistant steel shall conform to the chemical composition for AISI type 302 or 304 per Fed. Std. 66.

3.3 Design. The curing unit shall be a two stage, automatically controlled unit. The unit shall essentially consist of an enclosure housing, a tank with cover, two grates, and necessary electrical components including heating element, two timers, two thermostats, two pilot lights, and a power switch. The unit shall be capable of heating water in one or two stages to controlled temperatures in the range of 105°F to 212°F, for intervals of time from 15 minutes to 23 hours, depending on time settings and thermostat settings. The unit shall be capable of accommodating twelve denture flasks, in six flask presses (6.4), and up to fifteen flasks, by modifying the position of the grates. All electrical controls and necessary buss bars shall be installed on a non-metallic board mounted behind the front control panel with the control shafts protruding through the control panel. The board shall be mounted in such a way as to provide easy access to all control components when the front panels are removed. The curing unit shall be designed to operate on a nominal 115 volt, 60 Hertz (Hz), single phase circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.4 Construction.

3.4.1 Dimensions. The curing unit shall have the following overall dimensions: 16-1/2 ± 1/2 inches wide, 17-1/2 ± 1/2 inches deep and 15-1/2 ± 1/2 inches high (see figure 1).

3.4.2 Enclosure housing. The enclosure housing shall have a sectional wrap-around, forming the two sides and rear, a one or three section front control panel, a baffle plate separating the controls section from the heating section, an electrical controls mounting board, a bottom cover plate, and a drip board of the tank assembly which covers the controls section. An opening shall be provided in the top of the enclosure housing to accept the water tank (3.4.3).


3.4.2.1 Front control panel. The control panel(s) shall be fabricated from cold rolled steel having a thickness of 0.0598 inch (No. 16 Mfrs. Std. Gauge). If a one piece control panel is supplied it shall be secured to the enclosure housing with a minimum of six corrosion-resistant steel machine screws. If a three section control panel is supplied, each panel shall be secured to the enclosure housing with a minimum of four corrosion-resistant steel machine screws. The control panel(s) shall be readily removable for servicing.

3.4.2.2 Controls mounting board. The electrical controls mounting board shall be fabricated of a mineral type material of high dielectric strength. The board shall have a minimum thickness of 1/4 inch. The board shall be mounted to its supports by means of machine screws.

3.4.2.3 Baffle, wrap-around, bottom cover. The baffle, wrap-around and bottom cover shall be fabricated from cold rolled steel having a thickness of 0.0299 inch (No. 22 Mfrs. Std. Gauge).

3.4.3 Tank assembly. The tank and its dripboard shall be fabricated from nickel-copper alloy (3.2.1) or corrosion-resistant steel (3.2.2). The tank portion shall be rectangular in shape having the following dimensions: 14 ± 1/4 inches wide, 10 ± 1/4 inches long and 12-1/2 ± 1/4 inches deep. The tank shall have a minimum top opening of 13-5/8 inches by 9-5/8 inches. The thickness of the tank sides shall be 0.0312 inch (No. 22 USS Gauge). The thickness of the tank bottom shall be 0.050 inch (No. 18 USS Gauge). The dripboard section shall be welded to the peripheral top of the tank and shall provide drainage into said tank. The thickness of the dripboard shall be 0.035 inch (No. 20 USS Gauge). All tank seams shall be welded as specified in 3.9.1. The tank shall be insulated on the sides and bottom with a minimum of 1 inch of dead air space provided by the enclosure housing. The tank shall be equipped with a 3/8 inch inside diameter (nominal I.D.) brass drain pipe and a brass drain cock. The drain cock and visible portion of the drain pipe shall be finished with a black texture vinyl coating. Sealing between the tank and nickel-plated brass or corrosion-resistant drain and thermostat (3.4.7) fitting shall be accomplished with copper gaskets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

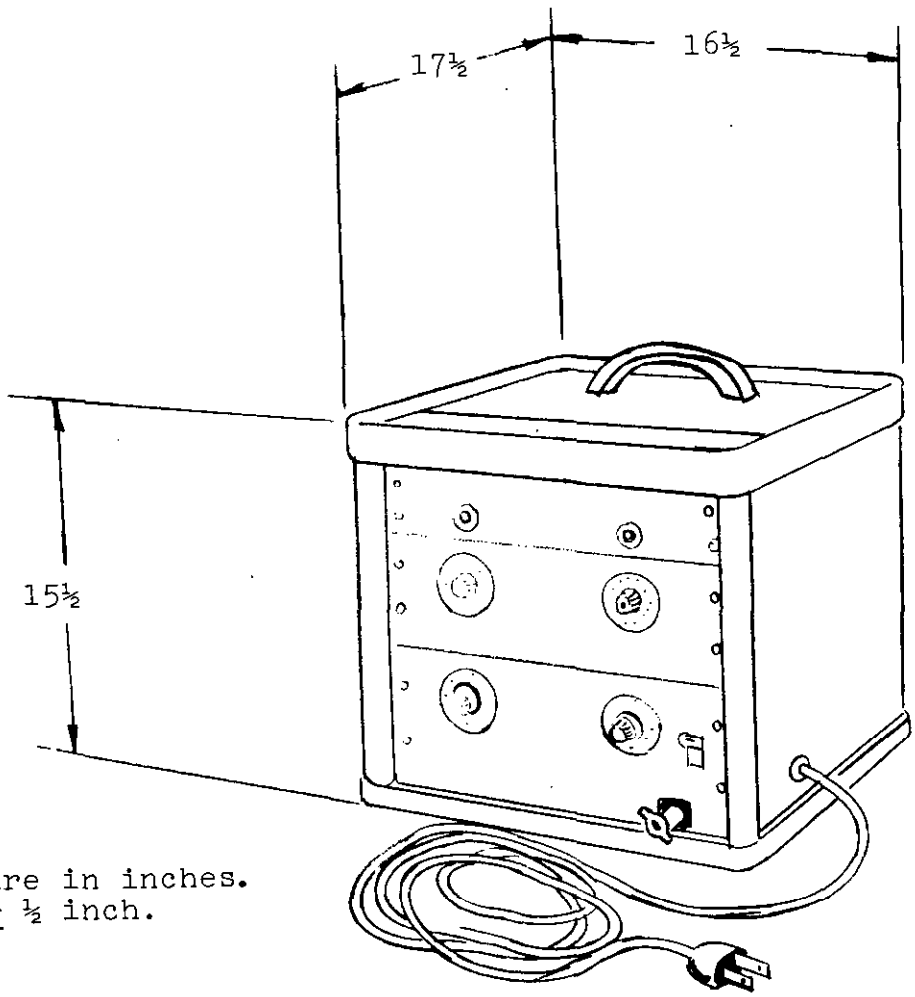

Dimensions are in inches.
Tolerances ± ½ inch.

The illustration shown above is typical for style and design and is not intended to restrict or preclude the purchase of dental curing units which are otherwise in accordance with the requirements of this specification.

FIGURE 1. Curing unit, denture, two stage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.4.3.1 Tank cover. The tank cover shall be fabricated from nickel-copper alloy (3.2.1) or corrosion-resistant steel (3.2.2) having a thickness of 0.0312 inch (No. 22 USS Gauge). The cover shall be provided with a molded plastic handle with a minimum 4 inch by 1 inch opening when assembled to the cover. Free edges of the cover shall be hemmed, and all corners shall be rounded to prevent sharp edges. The cover shall be fitted, on the underside with a hollow flange frame to fit the opening of the tank.

3.4.4 Grate. The grates shall be cast in bronze and nickel plated. The grates shall have four tapered legs, rounded corners and a minimum open grate area of 65 percent. The overall dimensions of the grate shall be 4-5/8 ± 1/8 inches by 13-5/8 ± 1/8 inches by 3-3/4 ± 1/8 inches high. The grates shall be designed to fit side by side within the tank to support the flask presses and to protect the heating element. The rear grate shall be designed so that when inverted, with the legs extending upward, three 3-flask presses instead of three 2-flask presses may be used, thereby increasing the total capacity of the curing unit to 15 flasks.

3.4.5 Heating element. The heating element shall be of the immersion type rated for 1650 watts at a nominal 115 volts, 60 Hertz (Hz). The heating element shall be copper clad, nickel plated.

3.4.6 Timers. The timers shall consist of a nominal 115 volt, 60 Hz, single phase, synchronous type motor and the necessary mechanism for the timer to perform its intended function. The timers shall be provided with a screw-type terminal block for connecting the timers into the circuit. The timers shall be mounted to, and behind the control panel, so that it is enclosed, and the dial is visible through a clear, plastic window on the control panel. The timer dials shall have a minimum diameter of 1-7/8 inches, and permanently and legibly marked from 15 minutes to 23 hours in intervals of 15 minutes. The timer contacts shall be protected by a relay.

3.4.7 Thermostats. The thermostats shall be of the immersion, strut-type construction, not bimetallic, enclosed in a nickel-copper alloy or corrosion-resistant steel sheath mounted to the tank (3.4.3) by means of a threaded fitting. The controls shall be extended to the front control panel. The thermostat shall be readily removable for servicing. The thermostat contacts shall be protected by a relay.

3.4.7.1 Temperature dials. The temperature dials shall be calibrated from 105^{0} F to 212^{0} F and permanently and legibly marked in increments of 20^{0} F starting at the 110^{0} F mark. A metal pointer knob or other suitable means of indicating the temperature setting shall be provided.

3.4.8 Pilot lights. The pilot lights shall be of the neon type, with a nylon body. One assembly shall be supplied with a green lens (station 1) and the other assembly with a red lens (station 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.4.9 Power switch. The power switch shall be a double pole, toggle switch, rated for 20 amperes at 115 volt, 60 Hertz. The switch lever shall be clearly etched with the words "ON" and "OFF". The power switch shall serve only as a total disconnecting medium in the operation of the curing unit.

3.4.10 Power cord. The curing unit shall be equipped with a 3-conductor power cord not less than 6 feet in length. The cord shall be a minimum of No. 14 AWG with a type SPT-3 thermoplastic insulation. The cord shall be equipped with a three prong plug suitable for use with receptacles specified in ANSI C73.11. The power cord shall enter the side of the unit through a strain relief fitting.

3.5 Performance.

3.5.1 Dielectric voltage withstand. The curing unit shall be capable of withstanding without failure the dielectric voltage withstand test specified in UL-1262.

3.5.2 Power cord strain relief. The curing unit power cord shall be capable of withstanding without failure the strain relief test specified in UL-1262.

3.5.3 Operational test. The curing unit shall operate as stated below when tested as specified in 4.4.2. With main power switch on and station no. 1 and station no. 2 set for a specific temperature and time interval both pilot lights shall be on. When the preset time for station no. 1 has elapsed, the green pilot light shall go out and the station no. 2 timer and thermostat shall take over for the remainder of the curing cycle. When preset time for station no. 2 has elapsed the red pilot light shall extinguish and the curing unit shall turn off.

3.5.4 Heating rate. The heating element shall be capable of providing a uniform water temperature increase, in one or two stages, of $2^{\circ} \pm 1/2^{\circ}$ F when tested as specified in 4.4.3.

3.5.5 Heating element. The heating element shall be capable of withstanding continuous duty operation when tested as specified in 4.4.4.

3.5.6 Timers. The timer shall maintain the set time within $\pm$ 2 percent when tested as specified in 4.4.5.

3.5.7 Temperature control. The thermostat shall maintain the set temperature within $\pm$ 2 percent when tested as specified in 4.4.6.

3.5.8 Leakproof. The tank shall be free of leaks when tested as specified in 4.4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

3.6 Finish. All items fabricated of cold-rolled steel shall be suitably finished for protection against corrosion. The outside surface of the wrap-around shall be finished with baked black crinkle enamel or black texture vinyl coating. The tank, tank cover and dripboard shall have a satin finish. The bottom cover shall have a black enamel finish.

3.7 Identification marking. Each curing unit shall be permanently and legibly marked with the following information: name or registered trademark of the manufacturer, manufacturer's model number, voltage, frequency and current. The serial number shall be die stamped into the surface of the tank at the upper right side, adjacent to the dripboard.

3.8 Service data. The contractor shall furnish, with each unit, two copies each of a technical manual which contains complete instructions for installation, operation, and maintenance and lists of component parts. The manual shall comply with the requirements of MIL-M-7298. As soon as practicable after award of the contract or purchase order, the contractor shall furnish to the Contracting Officer two preliminary copies of his proposed technical manual for review and comment by the Directorate of Medical Materiel, Defense Personnel Support Center. The preliminary manuals shall be submitted sufficiently early to permit adequate review by the Directotate of Medical Materiel, Defense Personnel Support Center (based on a maximum period of 30 days for such review) and to allow incorporation by the contractor of any required revisions and corrections in the final manual without delaying delivery under the contract, or purchase order. In addition, the Contractor shall furnish 15 copies of the approved technical manual to the Contracting Officer for distribution. Should the supplier have furnished acceptable manuals for the identical item within two years preceding the date of the contract and propose to furnish manuals identical with those previously accepted, then the requirements for review of drafts and submission of 15 additional copies may be waived upon request to the Contracting Officer. Waiver of submission of drafts and submission of 15 additional copies shall be at the option of the Government.

3.9 Workmanship. Workmanship shall be first class throughout. Item shall be free from defects which detract from its appearance or impair its serviceability. All burrs and sharp edges shall be removed from the item.

3.9.1 Welding. Welding shall be durable, sound in every detail and in accordance with the latest practices recommended by the American Welding Society. All welds shall be produced by qualified welding operators with satisfactory welding equipment using satisfactory filler metal or electrode where applicable to provide the best possible weld. Surfaces to be welded shall be free from grease, oil, oxides or any other foreign matter. Any cleaning method which will remove these substances and leave the surface clean is satisfactory. All weld joints shall blend into the adjacent metal in gradual, smooth curves. Beads shall be smooth and free of slag, excessive undercut, or excessive splatter. Sufficient soft metal shall be added to provide a suitable fillet or reinforcement unless otherwise specified. Welds shall not be oxidized. All welds shall be continuous with no visible voids, pin holes, or cracks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table I. The unit of product for sampling purposes shall be one curing unit.

TABLE I. Sampling for examination

Type defect	Inspection level	AQL (percent defective)
For visual examination:		
Major defect	II	1.0
Minor defect	II	2.5
For dimensional examination	S-2	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II. The unit of product for test purposes shall be one curing unit.

TABLE II. Sampling for tests

Unit of product	Characteristic	Requirement	Test procedure	Inspection level	AQL (percent defective)
Curing unit	Dielectric withstand	3.5.1	UL-1262	100%	1/
	Strain relief	3.5.2	UL-1262	S-2	2.5
	Operational test	3.5.3	4.4.2	S-2	2.5
	Heating rate	3.5.4	4.4.3	S-2	2.5
	Heating element	3.5.5	4.4.4	S-2	2.5
	Timers	3.5.6	4.4.5	S-2	2.5
	Temperature control	3.5.7	4.4.6	S-2	2.5
	Leakage	3.5.8	4.4.7	S-2	2.5

1/ Any defect shall constitute rejection of the lot.

4.3 Examination.

4.3.1 Curing unit. The curing unit shall be examined to determine compliance with all requirements contained in this specification. Examination shall be conducted as specified in table III. Examination however, shall not be restricted to defects listed in table III.

TABLE III. Classification of defects

Categories	Defects
Major:	
101	Any components missing or damaged.
102	Design and construction not as specified.
103	Gauge of metal not as specified.
104	Exposed surfaces not smooth or free of sharp edges.
105	Electric cord grounding plug not as specified.
106	Timer dials have incorrect scale graduations.
107	Tank cover does not fit tank.
108	Edges of cover not smooth or rounded.
109	Welds are not finished smooth to blend with adjacent surfaces.
110	Grates do not fit properly into tank.
111	Grates have casting defects.
112	Dripboard does not drain into tank.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (Cont'd)

Categories	Defects
Minor:	
201	Enclosure finish not as specified.
202	Tank and cover finish not as specified.
203	Enclosure finish not free of scratches, chipping or blisters.
204	Identification marking not complete, legible, or permanent.
205	Identification marking not as specified.
206	Identification marking missing.

4.3.2 Examination of preparation for delivery. An examination shall be made to determine compliance with the packaging, packing and marking requirements of section 5. Defects shall be scored as specified in table IV. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with AQL of 4.0 expressed in terms of percent defective.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Contents	Not as specified.
Container	Not as specified.
Marking	Omitted; incorrect; illegible; improper size, location, sequence or method of application.
Packaging and packing material	Component missing or damaged.
Workmanship	Bulging or distortion of containers.

4.3.2.1 Examination of closure, waterproofing and banding of container. When the container is required to comply with PPP-B-585, PPP-B-601, PPP-B-621 or PPP-B-636, the examination for defects in closure, waterproofing or banding shall be in accordance with the appendix of the appropriate box specification.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical analysis. In the absence of certificates of quality for the raw material, a chemical analysis shall be conducted. The chemical analysis shall be performed by reagent solutions, combustion methods, nonemission methods, or by spectrochemical analysis. Any ASTM method shall be acceptable.

4.4.2 Operational test. Add water to the tank to a depth of 10 ± 1/2 inches. Station no. 1 thermostat shall be set at 125° F and station no. 1 timer shall be set at 3 hours. Station no. 2 thermostat shall be set at 212° F and station no. 2 timer shall be set at 1-1/2 hours. Turn on main power switch. The curing unit shall operate as specified in 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

4.4.3 Heating rate. The following procedure shall be followed: Place four flask presses with two denture flasks each in the tank of the curing unit. Add sufficient water to cover the flasks. Set the timer and thermostat of station no. 1 to the "off" position. Set the timer and thermostat of station no. 2 to 90 minutes and 212° F respectively. Suspend a calibrated immersion type thermometer in the water. Cover the tank with the thermometer protruding thru. Record the temperature of the water. Turn the main power switch on. Monitor the time it takes for the water temperature to read 200° F. Calculate the heating rate. The curing unit shall meet the requirements of 3.5.4.

4.4.4 Heating element. The tank shall be filled with water. The station no. 1 thermostat shall be set for 150° F and the station no. 1 timer for 12 hours. The station no. 2 thermostat shall be set at maximum and the station no. 2 timer shall be set for 23 hours. The main power switch shall be turned on and the curing unit permitted to operate for 24 hours. The water level shall be checked occasionally and water added if necessary. The power consumption shall be monitored and recorded (see 3.4.5). The heater assembly shall show no signs of deterioration. The heating element shall meet the requirements of 3.5.5.

4.4.5 Timer. During the performance of the test specified in 4.4.4, the timer shall be tested for accuracy with an accurate time piece. Accurate recordings of the timepiece and the timers shall be made at the start of the test and at the sixth, twelth, eighteenth and twenty-third hour of the test period. The recorded data shall be used to determine the accuracy of the timers.

4.4.6 Temperature control. The tank shall be filled with water to a depth of 10 ± 1/2 inches. A calibrated immersion type thermometer shall be suspended in the water. The tank shall be covered. Each thermostat shall be checked at intervals of 15° F starting at 105° F on station 1 thermostat and 110° F on station 2 thermostat. The water temperature shall be permitted to stabilize. The thermostat setting and thermometer reading shall be recorded at each interval. The temperature controls shall meet the requirements of 3.5.7.

4.4.7 Leakage test. At the completion of the test specified in 4.4.6 the curing unit shall be checked for any water leakage from the tank. Any leakage shall be recorded. The curing unit shall meet the requirements specified in 3.5.8.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each curing unit shall be wrapped in kraft paper or other suitable barrier material and packaged in a box conforming to PPP-B-636, class domestic. The unit shall be cushioned within the box with fiberboard pads or other suitable cushioning material in such a manner to afford adequate protection against physical damage during shipment and handling. Closure of the box shall be as specified in the appendix of PPP-B-636.

5.1.2 Level C. Each curing unit shall be packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the first receiving activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Each packaged curing unit shall be packed in a shipping container designed for a type 2 load and conforming to PPP-B-585, class 3, style 3; PPP-B-601, overseas type or PPP-B-621, class 2. The shipping container shall be lined with a case liner conforming to MIL-L-10547. Closure and sealing shall be as specified in the appendix of the liner specification. Closure of the shipping container shall be as specified in the applicable container specification.

5.2.2 Level B. Each packaged curing unit shall be packed in a shipping container designed for a type 2 load and conforming to PPP-B-585, class 1, style 3; PPP-B-601, domestic type or PPP-B-621, class 1. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. Each packaged curing unit shall be packed in a shipping container in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the carriers rules and regulations.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipment shall be in accordance with Fed. Std. No. 123.

5.3.2 Military activities. Each unit package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. The item covered by this specification is intended for use in dental laboratories for curing dental acrylic resins used in the fabrication of dentures and other dental restoration and appliances.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information on the procurement documents:

a. Title, number and date of this specification.
b. National Stock Number (NSN).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification covers the following item listed in the Federal Supply Catalog:

National stock number	Item identification
6520-00-519-8000	CURING UNIT, DENTURE, TWO STAGE, 115 volt, 60 Hertz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

6.4 The flask press referred to in 3.4 is NSN 6520-00-515-5150. The flask referred to in 3.4 is NSN 6520-00-559-9935.

MILITARY CUSTODIANS:
Army - MD
Navy - MS
Air Force - 03

Review activity:
DoD - MB

Preparing activity:
DLA-DM

Civil Agency Coordinating Activities:
GSA-FSS
COMMERCE-NBS

Project No. 6520-1445

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies of documents referenced herein. Price 90 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

GG-C-860B CURING UNIT, DENTURE, TWO STAGE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:53Z
Check the source to verify that this is the current version before use.