
MILITARY STANDARD

MIL-STD-1323-387

(NAVY)

25 NOVEMBER 1992

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
BOMB, 2000 LB. BLU-109-A/B
(THERMALLY PROTECTED)
IN PALLET, BOMB, S/S, MHU-212/E
(DWG # 3336AS100)

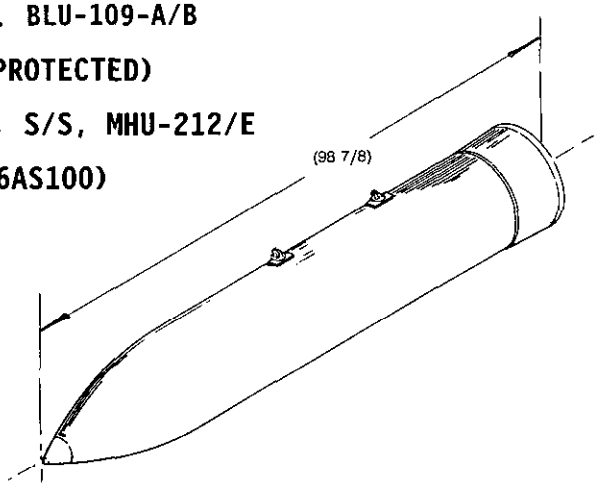


UNIT LOAD DATA

NUMBER OF BOMBS/UNIT LOAD	2
GROSS WEIGHT OF ONE BOMB	1,988 LBS.
GROSS WEIGHT OF TOP FRAME	123 LBS.
GROSS WEIGHT OF BOTTOM FRAME	217 LBS.
WEIGHT OF STEEL STRAPPING	5 LBS.
GROSS WEIGHT OF UNIT LOAD	4,321 LBS. △
CUBE	47.63 CU.FT.

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 6 UNIT LOADS HIGH IN STORAGE

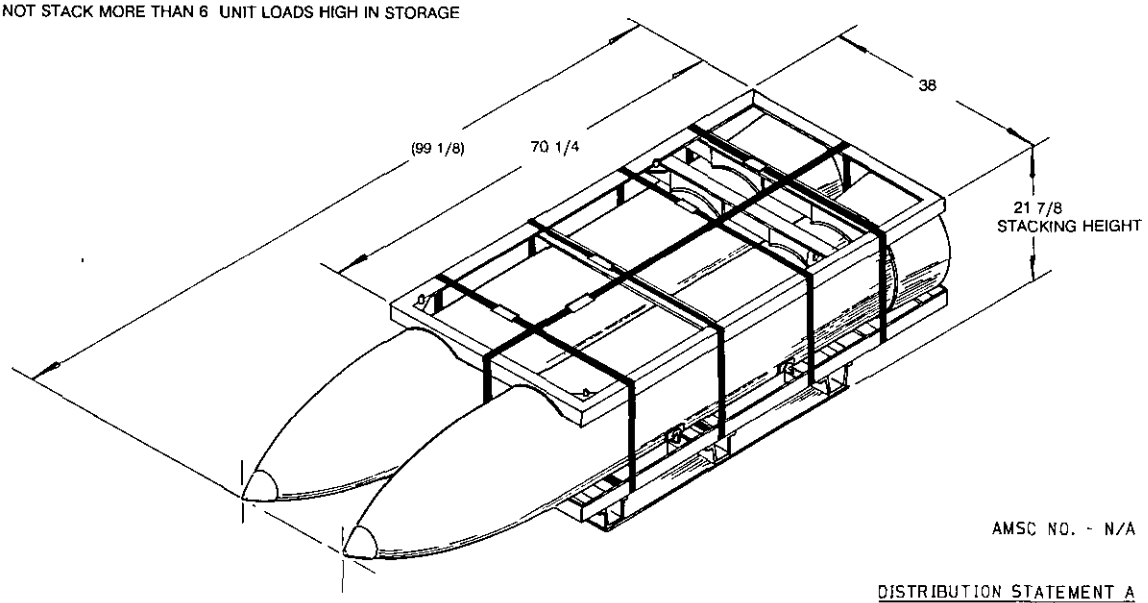

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

E. Sinaldi — 92/11/25
SIGNATURE TDA, WPNSTA EARLE DATE

SIGNATURE AIRSYSCOM BY DIRECTION 92/11/25 DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD LONGITUDINAL STRAPPING, ITEM 3, THROUGH SLOTS IN BOTTOM FRAME, ITEM 1, AS SHOWN IN VIEW A-A.


(B) PRE-POSITION TWO BOMBS WITH THEIR SUSPENSION LUGS OUTBOARD IN THE FIVE O'CLOCK AND SEVEN O'CLOCK POSITIONS AND PLACE IN BOTTOM FRAME, ITEM 1, AS SHOWN IN SECTION B-B AND THEIR AFT ENDS SNUG AGAINST THE AFT RIM OF THE FRAME AS SHOWN IN VIEW C-C.

(C) POSITION THE TOP FRAME, ITEM 2, OVER THE BOMBS WITH THE AFT RIM SNUG AGAINST THE AFT END OF THE BOMBS AS SHOWN IN VIEW C-C.

(D) POSITION LATERAL STRAPPING, ITEM 4, UNDER THE UNIT LOAD AND OVER THE TOP FRAME IN POSITIONS SHOWN. TENSION AND DOUBLE NOTCH SEALS, ITEM 5.

(E) POSITION LONGITUDINAL STRAPPING, ITEM 3, OVER THE TOP FRAME. TENSION AND DOUBLE NOTCH SEAL, ITEM 5.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

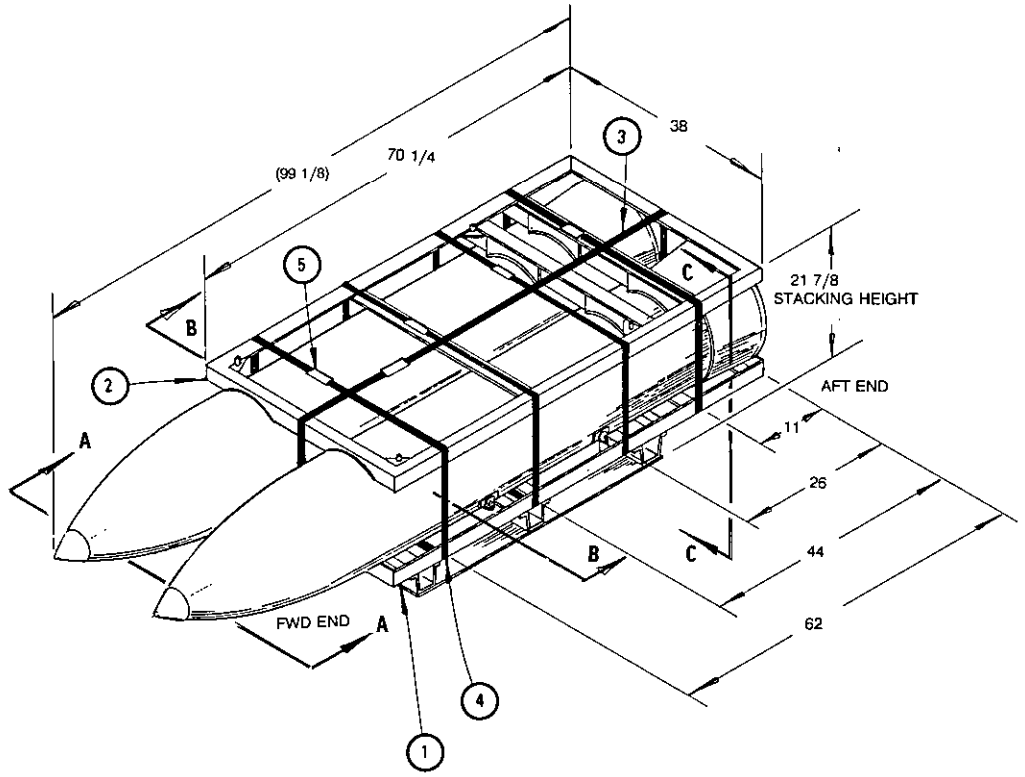

UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323 (NAVY).


DEPALLETIZING PROCEDURE

1. CUT AND REMOVE STRAPPING.
2. REMOVE TOP FRAME.
3. REMOVE BOMBS.


LIST OF MATERIALS

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
5	5	SEAL	STEEL	FOR 1 1/4 STRAPPING
4	4	STRAPPING, LATERAL	STEEL	.035 X 1 1/4 X 11 FT
1	3	STRAPPING, LONGITUDINAL	STEEL	.035 X 1 1/4 X 16 FT
1	2	FRAME, TOP	3336AS102	70 1/4 X 38 X 2 1/2
1	1	FRAME, BOTTOM	3336AS101	70 1/4 X 38 X 6 3/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

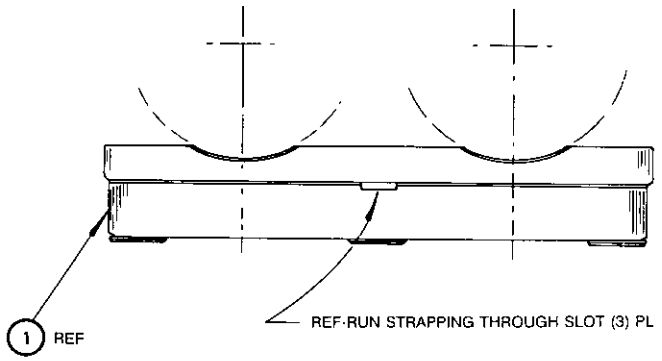


VIEW A-A

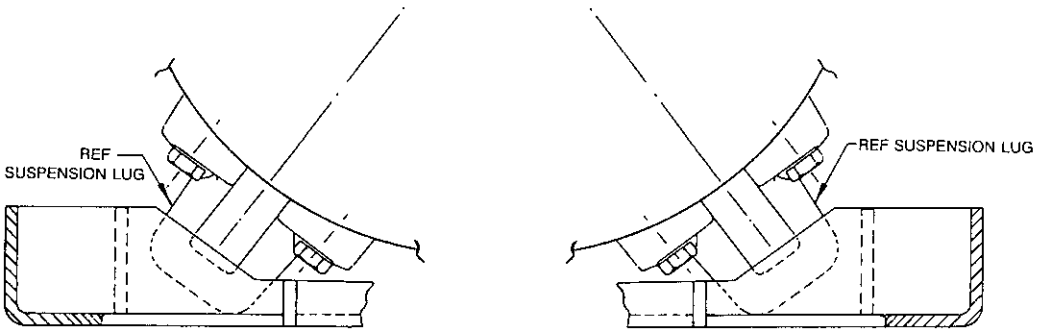

SECTION B-B

ROTATED 30°C C

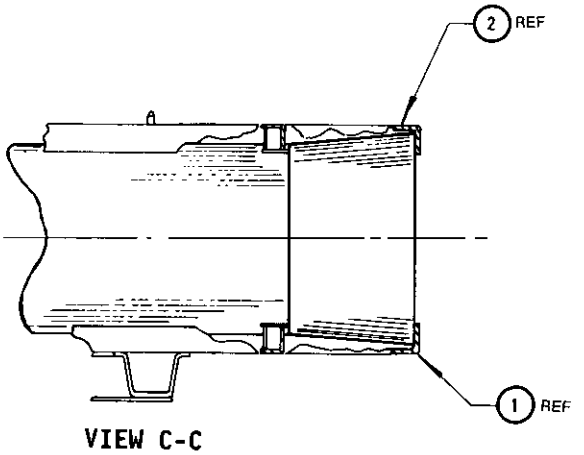

VIEW C-C

ROTATED 30°C C

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.