MIL-T-28862A(EC)
3 January 1985
SUPERSEDING
MIL-T-28862(EC)
21 July 1981
MIL-R-24470 (IN PART)
18 September 1982

MILITARY SPECIFICATION

TEST SET, BUOY, RADIO TRANSMITTING, AN/BRM-2(A)

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements and tests for Test Set, Buoy, Radio Transmitting, AN/BRM-2(A), hereinafter referred to as the test set. The test set provides message insertion and a prelaunch check for the Buoy, Radio Transmitting, AN/BRT-1, hereinafter referred to as the buoy.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-J-641/12	Jack, Telephone, Type JJ-089
MIL-P-642/4	Plugs, Telephone (Types PJ-055B, PJ-055R, and PJ-055M) And Accessory Screws
MIL-S-901	Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment And Systems, Requirements For
MIL-E-16400	Electronic, Interior Communication And Navigation Equipment, Naval Ship And Shore: General Specification For
MIL-E-17555	Electronic And Electrical Equipment, Accessories And Repair Parts, Packaging And Packing Of
MIL-B-28841	Buoy, Radio Transmitting, AN/BRT-1

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-108	Definitions Of And Basic Requirements For Enclosures For Electric And Electronic Equipment
MIL-STD-109	Quality Assurance Terms And Definitions
MIL-STD-167-1	Mechanical Vibrations Of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-454	Standard General Requirements For Electronic Equipment
MIL-STD-461	Electromagnetic Emission And Susceptibility Requirements For The Control Of Electromagnetic Interference
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of
MIL-STD-781	Reliability Design Qualification And Production Acceptance Tests: Exponential Distribution
MIL-STD-965	Parts Control Program
DoD-STD-1399, Section 300	Interface Standards For Shipboard Systems, Electric Power, Alternating Current (Metric)
MIL-STD-1635	Reliability Growth Testing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to Commander, Naval Electronic Systems Command, Defense Standardization Program Branch, Washington, D.C. 20363, Attn: ELEX 8111, by using the self-addressed Standardization Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-20T20:11Z
Check the source to verify that this is the currentversion before use.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. The issue of the document which is indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

DRAWING

SIPPICAN OCEAN SYSTEMS

16848-301572 AN/BRM-2A

(Application for copies should be addressed to the Naval Electronic Systems Command, Washington, D.C. 20363.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 General. The test set shall be in accordance with the provisions of MIL-E-16400, except as hereinafter specified; the test set shall be constructed in accordance with Drawing (Dwg) 16848-301572. In the event of conflict between MIL-E-16400 and DWG 16848-301572, DWG 16848-301572 shall take precedence.

3.1.1 Test set and buoy compatibility. The test set and the buoy shall be mutually compatible electrically and mechanically. The test set shall interface with the buoy as specified in MIL-B-28841.

3.2 First article. When specified, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Characteristics. The test set shall conform to the characteristics specified in 3.3.1 through 3.3.3.2.

3.3.1 Performance characteristics. The test set shall conform to the performance characteristics specified in 3.3.1.1.

3.3.1.1 Operation. The test set shall insert a message into the buoy and monitor a playback of the message prior to launch of the buoy. The test set shall provide primary power to the buoy and shall control the message recording and storage device.

3.3.2 Physical characteristics. The test set shall conform to the physical characteristics specified in 3.3.2.1 and 3.3.2.2.

3.3.2.1 Dimensions. The test set shall be not greater than 1 cubic foot in volume including the carrying case.

3.3.2.2 Weight. The weight of the test set, including the auxiliary equipment and carrying case, shall be not greater than 30 pounds.

3.3.3 Environmental. The test set shall conform to the environmental requirements specified in 3.3.3.1 and 3.3.3.2.

3.3.3.1 Temperature. The test set shall conform to the temperature requirements for Range 4 equipment of MIL-E-16400.

3.3.3.2 Shock. The test set shall conform to Grade B, Class I, lightweight, Type A shock requirements of MIL-S-901.

3.4 Parts control. The parts to be incorporated in the test set shall be controlled in accordance with MIL-STD-965, Procedure I.

3.5 Electrical requirements. The test set shall conform to the electrical requirements specified in 3.5.1 through 3.5.6.

3.5.1 Input power. The test set shall operate in accordance with the Type I (115 volts (V)), 60 hertz (Hz), power requirements of DoD-STD-1399, Section 300.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:11Z
Check the source to verify that this is the current version before use.

3.5.2 Output power. The test set shall provide the power to the buoy during message insertion and playback of the message prior to launch.

3.5.3 Playback. The test set shall contain a receiver which shall receive the radio frequency (RF) signal from the buoy and demodulate the message during playback of the buoy message prior to launch.

3.5.4 Receiver tuning. The receiver shall be tunable in the frequency range from 160 megahertz (MHz) to 174 MHz very high frequency (VHF), channels 1 through 31.

3.5.5 Automatic level control. The test set shall provide a constant level to the message storage device of the buoy.

3.5.6 Headset jack. The headset jack, conforming to MIL-J-641/12, Type JJ-089, shall mate with PJ-055B plug in accordance with MIL-P-642/4. The test set shall perform with a 600-ohm input headset.

3.5.7 Electromagnetic compatibility (EMC). The test set shall conform to Requirements CE01, CE03, CS01, CS06, and RS03 of MIL-STD-461 for Class A5 equipment. Requirements RE01, RE02, RS01, and RS02 of MIL-STD-461 shall be performed for informational purposes only. The test set shall be capable of operating in normal submarine environments.

3.6 Enclosure. The enclosure shall serve as a carrying case and shall be in accordance with MIL-STD-454, Requirement 55. The degree of enclosure shall be spraytight in accordance with MIL-STD-108. Synthetic or natural rubber bumpers shall be mounted near the corners of the bottom surface of the enclosure and the surface opposite the handle. The bumpers shall be of the minimum size necessary to protect these surfaces, or any parts that may protrude from the bumpers during normal storage and usage.

3.7 Controls and indicators. The test set shall have the controls and indicators specified in a through l:

a. Switch that shall turn power off and on to test set
b. Connector for input power to the test set
c. Light to indicate power on to the test set
d. Elapsed time meter to indicate recording time
e. Reset switch to reset elapsed time meter at any time
f. Connector for continuous wave (CW) key
g. Volume control for tone when test set is in CW record mode
h. Mode switch to indicate test set is in stop, voice record, CW record or playback mode
i. Light to indicate test set is in the record mode
j. Speaker for the receiver
k. Headset jack for the receiver and for disengaging the speaker simultaneously when the headset is connected
l. Volume control for receiver and headset

3.8 Leakage current. The leakage current of the test set shall not exceed 5 milliamperes (mA).

3.9 Quantitative reliability requirements. The upper test mean-time-between-failures (MTBF) (θ_0 as defined in MIL-STD-781) shall be 3000 hours (see 6.4.1). The lower test MTBF (θ_1 as defined in MIL-STD-781) shall be 1500 hours.

3.10 Workmanship screen. All equipment shall withstand a defect detection vibration screen of random type vibration (see 4.8.1.1) at 0.04 g^2 per Hz ±3 decibels (dB) from 80 Hz to 350 Hz and temperature cycling as specified in 4.8.2.

Source: https://assist.dla.mil -- Downloaded: 202610-20T20:11Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at any time. Verification will consist of, but is not limited to, a) surveillance of the operations to determine that practices, methods, and procedures of the written quality program are being properly applied, b) Government product inspection to measure quality of the product to be offered for acceptance, c) Government inspection of delivered products to assure compliance with all inspection requirements of this specification. Failure of the contractor to promptly correct deficiencies discovered by him or of which he is notified shall be cause for suspension of acceptance until corrective action has been taken or until conformance of the product to prescribed criteria has been demonstrated.

4.1.2 Quality assurance terms and definitions. Quality assurance terms used in this specification shall be as defined in MIL-STD-109.

4.2 Classification of inspections. The inspection requirements specified herein are classified as specified in a through c:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)
    1. Production inspection (see 4.4.1)
    2. Production control inspection (see 4.4.2)
    3. Environmental inspection (see 4.4.3)
c. Inspection of preparation for delivery (see 4.9)

4.3 First article. Unless otherwise specified (see 6.2), one test set shall be required for first article inspection. First article inspection shall consist of all examination and testing necessary to determine compliance with the requirements of this specification. First article inspection shall include the tests specified in TABLE I.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the inspections specified in 4.4.1 through 4.4.3.1.

4.4.1 Production inspection. Production inspection shall be made on every test set offered for delivery. Production inspection shall comprise such examination and testing as will prove the workmanship and reveal the omissions and errors of the production process, such as functional and performance tests at a limited number of points, tests which detect deviations from design, tests of adjustment, and tests which detect hidden defects of material. Production inspection shall consist of the Group A tests and examinations of TABLE I.

4.4.2 Production control inspection. Production control inspection consists of the Group B tests of TABLE I and shall conform to the inspection procedures of MIL-STD-105 using the special inspection level. The inspection level shall be S-3 for normal, tightened, and reduced inspection with an acceptable quality level of 6.5 percent. Production control inspection shall be performed on test sets that have passed production inspection. The test sets shall satisfactorily conform to the requirements of production control inspection prior to release for shipment.

4.4.3 Environmental inspection. Environmental inspection shall consist of the Group C tests of TABLE I and shall be performed on test sets which have been subjected to and passed production inspection.

4.4.3.1 Environmental inspection samples. Samples for the environmental inspection shall be selected in accordance with the requirements specified in a and b:

a. One sample from the first 25 production units fabricated
b. One sample from each successive 100 units produced, or fraction thereof

Source: https://assist.dla.mil -- Downloaded: 20261O-20T20:11Z
Check the source to verify that this is the currentversion before use.

4.5 Test methods. The examinations and tests specified in TABLE I shall be conducted in accordance with the applicable test methods of MIL-E-16400, except as specified in 4.5.1 through 4.5.5.

TABLE I. Examinations and tests.

Examination or test	Requirement paragraph	Test paragraph	First article	Quality conformance inspection		
				Production inspection Group A	Production control inspection Group B	Environmental inspection Group C
Surface examination						
Weight	3.3.2.2	4.5	X		X	
Size	3.3.2.1	4.5	X	X		
Workmanship screen	3.10	4.8		X		
Performance	3.3.1	4.5.1	X	X		
Low temperature	3.3.3.1	4.5	X			X
High temperature	3.3.3.1	4.5	X			X
Shock	3.3.3.2	4.5.2	X			X
Vibration	3.1	4.5.3	X			X
Enclosure	3.6	4.5.4	X		X	
Input power	3.5.1	4.5	X		X	
Output power	3.5.2	4.5.1	X	X		
Playback	3.5.3	4.5.1	X	X		
Receiver tuning	3.5.4	4.5.1	X	X		
Automatic level control	3.5.5	4.5.1	X	X		
Headset jack	3.5.6	4.5.1	X	X		
Leakage current	3.8	4.7	X		X	
EMC	3.5.7	4.5.5	X			
Construction	3.1	4.5	X			
Compatibility	3.1.1	4.5	X			
Reliability	3.9	4.6	X			

4.5.1 Performance tests. The test set and the buoy, functioning as a system, shall be subjected to a thorough electrical performance test. Performance requirements shall be demonstrated as specified in a through c and 4.5.1.1.

a. Test set tuning (see 3.5.4)
b. Test set level control (see 3.5.5)
c. Test set playback (see 3.5.3)

4.5.1.1 Operating checkout and playback. During production control and environmental testing, the operating checkout and playback shall supplement the performance test for the periodic checking of the functional capabilities of the test sets. The checkout procedures shall be as specified in a through h:

a. Connect power cable to test set and 115 V power source.
b. Connect buoy test cable connector and test set connector.
c. Connect RF probe cable to buoy connector and test set connector.
d. Turn test set power switch to ON position.
e. Turn test set to voice record mode and record the maximum message length obtainable.
f. Place the mode switch to the playback position and depress the message advance switch until end of message light turns off.
g. Verify that the entire message recorded is understandable.
h. Place mode switch to OFF position and disconnect the test RF probe.

4.5.2 Shock. The test set (nonenergized) shall be tested to verify compliance with 3.3.3.2.

4.5.3 Vibration. The test set (nonenergized) shall be subjected to the Type I vibration test of MIL-STD-167-1.

4.5.4 Enclosure test. Following completion of the shock and vibration test, the test set shall be subjected to the spraytight test of MIL-STD-108 to demonstrate compliance with 3.6.

4.5.5 EMC. The test set shall be tested in accordance with MIL-STD-462 to demonstrate compliance with the EMC requirements of 3.5.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:11Z
Check the source to verify that this is the current version before use.

4.6 Reliability. Reliability shall be in accordance with 4.6.1 through 4.6.4.

4.6.1 Reliability testing. During first article testing, reliability testing shall be performed on one to five test sets of the first production lot in accordance with Test Plan IVC of MIL-STD-781 for Category 3A equipment. A combined MTBF using the quantitative reliability requirements shall be used as the system MTBF for this test. Continuous functional operational testing in each operational mode shall be accomplished during extremes and normal environmental conditions throughout the test. For the definition of failure, see 6.4.1.

4.6.2 Reliability retesting. In the event a reject decision is reached, retesting shall be required with test sets other than the ones used in the failed reliability test. Authority for retesting is required from the procuring activity. No production equipment shall be accepted by the Government until the reliability test is successfully completed.

4.6.3 Disposition of tested test sets. Upon successful completion of reliability testing, tested test sets shall be returned to the production area for reinspection and reconditioning as required and shall be subjected to the production inspection specified in TABLE I for Group A.

4.6.4 Pattern failures. In the event of pattern failures (as defined by MIL-STD-781) which occur during any testing, acceptance test shall be stopped and the contractor shall immediately notify the procuring activity. The procuring activity shall have the authority to continue the test, start another test, require the contractor to conduct a test, analyze, and fix (TAAF) program in accordance with MIL-STD-1635, or continue acceptance. The TAAF test environment shall be equivalent to the environment of the test in which the pattern failure occurred. The Government has the authority to determine patterns of failure.

4.7 Leakage current test. The leakage current test shall be in accordance with 4.7.1 and 4.7.2.

WARNING

THIS TEST MAY BE HAZARDOUS DUE TO THE UNGROUNDED CONDITION OF THE TEST SET DURING THE TEST. DO NOT TOUCH EXPOSED METAL SURFACES WITHOUT ADEQUATE ELECTRIC SHOCK PROTECTION.

THE UNITED STATES GOVERNMENT NEITHER ASSUMES NOR ACCEPTS RESPONSIBILITY FOR ANY INJURY OR DAMAGE THAT MAY OCCUR DURING OR AS A RESULT OF THIS TEST.

4.7.1 Test set test connections. After power removal, each test set directly connected to an external power source and units deriving power from the test set shall be placed on an insulated surface. All safety ground conductors between the test set and units deriving power from the test set shall be intact. The safety ground conductor between the test set and the source power shall be opened during the test. The equipment shall be connected as shown in FIGURE 1.

4.7.2 Measurement. Leakage current shall be measured on the test set in its normal operating configuration. Test set controls in each operating mode shall be such that maximum power will be utilized during leakage current measurements. The leakage current shall be determined by the voltage-drop method. A true root-mean-square (rms) voltmeter shall be used. The voltage measured across the 1500 ohm resistor shall not exceed 7.5 V at the highest nominal power line voltage and the highest and lowest nominal power line frequencies for which the test set is designed. The overall measurement error shall not exceed 5 percent. The probes shall be used on all external conducting parts such as case, connector housings, recessed calibration or adjustment controls, and control shafts with knobs removed. The voltage shall be measured from each part to ground and from each part of all other simultaneously accessible parts for every combination of switch positions available in the test diagram. The open safety ground conductor shall be reconnected immediately after the test is completed.

4.8 Workmanship screen. The workmanship screen shall be as specified in 4.8.1 and 4.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:11Z
Check the source to verify that this is the current version before use.

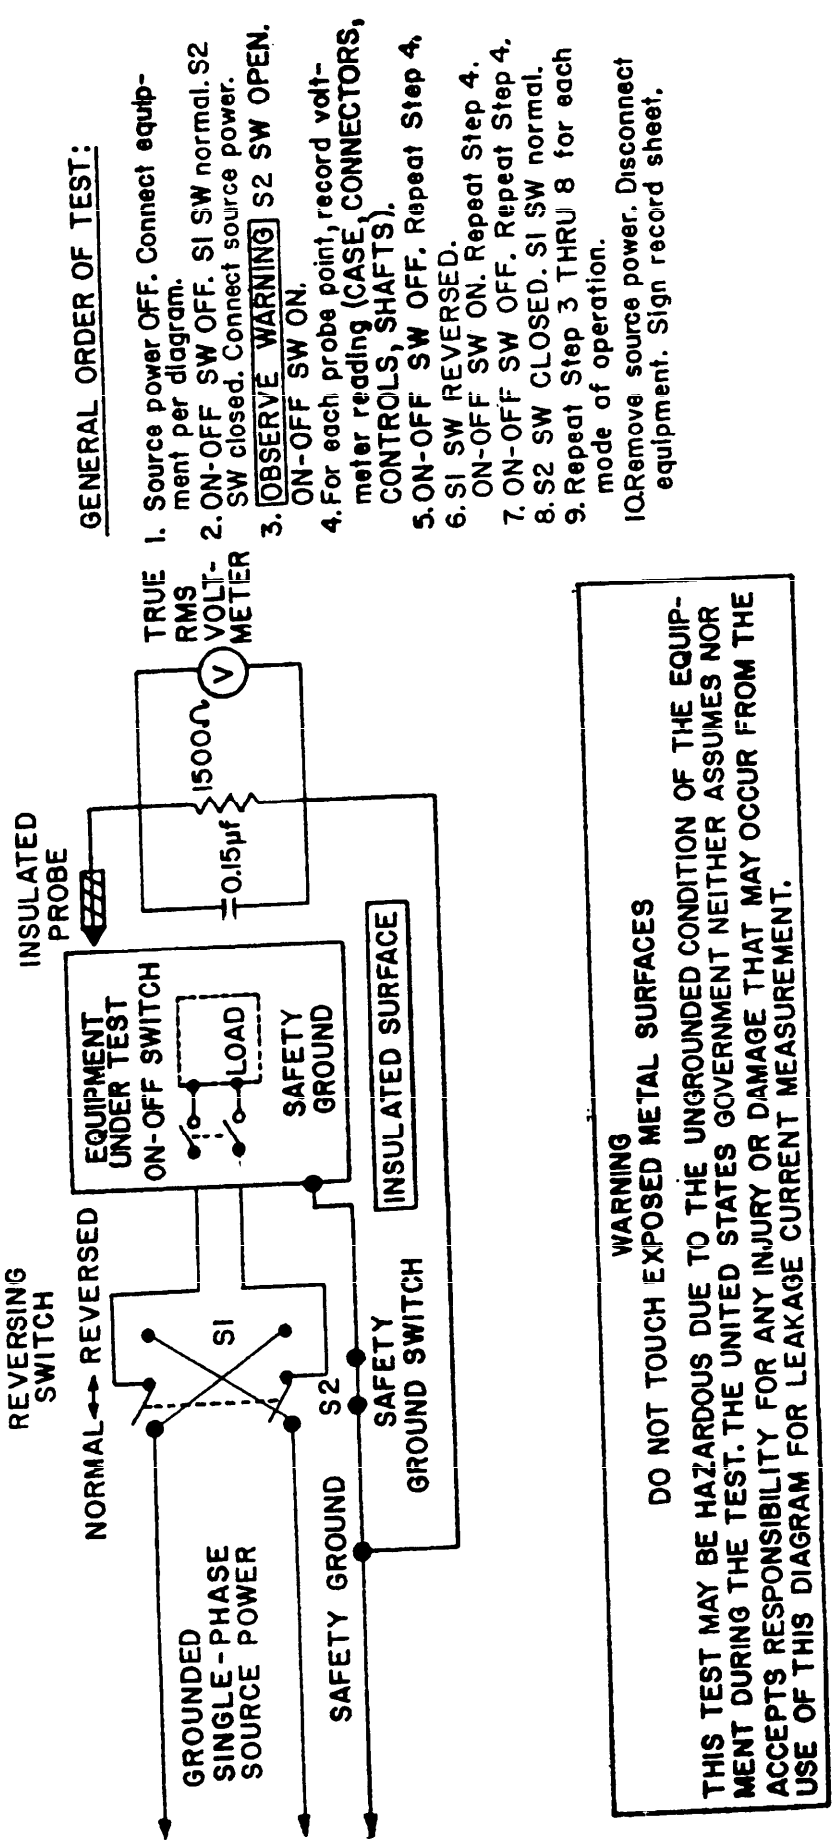


FIGURE 1. Single-phase test diagram for leakage current measurement.

Source: https://assist.dla.mil -- Downloaded: 20260-20T20:11Z
Check the source to verify that this is the current version before use.

4.8.1 Vibration. Prior to conducting temperature cycling, vibration shall be performed on each test set. The vibration may be performed at the module, drawer, or end item level. All the hardware, including cables and connectors, shall be exposed to vibration.

4.8.1.1 Type of vibration. The vibration shall be random, or subject to procuring activity approval, pseudo-random or complex waveform vibration, for an accumulated time of 10 minutes in the axis deemed most susceptible to vibration excitation. All test sets shall be hard-mounted (without shock isolators) and subjected to the vibration conditions of FIGURE 2. The control accelerometer shall be located next to one of the mounting points of the item under vibration. Test sets having a bandwidth no greater than 10 Hz for vibration frequencies up to 500 Hz and 100 Hz for vibration frequencies above 500 Hz shall be used for the control and analysis of the acceleration spectral density (ASD). The item shall be energized during vibration and appropriate input signals applied to observe any abnormal conditions of the output functional characteristics. All failures occurring during screening shall be corrected and the vibration resumed.

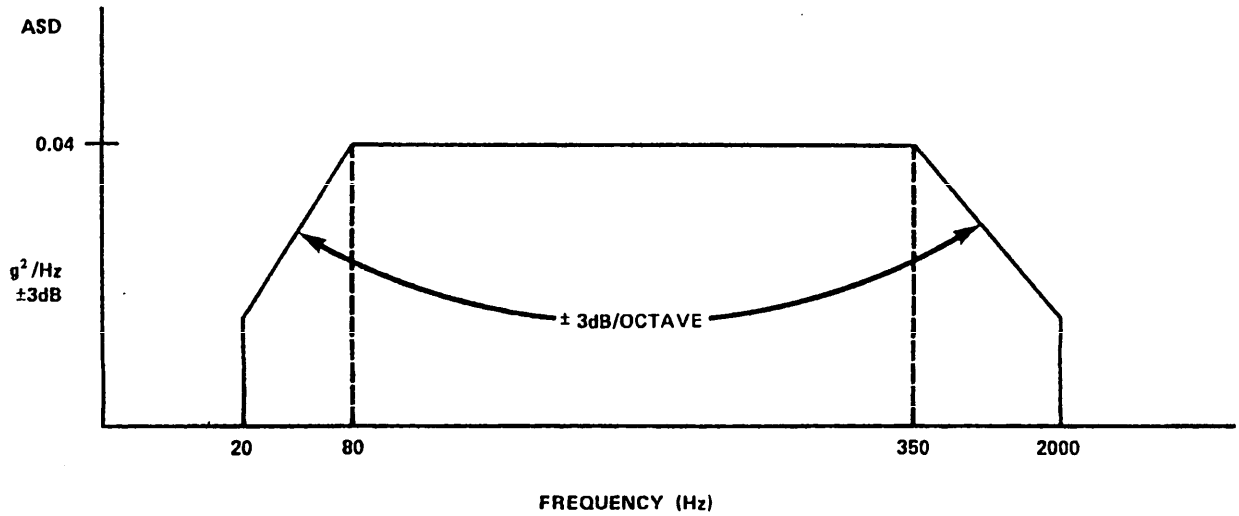


FIGURE 2. Random vibration curve.

4.8.2 Temperature cycling. Each test set shall be subjected to 10 cycles of the temperature curve as specified in FIGURE 3. The temperature rate of change shall be not less than 5° Celsius (C) per minute. Test set power shall be turned on and off at the indicated times. The test set shall be positioned for maximum exposure to the changing temperature. Where performance measurements are called for, a minimal functional operating test shall be performed. The dwell time shall be maintained until the largest electrical or electronic part in the test set reaches 80 percent of the chamber temperature. When failures occur, the test set shall be reworked and the cycling continued for a cumulative total of 10 cycles.

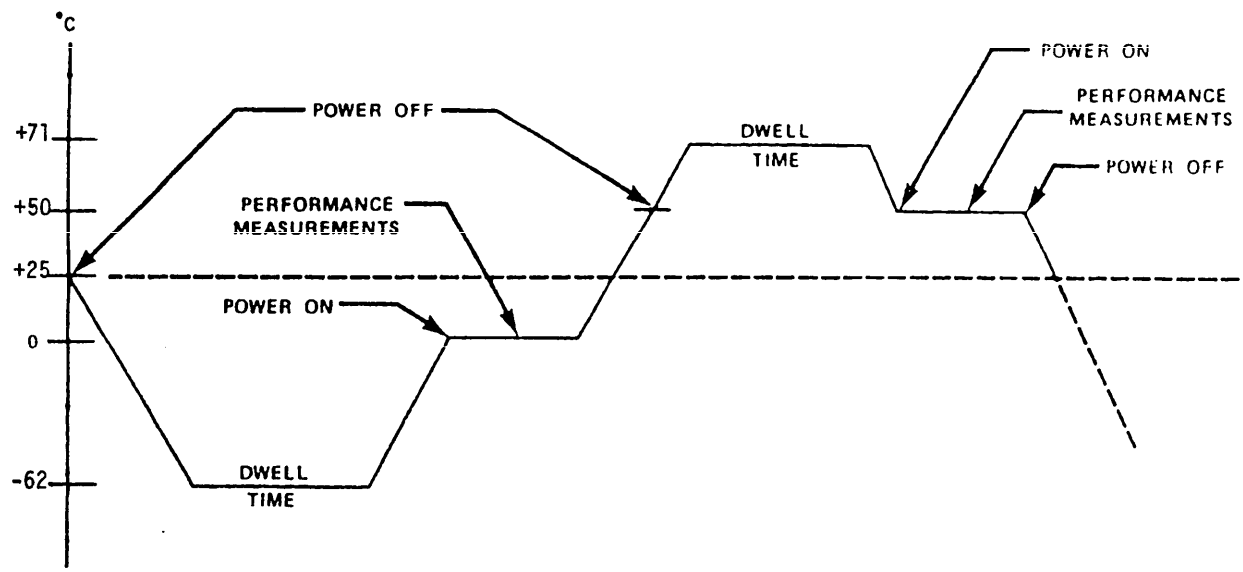


FIGURE 3. One cycle of temperature curve (not to scale).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:11Z
Check the source to verify that this is the current version before use.

4.9 Inspection of preparation for delivery. Inspection shall be performed to assure conformance with the requirements of Section 5.

5. PACKAGING

(The preparation for delivery requirements specified herein apply only for direct Government procurements. Preparation for delivery requirements of referenced documents listed in Section 2 do not apply unless specifically stated in the contract or purchase order. Preparation for delivery requirements for products procured by contractors shall be as specified in the individual order.)

5.1 Preservation, packaging, packing, and marking. Unless otherwise specified herein, preparation for delivery shall be in accordance with the applicable levels of preservation, packaging, packing, and marking specified in MIL-E-17555.

6. NOTES

6.1 Intended use. The test set covered by this specification is intended for submarine use at sea.

6.2 Ordering data. Procurement documents should specify:

a. Title, number, and date of this specification
b. Number of first article samples to be submitted if other than specified in 4.3.

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 52.209-3 of the Federal Acquisition Regulations. The first article should be a first production item. The first article should consist of one unit. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for examinations and test approval of the first article.

6.4 Definition.

6.4.1 Failure. Failure shall be defined as any malfunction or parameter deviation that prevents the test set from performing within the operational requirements specified herein.

6.5 Supersession data. This specification supersedes that part of MIL-R-24470 which covers the Radio Transmitting Buoy Test Set AN/BRM-2().

Preparing activity:
NAVY - EC

(Project No. 6625-N827(EC))

Source: https://assist.dla.mil -- Downloaded: 202610-20T20:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-04-20T20:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-28862A(EC)	TEST SET, BUOY, RADIO TRANSMITTING, AN/BRM-2(A)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-20T20:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

REPRODUCED AT GOVERNMENT EXPENSE

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:11Z
Check the source to verify that this is the current version before use.