|INCH-POUND|

MIL-S-28574C(YD)
28 March 1991
SUPERSEDING
MIL-S-28574B(YD)
11 June 1984

MILITARY SPECIFICATION

# SCREED, VIBRATORY, CONCRETE, MANUALLY OPERATED

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

* 1.1 Scope. This document covers manually operated, gasoline-engine and pneumatic-powered, vibratory screeds, referred to as screeds, for striking-off freshly placed concrete slabs.

* 1.2 Classification.

* 1.2.1 Classes, types, and sizes. The screed covered by this document shall be one of the following classes, types, and sizes as specified (see 6.2):

Class 1 - Gasoline Engine Powered
Class 2 - Pneumatic powered

Type I - Lightweight unit (portable) with clamps for attaching 2 or twin wooden strike-off beams.
Type II - Heavyweight unit with 2 or twin prefabricated strike-off beams.

Size 1 - 16 feet (nominal beam length).
Size 2 - 21 feet (nominal beam length).
Size 3 - 30 feet (nominal beam length).

* 1.2.2 Part number designation. Screeds covered by this document shall be identified by a part or identifying number (see 6.5).

|Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.|

AMSC N/A FSC 3895

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:16Z
Check the source to verify that this is the current version before use.

## 2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, and standards. The following specifications, and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

TT-P-664 - Primer Coating, Synthetic, Rust Inhibiting, Lacquer Resisting.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-R-196 - Repair Parts, Accessories, and Kits, Mechanical; Packaging of.
MIL-P-514 - Plate, Identification, Instruction and Marking, Blank.
MIL-E-10062 - Engines: Preparation for Shipment and Storage.

STANDARDS

MILITARY

MIL-STD-129 - Marking for shipment and Storage.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Navy Publication & Printing Service Office, Building 4D, NPM DODSSP, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF LABOR (DOL)
OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

Title 29, CFR, Part 1910.219 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

ASTM

ASTM D 3951 - Packaging, Commercial.

(Application for copies should be addressed to the ASTM, 1916 Race Street, Philadelphia, PA 19103.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE J 534 - Lubrication Fittings.
SAE J 551 - Performance Levels and Methods of Measurement of Electromagnetic Radiation from Vehicles and Devices (30-1000 Mhz).

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 Description.

3.1.1 Classes.

3.1.1.1 Class 1. Each class 1 screed shall consist of a powerplant, power train, vibrating mechanism, and strike-off beams (see 6.2).

3.1.1.2 Class 2. Each class 2 screed shall consist of a power system, vibrating mechanism, and strike-off beams.



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the current version before use.

* 3.1.2 Types.

* 3.1.2.1 Type I. The type I screed shall have a steel frame fabricated to receive and secure two strike-off beams constructed from nominal 2 inch thick wooden members. When specified for the type I screed (see 6.2), two straight, nominal 2 inch thick, kiln dried, Douglas fir strike-off beams, of the length and width required, shall be furnished. Maximum beam length shall not exceed 18 feet. The frame shall be equipped with a vibration dampened operating handle. Not less than two pull ropes, one attached to each end of the screed, shall be provided to facilitate propelling the screed.

* 3.1.2.2 Type II. The type II screed shall be equipped with prefabricated, truss supported, 2 or twin strike-off beams of a nominal fixed length as specified (see 1.2.1 and 6.2). When beams are fabricated from wood, surfaces that contact the concrete shall be clad with steel or magnesium to resist beam wear. Not less than two winch assemblies, one attached to each end of the screed, shall be provided to facilitate propelling the screed.

* 3.2 Standard commercial product. The screed shall, as a minimum, be in accordance with the requirements of this document and shall be the manufacturer's standard commercial product. Additional or better features, which are not specifically prohibited by this document but which are a part of the manufacturer's standard commercial product, shall be included in the screed being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

* 3.3 First Article. When specified (see 6.2), the contractor shall furnish one screed of each class, type, and size included in the contract for first article inspection and approval (see 4.2.1 and 6.3).

* 3.4 Construction. The screed shall be designed to withstand strains, jars, vibrations, and other conditions incidental to shipping, storage, installation, and operation and to permit easy accessibility for maintenance and service in the field. The design shall be such as to prevent conditions which may be hazardous to personnel or deleterious to equipment. The screed shall be furnished complete in all details including those not specifically mentioned herein.

* 3.4.1 System of measurement. The dimensions used in this specification are not intended to preclude the use of the metric system of measurement in the fabrication and production of the material, individual parts, and the finished product, provided form, fit, and function requirements are satisfied.

3.5 Safety. All rotating or reciprocating parts and all parts subject to high operational temperatures or pressures, that are of such a nature or are so located as to be or become a hazard to the safety of the operating personnel, shall be insulated, enclosed, or guarded to the extent necessary to eliminate the hazard. The screed shall comply with applicable DOL, OSHA regulations in effect at time of manufacture.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:16Z
Check the source to verify that this is the current version before use.

3.6 Materials. Materials shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this document are to be new; however, recovered raw materials shall be used to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials reprocessed to become a source of raw materials, as opposed to virgin raw materials which include previously unused metal or metal ore, any undeveloped resource, or new technology which will become a source of raw material. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed, unless otherwise specified.

3.7 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

* 3.8 Ease of maintenance. Design of the screed shall permit ready accessibility to all parts for maintenance and repair in the field by use of conventional general-purpose tools associated with screeds. Replacement and adjustment of component parts and accessories shall be accomplished with minimum disturbance to other elements of the screed. Intricate locking devices, controls, and threaded fastenings that can be easily over-torqued shall be avoided. Covers or plates that must be removed for component adjustment or for parts removal shall be equipped with substantial, quick disconnect fastenings. Compressed air fittings shall be substantial and of the quick disconnect type. Accessibility to lubricating oil fill openings, fluid checking devices, and drain plugs shall be provided without the need of removing or adjusting accessories and parts.

* 3.9 Operational requirements. The screed shall be capable of operating satisfactorily in ambient temperatures from 0 degrees Fahrenheit ($^{o}$F) up to 125$^{o}$F.

* 3.10 Performance. The screed, riding on pre-positioned forms, shall strike-off across the full width of the pavement as specified herein and to a tolerance of $\pm$ 1/8 inch per 10 feet transversely and longitudinally. The screed shall properly strike-off the concrete while retaining coarse aggregate near the finished surface. The screed shall produce a surface having uniform texture. The screed shall perform the preceding functions in not more than two passes on concrete having a slump as low as 2 inches. Continuous linear screeding rate for 2 inch slump concrete shall be not less than 3 feet per minute (fpm).

* 3.11 Weight and dimensions. The weight of the type I screed less strike-off beams shall not be greater than 90 pounds. The length dimension shall not be greater than 36 inches. The width dimension shall not be greater than 24 inches, and the height dimension, less the handle, shall not be greater than 20 inches. The weight distribution of the type II screed, complete and ready for operation, shall not be greater than 20 pounds per lineal foot.



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the currentversion before use.

* 3.12 Power system.

* 3.12.1 Class 1. The screed shall be powered by a four-stroke, air cooled, gasoline engine, which operates on unleaded fuel. The screed shall be powered by the manufacturer's standard commercial engine normally furnished to the commercial market for that screed. The power and speed to meet the performance requirements of the screed shall not be greater than the continuous rated horsepower and maximum rated engine speed. The engine shall be mounted on the screed by a suitable vibration dampening system. The engine shall be furnished with accessories normally equipped on the manufacturer's commercial standard screed and have, as a minimum, the following:

a. A governor set to keep the engine from exceeding the maximum rated engine speed.
b. A fuel tank with a sufficient capacity for not less than 3 hours of continuous operation.
c. A suitable serviceable dry type or oil bath type intake air cleaner.
d. A manual speed control and choke.
e. A recoil starter.
f. A stop control.
g. An exhaust muffler.

* 3.12.2 Class 2. The screed shall be powered by a portable air compressor capable of producing 75 cubic feet of air per minute at 90 pounds per square inch (PSI). Any components, other than the air governor valve and pressure relief valve provided as standard items on commercial air compressors, required for proper operation will be provided as part of the screed. The screed shall be furnished with accessories normally equipped on the manufacturer's commercial standard screed and have, as a minimum, a hand off-on valve (air control system) for control of vibration speed.

* 3.13 Power train. Power train for the Class 1 screed shall consist of a V-belt and pulley arrangement. The engine's drive shaft shall be furnished with a centrifugal type clutch equipped with heavy-duty ball bearings and a drive pulley(s). The vibrating mechanism's eccentric rotor shaft shall be fitted with a pulley(s). V-belt(s) shall transfer power from the engine to the vibrating mechanism. A mechanical method shall be provided for adjusting belt tension without removing any components.

* 3.14 Vibrating mechanism.

* 3.14.1 Class 1. The vibrating mechanism shall be engine driven. Vibrating frequency shall be not less than 4,000 vibrations per minute at maximum governed engine speed and shall not vary by more than ± 10 percent. Amplitude and frequency of the vibrating mechanism shall be of sufficient magnitude that the screed shall strike-off 2 inch slump concrete. When specified (see 6.2), the amplitude of vibration shall be adjustable.

* 3.14.2 Class 2. The vibrating mechanism shall be pneumatic. Vibrating frequency shall be not less than 4,000 vibrations per minute and shall not vary by more than ± 10 percent. Amplitude and frequency of the vibrating mechanism



Source: https://assist.dla.mil -- Downloaded: 20260-20T13:16Z
Check the source to verify that this is the current version before use.

shall be of sufficient magnitude that the screed shall strike-off 2 inch slump concrete. When specified (see 6.2), the amplitude of vibration shall be adjustable.

* 3.15 Propelling system. The screed shall be manually propelled while supported on pre-positioned forms. Type I screeds shall be provided with a vibration dampened operating handle which can be adjusted to suit the height of the operator and shall be provided with two beam spreaders equipped with pull ropes. Type II screeds shall be propelled by hand operated winches, one attached to each end of the screed. The manufacturer shall provide a complete system of winches, pulleys, and cables necessary to meet the performance requirements of 3.10.

* 3.16 Lubrication. Means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high pressure lubricating equipment; 1,000 pound-force per square inch or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location. The unit shall be lubricated prior to delivery with the type of lubricant specified in the owner's manual and grade of lubricant recommended for ambient temperature at the delivery point. The unit shall be conspicuously tagged to identify the lubricants and their temperature range.

* 3.17 Electromagnetic radiation. Electromagnetic radiation from the screed shall not exceed the limits recommended in SAE J551.

3.18 Instruction plates. Each screed shall be furnished with suitably located, firmly attached instruction plates conforming to MIL-P-514, describing any special or important procedures for operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment.

3.19 Identification marking. Identification shall be permanently and legibly marked directly on the screed or on a corrosion resisting metal plate securely attached to the screed by the manufacturer. Identification shall include the manufacturer's model and serial number, name, and trademark to be readily identifiable to the manufacturer.

3.20 Cleaning, treatment, and painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. The color of the finish coat shall be as specified (see 6.2). Surfaces to be painted shall be cleaned and dried to insure that they are free from contaminants such as oil, grease, welding slag and spatter, loose mill scale, water, dirt, corrosion product, or any other contaminating substances. As soon as practicable after cleaning, and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to insure the adhesion of the coating system. The painting shall consist of at least one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects.



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the current version before use.

3.21 Workmanship.

3.21.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.21.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lock washers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.21.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of shape and uniform size approved by the contracting officer. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.21.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

3.21.5 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings' ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the current version before use.

acceptable practice to ascertain conformance to the requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

* 4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

* 4.2.1 First article inspection. When a first article is required (see 3.3 and 6.2), the first article inspection shall be performed on one screed. This inspection shall include the examination of 4.3 and the tests of 4.4.1 and 4.4.2. The contracting officer will provide specific guidance on whether the first article must be a first article sample or may be a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract (see 6.2 and 6.3).

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3, the tests of 4.4.3, and the packaging inspection of 4.5.

4.3 Examination. Each screed shall be examined for compliance with the requirements specified in section 3 of this document. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Tests.

* 4.4.1 Performance test. Before testing, the contractor shall prepare a maintenance schedule. Unless otherwise specified in the maintenance schedule, the screed shall operate as specified herein without maintenance. The screed shall be operated continuously at maximum vibrational speed for a period of 4 hours. At the conclusion of the 4 hour test, the screed shall be checked for lubrication and any signs of damage or deformation. Oil or grease shall be replaced as required. The screed shall be operated for an accumulated period of 8 hours over a duration of not more than 2 days. Travel speed shall be checked by a distance over time calculation and the vibration frequency with a vibratory type tachometer. Every 4 hours the screed shall be examined for excessive wear, overheating, and any signs of damage or deformation. Throughout the test, the screed shall be observed to ascertain compliance with:



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:16Z
Check the source to verify that this is the current version before use.

a. Safety requirements of 3.5.
b. Ease of maintenance and lubrication requirements of 3.8 and 3.16 respectively.
c. V-belt adjustment requirement of 3.13 (Class 1 only).

* 4.4.2 Screeding test. The screed shall demonstrate its ability to screed concrete having a slump of 2 inches. Forms set at zero grade shall be used to contain the concrete and support the screed. If the outside air temperature is below 45°F, warm water shall be used as part of mix and the temperature of the concrete, when placed into the forms will be between 60°F and 80°F. If the outside air temperature is above 90°F, ice shall be used as part of mix and the temperature of the concrete, when placed into the forms shall be between 60°F and 80°F. For the type I screed, the freshly placed slab shall be not less than 16 feet wide, 36 feet long, and 6 inches thick. The contractor shall provide his equipment complete with the striking beams, beam spreaders, and pull ropes necessary to perform the test. The freshly placed slab for testing the type II screed shall also be 36 feet long and 6 inches thick but the width shall be the maximum working width for the screed being tested. The screed shall make two passes at a propelling speed of not less than 3 fpm. Finished surface of the screeded slab shall comply with the requirements of 3.10 and also be relatively smooth (texture). Failure to pass any phase of this test shall be cause for rejection.

* 4.4.3 Operational test. The vibrating power system shall be started and subjected to a warm-up period as recommended by the manufacturer. The screed shall be operated for not less than one hour. The vibrating power system shall be stopped and started as many times as necessary to determine ease of operation, effectiveness, and responsiveness, and that the vibrating power system and vibrating mechanism actuated by the speed control operate promptly, without restriction, or malfunction. All moving parts shall be both visually and tactually examined for excessive heating or abnormal operation. Failure to meet the requirements of section 3 or any evidence of damage shall be cause for rejection.

* 4.5 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification shown in section 5. The inspection of marking for shipment and storage shall be in accordance with MIL-STD-129. The inspection of commercial packaging shall be as specified in the contract (see 6.2).

## 5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Methods of preservation. Cleaning processes, drying procedures, preservatives, and methods of preservation specified in the following paragraphs



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the currentversion before use.

are listed in MIL-P-116 and shall conform to the requirements of MIL-P-116 and any applicable specifications.

5.1.1.2 Disassembly. Disassembly shall be minimum necessary to protect parts subject to damage or loss, and to accomplish reduction in cube. Removed bolts, nuts, pins, screws, and washers shall be reinstalled in mating parts and secured to prevent their loss.

* 5.1.1.3 Cleaning and drying. Prior to application of preservative compounds or paint, surfaces shall be cleaned by process C-1 and dried by any applicable procedure of MIL-P-116.

* 5.1.1.4 Unit protection. The complete screed shall be preserved method IIa of MIL-E-10062. Openings in the equipment shall not be sealed, so that desiccated air may circulate.

5.1.1.5 Drive belts and pulleys. Drive belts shall be removed or released from tension. Removed belts shall be preserved method IC-1 or IC-3. A weatherproof tag shall be attached in a conspicuous location indicating: "Belts have been (removed or released from tension). (Install or tension) prior to operation." Markings shall be applied to the tags with a waterproof material.

5.1.1.6 Repair parts. The preservative application criteria and applicable methods of preservation of MIL-P-116 shall be used to preserve repair parts. When specified (see 6.2), the repair parts shall be preserved in accordance with level A requirements of MIL-R-196, or, when parts are not specifically covered in MIL-R-196, an applicable submethod of preservation of MIL-P-116 shall be used.

5.1.1.7 Technical Publications. Technical publications for each piece of equipment shall be preserved method IC-1 or IC-3.

5.1.1.8 Consolidation. Disassembled items and technical publications for each screed shall be consolidated in containers conforming to PPP-B-636, class weather-resistant.

5.1.2 Commercial. The equipment shall be preserved in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A or B or Commercial as specified (see 6.2).

5.2.1 Level A. Each complete screed shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, or PPP-B-621, class 2. The contents shall be blocked, braced, and secured to prevent movement inside the container.

5.2.2 Level B. Each complete screed shall be packed as specified for level A, except that boxes shall conform to PPP-B-601, domestic type; or PPP-B-621, class 1.



Source: https://assist.dla.mil -- Downloaded: 202610-20T13:16Z
Check the source to verify that this is the current version before use.

* 5.2.3 Commercial. Packing shall be in accordance with ASTM D3951.

* 5.3 Marking. Marking shall be in accordance with MIL-STD-129 for military levels of protection. Commercial packaging shall be marked as prescribed.

6. NOTES

(This section contains information of a general explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The screeds covered by this specification are intended for uses such as striking-off surfaces of freshly placed concrete sidewalks, bridge decks, pavements, and building slabs.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Class, type, and size screed required (see 1.2.1).
c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article screed is required for inspection and approval (see 3.3, 4.2.1, and 6.3).

    1. Location for first article inspection.
    2. Notification requirements.
    3. Special instructions.

e. When vibration amplitude shall be adjustable (see 3.14).
f. When strike-off beams are required (see 3.1.1.1).
g. Color of finish coat (see 3.20).
h. Level of preservation and packing required (see 5.1, 5.2, and 5.3)
i. When repair parts are to be preserved in accordance with MIL-R-196 (see 5.1.1.6).


* 6.3 First article. When first article inspection is required (see 3.3 and 6.2), the contracting officer should provide specific guidance to offerers whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one complete screed. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results, and disposition of the first article. Invitations for bids should provide that the Government reserves the right to waive the requirement for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

* 6.4 Supersession data. This specification supersedes MIL-S-28574B(YD) dated 11 June 1984.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:16Z
Check the source to verify that this is the current version before use.

* 6.5 Part or identifying number (PIN). The PIN to be used for screeds acquired to this document are created as follows:

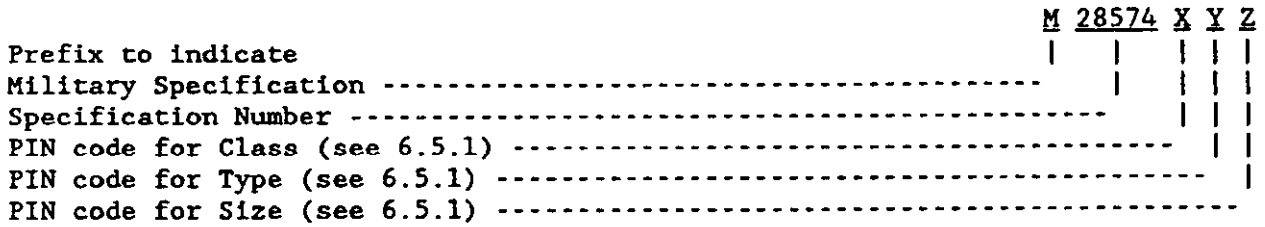


* 6.5.1 Cataloging Data. For cataloging data purposes, PIN code numbers for class, type, and size are assigned as follows:

a. PIN code for class.
   1 = Class 1
   2 = Class 2

b. PIN code for type.
   A = Type I
   B = Type II

c. PIN code for size.
   1 = Size 1
   2 = Size 2
   3 = Size 3

* 6.6 Cross reference of classification. The classification of the screeds in this document differs from the superceded specification in the following respects:

| MIL-S-28574B(YD) | MIL-S-28574C(YD) |
|---|---|
| Not designated | Class 1 |
| Not designated | Class 2 |
| Type I | Type I |
| Type II | Type II |
| Size 1 | Size 1 |
| Size 2 | Size 2 |
| Size 3 | Size 3 |

* 6.7 Subject term (key word) listing.

Screed
Concrete; finishing
Strike-off
Pneumatic screed

6.8 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to



Source: https://assist.dla.mil -- Downloaded: 202640-20T13:16Z
Check the source to verify that this is the current version before use.

evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - YD

Preparing Activity:
Navy - YD

(Project 3895-0305)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:16Z
Check the source to verify that this is the current version before use.