MILITARY SPECIFICATION

RADIO SET AN/URC-80(V)5

This amendment forms a part of Military Specification MIL-R-28823(EC) dated 17 November 1975.

PAGE 1

2.1, line 2: Delete "proprosal" and substitute "proposal".

page 2

3.1.2, line 6: Delete "156.800 MHZ" and substitute "156.650 MHz (CH-13)".

PAGE 3

3.1.8: Line 2, Delete "156.800 MHz" and substitute "156.650 MHz (CH-13)".

3.1.8, line 3, Delete "following frequencies" and substitute "frequencies shown in TABLE I."

PAGE 4

Add the following new paragraph:

* "3.2.1.2 Leakage current. When practicable, the leakage current of the equipment shall not exceed 5 Ma to ground, whether or not such equipment contains radio interference filters or capacitors. On equipments which have an unavoidable leakage current in excess of 5 Ma, a warning plate shall be attached to the front panel reading:

DANGER - Do not energize this equipment unless frame and all exposed metal parts are grounded.".

3.2.2.1, line 5: Delete "impedence" and substitute "impedance".

PAGE 5

3.2.7: Delete.

PAGE 6

TABLE II, Reference paragraph column, after "3.2.3.14", add "4.5.5.1".

In the sentence immediately following TABLE II: Delete "4.4.1.4" and substitute "4.4.3.1".

FSC 5820

Source: https://assist.dla.mil -- Downloaded: 20260-20T19:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.

PAGE 7

4.2(b)(2): Delete "4.4.3" and substitute "4.4.2".
4.2(b)(3): Delete "4.4.4" and substitute "4.4.3".
4.2(b)(4). Delete "4.4.5" and substitute "4.4.4".

4.3, lines 3 and 4: Delete "4.4.3" and "4.4.4" and substitute "4.4.2" and "4.4.3".

PAGE 8

TABLE IV, test paragraph column: Delete "4.5.7" and substitute "4.5.6".

TABLE V, test paragraph column: Delete "4.5.5" and "4.5.6" and substitute "4.5.4" and "4.5.5", respectively.

PAGE 9

4.4.1.4 Temperature test . Renumber as "4.4.3.1" and relocate entire paragraph to follow renumbered paragraph 4.4.3 Periodic inspection.

4.4.2 Frequency stability. Renumber as "4.5.5.1" and relocate entire paragraph to follow renumbered paragraph 4.5.5 Receiver tests.

4.4.3 Production control inspection: Renumber as "4.4.2".

TABLE VI, test paragraph column: Delete "4.5.5", "4.5.5", "4.5.6", "4.5.6", "4.5.5", and "4.5.6" and substitute "4.5.4", "4.5.4", "4.5.5", "4.5.5, "4.5.4", and "4.5.5", respectively.

TABLE VII, under "General", add the following, in the columns shown:

Inspection	Test channels	Reference paragraph	AQL %	Test paragraph
"Leakage Current"	"16"	"3.2.1.2"	"6.5"	"4.5.7"

4.4.3.1 Lots requiring inspection. Renumber as "4.4.2.1".

4.4.4 Periodic inspection. Renumber as "4.4.3".

Following renumbered paragraph 4.4.3 Periodic inspection., insert renumbered paragraph 4.4.3.1 Temperature test., in its entirety.

4.4.4.1 Sampling for periodic inspection. Renumber as "4.4.3.2".

4.4.4.2 Nonconforming periodic sample units. Renumber as "4 .4.3.3".

PAGE 10

TABLE VII, test paragraph column: Delete "4.5.5", "4.5.5", "4.5.5", "4.5.6", "4.5.6", "4.5.4", and "4.4.1.4", and substitute "4.5.4", "4.5.4", "4.5.4", "4.5.5", "4.5.5", "4.4.3.5" and "4.4.3.1", respectively.

4.4.4.3 Reinspection of conforming periodic sample units. Renumber as "4.4.3.4".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.

Following renumbered paragraph 4.4.3.4 Reinspection of conforming periodic sample units., insert renumbered paragraph 4.4.3.5 Examinations and tests. in its entirety.

4.4.5 Inspection of preparation for delivery. Renumber as "4.4.4".

4.5.4 Examinations and tests. Renumber as "4.4.3.5" and relocate entire paragraph to follow renumbered paragraph 4.4.3.4 Reinspection of conforming periodic sample units..

PAGE 11

4.5.5, line 1: Delete "accorance" and substitute "accordance".

4.5.5: Renumber as "4.5.4", and insert paragraph heading "Transmitter tests.".

4.5.6 Renumber as "4.5.5", and insert paragraph heading "Receiver tests.".

Following renumbered paragraph 4.5.5 Receiver tests., insert renumbered paragraph 4.5.5.1 Frequency stability. in its entirety.

4.5.7 Vibration. Renumber as "4.5.6".

Add the following new paragraph:

* "4.5.7 Leakage current. Leakage current, as specified in 3.2.1.2, shall be measured in the following manner. The equipment shall be placed on an insulated surface and test connections made as shown in the Test Diagram for Leakage Current, FIGURE 1. All ground connections between the main equipment and other equipments deriving power from the main equipment shall be intact. The ground connection between the main equipment and the safety ground conductor shall be opened. The equipment shall be operating with nominal AC input voltage at 400 Hz. Connect the probe to the equipment enclosure and measure the leakage current for every combination of switch positions available in the test program. All parts not electrically common with the equipment enclosure shall also be tested for leakage current. Equipments having more than one mode of operation, such as transmit and receive, shall be tested in each mode.".

* After 4.5.7, add new FIGURE 1.

6.4 Delete "Supercession data." and substitute "Supersession data.".

NOTE: The following is a sequential listing of the renumbered and relocated paragraphs of MIL-R-28823(EC), as accomplished by this amendment, and is added as a convenience only:

4.4.2	Production control inspection
4.4.2.1	Lots requiring reinspection
4.4.3	Periodic inspection
4.4.3.1	Temperature test
4.4.3.2	Sampling for periodic inspection
4.4.3.3	Nonconforming periodic sample units
4.4.3.4	Reinspection of conforming periodic sample units
4.4.3.5	Examinations and tests
4.4.4	Inspection of preparation for delivery
4.5.4	Transmitter tests
4.5.5	Receiver tests
4.5.5.1	Frequency stability
4.5.6	Vibration
* 4.5.7	Leakage current
* FIGURE 1	Test diagram for leakage current

NOTE: The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous amendment.

Preparing activity:
NAVY-EC
(Project 5820-N699)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.

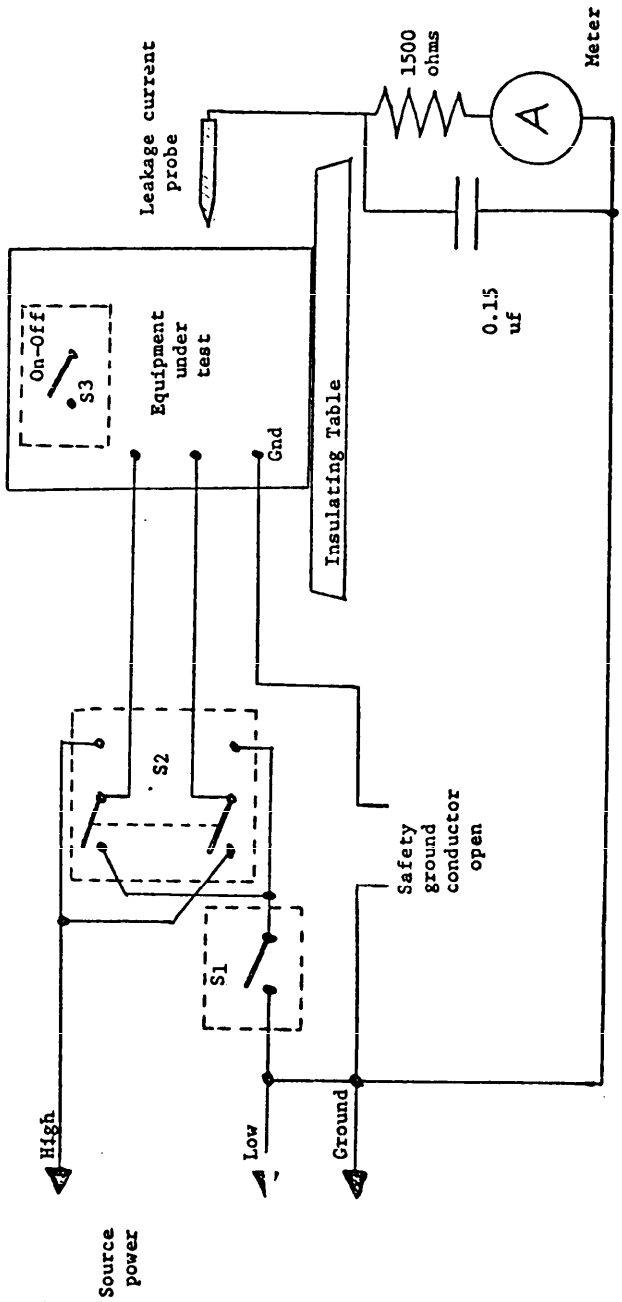


FIGURE 1. Test diagram for leakage current.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T19:14Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.