INCH POUND

MIL-DTL-82966B(OS)
12 November 2024
SUPERSEDING
MIL-DTL-82966A(OS)
8 August 2002

DETAIL SPECIFICATION

SQUIB, ELECTRIC (DELAY), SQ86

This specification is approved for use by the Naval Surface Warfare Center Indian Head Division (NSWC IHD) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the SQ86 Electric (Delay) Squib, referred to herein as the squib.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-L-3055 - Lead Azide

MIL-DTL-23659 - Initiators, Electric, General Design Specification for

DEPARTMENT OF DEFENSE

MIL-STD-1168 - Ammunition Lot Numbering and Ammunition Data Card

(Copies of these documents are available online https://quicksearch.dla.mil.)

Comments, suggestions, or questions on this document should be addressed to Commander, Naval Sea Systems Command, ATTN: SEA 05S, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard, DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 1377

Distribution Statement A: Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

NAVAL AIR SYSTEMS COMMAND (NAVAIR) DRAWINGS

2518510 - Squib Assembly Test Fixture

855AS118 - Squib, Electric (Delay)

(Copies of this drawing are available from Commander, Indian Head Division, Naval Surface Warfare Center, CAD/PAD Data Management Branch (Code E26), 4393 Benson Road, BLDG 1557, Indian Head, MD 20640 5092. Refer questions, inquiries, or problems to nswc_iheodtd_dmo@navy.mil.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM E1742/E1742M - Standard Practice for Radiographic Examination

(Copies of this document are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Primary components. The Lead Azide (MIL-L-3055, Type I), Boron Calcium Chromate, Boron Barium Chromate and the Tetramethylammonium Perchlorate/Ammonium Perchlorate (TMAP/AP) are the squibs primary components (see 6.7). Only one lot of each primary component shall be used in a squib lot. One primary lot may be used in more than one squib lot.

3.3 Squib production. The squibs shall be manufactured in accordance with Drawing 855AS118 and the documents listed thereon. Each production squib shall meet the requirements of 3.2 through 3.3. Failure of any squib to meet the applicable requirements of 3.3 shall result in rejection of that unit.

3.3.1 Visual inspection requirement. All squibs shall be visually inspected and screened for defects as outlined in 4.5.1.

3.3.2 Radiographic examination requirement. Squibs shall show proper assembly, presence of parts, sealing, when examined radiographically in accordance with 4.5.2.

3.3.3 Electrostatic discharge. The squib shall not fire, dud, or otherwise be affected when tested in accordance with 4.5.3.

3.3.4 Bridge circuit resistance. The bridge circuit resistance of the squib shall be 0.9 to 1.1 ohms, including leadwires, when tested in accordance with 4.5.4.

3.3.5 Dielectric withstanding voltage. The squib shall not exhibit a dielectric current leakage in excess of 0.1 milliamperes when tested in accordance with 4.5.5.

3.3.6 Leakage. Each squib shall not exhibit a leak rate in excess of 1.0×10^{-5} cubic centimeters per second of helium at a pressure differential of 1.0±0.1 atmospheres when tested in accordance with 4.5.6 .

3.4 Squib performance.

3.4.1 Electrical characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

3.4.1.1 Stray voltage. The squib shall not fire, dud, or otherwise be affected when tested in accordance with 4.5.7.

3.4.1.2 No-fire. The squib shall not function or degrade when subjected to 1 amp/1 watt direct current for 5 minutes, when tested in accordance with 4.5.8.

3.4.2 Environmental.

3.4.2.1 Six-foot drop. The squib shall not fire or incur any detrimental internal or external degradation as a result of the six-foot drop test in accordance with 4.5.9. and shall meet the performance requirement of 3.4.3 when tested.

3.4.2.2 Shock. The squibs shall not fire or incur any detrimental internal or external degradation as a result of the shock test in accordance with 4.5.10 and shall meet the performance requirement of 3.4.3 when tested.

3.4.2.3 Vibration. The squibs shall not fire or incur any detrimental internal or external degradation as a result of the vibration test in accordance with 4.5.11 and shall meet the performance requirement of 3.4.3 when tested.

3.4.2.4 Temperature/humidity/altitude(THA) cycling. The squibs shall not fire or incur any detrimental internal or external degradation as a result of the THA test in accordance with 4.5.12 and shall meet the performance requirement of 3.4.3 when tested.

3.4.3 Ballistic requirements. Squibs shall meet the requirements of 3.4.3.1 through 3.4.3.4 when tested in accordance with 4.5.13.

3.4.3.1 Function. Each squib shall function when evaluated in accordance with 4.5.13.1.

3.4.3.2 Ignition delay. The ignition delay shall not be less than 0.40 second nor greater than 0.63 second when evaluated in accordance with 4.5.13.2.

3.4.3.3 Velocity. Each squib shall develop sufficient output to propel the steel piston of the test fixture at a minimum velocity of 100 feet per second when evaluated in accordance with 4.5.13.3.

3.4.3.4 Misfire. There shall be no misfires.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Production inspection (see 4.3).

c. Lot acceptance inspection (see 4.4).

4.2 First article inspection. Unless otherwise specified (see 6.2), a first article sample of 57 squibs shall be subjected to first article testing. Fifty-four of these squibs shall be expended in the tests listed in table I and three shall be retained for investigative purposes. First article inspection shall be performed on sample units that have been produced with equipment and procedures normally used in production. First article testing is for the purpose of determining that the contractor, prior to starting production, is capable of producing items that comply with the technical requirements of the contract. A first article inspection shall be required if 2 or more years have passed since the item was manufactured, after major turnover in personnel, following major changes to the production facility, or following transfer of production to a new facility or site. Failure of any squib to comply with the requirements of table I shall be cause for rejection of the first article represented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

TABLE I. First article test plan.

Test sequence	Requirement	Test	Test group						Total
			A	B	C	D	E	F	
1. Visual	3.3.1	4.5.1	6	12	12	12	12	3	57
2. Radiographic	3.3.2	4.5.2	6	12	12	12	12	3	57
3. Dielectric	3.3.5	4.5.5	6	12	12	12	12	3	57
4. Bridge circuit	3.3.4	4.5.4	6	12	12	12	12	3	57
5. Leakage	3.3.6	4.5.6	6	12	12	12	12	3	57
6. Stray voltage	3.4.1.1	4.5.7	6	12	12	12	12	3	57
7. Bridge circuit resistance	3.3.4	4.5.4	6	12	12	12	12	3	57
8. No-fire	3.4.1.2	4.5.8	6	12	12	12	12	3	57
9. Bridge circuit resistance	3.3.4	4.5.4	6	12	12	12	12	3	57
10. Six-foot drop	3.4.2.1	4.5.9	6						6
11. Shock	3.4.2.2	4.5.10		12					12
12. Vibration	3.4.2.3	4.5.11			12				12
13. THA cycling	3.4.2.4	4.5.12				12			12
14. Visual inspection	3.3.1	4.5.1	6	12	12	12			42
15. Radiographic examination	3.3.2	4.5.2	6	12	12	12			42
16. Bridge circuit resistance	3.3.4	4.5.4	6	12	12	12			42
17. Leakage	3.3.6	4.5.6	6	12	12	12			42
18. Electrostatic discharge	3.3.3	4.5.3	6	12	12	12	12		54
19. Bridge circuit resistance	3.3.4	4.5.4	6	12	12	12	12	3	57
20. Ballistic test (-65±5 °F)	3.4.3	4.5.13			4	3	4		11
21. Ballistic test (70±5 °F)	3.4.3	4.5.13	6	12	4	6	4		32
22. Ballistic test (160±5 °F)	3.4.3	4.5.13			4	3	4		11

4.3 Production inspection. Unless otherwise specified (see 6.2), all production squibs shall be inspected and screened to requirements specified in 3.2 and 3.3. Any unit failing to meet the requirements listed in 3.2 through 3.3 shall be rejected and removed from the lot.

4.4 Lot acceptance inspection. Unless otherwise specified (see 6.2), lot acceptance inspection shall consist of the examinations and tests specified in table II. Failure of any sample squib to comply with the requirements listed in table II shall be cause for rejection of the lot represented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

TABLE II. Lot acceptance inspections and tests.

Test sequence	Requirement	Test	Quantity
1. Visual inspection	3.3.1	4.5.1	Test and retained sample
2. Radiographic	3.3.2	4.5.2	Test and retained sample
3. Electrostatic discharge	3.3.3	4.5.3	Test and retained sample
4. Bridge circuit resistance	3.3.4	4.5.4	Test and retained sample
5. Dielectric	3.3.5	4.5.5	Test and retained sample
6. Bridge circuit resistance	3.3.4	4.5.4	Test and retained sample
7. Leakage	3.3.6	4.5.6	Test and retained sample
8. No-fire	3.4.1.2	4.5.8	Test and retained sample
9. Bridge circuit resistance	3.3.4	4.5.4	Test and retained sample
10. Ballistic test (-65±5 °F)	3.4.3	4.5.13	1/3 test sample
11. Ballistic test (70±5 °F)	3.4.3	4.5.13	1/3 test sample
12. Ballistic test (160±5 °F)	3.4.3	4.5.13	1/3 test sample

4.4.1 Sampling. Unless otherwise specified (see 6.2), a random sample of squibs from each production lot, including the samples retained for investigative purposes, shall be selected in accordance with table III for lot acceptance sampling. Lot acceptance test sample size shall not be reduced below the quantities provided in table III.

TABLE III. Lot acceptance sampling.

Lot size	Test sample size	Retained sample size
0-25	6	3
26-50	9	3
51-90	12	3
91-150	15	3
151-280	24	3
281-500	33	3

4.5 Inspections and tests.

4.5.1 Visual inspections.

4.5.1.1 Squib inspections. All assembled squibs shall be visually examined. Each unit shall be clean and free from smudges, nicks, burrs, or other foreign materials. Illegible markings (including serial numbers) and defects preventing proper installation or function shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

4.5.2 Radiographic examination. Each squib shall be radiographically examined in accordance with ASTM E1742/E1742M. All squibs shall be identified with serial numbers prior to examination. The squibs shall be arranged on trays or boards in consecutive numerical order with any missing serial numbers identified on the radiographic plate. The squibs shall be positioned for the most revealing exposure with the long axis perpendicular to the radiographic beam. Each radiographic plate shall carry a permanent identification of the item displayed thereon in a 4 x 6-inch region maximum. Squibs shall be free of imperfections in assembly. Any observable imperfections as outlined in 3.3.2 shall be cause for rejection of the squib. Defective squibs shall be clearly identified on the radiographic plate and those defective shall be discarded.

Each radiograph shall display the following information:

a. Nomenclature.

b. Department of Defense Identification Code.

c. Part Number.

d. Lot Number (in accordance with MIL-STD-1168).

e. Serial Number (in numerical order from lowest to highest).

f. Contract Number.

4.5.3 Electrostatic discharge. To determine if the squib meets the requirement of 3.3.3, a 500±5 percent picofarad capacitor charged to 25,000±500 volts and a 5000±5 percent ohm resistor shall be connected in a 5 microhenry total inductance series circuit between leadwires shorted together and the case of the squib. The series connection shall be maintained for 60 seconds. Each series test shall constitute a separate test. Squibs shall be temperature conditioned for a minimum of 12 hours at 70±5 °F just prior to test.

4.5.4 Bridge circuit resistance. Conformance with the bridge circuit resistance shall be ascertained by means of a test circuit that limits the bridge current to 25 milliamperes, maximum. Each squib shall meet the requirements of 3.3.4. The test shall be performed under room conditions of 70±18 °F.

4.5.5 Dielectric withstanding voltage. To determine if the squib meets the requirement of 3.3.5, a direct current of 500±25 volts shall be applied between the shorted lead wires and squib case in accordance with MIL-DTL-23659 for a maximum of 60 seconds. An instrument reading may be taken and the test terminated after 20 seconds of applied voltage, as long as the leakage current meets the requirements of 3.3.5, and is steady or decreasing. The test shall be performed under room conditions of 70±18 °F.

4.5.6 Leakage. To determine if the squib meets the requirement of 3.3.6, the following procedure shall be performed:

a. Place the squib in the vacuum/pressure chamber. Do not submit more units to test than can be leak tested within 20 minutes.

b. Evacuate the pressure to 27 in Hg minimum. Hold vacuum for 5 minutes minimum.

c. Pressurize the chamber to 30 +2/-0 pounds per square inch gauge of helium. Maintain this pressure for 20 minutes minimum.

d. Release pressure and remove squib to be tested.

e. Flush exterior of squib thoroughly with low-pressure air or dry nitrogen.

f. Perform helium leak test on the squib using a calibrated leak detector. Squibs not meeting the requirements of 3.3.6 shall be considered defective. All defective squibs shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

4.5.7 Stray voltage. The squib shall be conditioned at 70±5 °F for a minimum of 12 hours. The squib shall be subjected to 2,000 pulses of direct current. Each pulse shall be of 300 milliseconds duration, have a rate of 2 per second and an amplitude of 100±5 milliamperes. Each squib shall meet the requirements of 3.4.1.1.

4.5.8 No-fire. The squib shall be tested at the temperature indicated in the test matrix of table I. This test shall be performed within a temperature tolerance. The squibs shall be preconditioned at either 70±5 °F or 225±5 °F for a minimum of 12 hours.

Connect the squibs into an electrical series string and place inside the temperature chamber. Connect the power supply, preset to 1.0 +0.1/-0 ampere or the appropriate current that satisfies the 1 watt minimum requirement, and subject the squibs to this current for 5 minutes +5/-0 seconds. Remove the squibs from the temperature chamber and allow them to return to ambient temperature before removing the electrical string. Visually verify the squibs did not function. Each squib shall meet the requirements of 3.4.1.2.

4.5.9 Six-foot drop. To determine if the squibs meet the requirements of 3.4.2.1, six unprotected squibs shall be dropped from a height of 6 feet +2, -0 inches and impacted onto a 2-inch-thick steel plate imbedded in concrete. Two squibs shall be dropped in each of the three mutually perpendicular axes as shown in figure 1.

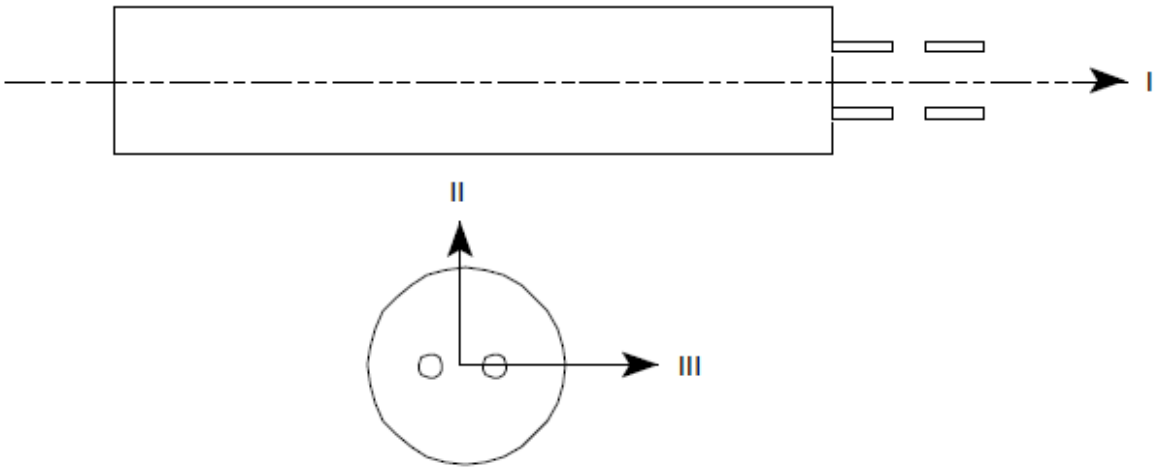


FIGURE 1. Axes orientations.

4.5.10 Shock. To determine if the squibs meet the requirements of 3.4.2.2, twelve units shall be subjected to three sawtooth shock pulses applied in both directions along the longitudinal axis of the squibs. Six pulses shall be applied in both directions along a lateral axis. Figure 2 describes the shock pulse to be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

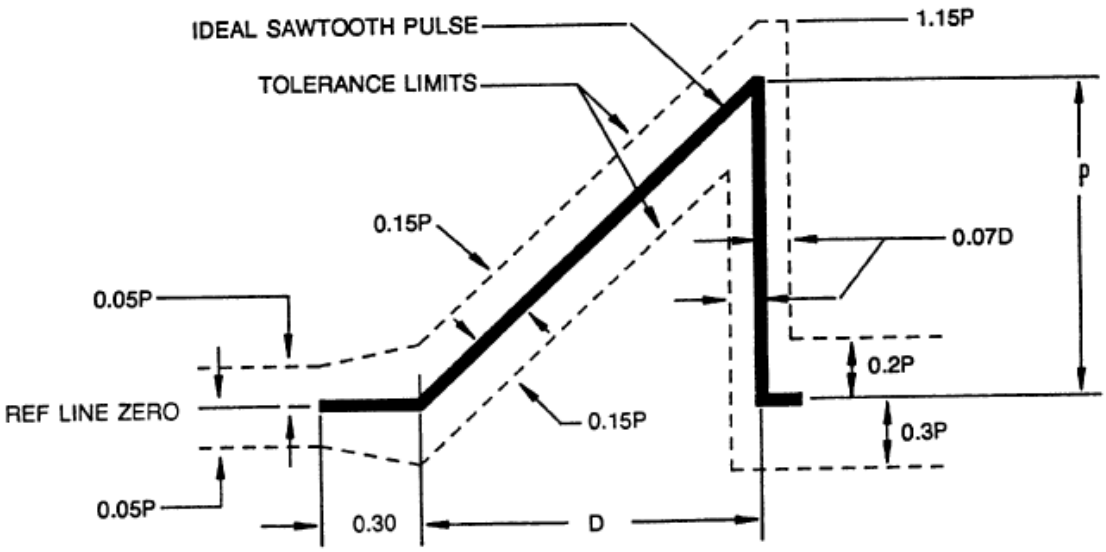


FIGURE 2. Sawtooth shock pulse where D = 6 milliseconds and P = 100 standard acceleration (g).

4.5.11 Vibration. Twelve units, as outlined in table I, shall be vibrated for 1 hour each along the mutually perpendicular axes shown in figure 1 at -65, 70, and 160 °F, for a total of 9 hours vibration time. Figure 3 describes the vibration test levels to be used for the vibration testing. Each squib shall meet the requirements of 3.4.2.3.

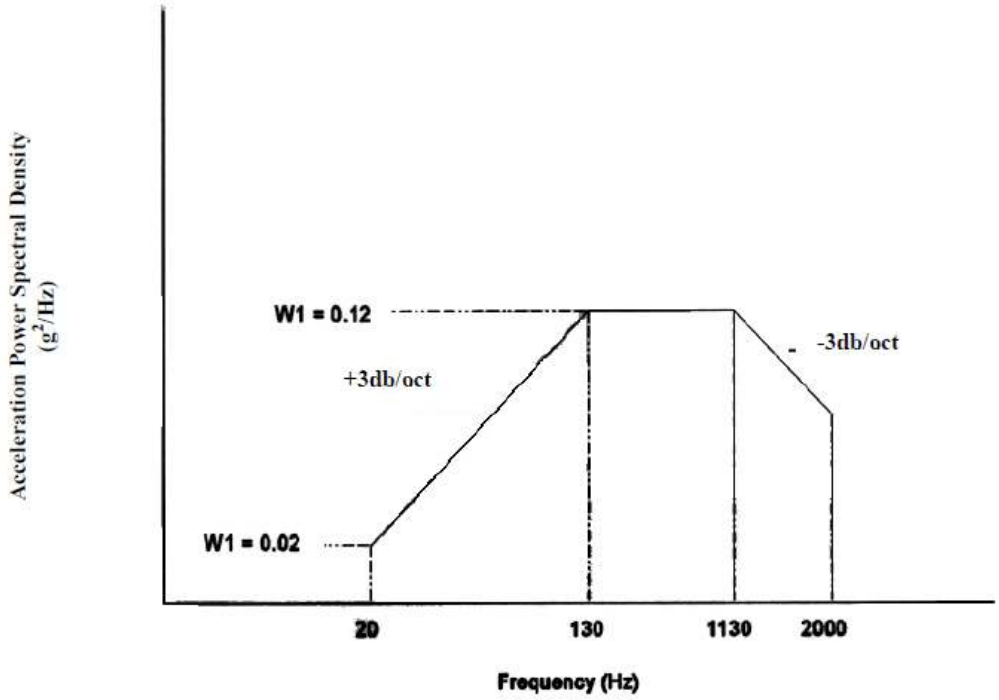


FIGURE 3. Vibration test levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

4.5.12 Temperature/humidity/altitude (THA) cycling. Twelve units, as outlined in table I, shall be placed on screen trays or in wire baskets to expose all surfaces and allow air to circulate freely. Then subject the squibs to the 28-day THA cycling test of table IV. This schedule shall be followed for a total of 4 weeks (28 days) except that on the second and fourth weekends the soak time shall be from 1200 on Friday until 0800 on Monday at a temperature of 160 °F and 95 percent relative humidity.

TABLE IV. Temperature shock/humidity/altitude cycling schedule.

Monday	800	Place test items in a chamber maintained at 70 °F and 50 percent relative humidity (RH).
	1200	Raise chamber temperature to 160 °F and the RH to 95 percent. The chamber temperature shall reach 160 °F and 95 percent RH no later than 1300.
	1600	Remove test items from the chamber and immediately place in a chamber maintained at -65 °F and a pressure altitude of 50,000 feet (1.68 pounds per square inch [psi]).
Tuesday	800	Remove test items from the chamber and immediately place in a chamber maintained at 70 °F and 50 percent RH.
	1200	Remove test items from the chamber and immediately place in a chamber maintained at -65 °F and a pressure altitude of 50,000 feet (1.68 psi).
	1600	Remove test items from the chamber and immediately place in a chamber maintained at 160 °F and 90 percent RH.
Wednesday	800	Reduce chamber temperature to 70 °F and RH to 50 percent. The chamber temperature shall reach 70 °F and 50 percent RH no later than 0900.
	1200	Raise chamber temperature to 160 °F and RH to 95 percent. The chamber temperature shall reach 160 °F and 95 percent no later than 1300.
	1600	Remove test items from the chamber and immediately place in a chamber maintained at -65 °F and a pressure altitude of 50,000 feet (1.68 psi).
Thursday	800	Remove test items from the chamber and immediately place in a chamber maintained at 70 °F and 50 percent RH.
	1200	Remove test items from the chamber and immediately place in a chamber maintained at -65 °F and a pressure altitude of 50,000 feet (1.68 psi).
	1600	Remove test items from the chamber and immediately place in a chamber maintained at 160 °F and 95 percent RH.
Friday	800	Reduce chamber temperature to 70°F and RH to 50 percent. The chamber temperature shall reach 70 °F and 50 percent RH no later than 0900.
	1200	Raise chamber temperature to 160°F and RH to 95 percent. The chamber temperature shall reach 160 °F and 95 percent RH no later than 1300.
	1600	Remove test items from the chamber and immediately place in a chamber maintained at -65 °F and standard ambient pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

4.5.13 Ballistic tests. Sample squibs shall be conditioned for a period not less than 4 hours nor more than 24 hours at the specified temperatures. The squibs shall be removed from the conditioning chamber and test fired within 5 minutes. If any squib is not fired within 5 minutes after removal, it shall be reconditioned at the specified temperature for an additional 4- hours then tested. The ballistic tests shall be performed using the test setup and fixture in accordance with Drawing 2518510. Squib ignition delay time and piston velocity shall be recorded with the proper instrumentation. The squibs shall meet the requirements specified in 3.4.3.

4.5.13.1 Function. Each squib shall meet the requirements of 3.4.3.1 when a firing current of 4.5±0.10 amperes is applied across the bridgewire circuit.

4.5.13.2 Ignition delay. The ignition delay shall be measured from application of the firing current to first movement of the test fixture piston. Each squib shall meet the requirements of 3.4.3.2.

4.5.13.3 Velocity. Instrumentation shall be placed to measure the time increment at which the fixture piston transverses from 1 to 7 inches beyond first movement (6.00±0.05 inches of travel). The exact distance of piston travel, in equivalent feet, shall be divided by the nearest thousandth of a second measured time increment for piston velocity determination. Each squib shall meet the requirements of 3.4.3.3.

4.5.13.4 Misfire. A squib that does not fire under the conditions specified in 4.5.13 shall be considered defective, and the lot shall be considered unacceptable, unless the misfire is clearly attributable to faulty test equipment or procedure. Each squib shall meet the requirements of 3.4.3.4.

4.5.13.5 Test failure. If a test failure is attributable to an assignable cause, excluding the test squib, original test results should be discarded and that part of the test reconducted.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The SQ86 Electric (Delay) Squib is used in the BQM-34 Aerial Target to provide power to automatically detach the parachute upon landing. The squib is fired by a water switch. The squib is only used in military aircraft, and there is no commercial application.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When first article inspection is required (see 3.1 and 4.2).

c. Production lot sizes and test activity (see 4.3, 4.4, and 4.4.1).

d. Directions for shipping radiographs of entire production lot along with the ballistic sample to the activity conducting the first article test.

e. Packaging and marking requirements if other than specified (see 5.1 and 6.6.2).

f. That the safety precaution requirements are met (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

6.3 Safety precautions. The safety precaution requirements of DoDM 4145.26, Contractor's Safety Manual for Ammunition and Explosives and related Dangerous Material, are applicable and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) 23.3.

6.4 First article. When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the items should be a first article sample or a sample selected from the first production items (see 3.1), and the number of items to be tested as specified in 4.2. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examination, approval of first test article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product that has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 Hazard notice. The squib described herein and certain components are flammable, toxic, or explosive. The squib and components present hazards in manufacture, handling, storage, and shipment. The contractor should recognize these properties and take appropriate measures to guard and protect against fire, explosion, adverse environment, corrosive atmosphere, rough handling, and electrically induced incidents.

6.6 Marking.

6.6.1 Special marking. Marking of outer containers should be in accordance with 49 CFR 100-199.

6.6.2 Normal marking. Unless otherwise specified (see 6.2), the marking information of the inner and outer containers should be as specified below:

Inner container marking.

NSN/DODIC: 1377-01-434-1418/ SQ86
Nomenclature: SQUIB, ELECTRIC (DELAY)
Part Number: 30003-855AS118
Quantity:
Lot number: (In accordance with MIL-STD-1168)
DOT Hazard Classification: 1.4B

Outer container marking.

NSN/DODIC: 1377-01-434-1418/ SQ86
Nomenclature: SQUIB, ELECTRIC (DELAY)
Part Number: 30003-855AS118
Quantity:
Gross weight and cube:
Proper shipping name: DETONATORS FOR AMMUNITION/UN0365
Lot number: (In accordance with MIL-STD-1168)
Contract or purchase order:
"WARNING: 1.4B EXPLOSIVE DEVICE, HANDLE CAREFULLY, KEEP AWAY FROM FIRE."

Additionally, the above-specified making information should be applied to the containers in accordance with the applicable provisions of MIL-STD-129.

6.7 Primary components. Primary components are all components in which a function failure would result in a misfire or malfunction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

6.8 Subject term (keyword) listing.

Aerial Target

BQM-34S

Recovery parachute

Water switch activation

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Preparing activity:
Navy – OS
(Project 1377-2024-010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.