MIL-T-52843C
1 May 1985
SUPERSEDING
MIL-T-52843B
19 June 1980

MILITARY SPECIFICATION

TRUCKS, LIFT, FORK, DIESEL-ENGINE-DRIVEN: PNEUMATIC-TIRED, ROUGH TERRAIN; 10,000 POUND CAPACITY AT 48-INCH LOAD CENTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for diesel-engine-driven, four-wheel drive, articulated steer rough terrain, pneumatic-tired forklift trucks.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-P-455	- Plates and Foils, Photographic (Photosensitive Anodized Aluminum).
QQ-P-35	- Passivation Treatments for Corrosion Resisting Steels.
TT-C-494	- Coating Compound, Bituminous, Solvent Type, Acid Resistant.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3930

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-V-173	- Varnish, Moisture-and-Fungus Resistant (For Treatment of Communications, Electronic, and Associated Equipment).
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-1283	- Can, Gasoline, Military, 5-Gallon.
MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-G-3859	- Grease Guns, Hand-Operated, Lever, Push and Screw Type.
MIL-A-8421	- Air Transportability Requirements, General Specification for.
MIL-C-21567	- Compound, Silicone, Soft Film.
MIL-S-40626	- Sign Kit, Vehicle Class.
MIL-S-43926	- Suit, Chemical Protective.
MIL-G-43976	- Glove Set, Chemical Protective.
MIL-F-43987	- Footwear Cover, Chemical Protective (Overboots).
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-L-46167	- Lubricating Oil, Internal Combustion Engine, Arctic.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.
MIL-B-46176	- Brake Fluid, Silicone, Automotive, All Weather, Operational and Preservative.
MIL-M-51282	- Mask, Chemical - Biological, Field, M17A1.
MIL-H-51291	- Hood, Chemical - Biological Mask: M6A2.
MIL-P-52192	- Primer Coating Epoxy.
MIL-A-52363	- Air Cleaners, Intake: Dry-Type (for Internal-Combustion Engine).
MIL-H-52471	- Hose and Hose Assemblies, Rubber: Hydraulic Pressure-Type, General Specification for.
MIL-E-52649	- Engine Cold Starting Aids, Ether Fuel Primers.
MIL-F-52723	- Filter Element, Hydraulic, Disposable.
MIL-P-53030	- Primer Coating Epoxy Water Reducible Lead and Chromate Free.
MIL-C-53039	- Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant.
MIL-T-62314	- Test Equipment (Simplified) for Internal Combustion Engine (STE/ICE).

STANDARDS

FEDERAL

FED-STD-H28	- Screw Thread Standards for Federal Services.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-162	- Materials Handling Equipment: Preparation for Shipment, Storage, Cyclic Maintenance, Routine Testing and Processing.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-461	- Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1223	- Administrative Wheeled Vehicles Treatment, Painting, Rustproofing, Undercoating, Identification Marking, Data Plates and Warranty Notice Standards.
MIL-STD-1366	- Material Transportation System Dimensional and Weight Constraints, Definition of.
MIL-STD-1410	- Methods for Selection of Industrial Engines for End Item Application.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.
MIL-STD-1474	- Noise Limits for Army Materiel.
MS24207	- Coupling, Grease Gun; Hydraulic Type Nozzle.
MS35000	- Battery, Storage, Lead-Acid, Waterproof.
MS51113	- Switch, Vehicular Lights, 24-Volt DC, Waterproof.
MS51118	- Pintle Assembly, Towing: 40,000 Lbs. Capacity, Manual Release.
MS51318	- Headlight: Blackout, 24 Volt, Waterproof.
MS51330	- Stop Light - Taillight, Vehicular - 24 Volt, Blackout Tail, Blackout Stop.
MS52125	- Composite Light - Tail, Stop, Turn and Marker.
MS52126	- Composite Light - Front, Turn, Park and Marker.
MS52131	- Connector, Plug, Electrical Intervehicle Power Cable.
MS53052	- Bracket Assembly, Liquid Container, Five Gallon.
MS500004	- Pad Eye Vehicular Towing Lug.
MS500048	- Towbar, Motor Vehicle, Light, Medium and Heavy Duty.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

HANDBOOK

MILITARY

Air Force System Design Handbook DH1-11	- Air Transportability.
MIL-HDBK-157	- Transportability Criteria.

(Copies of military specifications and military standards required by manufacturers in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120. Military handbooks should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

TACOM

12258941	- Connector, Receptacle 54 Pin.
12258955	- Vehicle Test Card.

REPORT

CR 82-588-003	- STE/ICE Design Guide for Vehicle Diagnostic Connector.

(Application for copies should be addressed to Department of the Army, U.S. Army Tank-Automotive Command, ATTN: DRSTA-RGD, Warren, MI 48090.)

UNITED STATES DEPARTMENT OF AGRICULTURE

Forest Service Standard 5100-1.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

B56.6 Safety Standard for Rough Terrain Fork Lift Trucks.
B93.30M Hydraulic Fluid Power - Contamination Analysis Data - Reporting Method.
B93.42 Testing Hydraulic Fluid Power Quick Disconnect Couplings.
MR11.3 Load Handling Symbols for Powered Industrial Trucks.
Z26.1 Safety Glazing Materials for Glazing Motor Vehicles Operating on Land Highways.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 1171 - Rubber Deterioration - Surface Ozone Cracking Outdoors or Chamber.
D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Welding Qualifications, Section IX.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN WELDING SOCIETY, INC. (AWS)

D1.1 - Structural Welding Code, Sections 5 and 6, Welding Qualifications.
D14.3 - Earthmoving and Construction Equipment Welding, Section 5, Qualification.

(Application for copies should be addressed to the American Welding Society, Inc., 2501 N.W. Seventh Street, Miami, FL 33126.)

ASSOCIATION OF AMERICAN RAILROADS (AAR)

General Rules Governing the Loading of Commodities on Open Top Cars. Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 50 East Van Buren Street, IL 60605.)

INDUSTRIAL FASTENERS INSTITUTE (IFI)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Standard 114 - Standard for Break Mandrel Blind Rivets.

(Application for copies should be addressed to the Industrial Fasteners Institute, 1517 Terminal Tower, Cleveland, OH 44113.)

NATIONAL FLUID POWER ASSOCIATION (NFPA)

T.3.9.18 - 1976 - NFPA Recommended Standard for Calibration of Liquid Automatic Particle Counters.

(Application for copies should be addressed to the National Fluid Power Association, P.O. Box 49, Thiensville, WI 53092.)

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

Rule 442 - Usage of Solvents.

(Application for copies should be addressed to the South Coast Air Quality Management District, 9150 Flair Drive, El Monte, CA 91731.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

TIRE and RIM ASSOCIATION, INC. (TRA)

Tire and Rim Association Yearbook.

(Application for copies should be addressed to the Tire and Rim Association, Inc., 3200 West Market Street, Akron, OH 44313.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The forklift truck (hereinafter called "truck" or "forklift") shall be a four-wheel drive, articulated steer, pneumatic-tired, diesel-engine-driven, front-loading truck.

3.1.1 Rated load. Rated load for the forklift shall be 10,000 pounds measured with the load center of the weight 48 inches from the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

forward face of the vertical member of the tines and above the load-bearing surface of the forks (see 6.10.1 and 6.10.2).

3.1.2 Physical characteristics.

3.1.2.1 Weight. The curbweight of the truck with the forklift fully fueled, serviced and ready for operation, without the operator shall not exceed 37,000 pounds. In the air transportable configuration the weight of the forklift shall be reduced so that the axle loads shall be in accordance with Air Force DH1-11 for C-141 transport.

3.1.2.2 Overall height. The overall forklift height, as defined in SAE J1234 of the forklifts with ROPS, FOPS, muffler, and cab, removed shall be not more than 103 inches. The forklifts shall be fully operable in this configuration without operator being contorted (see 3.6) or any portion of operator's body outside any maximum dimension requirements, height or width.

3.1.2.3 Axle spacing. Axle spacing for the forklifts shall be not less than 108 inches.

3.1.2.4 Width. The width of the forklifts as defined in SAE J1234 including the tire bulge at manufacturer's recommended tire pressure shall be not more than 111 inches even with the forklift carriage fully sideshifted.

3.1.2.5 Ground clearance. The ground clearance of the forklift as defined in SAE J1234 shall not be less than 13 inches and shall apply with the forklift fully fueled and serviced, with rated capacity load at carry position. The forklift with and without load, shall be capable of negotiating a 23 degree ramp of length greater than the trucks wheelbase with level surfaces at both top and bottom of the ramp. No portion of the forklifts other than the tires, shall come in contact with the ramp when the forklifts travel over the ramp in either direction. Hydraulic fittings, hoses, tubing, and linkages shall not be the lowest portion of the truck and shall be protected by structural members from striking obstacles.

3.1.3 Transportability. The forklift shall be transportable worldwide without damage, by highway, air, marine, and rail transport modes. Transportability criteria are established by MIL-STD-1366 and MIL-HDBK-157 as described herein.

3.1.3.1 Highway transportability. The forklifts shall be capable of being towed with a dead engine without damage. The drivetrain shall be provided with a means to disengage the wheels from the transmission for towing. Disengagement and reengagement shall each be performed in not more than one hour by one man using only manual devices and common tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.1.3.2 Air transportability. The forklift shall be transportable in the C-141 aircraft. Transportability requirements shall be in accordance with MIL-A-8421, Air Force Design Handbook DH1-11, and as specified herein. Counterweight(s), cab, ROPS, FOPS, muffler, forktines, or carriage may be removed to meet the air transportability requirements. Disassembly to achieve air transportable configuration (see 3.1.2.1), shall be accomplished in not more than 2 hours and reassembly shall be accomplished in not more than 2 hours using only common tools and available lifting devices. The forklift trucks shall be capable of being driven on and off the aircraft in the transportable configuration. The truck shall be provided with a minimum of 20 gallons of fuel in the tank. All removed parts shall be transportable with the truck in the aircraft.

3.1.3.3 Rail transportability. The forklift shall have unrestricted movement by railroad when loaded on a 50-inch high flat car in accordance with MIL-HDBK-157. The forklift shall withstand railroad humping without permanent deformation or damage to any of its components when secured to the flatcar in accordance with the Association of American Railroads (AAR) Rules Governing the Loading of Department of Defense Material on Open Top Cars. The railroad impact test shall be in accordance with MIL-STD-810.

3.1.3.4 Marine transportability. The forklift shall be transportable by breakbulk cargo ships, roll-on/roll-off (RORO) ships, barge carrying ships (SEABEE), LARC60 and larger amphibious vessels, and army barges and lighters in accordance with MIL-HDBK-157.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of trucks from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish trucks conforming to this specification.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification (see 6.7).

3.3.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless suitably protected against electrolytic corrosion. Dissimilar metals and methods of protecting them are defined and described in MIL-STD-889.

3.3.1.1 Material deterioration and control. The forklift shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

corrosion and deterioration that may affect the normal performance of the vehicle or during storage of the vehicle when stored in accordance with proper storage procedures for the type of storage involved.

3.3.2 Screw threads. Screw threads shall be in accordance with FED-STD-H28.

3.3.3 Tire material. Tires shall not exceed 8 calendar quarters in age from date of cure of the rubber to date of acceptance of the forklift by the Government.

3.4 Environmental and use requirements.

3.4.1 Operating conditions. The forklift truck shall withstand the usage encountered in military operations without damage, permanent deformation or failure of components. The military operations include loading and unloading of flatcars, flatbed trailers, landing craft and aircraft, with palletized and containerized loads of heavy supplies over unprepared, unstabilized surfaces, especially over rough terrain such as beach operations in and out of surf, in soft sand, snow and mud where high flotation is needed, and travel without load between work sites.

3.4.2 Operating temperatures. The engine shall start without preheating within 5 minutes and the forklift shall operate as specified herein within 15 minutes after engine start in any ambient temperature in the range of -25° F to +125° F.

3.4.3 Storage temperature. The forklift shall not be damaged by storage under the conditions indicated in table I.

TABLE I. Storage.

Air Temperature	Time Period
+160° F	1 hour daily.
+155° F	4 hours daily.
-25° F	6 hours daily.

3.4.4 Rain. The forklift shall start within 5 minutes and operate as specified herein when tested as specified in 4.6.2.28.

a. Without malfunction of any electrical component, gage, or instrument.
b. Without leakage of water into filters incorporating a sediment chamber in air-intake filter in excess of 8 percent of the fluid capacity of the sediment chamber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

c. Without leakage of water into the torque converter oil chamber, engine crankcase sump, transmission, transfer case, instruments, gages, or fuel tank.
d. Without any detrimental leakage into the cab.

3.5 Safety. The truck shall meet the safety requirements specified in SAE J98 and ANSI B56.6 except as otherwise specified herein. All rotating and reciprocating parts shall be guarded when such parts are exposed to contact by operator and maintenance personnel performing daily maintenance functions. A warning notice shall be stenciled near the steering hinge on both sides of the forklift, stating "WARNING, NO CLEARANCE FOR A PERSON STANDING IN THIS AREA", or words to that effect (see 3.34). Nonfunctional sharp edges, projecting points and excessive length of fasteners shall be avoided. Steps and platforms for entering the forklift shall have antiskid, ice resistant surfaces. Oil level indicators for engine, transmission, and other components shall be within easy and safe access of the operator or maintenance personnel.

3.5.1 Roll over protective structures (ROPS) and falling objects protective structure (FOPS). The forklift shall be equipped with a complete ROPS and FOPS structure conforming to SAE J1040 and SAE J321. Installation and removal of the ROPS and FOPS shall be accomplished without cutting or welding. The ROPS and FOPS shall be free from sharp edges, particularly at any point where a sling may come in contact during lifting (see 3.31). A restraint system shall be provided which will retain operator's torso within ROPS in the event of rollover.

3.5.2 Seatbelt. An adjustable, weather-resistant seatbelt with a corrosion-resistant, metal-to-metal, quick-release buckle conforming to SAE J386, type I shall be furnished and be anchored to the seat in accordance with SAE J787.

3.5.3 Backup alarm. A backup alarm conforming to SAE J994 type A, B or C shall be furnished. The backup alarm signal shall be audible above, and distinguishable from the surrounding vehicle noise level.

3.6 Human factors. The characteristics of the forklift, with cab, ROPS and FOPS installed, shall provide for operation and maintenance in daylight and darkness by personnel ranging from the small person clothed, through the large person arctic clothed, in accordance with SAE J833, SAE J925, and MIL-STD-1472 as specified herein.

3.6.1 Noise limits. The noise produced by the forklift shall conform with MIL-STD-1474 requirements when tested in accordance with specification, paragraph 4.6.2.27. The provisions of MIL-STD-1474, paragraph 4.3 and 4.4 shall be provided if and only if MIL-STD-1474, paragraph 5.1.1.2 procedures have been pursued and documented to the satisfaction of the procuring activity and written permission to exceed the 85dB(A) limit is obtained from the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Hazard signs shall conform with MIL-STD-1474, paragraph 4.3 and be readable at the distance indicated on the sign.

3.6.1.1 Personnel noise (steady state). The noise produced by the forklift shall not exceed 85dB(A) at the operator's position when tested in accordance with 4.6.2.27 (back-up alarm and horn excluded).

3.6.1.2 Exterior noise. The forklift shall not exceed 88dB(A) when tested in accordance with 4.6.2.27.1.

3.7 Maintainability. Provision shall be made for adjustment, servicing or replacement of parts and components. Test points identified for connection of the Simplified Test Equipment for Internal Combustion Engines to measure functions in the Transducer Kit (TK) mode (see 3.41) shall be accessible without the removal of other major assemblies and installed attachments not normally removed. When access openings are used on the exterior of the forklift, the edge of the opening shall be smooth and shall be provided with a removable or hinged cover whenever it is required. Dimensions of hand or arm access openings shall be in accordance with SAE J925 for arctic clothing. When tested as specified 4.6.2.36, the forklift shall have a maintenance ratio (MR) of not more than 0.15. The MR is defined as the ratio of total active maintenance man-hours required (scheduled and unscheduled) to the total operating time. Man-hours for repair of replaced components and scheduled before-and-after operation checks are excluded. Scheduled maintenance shall be required not more often than every 50 hours, except for before-and-after operation checks. Each operation in the following maintenance operations list shall be accomplished by one man (except where otherwise specified) in not more than the time specified, using common tools and special tools, if any, furnished with the forklift.

a. Remove, replace, and adjust all engine-driven belts - 3/4 hour.
b. Remove and replace alternator - 1/2 hour.
c. Remove and replace all hydraulic-system filters, screens, and strainers - 1 hour.
d. Remove and replace engine coolant-system hoses - 1 hour.
e. Drain engine lubricating oil, remove and replace oil filter elements and refill crankcase - 1 hour.
f. Remove and replace fuel filter elements - 1/2 hour.
g. Disconnect battery cables, remove and replace batteries, reconnect battery cables - 1/2 hour.
h. Drain torque converter oil and transmission oil, remove and replace all transmission filter elements and strainers, and refill converter and transmission - 1 hour.
i. Remove and replace starter - 1 hour.
j. Bleed and adjust brakes and refill master cylinder (if applicable) - 2 men - 1 hour.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

k. Remove and replace headlight, floodlight, and taillight bulbs (not including blackout lights) - 1/4 hour each bulb.
l. Remove, disassemble, service, and install air cleaner - 1/2 hour.
m. Lubricate all lubrication fittings with 2 strokes per fitting using the gun and extension specified in 3.29.1 - 1 hour.

3.8 Reliability. The forklift shall have a mean-time-between-failure (MTBF) of 75 hours when tested as specified in 4.6.2.34, using the failure definition in 4.6.2.35.

3.9 Performance. The forklift shall conform to the requirements specified herein under all conditions specified without damage or permanent deformation. There shall be no evidence of accelerated wear or failures when operated under service conditions specified herein.

3.9.1 Stability.

3.9.1.1 Static. The rear wheels of the forklift shall not clear the ground with 1.5 times the rated load at the applicable load center on the forks under the following conditions:

a. Forklift on a hard, level surface and stationary.
b. Forks horizontal and centered on the carriage.
c. Forks at maximum forward position (with respect to the chassis) in the lifting arc.
d. Forklift fully fueled.
e. Forklift at maximum steer angle.

3.9.1.2 Dynamic. The forklift shall negotiate a 15 percent slope with and without rated load in the carry position, in full circle operation at maximum steer angles in both directions without any wheel leaving the ground. The forklift while descending a 30 percent grade in the forward direction with rated load in the carry position (see 6.10.3) at not less than 2 mph, shall stop by rapidly applying the service brake without the rear wheels leaving the ground.

3.9.2 Vehicle flotation. The truck shall have a Floatation Index (FI) of not more than 25 with rated load in carry position and without rated load. The FI shall be calculated using the following formula:

$$FI = \text{Antilog}\quad 0.211 - 0.350\,C + 0.00710\,P - \frac{0.0752\left(P_{F_} P_{R}\right)}{P}$$

$$\frac{0.0402(A_{F_} A_{R}) + 0.0346K}{A}$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Where:

P_F = Tire pressure, front (psi)
P_R = Tire pressure, rear (psi)
P = Tire pressure, average = 1/2 (P_F + P_R)
A_F = Axle load, front (lbs)
A_R = Axle load, rear (lbs)
A = Gross vehicle weight - A_F + A_R
K = 53.75 + 0.000139A (for nonradial tires)
K = 55.77 + 0.000032A (for radial tires)

$$C = \text{Log} \quad \frac{A}{0.607 + 1.35\dfrac{117R}{5W + D} - 4.93}$$

R = Tire ply rating
W = Tire width (in. - as cited in tire size)
D = Rim diameter (in. - as cited in tire size)

The FI shall be determined with forklift fully fueled and serviced with lubricants. For the purpose of calculating both loaded and unloaded FI, the front tire inflation pressures shall be based on front axle weight with rated capacity load in carry position and rear tire inflation pressures shall be based on rear axle weight with no load on forks in carry position. Pressures may be reduced by not more than 30 percent of the recommended pressure published in the TRA Yearbook for the forklift's tire load at 5 mph rating.

3.9.3 Longitudinal gradeability. The forklift shall ascend a 45 percent grade in forward gear range at a speed of not less than 2 mph with rated load.

3.9.4 Travel speed. The forklifts shall be capable of travel speeds as follows:

Forward without load - 20 mph minimum. Forward with rated load - 15 mph minimum. Reverse with rated load - 7.5 mph minimum.

3.9.5 Fording. The forklift shall be equipped for operation in seawater to a fording depth of 60 inches including wave action. Forklift components shall be protected from damage, malfunction and corrosion due to immersion followed by drying for those components below the fording level, and due to splash and spray for those components above the fording level. When tested as specified in 4.6.2.31 the truck shall operate during and after fording operation without malfunction or damage from corrosion or salt. The volumetric water content of lubricants and hydraulic fluid shall not exceed 5 percent, and there shall be no measurable increase of water in the fuel at the conclusion of fording tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.9.6 Lifting speed. The forklift shall lift rated load at not less than 40 feet per minute.

3.9.7 Lowering speed. The lowering speed with rated load shall be not more than 80 feet per minute at maximum engine speed. The lowering speed without load shall be not less than 60 feet per minute at maximum engine speed.

3.9.8 Curb-clearance circle. The curb-clearance circle as defined in SAE J695 shall be 45 feet, maximum.

3.9.9 Fork tilt. When unloaded the forks shall have 10 degrees minimum forward tilt and 20 degrees minimum rearward tilt from the horizontal. The minimum rearward tilt angle shall apply at the carry position (see 6.10.3) and the minimum forward tilt angle shall apply at the highest specified lift height.

3.9.10 Fork positioning. Hydraulically powered fork positioning shall be furnished and shall be between 9 inches maximum, inside to inside in closed position to a minimum outside to outside of 79 inches in maximum spread position. Either a hydraulic flow divider shall be provided such that the forks move simultaneously at the same rate ±10 percent or the side shift function may provide fork positioning by the operator unlatching one fork and side shifting the other one.

3.9.11 Fork reach. The heel, front face, of the fork shall reach a minimum of 48 inches forward of the vertical plane of the front tires when the forks are 60 inches ±2 inches above ground.

3.9.12 Maximum for height. The fork height of a truck bearing rated capacity load in the horizontal position and measured from the ground to the load carrying surface of the fork at the rated load center, shall be not less than 120 inches.

3.9.13 Low engagement height. The lowest engagement height of the forks shall be not less than 6 inches below ground level when measured at the load carrying surfaces of the forks on an unloaded truck with forks horizontal.

3.9.14 Drift. The lift arm assembly shall be capable of holding the rated load at 24 inch height not less than 10 minutes with not more than 1 inch of boom cylinder and tilt cylinder retraction or travel. Specified drift rates shall be measured when hydraulic oil temperature is not less than 120° F.

3.9.15 Oscillation. Hydraulically powered oscillation of the forks shall be furnished. The forklift shall be capable of oscillating rated load at each maximum side shifted position. The oscillation of the rated load from horizontal shall be not less than 6 degrees clockwise when the load is side shifted to extreme left and not less

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

than 6 degrees counter clockwise when load is sideshifted to extreme right (12 degrees total oscillation). Time to oscillate the total 12 degrees shall be not more than 7 seconds at low engine idle and not less than 3 seconds at high-engine idle for both clockwise and counter clockwise rotation. The forklift shall be capable of oscillating the rated load when tested in accordance with 4.6.2.23.

3.9.16 Sideshift. The forklift shall be equipped with a hydraulic powered forktine sideshift capable of sideshifting rated load a minimum of 12 inches to each side of center with the forks at the maximum spread position (see 3.9.10). The fork carrier assembly width shall not exceed 83 inches from the bottom of the carrier to a height of 30 inches above the bottom of the fork heel. The fork carrier assembly width may exceed 83-inch width from a height of greater than 30 inches above the heel of the fork. There shall be no permanent structural deformation or damage when the sideshift mechanism is tested in accordance with 4.6.2.23.

3.9.17 Endurance. The forklift shall be capable of completing the test specified in 4.6.2.34 with no failures using the failure definition in 4.6.2.34.1 and without exceeding specified temperature limits for the cooling system (see 3.10.2.6) if applicable, engine oil (see 3.10), transmission oil (see 3.11.1.1 or 3.11.1.2 as applicable), universal joints (see 3.11), or hydraulic system (see 3.12).

3.9.18 High speed. The forklift shall be capable of 4 hours of high speed operation when tested as specified in 4.6.2.32 without malfunction, damage, or permanent deformation, and without exceeding specified temperature limits for the cooling system (see 3.10.2.6), engine oil (see 3.10), transmission oil (see 3.11.1), universal joints (see 3.11), or hydraulic system (see 3.12).

3.10 Diesel engine. For the purpose of selecting the engine, the forklift truck shall be classified as a class II end item in accordance with MIL-STD-1410. Sleeveless engine is acceptable. The engine, including all systems, components, and accessories, shall conform to MIL-STD-1410, unless otherwise specified herein. All engine accessories shall be furnished by or approved by the engine manufacturer for this application. The engine shall be capable of operating on fuels and lubricating oils as specified in MIL-STD-1410. Unless otherwise specified herein, the engine shall meet all operational requirements and conditions specified in table I of MIL-STD-1410, or the engine manufacturer's recommended operating limits. Emergency manual shutdown provisions shall be furnished when recommended by the engine manufacturer.

3.10.1 Power and speed rating. The power and speed rating of the engine shall be such that operation of the forklift under any of the operational requirements and conditions specified herein will not require horsepower in excess of the intermittent horsepower rating of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

the engine for the applicable governed speed as established by the engine manufacturer.

3.10.2 Engine accessories.

3.10.2.1 Starting priming system. Either a glow plug for each cylinder or an auxiliary fluid priming system, conforming to MIL-E-52649, type III, shall be furnished and shall be operable from the operator's seat. The size of the primer shall be in accordance with the engine manufacturer's recommendations. The primer may be mechanically or electromechanically operated. When the primer is mechanically actuated, it shall be furnished with a total cable length not exceeding 6 feet, and a "tee" handle which is labeled "engine primer" in accordance with MIL-STD-1472 (labels). The primer shall be furnished with a temperature control so that it shall be inoperable when engine is running at normal temperature.

3.10.2.2 Alternator. A heavy duty waterproof alternator with double mounting lug shall be provided. The alternator shall be not less than 50 amp capacity and shall provide charge at engine low idle speed. The regulator shall be integral with the alternator.

3.10.2.3 Starting system. The starting system shall be 24 volts and shall include, as a minimum, a starting motor solenoid, a starting motor, necessary wiring and cable, starter relay and starting motor switch. A means shall be furnished to prevent energizing the starter motor whenever the engine is running. The forklift shall be provided with either an interlock in the starting system or other means to prevent energizing the starter motor except when the transmission is disengaged. The starting system shall function properly when fording as required in 3.9.5. The starter shall be in accordance with the engine manufacturer's recommendations. The starting motor and starter solenoid shall be waterproof.

3.10.2.4 Fuel system. The capacity of the fuel tank shall provide for not less than 10 hours operation when tested as specified in 4.6.2.35, and test method No. 33. The fuel-tank filler cap shall be captive chained or hinged. The fuel fill port shall be labeled "Diesel Fuel" with cast or embossed letters in not less than 1-inch letter height unless a data plate in accordance with 3.32 is furnished near the fill pipe marked, "Diesel Fuel". The tank shall accept fuel at the rate of not less than 17 gallons per minute and shall be located so that the tank can be filled from a 5-gallon can conforming to MIL-C-1283 by a person standing on the ground or a surface on the forklift intended for standing. The tank shall be able to accept a fuel nozzle of 2 inches diameter with sufficient air release clearance. The fuel tank shall be equipped with a drainplug at the lowest point of the tank. The drainplug shall be removable with handtools without the removal of any other component and shall be located such that the tank contents can be drained into a

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

container. The fuel tank shall be protected by position or otherwise from external damage. Fuel lines shall provide continuous operation at full throttle and maximum loads, including slope ascension. The fuel system shall include a fuel transfer pump, fuel strainer, water separator with provisions for draining sediment, fuel filter(s) in accordance with engine manufacturer's recommendations and a fuel injection pump, including provisions for priming. The fuel strainer and fuel filter(s) shall be between the fuel tank and fuel transfer pump. A fuel shutoff valve in the fuel line shall be provided between the tank and the fuel filter(s) if fuel filter(s) are located below the top of the fuel tank. It shall be labeled:

"Fuel Shut Off ON/OFF".

3.10.2.5 Air cleaner. The engine shall be furnished with a heavy-duty, drytype air cleaner in accordance with MIL-A-52363, class II or class III. The cleaner shall be of the dual-element type and shall include a dust scavenger. The capacity of the air cleaner shall be in accordance with the engine manufacturer's recommendations. An air-cleaner intake-restriction indicator shall be provided and shall be visible from the operator's compartment. The intake-restriction indicator shall have graduated markings with continuous reading on remaining service of the air cleaner with and without the engine running. The indicator shall also have reset capabilities.

3.10.2.6 Cooling system. When a liquid-cooled engine is furnished, the cooling system shall be the closed-pressure-type, incorporating a radiator with a radiator pressure cap, hoses, thermostat, fan, and circulating pump. Under all operating conditions specified herein, the temperature differential between the cooling system (radiator top tank) and ambient air temperature shall be less than the difference between the boiling point of the pressurized system and 120° F. Drains shall be provided to completely empty the cooling system. Petcocks on all drains shall be accessible and contents should drain into a container. The cooling-system fluid shall be a solution of ethylene-glycol and water conforming to MIL-A-46153 or SAE J1034. All fill ports shall be accessible. When an air-cooled engine is furnished, the engine shall be cooled by a fan that is either gear-driven, belt-driven, or directly driven from the crankshaft. The air intake face of the fan shroud shall be provided with a removable grille or screen guard.

3.10.2.6.1 Fan. The fan shall either discharge away from the operator, or be a suction type used in conjunction with a radial flow type shrouding such that the air drawn through the radiator is redirected in a radial direction around and about the radial shrouding and then expelled out the sides of the engine compartment. The fan shall rotate on antifriction bearings. When utilized, the fan belt takeup shall be at least 3 percent of the belt circumferential length, plus an allowance for replacement of new belts without forcing. The belts shall be clear of all other components within the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

adjustment range. Belts shall be accessible for easy replacement. Provisions shall be made for disconnecting the fan when necessary for water fording operations without affecting coolant circulation within the engine. Fan disengagement, shall be controlled from the operator's compartment with a control labeled "Fan ON-OFF". A welded wire or expanded metal fan guard shall be provided.

3.10.2.6.2 Water pump. When utilized, the water pump(s) shall be of the centrifugal type, shall be replaceable, and shall be equipped with shaft seals that will prevent leakage. The shaft shall be corrosion resistant when exposed to water and a mixture of ethylene-glycol and water. Either a lifetime lubrication system or accessible pressure lubrication fittings shall be provided.

3.10.2.6.3 Thermostat. When utilized, the thermostat shall be in accordance with the engine manufacturer's recommendations. The thermostat shall be removable.

3.10.2.6.4 Radiator. When utilized, the radiator assembly shall be a heavy duty type and shall consist of a core with an expansion tank and sediment tank. Where the top of the radiator is lower than the top outlet of the engine, a surge tank may be used. The radiator cap shall meet the requirements of SAE J164 and be accessible without removal of the engine hood. The radiator shall be mounted to prevent its being damaged due to shock and racking experienced in normal operation of the forklift. The radiator shall be protected by a heavy grilled guard or by the counterweight. A shield shall be provided, if necessary, to protect the radiator from mud and gravel thrown by the tires. Hoses shall clear the forklift structure and other components under all operating conditions specified herein. The cooling system shall include baffles and shroud to prevent recirculation of cooling air. A sign warning "CAUTION -DO NOT OPEN WHEN HOT" shall be placed near the radiator cap.

3.10.2.6.5 Gaskets, seals, and packing. When utilized, gaskets, seals, and packing used in the cooling system shall be made of materials capable of resisting deterioration from mixtures of water and ethylene-glycol-base antifreeze conforming to SAE J1034 or MIL-A-46153.

3.10.2.6.6 Engine coolant hose. When utilized, all engine coolant hoses shall be SAE J20, heavy-duty type. All hose clamps shall be of the double wrap stainless steel type in accordance with SAE J536, type F, style 1, 2, or 4.

3.10.2.7 Governor. A governor shall be provided to limit the engine speed to not more than the intermittent duty speed recommended by the engine manufacturer when the forklift is operated under any condition specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.10.2.8 Exhaust system. The exhaust system shall be protected against entry of rain and ocean surf. The back pressure of the exhaust system, including muffler, shall in no case exceed the maximum recommended by the engine manufacturer when measured approximately 2 inches beyond the header outlet at any load up to rated net continuous load. The exhaust system shall be arranged to prevent burns to the operator and maintenance personnel while working on the step surfaces of the forklift. The exhaust system shall be provided with a spark arrestor conforming to either Forest Service Standard 5100-1, or SAE J350 for not less than 80 percent efficiency. The spark arrestor shall be provided with a means for cleaning out trapped particles. Exhaust discharge shall be directed so as to minimize the exhaust fumes at the operator's station. The exhaust system shall not obstruct the view of the operator.

3.10.2.9 Crankcase ventilation system. The crankcase ventilation system shall prevent water entering the engine during fording operations. When the crankcase vapors are directed into the induction system, means shall be provided on turbocharged engines to prevent coking of turbocharger blades. No vapors or condensation shall be deposited on or come in contact with the air-cleaner element.

3.10.2.10 Oil filter. Oil filter(s) of the heavy-duty full flow type or heavy-duty full flow and partial flow type shall be accessible and shall be furnished in accordance with the engine manufacturer's recommendations. A label specifying filter type shall be placed near the point of filter installation. Oil lines, when applicable, to and from the filters shall be installed to minimize vibration and shall be of flexible hose meeting the requirements of SAE J30(d) with reusable fittings.

3.10.2.11 Tachometer drive. A heavy-duty key type tachometer drive shall be provided and shall have a 5⁄32 inch female connection in accordance with SAE J678.

3.10.2.12 Oil sampling valve. An oil sampling valve shall be provided on the engine and transmission. The valve shall be manually operated and shall automatically close after release. It shall be made of material resistant to corrosion such that it will not contaminate the sample. The discharge port of the valve shall be covered with a captive chained metal threaded cap which provides a positive seal of the sampling port. The valve shall be located in such a way as to insure that personnel will not be exposed to danger when taking oil samples with the engine running. The location of the oil tap shall be such that when samples are taken, it shall be a true representation of oil that is flowing while the engine is running. The sampling valve shall be labeled in accordance with MIL-STD-1472 adjacent to the valve indicating the type of oil sampled (engine or transmission, whichever is appropriate).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.11 Drive assembly. The drivetrain assembly shall consist of all components necessary to transmit power from the engine to all four wheels. All gears shall operate in lubricant, and a standard pressure grease lubrication system shall be provided for other friction parts. Gear housing shall be equipped with filler plugs and magnetic drainplugs. Differential ring and pinion gears shall be adjustable. Drive shafts shall be provided with a minimum of two heavy-duty universal joints and a nonbinding slip joint. Drivetrain components shall conform to and shall be installed in accordance with each component manufacturer's recommendations. The,drivetrain fluid and lubricant temperatures shall not exceed 250° F and drivetrain universal joints shall not exceed 180° F when the forklift is tested as specified herein.

3.11.1 Transmission. The transmission gear ratios shall be manually selected. All transmission gears shall be constantmesh. The transmission shall provide for shifting under full engine power through all successive forward and reverse transmission gear ratios. The transmission shall be protected from damage when the operator moves or attempts to move the directional control to the opposite direction while the forklift is in motion. The transmission shall provide controlled application of the clutches to provide smooth shifting, limiting slippage which could damage the clutches. The transmission oil shall conform to MIL-T-2104, grade 10, or MIL-L-46167. All transmission component material shall be compatible with these oils. Oil pressure for actuation of the transmission clutches, for torque converter supply, and for transmission lubrication shall be supplied by a mechanically driven pump. The transmission and torque converter fluid shall be filtered by filter(s) having replaceable elements in accordance with the transmission manufacturer's recommendations. The torque converter and transmission shall absorb maximum stall operation for a minimum of 30 seconds without damage or permanent deformation and without exceeding the fluid temperature limit of 250° F with an initial fluid temperature of not less than 157° F in an ambient temperature of not lower than 25° F. The transmission shall be provided with a disconnect control. The disconnect control shall simultaneously disengage the transmission and apply the service brakes while allowing the engine to be operated throughout the entire speed range. The forklift shall be capable of achieving specified lifting, lowering and tilting rates of the rated load while the disconnect control is engaged and transmission control is in forward without moving the truck.

3.11.1.1 Hydrodynamic powershift transmission. The transmission shall provide controlled application of the clutches mto provide smooth shifting, limiting slippage which would damage the clutches. All transmission gears shall be constant mesh. Oil pressure for actuation of the transmission clutches, for torque converter supply, and for transmission lubrication shall be supplied by a mechanically driven pump. The transmission shall be capable of withstanding maximum stall operation for a minimum of 30 seconds without damage or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

permanent deformation and without exceeding the fluid temperature limit of 250° F with an initial fluid temperature of not less than 157° F in an ambient temperature of not lower than 25° F.

3.11.1.2 Hydrostatic transmission. The hydrostatic transmission shall be a closed loop type with a reversible variable displacement pump and a reversible variable or reversible fixed displacement motor. A charge pump shall be provided and shall be gear or shaft driven by the engine and shall provide sufficient oil under pressure to retard cavitation of the pump and motor and to maintain a constant, smooth control lever response independent of operating conditions performed at full throttle engine speeds. With an oil temperature of 140° ±5° F and new filter, the vacuum at the charge pump inlet port shall not exceed 5 inches Hg when tested in accordance with 4.6.2.21.1. A shuttle valve or equivalent means shall be provided to automatically prevent loss of high pressure oil from the closed loop pump/motor circuit during the transition of rapid change in direction of the forklift. A set of reduction gears with a minimum of two speed ranges capable of being shifted on the move under full engine torque may be used in conjunction with the hydrostatic transmission. When a gear range selector is provided it shall be accessible to the operator in the normal operating position and shall be labeled to indicate speed ranges. Oil temperatures in the transmission shall not exceed 180° F when measured at the pump case drain and motor case drain under any operating conditions specified herein. When a heat exchanger is required to meet temperature limits stated herein, means shall be provided to insure recommended case pressures of the pump and motor are not exceeded during all operating conditions specified herein including cold weather start-up. The transmission shall be capable of withstanding maximum stall operation for a minimum of 30 seconds without damage or permanent deformation and without exceeding the fluid temperature limit of 180° F. The system shall withstand all operations specified herein without permanent deformation, damage, or leakage.

3.11.2 Rear axle oscillation. The rear axle shall oscillate freely such that the total vertical travel of each rear wheel shall be a minimum of 14 inches (seven inches above and seven inches below the horizontal axle centerline.)

3.12 Hydraulic system. The hydraulic system shall consist of all fluidpower components necessary for the operation of the forklift, including the steering system and hydrostatic transmission system but does not include the brake or the hydrodynamic type power train. All filler tubes shall be labeled "hydraulic fill". The working hydraulic system (lift, tilt, fork function and steering) maximum operating pressure (relief valve setting) shall not exceed 3000 psi and if furnished, the hydrostatic transmission relief valve setting shall not exceed 6100 psi. The system fluid shall conform to MIL-L-2104, grade 10 or MIL-L-46167. All hydraulic system component material shall be compatible with these fluids. The temperature of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

hydraulic fluid shall not exceed 100° F above the ambient during all operations and tests specified herein. Hydraulic fittings on pumps, valves and cylinders shall be either the O-ring, straight thread type, as specified in SAE J514 or the 4-bolt flange type as specified in SAE J518 for 1 inch and smaller, and only the 4-bolt flange type as specified in SAE J518 for ports larger than 1 inch. The hydraulic system shall be flushed free of foreign matter including weld slag and spatter. The connection ports of the hydraulic components shall be sealed by the component manufacturer. In event of failure or damage to the hydraulic system, a means to prevent the forks from tilting, or the frame (forks) from oscillating shall be provided. A straight thread "O" ring boss diagnostic port conforming to SAE J514 shall be provided at the pump(s) outlet or pressure inlet of each control valve.

3.12.1 Hydraulic lines. Hydraulic lines shall consist of tubing, flexible hose and steel fittings. Hose or a combination of hose and tubing shall be used between components that are not mounted to a nonflexing, rigidly connected structural member or rigidly connected subassembly. All lines shall be routed to provide the minimum number of bends, ease of maintenance, maximum protection and provision shall be made to prevent damage of lines due to chafing. The hose installation, such as angle of fittings and location, shall cause no stress concentration on the hose at the fitting, and the hose shall be supported, when necessary, to eliminate sagging at the fitting. All lines, other than suction lines, return lines and cylinder bleeder lines, shall be considered pressure lines. All lines shall be flushed free of foreign matter including weld slag and spatter.

3.12.1.1 Pressure hose assemblies. Pressure hose shall be as specified in SAE J517 or MIL-H-52471. Permanently attached type pressure hose couplings are acceptable as original equipment hose assemblies. The truck shall be compatible with hose assemblies with field attachable reusable fittings *in* place of each hose assembly with permanently attached couplings when tested as specified herein. All fittings shall be 37-degree flare, female swivel or 4-bolt split flange as specified in SAE J516. Hose ID shall be limited to 1/4, 3/8, 1/2, 3/4, 1, 1-1/4, 1-1/2, and 2 inches. The hose selected shall have a rated operating pressure that is greater than the hydraulic circuit maximum relief valve setting. The hose installation shall not cause the hose to be bent beyond the minimum bend radius specified in SAE J517.

3.12.1.2 Pressure tubing. Pressure tubing shall be in accordance with SAE J524 or SAE J525 and shall meet the requirements specified herein. Pressure tube sizes shall be limited to 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2, and 2 inches. Tubing shall have a minimum burst pressure that is equal to or greater than 3.0 times the system maximum working pressure. Tubing shall be securely clamped. All bends shall be smooth without flattening, kinking, or wrinkling of the tube. The term "without flattening" is defined as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Throughout the bend, the tube maximum diameter shall be equal to or greater than the tube nominal diameter, and the tube maximum diameter minus the tube minimum diameter shall be not greater than 15 percent of the nominal tube diameter.

3.12.1.3 Pressure tube fittings. Unless otherwise specified herein pressure tube fittings shall be 37-degree flared and straight thread fittings conforming to SAE J514 or 4-bolt split-flange type conforming to SAE J518. Jump size tees may be used. The 4-bolt split-flange type connections may terminate in either a flange head that incorporates a SAE J518 mating face or a flange head that integrally incorporates four boltholes and an O-ring groove for mating to a SAE J518 port face. Pressure tube fittings that incorporate the J518 connection shall contain a box into which the tube shall be brazed or welded. Pressure tube fitting sizes shall be limited to 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2, and 2 inch. Pressure tube fittings shall have a minimum burst pressure 3 times the maximum operating pressure.

3.12.1.4 Suction lines. A pump inlet suction line shall include provision for flexibility when there is vibration or movement between the reservoir and the pump. The suction line shall he sized so that the pump inlet pressure does not drop below atmosphere by more than 7 inches of mercury vacuum at 120° F ±10° F oil temperature and at governed engine speed. The inlet suction line installation shall include no stress concentration at the end fittings and no kinks. Hose shall conform to SAE J517, 100R4 or shall be oil resistant hose. Suction hose clamps shall be of the double wrap stainless steel type in accordance with SAE J536, type F, style 4 or of the saddle worn thread type with stainless steel inner lining or of the heavy duty T-bolt clamp type or shall be in accordance with fittings specified in 3.12.1.1.

3.12.1.5 Quick-disconnect couplings. Quick-disconnect hydraulic couplers shall be used in hydraulic line where separation is made for transportability requirements (see 3.1.3.2) and they shall perform as specified herein. The hydraulic couplings shall connect to lines equal to or smaller than 1 inch with straight thread fittings conforming to SAE J514 and to lines larger than 1 inch with the SAE J518, 4-bolt, split flange face fittings. The coupler halves shall be restrained to prevent contact with the ground or any surface of the boom when connected and when disconnected. The coupler halves shall be identified with metal identification plates, metal tags, metal bands or by color coded anodized aluminum fittings to assure assembly of correct mating halves. Each coupler half shall be provided with a captive chained cap to protect the opening when the coupler is disconnected. The caps of the mating coupler halves shall fit together when not in use to prevent corrosion, damage, and contamination of the mating surfaces. The hydraulic coupler shall not have any partially coupled unlocked positions in which the couplings

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

can remain stable and permit flow. After 100 connections and disconnections, the coupler shall meet all requirements specified herein. When coupled and uncoupled with 60 psi applied, the coupler shall seal the ends of the disconnected lines at the point of disconnection and shall not permit external fluid loss exceeding 1/2 fluid ounce. At full line flow, the pressure drop across the quick disconnect coupler shall not exceed 15 psi. The connected couplings and disconnected halves shall withstand a surge pressure equal to 150 percent of the relief valve setting without evidence of leakage or rupture. The quick disconnect couplings shall show no leakage and shall be in accordance with ANSI B93.42 and meet all requirements specified.

3.12.1.6 Return lines. Return lines shall be in accordance with SAE J517.

3.12.2 Hydraulic pumps. The hydraulic pump(s) shall have been tested in accordance with NFPA Recommended Standard T.3.9.18-1976. When tested in this manner, the contaminant tolerance profile for the hydraulic pump(s) shall either:

a. Not fall below or cross the B_{10} curve of the hydraulic system filter when tested in accordance with MIL-F-52723 (see 4.6.2.21.2).

or else

b. The pump Omega rating shall be less than the filter Beta 10 rating.

3.12.3 System filtration. System filter(s) shall be furnished either in the pressure line, return line (suction line of charge pump allowed for filtration of hydrostatics), or combinations (as specified in 3.12.3.1 or 3.12.3.2 or 3.12.3.3). Labels identifying each filter shall be provided near the points of filter installation.

3.12.3.1 Return line filters. Although the system filter element need not be qualified to MIL-F-52723, it shall meet the performance requirements as stated therein. The filter shall maintain a full flow condition for the duration of reliability testing as specified in 4.6.2.35. The filter bypass may open for system oil at a temperature less than 70° F. The filter element shall have been tested to the performance requirements of MIL-F-52723 at a flow rate equal to or greater than the truck maximum system oil flow at maximum governed engine speed. All return oil shall pass through the filter except relief oil which may return directly to the reservoir. The filter shall be located so that the element may be removed, without removal of other components, for examination or replacement without spilling or draining oil from the reservoir. At the maximum system oil flow through the filter, including lowering rated capacity load at maximum governed engine speed and an oil temperature of 150° F±5° F, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

pressure drop across a new filter assembly shall not exceed 10 psi. An automatic bypass shall be provided in the system filter and shall open at not less than 10 psi greater than the pressure drop measured across the new filter assembly and it shall permit full flow at a pressure drop not greater than 35 psi. The filter housing shall have a minimum proof pressure of 100 psi without permanent deformation, damage, or leakage. The system filter shall be equipped with a contamination indicator which may be remotely mounted. The indicator shall be clearly readable without the removal of any components. As a minimum, the indicator shall show when the filter element is clean and when the system filter is beginning to bypass, requiring a change of the element.

3.12.3.2 Suction filter. The pump inlet line suction filter shall conform to 3.12.3.1 with the following exceptions:

a. The pressure drop across the new filter assembly shall not exceed 0.75 psi.
b. At a pressure drop of 1.5 psi across the filter assembly the automatic by-pass shall crack open and full flow pressure override shall occur at no more than 2.5 psi.
c. The filter housing shall withstand a proof pressure not less than 30 psi.
d. Although the suction line filter element need not be qualified, it shall meet the performance requirements of MIL-F-52723 except that the test terminal pressure drop shall be 2.5 psi and average filtration ratio (B10) shall be equal to or greater than 2.2.

3.12.3.3 Pressure filter. The pressure filter(s) shall conform to 3.12.3.1 except that proof pressure test shall be 150 percent of the maximum system operating pressure.

3.12.4 Reservoir. A hydraulic reservoir shall be furnished to contain the hydraulic system oil. The reservoir shall include a filler opening, screen, cap, and other items required to function as specified herein. The reservoir shall be mounted to prevent vibrations that could result in leaks, loosening of fasteners, brinelling of material, or cracks. The location shall not impair operational visibility or access to either side of the operator's compartment. The reservoir shall have sufficient capacity to prevent air entering the system with all hydraulic pistons fully extended and sufficient free air capacity to prevent oil being discharged through the reservoir air vent when maximum return flow of oil is surged into the reservoir from the system. The "Add" and "Full" marks on the dipstick or sightglass(s) shall be in accordance with SAE J614b, and shall indicate the correct oil level when the truck and forks are on level ground, and the oil is at normal operating temperature. The fillercap and tube shall be located to provide for filling from a standard 5 gallon container conforming to MIL-C-1283, and to prevent entrance of contaminants throughout filling and checking operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

The reservoir filler neck shall contain a removable 50 mesh, or finer, strainer retained in place unless all oil added to the reservoir is filtered by an equal or finer filter prior to passing through the pump. The filler tube shall be not less than 1 inch inside diameter. The reservoir pump inlet line suction openings, except for the auxiliary steering pump opening shall be located a minimum of 2 inches above the bottom of the reservoir. When furnished, the auxiliary steering pump inlet line suction opening shall be located a minimum of 1/2 inches above the bottom of the reservoir. Except for sealed reservoir, a pressurized breather with 30 psi maximum relief valve and 1-inch Hg vacuum breaker shall be furnished. The breather shall have a nominal rating of 40 microns. The breather shall preclude the entrance of water. The reservoir shall provide a tortuous flow path from the reservoir inlet to the reservoir outlet in order to prevent a direct current between the two ports. All return line flow except the vent line shall discharge into the reservoir at a level which is below the oil level in the reservoir. When filters are located within the reservoir, a removable 50 mesh, in-tank suction strainer with bypass valve shall be installed in the suction line of the reservoir unless a suction line filter is furnished in accordance with 3.12.3.2. The reservoir shall have suction flanges and one or more access holes with covers for inspection, cleaning and maintenance of the entire inside.

3.12.5 Relief valve. A relief valve shall be provided to limit the pump pressure to the maximum required to perform the necessary system functions. Relief valve discharge lines should be large enough to handle the maximum pump output and should return to the reservoir. Pressure equal to the relief valve shall be obtained only when a cylinder is bottomed or when the system is subjected to shock loading.

3.12.6 Hydraulic control valves. The control valve spools shall be spring centered with sufficient force to return and retain the levers at the center position throughout all forklift operations. The spool connection eye end shall conform to SAE J748 and shall not bind while operating as specified herein. The exposed control-valve surfaces shall show no evidence of corrosion or pitting when tested as specified herein. The contractor shall present information during first article test that the control valves were tested in accordance with procedures specified in SAE J747 and J1117. The inlet to outlet port pressure differential shall not exceed 3 percent of the maximum operating pressure at rated flow.

3.12.7 Cylinders. All hydraulic system and steering cylinders shall be fabricated from either seamless steel tubing or welded and redrawn tubing. All welding and brazing to the cylinder within the zone of piston operation shall be done prior to final machine honing or rolling of the cylinder. Cylinders shall be so located as to provide for ease of maintenance and replacement. All internal cylinder ports shall be located beyond the area of piston travel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Each cylinder shall have any exclusion device to prevent foreign material and fluids from entering around the piston rod and damaging the seal and other cylinder components. All hydraulic system and steering cylinders shall perform as specified herein without buckling or bending. Each piston shall have a bearing surface concentric with piston to carry the piston side loads against the cylinder walls. The bearing surface shall be of material that will not scar, score, or gall the inside surface of the cylinder. All cylinder rods shall be hard chrome plated. All cylinders shall withstand a pressure that is equal to 1.5 times the system relief valve setting without evidence of rupture, permanent deformation, damage, internal or external leakage.

3.12.8 Contamination levels for hydraulic system. The particulate matter in hydraulic fluid removed from the system directly upstream of the filter, shall not exceed the ISO code level of 19/16 in accordance with SAE J1165 after completion of assembly of the truck when tested as specified in 4.6.2.21.3.

3.12.9 External leakage. After completing tests specified in 4.6.2, the degree of external hydraulic system leakage shall not exceed a class 4, for dust-free conditions and a class 4D for dusty conditions of SAE J1176. External hydraulic system leakage shall not exceed a class 3 for all production trucks examined under table III.

3.13 Lift mechanism. A lift mechanism (lift arms and fork carrier) shall be provided. The lift arms shall be pivoted from a location clear of the operator's position to provide the vertical lift without interference to the operator's movement necessary to operate the forklift, or to ingress or egress from the operator's seat in any lift position. The movement of the boom and fork carriage shall be controlled by means of double-acting hydraulic cylinders. The fork tilt angle shall be automatically maintained to be approximately the same throughout the lift cycle, allowing not more than 30 degree tiltback when the forks are lifted from a level position on the ground to the highest position with no tilt forward of horizontal permitted throughout the lift cycle. Tilt control valve or other positive means shall be provided to prevent cavitation in the tilt cylinder(s) when tilting rated load to full forward tilt position at engine low idle speed at a minimum 120° F oil temperature, when the tilt valve is wide open and cracked open. Tilt speed from maximum forward tilt to maximum rearward tilt or from maximum rearward tilt to maximum forward tilt shall be not less than 0.8 degree/second. The operator shall be able to see the tip of at least one fork at any lift height without leaving his seat when there is no load on the forks. Lift arm safety device(s) shall be furnished in accordance with SAE J38.

3.13.1 Load backrest extension. A load backrest extension shall be provided when specified at 33 inches ±3 inches high. Load backrest

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

shall be removable without removal of any other components and shall not have any projections beyond the side plane of the frame.

3.14 Forks. Structurally, the forklift shall be capable of supporting a load equal to 300 percent of the rated load on the forks at the applicable load center with the forks and carrier assembly centered, and 200 percent of the rated load on the forks at the applicable load center, with the forks fully shifted to either side of the forklift without permanent structural deformation or evidence of mechanical damage. The forks shall be attached to the carrier assembly in a manner which prevents their lateral movement, except when the fork position is mechanically changed by the operator. Fork length, width and thickness shall be as specified below. The taper shall be on the underside of the forks and no less than 14 inches long. The fork tine tips shall be chamfered and corners rounded to facilitate fork engagement.

TABLE II. Fork dimensions.

Length	72 in +0-1/2 in
Width	8-1/16 in max
Thickness	2-9/16 in max tapered to 3/4 in max at tip

NOTE: The heel of the forks may be 3⁄16 in. thicker/wider in the bend for added strength.

3.15 Wheels and tires.

3.15.1 Wheels. The forklift shall be mounted on four hubs with four demountable rim and tire assemblies as recommended by SAE J751. The wheels shall be fastened to the hubs in accordance with the axle manufacturer's recommendations for off highway application. Wheel rims shall be in accordance with the TRA yearbook.

3.15.2 Tires. All tires shall be new and unused, wide base, or 65 series, off-the-road type, and of identical size and construction. The tires shall be pneumatic, low pressure, tubeless, furnished with type L-2 traction-type tread. Tire loading shall be based on front axle weight with rated capacity load in the carry position and shall be in accordance with the TRA yearbook and the tire manufacturer's published literature for a 5 mph load rating. Valves and caps shall be in accordance with the TRA yearbook. Large bore valves shall be furnished. A valve adapter shall be furnished to reduce the large bore to the standard passenger vehicle size bore. Valve caps shall be metal with elastomer inner seal. Hydroinflated tires are not acceptable.

3.16 Wheel guards. Wheelguards shall be furnished at all four wheels to provide protection for the operator from material being

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

thrown radially off the rotating tires. Each fender shall structurally support a weight of 300 pounds without evidence of damage.

3.17 Steering and steering control. The steering method shall be the hinged-frame (articulated) type. The steering shall be accomplished by fluid power actuators. The steering system shall permit control of the forklift while traveling at any speed up to the maximum specified travel speed (see 3.9.4). The fluid power steering actuating device shall be located so as to absorb all road shock without transmitting the shock effect to the steering wheel. A steering frame lock shall be included and it shall conform to SAE J276 except it shall be painted in accordance with 3.33. The forklift shall operate without loss of operator control when tested as specified in 4.6.2.12.

3.17.1 Steering control. The steering system shall be controlled by a single steering wheel. The effort required to turn the steering wheel shall not exceed 10 pounds pull at the rim. The steering wheel shall require not more than 5-1/2 turns to move the wheel from one stop to the opposite stop. The steering wheel shall require not more than 8 seconds for the maximum range of movement at low idle engine speed and shall require not less than 4 seconds at governed engine speed. There shall be a minimum of 7 inches clearance measured vertically between the lowest point on the steering wheel rim and a line parallel to the floor and passing through the highest point of the unoccupied seat cushion. There shall be a minimum of 3 inches between the rim of the steering wheel and the directional control lever(s) for all positions of the lever(s). The steering wheel shall be capable of withstanding a minimum 300 pound force applied perpendicular to the plane of the steering wheel, a minimum 150 pound force applied tangentially to the rim of the steering wheel, without permanent deformation or damage and not more than 50 pounds turning force shall be required in the event of power assist failure.

3.17.2 Emergency steering. Emergency steering conforming to SAE J53 shall be provided for retaining steering control in the event of engine failure or steering power source failure when traveling at any speed to the maximum speed.

3.18 Brake system. Service and parking brakes shall be provided and shall be independently actuated systems. If a separate hydraulic system for the brakes is utilized, the brake system shall be filled with a fluid that is listed on the qualified product list of MIL-B-46176. If air brakes are provided, air brake service and emergency line coupling conforming to SAE J318 shall be provided on the rear of the vehicle.

3.18.1 Service braking system. Foot controlled service brakes shall be provided for all wheels. The brakes shall be capable of bringing the forklift, with rated load on the forks, to a complete

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

stop without any wheel leaving the ground from a speed of 10 mph as follows:

a. Dry - within 15 feet with fishtailing of no more than 1 foot when tested as specified in 4.6.2.18.
b. Fade - within 15 feet with fishtailing of no more than 1 foot when tested as specified in 4.6.2.18.
c. Wet - within 25 feet with fishtailing of no more than 1 foot when tested as specified in 4.6.2.18.

Pedal force while making any stop shall not exceed 90 pounds. The brake system shall provide for bleeding of air from hydraulic lines and for draining of moisture from the compressed air system, as applicable. Automatic or manual brake adjustment provisions shall be provided. Automatic adjustment shall maintain correct lining to drum or disk adjustment without looseness or lockup. Automatic adjusters shall be enclosed or guarded for protection from environmental damage or malfunction. The brake system shall withstand an operator's brake application force of not less than 300 pounds as specified by ANSI B56.6 at the pedal, a minimum of 10 times, without permanent deformation or evidence of mechanical damage.

3.18.2 Parking system. The parking brakes shall provide on-grade parking performance, but not necessarily stop the gross weight of the forklift with rated load on the forks when the forklift is stopped on a 30 percent grade in both the ascending and descending attitude when tested in accordance with test method 7. The parking brakes shall be hand-operated and equipped with a locking device. The manual control shall be located within reach of the operator and in a noninterfering position. Hand-lever pull to set the parking brake shall not exceed 70 pounds. The parking brake shall be an independent mechanical friction brake mounted on the drive or propeller shaft rotating with the wheels, or a separate isolated system actuating the service brakes. Adjustment of parking-brake shoes or bands shall be accomplished without the removal of any component parts.

3.18.3 Emergency braking provisions. The truck shall provide not less than six "dead engine" stops with rated load while descending the 30 percent grade. The emergency braking provisions may be provided through either the parking brake or service brake system. Means shall be provided to release the brakes for towing.

3.19 Operator access. Operator-access systems to the forklift shall be in accordance with minimum requirements of SAE J185.

3.20 Operator's seat. A cushioned bucket type operator seat shall be furnished in accordance with minimum requirements of SAE J899 and located in accordance with SAE J1163 to permit 90 percent of US male/female operator population (SAE J833) to reach controls in the optimum areas of the forklift as defined in SAE J898 by operator clothed in NBC and cold-wet gear. The cushion material shall be foam

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

rubber or polyurethane, covered with slip-coated vinyl with reinforced fabric backing upholstery having a minimum weight of 45 ounces per linear yard.

3.21 Cowl or hood. The engine shall be protected by a hood cover and sideplates, except that sideplates may be omitted when the wheel guards provide the engine compartment with protection from road splash and debris. The sideplates shall be quick opening. The sideplate shall be capable of being opened or removed by one man and shall be within the design weight limits of MIL-STD-1472, figure 21, table XXVI, Weight Requirements. Handtools shall not be required for release of the sideplates. Elastomer hood latches or paddle latches shall be provided on the side panels. All engine accessories shall be completely accessible without requiring the removal of any additional forklift components when the hood cover and sideplates are opened.

3.22 Instrument panel. The instrument panel shall be installed on an incline at a minimum of 5 degrees to a maximum of 80 degrees. On this panel shall be mounted the charging system monitor, engine oil-pressure-monitor, engine-coolant temperature monitor (if applicable), torque converter or transmission-fluid temperature monitor, fuel gage, and any other instruments used, unless otherwise specified herein. Universal symbols shall be furnished in accordance with SAE J298 and ANSI MH11.3. All gages shall be flush mounted and shall be provided with switch-controlled illumination.

3.23 Controls and instrumentation. Each control shall be provided with symbolic labels either on plates conforming to 3.32 or embossed or depressed on or near the control. Labeling for levers which control any part of the lift mechanism shall conform to ANSI MH11.3. The labels shall be visible to the operator from his normal operating position. All controls for the forklift shall be located in the operator's compartment and shall be within the maximum area specified in SAE J898. Unless otherwise specified herein, the controls shall conform to MIL-STD-1472. Electric controls and instrumentation shall be weather-tight. All hand operated controls shall be operable by persons wearing cold-wet gloves. Mechanical push-pull remote controls, when furnished, shall be of waterproof, heat resistance, antifriction type, conforming to requirements for marine cables specified in SAE J917, except as specified herein. As a minimum, all exposed parts of the control cables shall be fabricated of corrosion-resistant steel that has been passivated as per QQ-P-35. The cables shall be covered with a polyethylene or vinyl jacket. Cable ends shall be tailored to actuate all levers through their respective arcs without binding. Bend radii shall be recommended by the cable manufacturer. The "as-installed" mechanical efficiency of each installation shall be not less than 70 percent and the no-load friction shall not exceed 5 ounces per foot. The control manufacturer's recommended load ratings for continuous operation shall not be exceeded for any required operation of the control specified herein. Only controls associated with the cab, such as

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

windshield wiper and heater controls, may be mounted on the cab structure.

3.23.1 Charging system monitor. A remote indicating ammeter or voltmeter, or alternator indicator red light shall be furnished. The ammeter shall be of sufficient capacity to indicate variations in the current supply or demand experienced by the truck, exclusive of starter requirements. The indicator light shall light when the alternator is not charging and the engine run control is "on" and shall be labeled "alternator" or with appropriate universal symbology.

3.23.2 Engine oil pressure monitor. A remote indicating engine oil pressure gage shall be furnished. A low pressure red indicator light or low pressure alarm shall be furnished in addition to the gage. Means shall be provided to check operation of the light or alarm.

3.23.3 Engine coolant temperature monitor. For liquid cooled engines, remote indicating engine coolant temperature gage shall be furnished and a high temperature red indicator light or alarm shall be furnished in addition to the gage. Means shall be provided to check operation of the light or alarm.

3.23.4 Transmission temperature monitor. A remote indicating torque converter or transmission temperature gage shall be furnished. A high temperature red indicator light shall be furnished in addition to the gage. Means shall be provided to check operation of the light.

3.23.5 Air pressure monitor. When a compressed air system is furnished, an air pressure gage shall be furnished and an audible alarm which exceeds operating noise levels by 20dB shall indicate when air pressure is inadequate for proper brake operations.

3.23.6 Hourmeter. An hourmeter which registers the number of engine operating hours up to a minimum of 9999 hours shall be provided. The hourmeter shall be accessible for reading without removing any component of the truck.

3.23.7 Fuel monitor. A fuel gage shall be provided.

3.23.8 Engine run control. An engine run control shall be furnished and shall be a keyless type. It shall have not less than two positions: "On" and "Off". The switch shall control the actuation of all electrical monitors and electrical equipment except the horn.

3.23.9 Light switches. "On-off" light switches shall be furnished on the instrument panel and each identified by labels. One switch shall control the forward flood lamps and one switch shall control the rear floodlamps as specified in 3.24.4. The forward and rear flood lamps shall be inoperable when using the blackout lights. One light switch conforming to MS51113 and clearly labeled as to specific

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

function (i.e., front headlights, rear flood lamps, etc.) shall be provided for the front headlights (see 3.24.4), rear taillights (see 3.24.4.2), blackout headlight (see 3.24.4.1), two blackout stoplight-taillights (see 3.24.4.1), and instrument panel lights (see 3.22).

3.23.10 Braking and transmission disconnect pedal(s). Two pedals shall be provided for transmission disconnect and braking control and shall comply with MIL-STD-1472 (see 5.4.3.22 and Hg 14) requirements for pedals and foot operated controls, unless otherwise specified herein. The right pedal located for convenient right foot operation, shall provide the braking control only. The left pedal located for convenient left foot operation shall be a combination transmission disconnect and braking pedal. Each pedal shall be a minimum of 2-1/2 inches wide and shall have all around clearance of not less than 2 inches. Grease fittings or permanent lubrication shall be provided for lubricating moving parts of all pedals and shafts.

3.23.11 Engine speed control. The engine speed control pedal shall be installed for comfortable right foot operation and shall be located to the right of and shall be free of interference from the brake pedals. The engine speed control pedal shall have an all around clearance of not less than 3 inches and shall be in accordance with MIL-STD-1472, pedals requirements, unless otherwise specified herein.

3.23.12 Transmission controls. Selective forward and reverse and speed range controls shall be provided and shall be located for convenient left hand operation. Forward, reverse, and speed ranges shall be labeled in accordance with SAE J298. Movement of the control lever in a forward or upward direction shall cause forward motion of the forklift. Transmission control levers and linkage shall withstand, without permanent deformation or damage, a force of 100 pounds at the handgrip and the shock and vibration encountered during operation specified herein. The force necessary for the movement of the hand control levers shall not exceed 20 pounds.

3.23.13 Hydraulic controls. Lift, tilt, fork positioning, oscillation, and sideshift hydraulic controls shall be self-centering lever(s) located for convenient right-hand operation. All control levers and linkage shall withstand, without permanent deformation or damage, a force of 50 pounds at the handgrip and the shock vibration encountered during operations specified herein. The force necessary to move any control to the end of its travel shall not exceed 20 pounds at the handgrip. Total control lever travel from one end to the other shall not exceed 14 inches, measured at the center of the handgrip. Clearance between control handgrips shall be not less than 2 inches in any control position. When separate lift and tilt levers are used, the tilt control shall be at the right of or below the lift control, as viewed by the operator. Control functions and predominant control motion shall be as follows (function listed, followed by control motion - the first applicable motion listed, depending on lever mounting, shall apply):

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

a. Lift load - Toward the operator, rearward, or upward (opposite direction to lower).
b. Tilt load rearward - Toward the operator, rearward, or in the same rotational direction as fork movement (opposite direction to the tilt forward).
c. Sideshift to right - To the operator's right, rearward, or upward (opposite direction to sideshift left).
d. Oscillate clockwise (as viewed by operator) - To the operator's right, rearward, or upward (opposite direction to oscillate counterclockwise).
e. Bring forks together - Toward the operator, rearward, or upward (opposite direction to spread forks apart).

3.23.14 Starter system. The starting system solenoid(s) (see 3.10.2.3) control shall be of a keyless type and shall be incorporated as part of the engine run control (see 3.23.8).

3.24 Electrical system. The forklift electrical system shall be for heavy duty, 24 volt service and in accordance with SAE J539. The electrical circuits shall be assigned identification numbers andbe color coded as shown in table I of SAE J821.

3.24.1 Batteries. Batteries shall be furnished and shall be in accordance with MS35000, type 6TN and shall be readily accessible for service. The batteries shall be negative grounded in accordance with SAE J538. The battery terminals shall be accessible for removal without requiring disassembly of other components.

3.24.1.1 Battery mounting. Batteries shall be located so they can be cleaned, serviced, and removed without removing any component except the quick-release battery box cover if a battery box is furnished. Battery supports, holddowns, and areas around the installation which could possibly be affected by dripping or seepage of acids shall be protected with a coating Conforming to TT-C-494, type II. The battery shall be mounted in such a manner as not to interfere with access to engine components (accessories). Battery mounting shall provide for complete support over the entire base of the battery and shall be in such a position that the level of the electrolyte is directly visible without removing the battery from its mounting bracket or requiring the use of tools. Battery restraining clamps shall be provided to hold the battery in a fixed position. The battery compartment (if furnished) shall have provision for drainage and provision for gas venting at or near the top of the compartment. Cover and positioning shall be protected against short circuiting. Ungrounded cable shall be protected by rubber grommets or insulated passages at entry to the battery box. Adequate instruction shall be provided to insure the batteries are installed and connected properly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.24.1.2 Battery cable. Battery cables shall be furnished which meet the requirements of SAE J1127. The voltage at the storage battery terminals and the starting motor terminals including connections shall not differ more than those shown in table I of SAE J541. Positive and negative cable terminals shall be identified and corrosion-resistant SAE bolts and nuts provided.

3.24.2 Slaving components. The truck shall be equipped with a 24-volt slave receptacle conforming to MS52131. The slave receptacle shall permit charging of the truck batteries and slave starting of the engine from an external power source and shall also provide a power source for charging and slaving other equipment. The slave receptacle shall be installed on the exterior of the truck near the battery enclosure and shall be accessible to personnel standing on the ground. A plate shall be furnished adjacent to the slave receptacle which reads "24 volts slave receptacle". The plate shall be in accordance with 3.32.

3.24.3 Circuit breaker. Each electrical circuit shall be protected with a circuit breaker in accordance with SAE J553 and have labels which describe the function served by the circuit breaker. Fuses are not acceptable.

3.24.4 Lights. The forklift shall be provided with not less than two headlamps and two floodlamps for forward illumination and not less than two floodlamps for rearward illumination. The lights shall be shock mounted in elastomer ring housings and shall conform to SAE J598. Headlamps shall be positioned to provide illumination with minimum obstruction when the forks are in carry position (forks tilted back fully). Front floodlamps shall be adjustable a minimum of 45 degrees above and below the horizontal plane. Lights positioned in such a way as to be subject to damage shall be protected by guards.

3.24.4.1 Blackout lighting. A separate wiring harness may be provided for the blackout lights. One blackout headlight conforming to MS51318 shall be mounted on the extreme left within the plan outline of the forklift at the front, positioned to provide illumination when the forks are in carry position. The blackout headlight shall be adjustable in accordance with SAE J598. Two blackout stoplight-taillights conforming to MS51330 or MS52125 shall be mounted adjacent to the rear taillights, and shall be mounted in 6-inch-diameter holes or shall be provided with guards. Each light shall be recessed not less than 1/2 inch behind the hole or face of the guard. Two blackout marker lights conforming to MS52126 shall be mounted on the front, one each side of the vertical centerline of the truck, at the same level, and as far apart as practicable.

3.24.4.2 Taillights. Two taillight-stoplight assemblies in accordance with SAE J585 and SAE J586 shall be installed, one on the left rear and one on the right rear of the forklift, with the lens face recessed not less than 1/2 inch back of a protecting member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.24.4.3 Interior lighting. The truck shall be equipped with gauge lighting or indicators which are readily visible to the full range of user personnel and shall be adequately lighted for night operation. Interior lights, gauges and instruments, to include warning lights, shall not emit energy out of the 400-625 nanometer wavelength range.

3.25 Horn. The forklift shall be equipped with an electric, air, or air-over-electric horn. The horn shall sound with levels at least 20dB above truck noise. The horn button assembly and electrical wiring for the horn shall be constructed to be moisture and weather resistant to prevent entry of moisture when operated or stored outdoors under all weather conditions. The horn button shall be mounted on the steering wheel.

3.26 Pintle hook and towing lugs.

3.26.1 Pintle hook assembly. A rear mounted swivel pintle hook assembly conforming to MS51118 shall be provided. The pintle hook assembly shall be located on the vertical center line of the truck with a minimum height of 31 inches and a maximum height of 39 inches. The pintle hook assembly mounting shall be of sufficient strength to withstand, without permanent deformation or damage, the drawbar pull induced when the pintle hook assembly is restraining forward motion at transmission stall.

3.26.2 Towing lugs. Two vehicular towing lugs, conforming to MS500004, 10-50 tons, shall be furnished and shall provide clearance to connect a towbar conforming to MS 500048, medium duty capacity. The lugs shall be installed between 17 to 21 inches on each side of the truck center line, on the rear of the truck.

3.27 Personnel cab. The forklift shall be equipped with an insulated, weathertight personnel cab, which may be combined with ROPS and FOPS specified in 3.5.1. The cab space envelope shall be in accordance with SAE J154. The seated operator clearance dimensions shall be based upon a 95 percentile U.S. male wearing arctic gear and safety helmet. The cab shall withstand all operational shock and vibration without deformation or damage under operating conditions specified herein. The cab shall be constructed of metal or fiberglass and shall be equipped with a minimum of one door and another emergency exit (either door or window that can be opened) on the other side of the cab. All doors shall have closing latches, opening stops and hold-open catches. The doors shall either slide and latch at each end of travel or shall swing open a minimum of 90 degrees and latch open except that if a split door is furnished, only the top half must latch open. All hardware shall be of the heavy-duty-truck- or industrial-type, resistant to corrosion. Front rear window defrosters, operating in conjunction with the heater blower (see 3.27.4), or not less than two minimum 6-inch diameter, ventilation fans, shall be furnished. The fans shall be directionally adjustable

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

to direct air flow toward all glazing. Each fan shall have an "on-off" switch.

3.27.1 Safety glazing. Safety glazing of the windshield, door windows, side and rear window shall be provided. The upright seated operator shall have all-around visibility and visibility of the fork carrier in all possible fork positions. When a roof window is provided, it shall have safety glazing and it shall be sloped to provide for water drainage and guarded as necessary to meet the FOPS requirement (see 3.5.1). Glazing shall conform to ANSI Z26.1, type AS1 for the windshield and roof window and type AS1 or AS2 for other windows. Fixed or hinged glazing shall be sealed in waterproof, stress-absorbent molding and movable windows shall be sealed on extra-heavy-type, pile-lined channels.

3.27.2 Interior. The interior of the cab shall be fitted with insulation, retarding both heat loss and noise intrusion. Heavy-duty floor mats shall be furnished. All cab openings shall be sealed with elastomer grommets, seals, weather stripping, or body compound.

3.27.3 Windshield and window wipers. The cab shall be equipped with at least two wiper assemblies to clear the windshield and the rear window in accordance with the performance requirements of SAE J198. Wipers shall be capable of being operated at two or more frequencies. The frequencies must be maintained during normal engine speed and workload. Wiper arms shall be of the heavy duty commercial type and wiper element shall withstand an ozone rating of two or better in accordance with ASTM D 1171. The wiper arms shall provide tension on the glazed surfaces of at least 1 ounce per inch of wiper arm length. A windshield washer shall be provided for the front windshield.

3.27.4 Heater. A recirculating-air-type heater shall be furnished in accordance with the performance requirements of SAE J1129. The heater controls shall be within reach of the operator and shall provide for variable selection of blower speeds and temperature. If a fuel-fired heater is furnished, it shall be in accordance with SAE J1024.

3.28 Electromagnetic interference. The electromagnetic interference emission characteristics of the truck shall meet the limits specified in MIL-STD-461, part 8, class Cl, group II, except that a 20dB relaxation is permitted in the emission limits. The operator's horn is exempt from electromagnetic interference requirements.

3.29 Lubricants. Unless otherwise specified herein, the forklift shall be serviced with military lubricants selected by the contractor in accordance with table I, SAE J754. Run-in and testing shall be performed with these lubricants as applicable for the ambient operating temperature. A lubrication data plate identifying military

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

lubricants and applicable temperature ranges shall be provided and mounted (see 3.32.1) on each forklift.

3.29.1 Lubrication fittings. Lubrication fittings shall conform to SAE J534. Fittings shall be located in a protected accessible position. Fittings shall be accessible to a grease gun conforming to MIL-G-3859, equipped with a hydraulic coupler conforming to MS24207 and a 10-inch flexible extension. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Panels and plates equipped with hand-operated fasteners may be removed to provide accessibility. Accessibility shall be in accordance with SAE J925 for personnel normally clothed.

3.29.2 Enclosures with integral reservoir of lubricant. Enclosures such as the gearcases, transmission housing and engine crankcase, which contain a reservoir of liquid lubricants for the lubrication of the parts enclosed, shall be equipped with dipsticks, marked in accordance with SAE J614, check plugs not less than 1/2-inch pipe size, or sight gages to determine the acceptance level of the lubricant. Each enclosure shall be equipped with a means for filling the enclosure with lubricant and for draining. The drain, except planetaries, shall be fitted with a SAE J531 or J532 magnetic drainplug. The drainplug shall be located so that removal of the plug will result in complete drainage of the lubricant from the enclosure. Drainage, except from planetary hubs, shall be to a container on the ground when the forklift is on level ground. Integral tubes or trough may be used to convey the lubricant from the drain to the container. Accessibility to the drainplug, the filling means, and the lubricant-level checking device shall be provided without the removal or adjustment of accessories or parts. Plates equipped with hand-operated fasteners may be removed.

3.30 Fungus and moisture resistance. Electrical circuitry, including all components and connections except as specified below, shall be protected from the effect of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, composition specified in 3.30.1, with 1 percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish, or a varnish capable of providing the same protection and having the same or equal antipollution ingredients when required:

a. Components or circuit elements which are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components of circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a minimum dry-film thickness of 1 mil to component or element surfaces previously cleaned and prepared so that

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

the surfaces are free from all foreign matter that would interfere with the adherence or function of the varnish.

3.30.1 Composition. Composition II shall be used only in the case when local air pollution regulations governing the application of varnish precludes the use of composition I. When composition II is used, the contractor shall provide evidence to the Government that the use of composition II is required, and shall certify that the composition II material complies with Rule 442, South Coast Air Quality Management District.

3.31 Slinging and tiedown provisions. Permanently affixed slinging and tiedown provisions that enable the forklift to be lifted in its normal travel position and to be fastened to the floor or deck of a transportation medium shall be provided. Provisions shall conform to MIL-STD-209, classes 1 and 2 or class 3 for type II or III equipment, including air transport requirements.

3.32 Identification marking. Each individual forklift and each separable attachment removable for either surface or air transportable purposes (e.g., cab, ROPS, fork carriage or counterweights) except forks shall be identified in accordance with MIL-STD-130 on identification plates conforming to MIL-P-514, type 1, style 1, composition C (GG-P-455, type I, grade A, class 1) material. The forklift shall also be labeled, on or near data plate, "CARC month/year" specifying the month and year the forklift was treated. Additional or specific information to be indented or embossed on the plate(s) shall be as specified (see 6.2). Plates shall be furnished and mounted by the contractor. A shipping data plate shall be furnished and shall conform to MIL-P-514, type III, composition C (GG-P-455, type I, grade A, class 1) material and, in addition, shall indicate the silhouette of the forklift in transport position indicating the center of gravity, the location and capacity of the lifting and the tiedown provisions. The plates shall be attached by screws, drive screws, bolts, or rivets in conspicuous protected locations.

3.32.1 Instruction plates. The forklift shall be equipped with instruction plates conforming to MIL-P-514, type III, composition C (GG-P-455, type I, grade A, class 1) material, or commercially proven decals, including warnings, cautions and diagrams describing any special or important procedures to be followed in assembling, operating or servicing the forklift. Commercially unproven labels shall conform to MIL-STD-1472 (labels).

3.33 Treatment and painting. The portions of the forklift normally painted, both internally and externally, shall be cleaned, treated, and painted in accordance with MIL-T-704, type F for ferrous metals and type G for nonferrous metals and fiberglass top coat camouflage green 383. Primer in accordance with MIL-P-53030 may be used in lieu of MIL-P-52192. Finish coat in accordance with MIL-C-53039

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

(polyurethane) may be used in lieu of MIL-C-46168. Vendor parts and components received by the prime contractor with either alkyd primer or alkyd paint coating may be coated with above specified primers and paints applied directly over existing alkyd primer or paint without additional service preparation except for cleaning, if the base alkyd primer or paint meets applicable military federal specifications and if the base alkyd primer or paint is allowed to cure for a period of 14 days. This exception for vendor parts and components is not intended to supercede the requirement that the complete truck be primed and painted in accordance with MIL-T-704 using the primers and paints specified above. If another color is specified (see 6.2), the above system shall be overcoated with MIL-C-46168 or MIL-C-53039 of the desired color.

3.33.1 Brake protection. Surfaces of steel and iron brake assembly components which are exposed to air, except for the braking surface, shall be protected either by treatment conforming to MIL-T-704, type B, except that the finish coat is not required or by a commercially proven equivalent. Bearing surfaces in brake assemblies such as brake-shoe anchor pins, anchor pin bearing holes in brake shoes, cylindrical surfaces of pistons in brake cylinders, and inside diameter of brake cylinders for the length of the piston contact shall be coated with a film of silicone compound conforming to MIL-C-21567. A film of silicone compound shall be applied to the lip and yoke hole of each dust boot and to the boot lip groove in the outside diameter at the ends of each cylinder. Protective treatment of brake components may be performed during initial component assembly.

3.34 Markings. Registration and other markings shall conform to and shall be applied in accordance with MIL-STD-642 and MIL-STD-1472. The gross weight of the forklift shall be stenciled on each side of the forklift. The prescribed tire pressure shall be stenciled in a suitable location adjacent to each tire with block or stenciltype letters not more than 1 inch and not less than 3/4 inch high. All suitable lifting and tiedown points shall be marked either "Lifting", "Tiedown", or "Lifting and Tiedown". Unless otherwise specified (see 6.2), vehicle markings and their locations for Air Force use shall be in accordance with MIL-STD-1223 and MIL-STD-1472. Registration numbers will be furnished by the contracting officer.

3.35 Toolbox. A toolbox shall be fabricated integrally inside the cab area or a separate toolbox made of steel having a minimum nominal thickness of 0.048 inch, shall be provided. The toolbox shall have a hinged opening and a hasp accommodating a padlock shackle of 3/8 inch diameter, accessible and operable by personnel wearing gloves. The toolbox shall be bolted or welded to the forklift in a protected position, shall have provisions for drainage of liquids and shall accommodate any maintenance tools furnished. The toolbox shall be treated and painted in accordance with 3.33.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.36 Decontamination bracket assembly. A decontamination bracket assembly in accordance with MS53052 shall be furnished. The location of the bracket shall be such that it is accessible to personnel and provides clearance to remove and emplace a 5-gallon container conforming to MIL-C-1283.

3.37 Workmanship.

3.37.1 Castings and forgings. All parts, components and assemblies of the forklift which include castings and forgings shall be clean of harmful extraneous material such as sand, dirt, sprues, scale and flux. Rework shall be limited to procedures which do not reduce mechanical properties or affect function.

3.37.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame-cutting, using tips suitable for the thickness of the steel may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly, except in the performance of designed heat treatment. External surfaces shall be free from burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.37.3 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parent materials, weld filler metals, and fabrication techniques shall be as required to enable the forklift to conform to the examination and test requirements specified in section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible, and in no event shall be separated by more than 3/16 inch, unless appropriate bridging techniques are used. The welding process used in fabrication of the forklift shall be at the option of the contractor.

3.37.3.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall obtain certification that the welder has passed qualification tests as prescribed by either of the following listed codes or the manufacturer's commercial code, for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

Structural Welding Code, AWS D1.1, Welding qualifications, Section 5 and 6.
Welding Qualifications of the ASME, Section IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Earthmoving and Construction Equipment Welding, AWS/ANSI D14.3, Qualification, Section 5.

Contractors who only make horizontal welds need not qualify welders for "all position welding." Subject to approval by the Government, the contractor's standard welder qualification may be substituted in lieu of the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with AWS and ASME codes. The certification shall be made available for review by the contracting officer or the contracting officer's representative.

3.37.3.2 Weld quality.

a. The contractor shall be responsible for determining the inspections needed to insure that, when the welded parts are assembled together to make the forklift, the forklift shall conform to the inspection requirements specified in section 4.
b. All weldments shall be free of slag, flux, weld spatter and other impurities detrimental to either the appearance or strength of the weldment.
c. Undercut in weldments shall be held to a minimum and shall not be more than 1/32 inch deep.

3.37.3.3 Welding practices.

a. Preheat of materials being welded and maximum interpass temperature during welding shall be in accordance with the contractor's recommendations.
b. Tack welds shall be subject to the same quality requirements as final welds.
c. Work shall be positioned for flat welding whenever practicable.
d. Procedures and sequences shall be such that distortion and shrinkage will be held to a minimum. When straightening is required, caution shall be exercised to insure that the straightening process does not weaken the part and forklift.

3.37.4 Bolted connections. Boltholes shall be accurately formed and shall have the burrs removed. Washers, lockwashers, or other positive locking devices shall be provided where necessary. Matching thread areas securing bolts conforming to SAE J429 or capscrews shall be sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement.

3.37.5 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

of the member, and shall be in accordance with SAE J492 or IFI Standard No. 114 for Break Mandrel Blind Rivets.

3.37.6 Machine work. Tolerances and gages for metal fits shall conform to the limits specified herein and to the standards of the Materials Handling Equipment Industry or the Construction Equipment Industry.

3.37.7 Fiberglass fabrication. Fiberglass reinforced plastic (FRP) and FRP coated plywood bodies shall be smooth surfaced and free from bubbles, glazing cracks, and discontinuities and shall have a uniform FRP thickness. All edges and openings of FRP coated plywood shall be completely sealed to prevent water intrusion between the laminates. The FRP shall be free of parting agents which impair paint adhesion. Welding, bonding, connections, and fabrication of the FRP shall be in accordance with the recommended methods of the manufacturer of the material for this application.

3.38 Nuclear-biological-chemical (NBC) protection. The forklift shall be operable by personnel wearing the following complete protective ensemble:

a. Chemical-biological mask, MIL-M-51282.
b. Chemical-biological hood, MIL-H-51291.
c. Chemical protective suit, MIL-S-43926.
d. Chemical protective glove set, MIL-G-43976.
e. Chemical protective footwear, MIL-F-43987.

The operator shall be capable of actuating all controls (i.e., levers, switches, pedals, knobs, and handles) without interference caused by the ensemble that is detrimental to the operation of the forklift. The forklift shall complete two cycles in 9 minutes or less on the load placement course as specified in 4.6.2.40. The protective ensemble, as listed above, will be loaned as Government loaned equipment in order to permit performance of the tests required under test method No. 34.

3.38.1 High altitude electromagnetic pulse (EMP). Schematic and electrical diagrams detailed to the component level (i.e., resistors, capacitors, filters, transistors, SCR's) with value of all components, of the forklift shall be furnished by the contractor to the Government to assist the Government in performing the EMP evaluation. When specified (see 6.2), a forklift shall be furnished to the Government and shall be evaluated by the Government to determine necessary protection devices for protection against EMP.

3.39 Vehicle weight classification sign kit. The contractor shall apply the Government furnished vehicle weight classification numbers to each vehicle utilizing a vehicle weight classification number kit conforming to MIL-S-40626. The kit shall be located on the front of the vehicle in a location approved by the contracting officer. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

contracting officer shall assign the classification numbers to be displayed on the vehicle.

3.40 Government-furnished equipment (GFE). The following items shall be furnished by the Government (see 6.9).

a. Vehicle weight classification sign kit, NSN 9905-00-565-6267, for each truck.
b. Case, NSN 7520-00-559-9618 (the contractor shall furnish fasteners and install the case on the forklift).

3.40.1 Government-loaned equipment. The following items shall be loaned by the Government (see 6.9.1):

a. NBC protective ensemble for test method No. 34:

(1) Chemical-biological mask, NSN 4240-00-926-4200.
(2) Chemical-biological hood, NSN 4240-00-999-0420.
(3) Chemical protective suit, NSN 8415-00-407-1062.
(4) Chemical protective glove set, NSN 8415-01-033-3519.
(5) Chemical protective footwear, NSN 8430-01-021-5978.

b. Towbar, MS500048, for test method No. 13.
c. STE/ICE for test in 4.6.2.41.1.
d. DCA tester for use in 4.6.2.41.1.
e. Cold-wet gloves.

(1) Shell, NSN 8415-00-269-5700.
(2) Liner, NSN 8415-00-682-6575.

3.41 Diagnostic connector assembly (DCA) measurement capabilities. Unless otherwise specified (see 6.2), the forklift shall incorporate an easily accessible DCA in the operator's cab for interface with the simplified test equipment/internal combustion engine (STE/ICE) test equipment as specified in MIL-T-62314, appendix B. The DCA shall be in accordance with TACOM drawing No. 12258941. All requirements for DCA shall be in accordance with the STE/ICE design guide for vehicle diagnostic connector assemblies, report No. CR-82-588-003. As a minimum the DCA shall have the capabilities for measuring:

Engine RPM (average).
Engine power (RPM/SEC).
Compression unbalance.
Battery voltage.
Starter negative cable voltage drop.

A fuel shut-off method shall be provided for running compression unbalance checks. Determination of test mode (either DCA or transducer kit [TK]) shall be made by the contractor for the following test parameters:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Fuel Supply Pressure.	Starter Motor Voltage.
Fuel Return Pressure.	Starter Current First Peak.
Fuel Filter Pressure Drop.	Internal Battery Resistance.
Fuel Solenoid Voltage.	Battery Resistance Change.
Engine Oil Pressure.	Alt/Gen Output Voltage.
Engine Oil Filter Pressure Drop.	Alt/Gen Field Voltage.
Engine Coolant Temperature.	Alt/Gen Neg Cable Voltage Drop.
Starter Solenoid Voltage.	Starter Circuit Resistance.
Starter Current (Average).	Transmission Oil Pressure.

Test points which are inaccessible for measurement in the TK mode (see 3.7) shall be made in the DCA mode. A separate wiring harness shall be provided for the DCA assembly and include all wiring and necessary hardware to perform required capabilities. The contractor shall also provide vehicle test cards in the format identified on TACOM drawing No. 12258955 addressing both DCA and TK measurements and shall incorporate the test cards into forklift technical manuals. Adaptors required for the interface with the STE/ICE when measuring in the TK mode shall be permanently installed on the forklift.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the perfomance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with the requirements of referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3 and 4.4).
b. Quality conformance inspection (see 4.5).
c. Inspection comparison (see 4.7).
d. Inspection of packaging (see 4.8).

4.3 First article inspection. Prior to examination and test of the forklift specified in 4.3.1.1 and 4.3.2, the following shall be performed:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

a. Service the forklift with oils, greases, and fuel specified herein and designated for use in the ambient temperatures at which the tests will be conducted.
b. Conduct the run-in as prescribed (4.6.2.37).
c. Set the hydraulic systems relief pressure as specified by the contractor and in 3.12 and record. Any change made to this setting shall constitute failure of all tests.
d. Furnish a schedule of maintenance to be followed during all testing of the forklifts. A list of tools required to perform this maintenance shall also be provided.

4.3.1 First article examination.

4.3.1.1 Pretest examination. Prior to testing, all first article forklifts shall be examined for the defects marked "X" in column 1 of table III (see 4.6.1). Presence of one or more defects shall be cause for rejection.

4.3.1.2 Post-test disassembly and examination. Upon successful completion of all tests specified in 4.3.2, the truck that underwent endurance/reliability testing, part A shall be subjected to the tests marked "X" in column 2 of table IV (see 4.6.2) and 4.6.2.39. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. Upon successful completion of the examination specified in 4.3.1.1, one first article forklift shall be subjected to the reliability testing, part B (see 4.6.2.34) and tests marked "X" in column 1 of table IV except for the endurance/reliability testing, part A (see 4.6.2.34) and noise level measurement tests (see 4.6.2.27). One other first article forklift shall be subjected to the endurance/reliability testing, part A (see 4.6.2.34). First article tests may be performed in any order. Except as otherwise specified herein, test conditions shall apply throughout testing. Failure of any test shall be cause for rejection. Failure of a first article forklift to meet any requirement specified herein shall be cause for rejection of the first article fork lift.

4.4 Inspection failure. Failure of a first article truck to meet any requirements specified herein during and as a result of the examination and tests specified shall be cause for rejection of the first article truck(s), and shall be cause for refusal by the Government to continue acceptance of production trucks until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on trucks previously accepted and produced under the contract. Any deficiencies found as a result of the first article inspection will be considered prima facie evidence that all trucks accepted prior to the completion of first article inspection are similarly deficient,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Examination. Each forklift shall be examined for the defects marked "X" in column 2 of table III (see 4.6.1). Presence of one or more defects shall be cause for rejection.

4.5.2 Tests. Each forklift shall be tested as specified in column 3 of table IV (see 4.6.2). Failure of any test shall be cause for rejection.

4.5.3 Sampling.

4.5.3.1 Unit of product. A unit of product is defined as a fully-serviced forklift.

4.5.3.2 Lot. A lot shall consist of not more than 25 units of product. Lots shall be formulated from forklifts which have successfully completed the individual examination and tests as specified in 4.5.1 and 4.5.2.

4.5.3.3 Sample tests. One sample shall be selected from each lot (25) and shall be subjected to the tests specified in 4.6.2.4, 4.6.2.5, 4.6.2.6, 4.6.2.18,(test method 17 only). Any sample failing any test shall be cause for rejection of lot.

4.6 Inspection schedule.

4.6.1 Examination. Forklifts shall be examined as specified herein in accordance with table III. An "X" in the column indicates the examination that shall be conducted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE III. Examination schedule.

First article	Quality conformance	Defects	Requirement paragraph
1	2	3	4
X	X	101. Materials not as specified.	3.3
X	-	102. Dissimilar metals not insulated as specified.	3.3.1
X	X	103. Materials are not corrosion resistant or treated to be made corrosion resistant for the applicable storage and operating environments.	3.3.1.1
X	-	104. Screw threads not as specified.	3.3.2
X	X	105. Tire material not as specified.	3.3.3
X	X	106. Safety provisions not specified.	3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE III. Examination schedule. (Continued)

First article	Quality conformance	Defects	Requirement paragraph
1	2	3	4
X	X	107. ROPS and FOPS missing or not as specified.	3.5.1
X	X	108. Seatbelt missing or not as specified.	3.5.2
X	X	109. Backup alarm missing or not as specified.	3.5.3
X	-	110. Human factors not as specified.	3.6
X	-	111. Maintainability provisions not as specified.	3.7
X	-	112. Calculated flotation index not as specified.	3.9.2
X	-	113. Engine not as specified.	3.10
X	X	114. Starting priming system missing or not as specified.	3.10.2.1
X	-	115. Alternator not as specified.	3.10.2.2
X	-	116. Starting system not as specified.	3.10.2.3
X	-	117. Fuel system not as specified.	3.10.2.4
X	-	118. Air cleaner not as specified.	3.10.2.5
X	-	119. Cooling system not as specified.	3.10.2.6
X	-	120. Fan not as specified.	3.10.2.6.1
X	-	121. Radiator not as specified.	3.10.2.6.4
X	-	122. Engine coolant hose not as specified.	3.10.2.6.6
X	-	123. Exhaust system not as specified.	3.10.2.8
X	-	124. Crankcase ventilation system not as specified.	3.10.2.9
X	-	125. Oil filters not as specified.	3.10.2.10
X	-	126. Drive assembly not as specified.	3.11
X	-	127. Transmission not as specified.	3.11.1
X	-	128. Hydraulic system not as specified.	3.12
X	-	129. Hydraulic lines not as specified.	3.12.1
X	-	130. Pressure hose assemblies not as specified.	3.12.1.1
X	-	131. Pressure tubing not as specified.	3.12.1.2
X	-	132. Pressure tube fittings not as specified.	3.12.1.3
X	-	133. Suction line not as specified.	3.12.1.4
X	X	134. Quick disconnect couplings not as specified.	3.12.1.5
X	-	135. Return lines not as specified.	3.12.1.6
X	-	136. System filtration not as specified.	3.12.3 thru 3.12.3.3
X	-	137. Reservoir not as specified.	3.12.4
X	-	138. Relief valve not as specified.	3.12.5
X	-	139. Hydraulic control valves not as specified.	3.12.6
X	-	140. Cylinders not as specified.	3.12.7
X	-	141. Hydraulic system roll-off cleanliness not as specified.	3.12.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE III. Examination schedule. (Continued)

First article	Quality conformance	Defects	Requirement paragraph
1	2	3	4
X	X	142. External leakage exceeds limits specified.	3.12.9
X	-	143. Lift mechanism and fork carrier not as specified.	3.13
X	-	144. Wheels not as specified.	3.15.1
X	-	145. Tires not as specified.	3.15.2
X	-	146. Wheelguards not as specified.	3.16
X	-	147. Steering and steering control not as specified (and frame lock).	3.17
X	-	148. Service brakes not as specified.	3.18.1
X	-	149. Parking brakes not as specified.	3.18.2
X	-	150. Operator access not as specified.	3.19
X	-	151. Seat not as specified.	3.20
X	-	152. Hood not as specified.	3.21
X	-	153. Instrument panel not as specified.	3.22
X	-	154. Controls and instrumentation not as specified.	3.23
X	-	155. Charging system monitor not as specified.	3.23.1
X	-	156. Engine oil pressure monitor not as specified.	3.23.2
X	-	157. Engine coolant temperature monitor not as specified.	3.23.3
X	-	158. Transmission temperature monitor not as specified.	3.23.4
X	-	159. Air pressure monitor not as specified.	3.23.5
X	-	160. Hourmeter not as specified.	3.23.6
X	-	161. Fuel monitor not as specified.	3.23.7
X	-	162. Engine run control not as specified.	3.23.8
X	-	163. Light switches not as specified.	3.23.9
X	-	164. Brake and declutch pedals not as specified.	3.23.10
X	-	165. Engine speed control not as specified.	3.23.11
X	-	166. Transmission controls not as specified.	3.23.12
X	-	167. Hydraulic controls not as specified.	3.23.13
X	X	168. Batteries not as specified.	3.24.1
X	-	169. Battery mounting not as specified.	3.24.1.1
X	-	170. Battery cable terminals not as specified.	3.24.1.2
X	-	171. Slave receptacles missing or not as specified.	3.24.2
X	-	172. Circuit breakders missing or not as specified.	3.24.3
X	X	173. Lights missing or not as specified.	3.24.4
X	X	174. Blackout lighting missing or not as specified.	3.24.4.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE III. Examination schedule. (Continued)

First article	Quality conformance	Defects	Requirement Paragraph
1	2	3	4
X	X	175. Taillights missing or not as specified.	3.24.4.2
X	X	176. Horn missing or not as specified.	3.25
X	-	177. Pintle hook missing or not as specified.	3.26.1
X	X	178. Towing lugs missing or not as specified.	3.26.2
X	-	179. Personnel cab not as specified.	3.27
X	-	180. Glazing not as specified.	3.27.1
X	-	181. Cab interior not as specified.	3.27.2
X	X	182. Windshield and window wipers not as specified.	3.27.3
X	-	183. Heater missing or not as specified.	3.27.4
X	-	184. Lubricants not as specified.	3.29
X	-	185. Lubrication fittings not as specified.	3.29.1
X	-	186. Filling, draining, and checking provision for lubricant enclosures missing or not as specified.	3.29.2
X	-	187. Fungus and moisture resistance provisions not as specified.	3.30, 3.30.1
X	X	188. Slinging and tiedown provisions missing or not as specified.	3.31
X	X	189. Identification marking missing or not as specified.	3.32
X	-	190. Instruction plates missing or not as specified.	3.32.1
X	-	191. Treatment and painting not as specified.	3.33
X	-	192. Brake protection not as specified.	3.33.1
X	X	193. Marking not as specified.	3.34
X	X	194. Toolbox not as specified.	3.35
X	X	195. Castings and forgings not as specified.	3.37.1
X	X	196. Metal fabrication not as specified.	3.37.2
X	X	197. Welding not as specified.	3.37.3
X	X	198. Welding certification not as specified.	3.37.3.2
X	X	199. Bolted connections not as specified.	3.37.3.3
X	X	101a. Riveted connections not as specified.	3.37.5
X	X	102a. Machine work not as specified.	3.37.6
X	X	103a. Parts or components missing or do not function.	Section 3
X	X	104a. Assembly incorrect or not complete.	Section 3
X	-	105a. Tachometer drive not as specified.	3.10.2.11
X	-	106a. Oil sampling valve not as specified.	3.10.2.12
X	X	107a. Brake fluid source not qualified under MIL-B-46176	3.18

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE III. Examination schedule. (Continued)

First article	Quality conformance	Defects	Requirement Paragraph
1	2	3	4
X	X	108a. Forks not as specified.	3.14
X	X	109a. Decontamination unit space not as specified.	3.36
X	X	110a. Fiberglass fabrication not as specified.	3.37.7
X	-	111a. Schematic and electrical diagram not as specified.	3.38.1
X	X	112a. Vehicle weight classification sign kit not as specified.	3.39
X	X	113a. DCA not as specified.	3.41
X	X	114a. Labels not as specified.	3.10.2.1, 3.10.2.4, 3.23.9, 3.32.1
X	X	115a. Human factors engineering not as specified.	3.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

4.6.2 Tests. Tests shall be conducted in accordance with table IV. An "X" in the column indicates the tests shall be conducted.

TABLE IV. Test schedule.

First article	Post test	Quality conformance	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5	6
X	X	X	Test conditions.	4.6.2.1	3.5, 3.6, 3.29
X	-	-	Engine.	4.6.2.2	3.10
X	-	X	Weight, dimensions, lift height, and fork reach.	4.6.2.3	3.1.2.1 thru 3.1.2.4, 3.9.11
X	X	X	Lifting speed and lowering.	4.6.2.4	3.9.6, 3.9.7
X	-	-	Curb clearance circle.	4.6.2.5	3.9.8
X	X	-	Travel speed.	4.6.2.6	3.9.4, 3.11.1, 3.10.2.7
X	-	-	Underclearance, angles of approach and departure.	4.6.2.7	3.1.2.5
X	-	X	Tilt, tilt speed, tilt cylinder cavitation.	4.6.2.8	3.13, 3.9.9
X	X	-	Drift.	4.6.2.9	3.9.14
X	-	-	Longitudinal gradeability, dynamic stability, emergency and parking brake.	4.6.2.10	3.9.3, 3.9.1.2, 3.18.2, 3.18.3
X	-	-	Static stability.	4.6.2.11	3.9.1.1
-	-	-	Steering.	4.6.2.12	
X	-	-	Obstacle course No. 1.	4.6.2.12.1	3.17
X	-	-	Obstacle course No. 2.	4.6.2.12.2	3.17
X	-	-	Emergency steering.	4.6.2.12.3	3.17.2
X	-	-	Steering and handbrake force.	4.6.2.12.4	3.17.1
X	-	-	Highway & rail transportability.	4.6.2.13	3.1.3.1, 3.1.3.3
X	-	-	ROPS and FOPS.	4.6.2.14	3.5.1
X	-	-	Overload.	4.6.2.15	3.14
X	-	-	Torque converter.	4.6.2.16	3.11.1, 3.26.1, 3.11, 3.10.2.8
X	-	-	Transmission disconnect.	4.6.2.17	3.11, 3.11.1, 3.13.4, 3.10.2.6, 3.10.1
X	-	-	Service brake.	4.6.2.18	3.18.1
X	-	-	Maintenance.	4.6.2.19	3.7
X	-	-	Air transportability.	4.6.2.20	3.1.3.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE IV. Test schedule. (Continued)

First article	Post test	Quality conformance	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5	6
-	-	-	Hydraulic system.	4.6.2.21	
-	X	-	Leakage.	4.6.2.22	3.12.9
X	-	-	Hydraulic filter and filter assembly.	4.6.2.21.2	3.12.3.1, 3.12.3.2, 3.12.3.3
X	-	-	Pump inlet pressure.	4.6.2.21.1	3.12.1.4
X	X	X	Hydraulic system roll-off cleanliness.	4.6.2.21.3	3.12.8
X	-	-	Hydraulic cylinders.	4.6.2.21.4	3.12.7
X	-	-	Pump contaminent tolerance.	4.6.2.21.5	3.12.2
X	-	-	Hydraulic fittings.	4.6.2.21.6	3.12.1.1
X	-	-	Sideshift, oscillation, and fork spread.	4.6.2.23	3.9.15, 3.9.16, 3.14, 3.9.10
X	-	-	Slinging provisions.	4.6.2.25	3.31
X	-	-	Tiedown provisions.	4.6.2.26	3.31
-	-	-	Noise level test.	4.6.2.27	3.6.1
X	-	-	Operator's station.	4.6.2.27	3.6.1
X	-	-	Exterior spectator.	4.6.2.27.1	3.6.1.2
X	-	-	Rain.	4.6.2.28	3.10.2.8, 3.4.4
X	-	-	Wheel guards.	4.6.2.29	3.16
X	-	-	Low temperature (-25° F)	4.6.2.30	3.4.2, 3.4.3, 3.10, 3.10.2.1, 3.10.2.6, 3.12
X	-	-	Fording.	4.6.2.31	3.9, 3.9.5, 3.10.2.3, 3.10.2.9
X	-	-	High speed.	4.6.2.32	3.9.18
X	-	-	Controls.	4.6.2.33	3.23.12, 3.23.13
X	-	-	Endurance.	4.6.2.34	3.9.17, 3.10.2.6, 3.10, 3.11.1, 3.12
X	-	-	Reliability.	4.6.2.35	3.8, 3.10, 3.10.2.4, 3.10.2.6, 3.11, 3.12
X	-	-	Maintainability.	4.6.2.36	3.7
X	-	X	Run-in.	4.6.2.37	Section 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

TABLE IV. Test schedule. (Continued)

First article	Post test	Quality conformance	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5	6
X	-	-	Rear axle oscillation.	4.6.2.38	3.11.2
X	X	-	Post-test.	4.6.2.39	Section 3
X	-	-	Transmission stall.	4.6.2.16	3.11.1, 3.26.1, 3.11, 3.10.2.8, 3.11.1.1, 3.11.1.2
X	-	-	Transmission disconnect.	4.6.2.17	3.11, 3.11.1, 3.23.4, 3.10.2.6, 3.10.1
X	-	-	Service brake.	4.6.2.18	3.18.1
X	-	-	Maintainability.	4.6.2.19	3.7
X	-	-	Other transportability.	4.6.2.20	3.1.3.1, 3.1.3.2, 3.1.3.3, 3.1.3.4
X	-	-	Nuclear-biological-chemical.	4.6.2.40	3.38
X	-	-	Electromagnetic pulse.	4.6.2.40.1	3.38.1
X	X	X	Diagnostic connector assembly capability.	4.6.2.41	3.41
X	X	X	DCA-STE/ICE interface	4.6.2.41	3.41.1

4.6.2.1 Test conditions. Unless otherwise specified herein, tests shall be conducted at the ambient temperature and climatic conditions existing at the place of test. Only that maintenance established by the contractor and submitted as maintenance schedule prior to commencement of the tests shall be performed during the tests. All tests shall be conducted with ROPS and FOPS installed, except when the requirements in section 3 specify otherwise. Safety and human factors considerations (see 3.5 and 3.6) shall be evaluated throughout testing. Test methods referenced in tests specified herein are those contained in the appendix. Operation of the forklift shall be with fuels, oils, lubricants, and antifreeze specified herein as applicable for the temperature conditions existing at place of test. All tests shall be conducted at manufacturer's recommended tire pressure except that test method No. 29 may be conducted at a reduced pressure consistent with the flotation index calculations (see 3.9.2).

4.6.2.2 Engine. The diesel engine shall be tested or certified in accordance with 5.2 and 5.3 of MIL-STD-1410.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

4.6.2.3 Dimensions, weight fork reach and lift height. Determine the axle-spacing, height, width, and length of the complete forklift in accordance with SAE J1234. Height shall be measured with the forks resting on the ground. Weigh the complete forklift fully fueled and serviced without load (see 6.10.3). Obtain for use in calculating the flotation index. Determine the fork reach lift height and low engagement height in accordance with test method No. 1. Nonconformance to 3.1.2.1, 3.1.2.2, 3.1.2.3, 3.1.2.4, 3.9.11, 3.9.12 and 3.9.13 shall constitute failure of this test.

4.6.2.4 Lifting speed and lowering speed. Test the forklift in accordance with test method No. 2. Nonconformance to 3.9.6 or 3.9.7 shall constitute failure of this test.

4.6.2.5 Curb clearance circle. Determine the curb clearance circle as defined in field test procedure of SAE J695 with the forks in carry position. Nonconformance to 3.9.8 shall constitute failure of this test.

4.6.2.6 Travel speed. Test the forklift in accordance with test method No. 3. Speeds not as specified in 3.9.4 shall constitute failure of this test. Inability to shift as specified in 3.11.1 shall constitute failure of this test.

4.6.2.7 Underclearance, angles of approach, and departure. Test the forklift in accordance with test method No. 4. Nonconformance to 3.1.2.5 shall constitute failure of this test.

4.6.2.8 Tilt, tilt speed, tilt cavitation. Test the forklift in accordance with test method No. 5. Nonconformance to 3.9.9 or 3.13 shall constitute failure of this test.

4.6.2.9 Drift. Test the forklift in accordance with test method No. 6. Nonconformance to 3.9.14 shall constitute failure of this test.

4.6.2.10 Gradeability, emergency and parking brake. Test the forklift in accordance with test methods No. 7 and 8. Inability of the forklift to operate on slopes as specified in 3.9.1.2, 3.9.3, and 3.18.2 or inability of the brakes to stop and hold the forklift shall constitute failure of this test.

4.6.2.11 Static stability. Test the forklift in accordance with test method No. 9. Nonconformance to 3.9.1.1 shall constitute failure of this test.

6.2.12 Steering.

4.6.2.12.1 Obstacle course No. 1. Test the forklift in accordance with test method No. 10, 3a and 3b. Inability of the forklift to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

negotiate the test course or the hitting of any markers, shall be considered loss of operator control as specified in 3.17.1 and shall constitute failure of this test.

4.6.2.12.2 Obstacle course No. 2. Test the forklift in accordance with test method No. 10, 3c. Inability of the forklift to negotiate the test course or hitting of any markers shall be considered loss of operator control as specified in 3.17.1 and shall constitute failure of this test.

4.6.2.12.3 Emergency steering. Test the emergency steering capability of the forklift in accordance with SAE J53. Inability of the forklift to negotiate the test courses shall constitute failure of this test.

4.6.2.12.4 Steering wheel and handbrake force. Test the steering wheel and handbrake lever in accordance with test method No. 12. Nonconformance to 3.17.1 or 3.18.2 shall constitute failure of this test.

4.6.2.13 Highway and rail transportability. Test the forklift in accordance with test method No. 13. Nonconformance to 3.1.3.1 or 3.1.3.3 shall constitute failure of this test.

4.6.2.14 ROPS and FOPS. The ROPS shall be tested in accordance with SAE J1040. The FOPS shall be tested in accordance with SAE J231. Nonconformance to SAE J231 or SAE J1040, as applicable, shall constitute failure of this test. A certified test report on an equivalent ROPS/FOPS is acceptable for this test.

4.6.2.15 Overload. Test the forklift in accordance with test method No. 14. Nonconformance to 3.14 shall constitute failure of this test.

4.6.2.16 Torque converter. Test the forklift in accordance with test method No. 15. Permanent deformation or damage to the pintle hook mounting provisions or forklift frame (see 3.26.1), temperatures not in accordance with 3.11, or nonconformance to 3.11.1 shall constitute failure of this test. Exhaust back pressure not in accordance with 3.10.2.8 shall constitute failure of this test.

4.6.2.17 Transmission disconnect. Test the forklift in accordance with test method No. 16. Nonconformance to 3.11 or 3.11.1 shall constitute failure of this test.

4.6.2.18 Service brake. Test the forklift in accordance with test method Nos. 17, 18, and 19. Stopping distance not as specified in 3.18.1 or loss of operator control shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

4.6.2.19 Maintenance. Test the forklift in accordance with test method No. 20. Nonconformance to 3.7, as applicable, shall constitute failure of this test.

4.6.2.20 Air transportability. Determine the height, width, and axle loadings of the forklift truck in the air transportable configuration. Remove and reassemble the counterweight, cab, ROPS, FOPS, exhaust pipe/muffler, forks, and carriage as required. Perform examination and tests required by MIL-A-8421. Nonconformance to the requirements of 3.1.3.2 shall constitute failure of this test.

4.6.2.21 Hydraulic system.

4.6.2.21.1 Pump inlet pressure. Test each pump in accordance with test method No. 21. Pressure differential between atmospheric pressure and the vacuum in the line in excess of that specified in 3.11.1.2 and 3.12.1.4 shall constitute failure of this test.

4.6.2.21.2 Hydraulic filter and filter assembly. Test the hydraulic filter in accordance with test method No. 22 and either test to MIL-F-52723 or provide certification with supporting test data. Nonconformance to 3.12.3.1, 3.12.3.2, or 3,12.3.3, as applicable, shall constitute failure of this test.

4.6.2.21.3 Hydraulic system roll-off cleanliness. Test each truck in accordance with test method No. 23. Continue cleanup procedure until the average of three consecutive counts conform to 3.12.8.

4.6.2.21.4 Hydraulic cylinders. Test each cylinder in accordance with test method No. 24. Nonconformance to 3.12.7 shall constitute failure of this test.

4.6.2.21.5 Pump contaminant tolerance. Either test the pump(s) in accordance with procedure set up in NFPA Recommended Standard T.3.9.18-1976 or provide certification with supporting data. Report contamination analysis data in accordance with ANSI Standard B93.30.

4.6.2.21.6 Hydraulic fittings. Test the truck in accordance with test method No. 25. The contractor shall furnish a complete set of hose assemblies with reusable fittings for conduct of this test. Nonconformance to 3.12.1.1 shall constitute failure of this test.

4.6.2.21.7 Hydraulic control valves. Either test the hydraulic control valves in accordance with 3.12.6 or provide certification with supporting data. Nonconformance with 3.12.6 shall constitute failure of this test.

4.6.2.22 External leakage. An external leakage test shall be conducted at the conclusion of the schedule of test indicated in table IV. Observe and record accumulated leakage at practical

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

intervals over a twelve hour period following the test(s). Leakage greater than 3.12.9 shall be cause for rejection.

4.6.2.23 Sideshift, oscillation, and fork spread. Test the forklift in accordance with test method No. 26. Nonconformance to 3.9.10, 3.9.15, 3.9.16, or 3.14 shall constitute failure of this test.

4.6.2.24 Electromagnetic interference. The forklift shall be tested in accordance with MIL-STD-461. Nonconformance to 3.28 shall constitute failure of this test.

4.6.2.25. Slinging provisions. Test the slinging provisions by applying the load for the time period specified in MIL-STD-209. Nonconformance to MIL-STD-209 shall constitute failure of this test.

4.6.2.26 Tiedown provisions. Test the tiedown provisions by applying the ultimate load for the time period specified in MIL-STD-209. Nonconformance to MIL-STD-209 shall constitute failure of this test.

4.6.2.27 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, figure 7. As a minimum: noise levels shall be measured when equipment is operating under full load; MIL-STD-1474, 5.1.2.1.4 contours shall be taken at not fewer than 12 equal (horizontal) arc increments; one increment shall include data from the noisiest position; additionally, the noise level at the typical operating position shall be provided as dB(A) level. Nonconformance to 3.6.1.1 shall constitute failure of this test.

4.6.2.27.1 Exterior spectator. Measure the exterior noise level in accordance with SAE J88. Nonconformance to 3.6.1.2 shall constitute failure of this test.

4.6.2.28 Rain. Test the forklift in accordance with test method No. 27. Nonconformance to 3.4.4 or 3.10.2.8 shall constitute failure of this test.

4.6.2.29 Wheel guards. Apply a vertical downward force of 300 pounds to geometric center of the horizontal surface, or to the uppermost point (not including supports or braces), whichever is applicable. The force shall be applied for not less than 2 minutes. Examine the guard for permanent deformation or fractures. Flexible wheel guards may be deformed during the test loading but shall return to their original shape when the load is removed. Nonconformance to 3.16 shall constitute failure of this test.

4.6.2.30 Low temperature -25° F. Test the forklift in accordance with test method No. 28. One or more of the following shall constitute failure of this test:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

a. Damage to any part of the forklift due to storage at -30 F (see 3.4.3).
b. Engine does not start within 5 minutes after beginning the first cranking (see 3.4.2).
c. Engine does not run smoothly within 15 minutes after starting without unnatural or continued control manipulation and without use of primers or priming aids (see 3.4.2).
d. Instruments and gages do not operate.
e. Battery charging system does not show positive charge.
f. With the operator wearing arctic mittens and boots.

(1) Power train cannot be engaged to the wheels.
(2) Any clutch, brake, shaft, or cylinder cannot be operated through two complete movement cycles.

g. Operator encounters difficulty in mounting to and dismounting from the operator's position on the forklift.
h. Measured temperatures of engine oil (see 3.10), of engine coolant (see 3.10.2.6), or hydraulic oil (see 3.12) not within specified limits.

4.6.2.31 Fording. The forklift shall be tested in accordance with test method No. 29. Any of the following shall constitute failure of this test:

a. Evidence of water damage or malfunction of the torque converter, engine oil sump, transmission, transfer case, fuel tank, hydraulic reservoir, either axle, any wheel, instruments, gages (see 3.9.5), or electrical drivetrain components as applicable.
b. Malfunctioning of any electrical component.
c. Malfunctioning of any brake.
d. Malfunctioning of any hydraulic component.
e. Malfunctioning of the steering system.
f. Evidence of corrosion which affects the correct functioning of the forklift (see 3.9.5).
g. Inability to start the engine in the water (see 3.10.2.3).
h. Water entering the engine (see 3.10.2.9).
i. Volumetric water content in excess of that specified (see 3.9.5).

4.6.2.32 High speed. Test the forklift in accordance with test method No. 30. Nonconformance to 3.9.18 shall constitute failure of this test.

4.6.2.33 Controls. Test the controls in accordance with test method No. 31. Nonconformance to 3.23.12 or 3.23.13 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

4.6.2.34 Endurance/reliability. Two trucks shall be tested for a total of 625 hours. The testing shall be in accordance with the following schedule: One truck shall complete all "part A" tests and the other truck shall complete all "part B" tests.

Part	Test method	Duration
A	33	210 Hours
A	32	205 Hours
B	33	210 Hours

Reliability and endurance will be evaluated using this test. More than 11 reliability failures (see 4.6.2.35) shall constitute failure of this test. No endurance failures (see 4.6.2.34.1) are allowed. Relevant failures will be determined by an authorized Government representative. The truck shall perform all tests without exceeding specified temperature limits for the cooling system (see 3.10.2.6), engine oil (see 3.10), transmission oil (see 3.11), universal joint (see 3.11), hydraulic system (see 3.12). Nonconformance shall constitute failure of this test.

4.6.2.34.1 Endurance failure. An endurance failure is any failure which results in permanent structural deformation of the truck or its components; or any failure which is corrected by redesign or by replacement of a failed component with a component of different configuration in order to meet specified performance requirements; or any failure resulting in replacement of the engine, transmission, transfer case, differential, hydraulic pumps or motors, hydrostatic drive pumps or motors, hydraulic cylinders or the drive axle.

4.6.2.35 Reliability failure. A reliability failure is defined as any malfunction which causes degradation of specified operations or any other unscheduled maintenance action to be taken in order to restore the forklift to specified requirements. Those malfunctions resulting from accidents, noncompliance with prescribed operational or maintenance procedures, faulty test instrumentation, fail-safe devices operating as specified, and dependent secondary failures shall be considered nonrelevent failures. Nonrepetitive replacement of light bulbs, fuses, tires, and tightening of fasteners shall be considered nonrelevent failures. Any impending malfunction detected which constitutes a safety hazard to operating personnel or would cause secondary damage either to the item under test or testing instrumentation will be corrected prior to malfunction and considered as a relevant failure. Hours specified herein shall be productive clock hours excluding fueling, servicing, and downtime. In addition, failure to meet the fuel tank capacity specified in 3.10.2.4, or exceeding the temperature limits specified for the cooling system (see 3.10.2.6), engine oil (see 3.10), transmission oil (see 3.11), universal joints (see 3.11), or hydraulic system (see 3.12) shall constitute failure of this evaluation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

4.6.2.36 Maintainability. Maintenance times shall be recorded throughout load placement testing in accordance with test method No. 32 and 33. A maintenance ratio of more than 0.15 as specified in 3.7 shall constitute failure of this test.

4.6.2.37 Run-in. Each forklift shall be driven through a run-in for not less than 1 hour. The run-in shall include operating in all gears, operating all electrical equipment, and performing all hydraulic functions with rated load as well as no load. Evidence of any deficiency, need for adjustment or maintenance, malfunction of any component, or evidence of leakage of air, fuel, lubricant or hydraulic oil, shall be cause for rejection of the forklift by the Government until corrected to the Government's satisfaction. The Government may require additional run-in after the deficiency is corrected.

4.6.2.38 Rear axle oscillation. Measure the total rear axle oscillation in accordance with test method No. 11. Nonconformance to 3.11.2 shall constitute failure of this test.

4.6.2.39 Posttest disassembly and examination. Upon completion of all endurance testing, measure and record the compression in each cylinder and dismantle the truck that underwent endurance testing sufficiently to permit detailed disassembly and visual examination of the following components:

a. Engine cylinder heads, all valves, two pistons and piston pins taken from the two cylinders having the lowest compression.
b. Torque converter and transmission.
c. Universal joints and drive shafts.
d. Differential.
e. Front axle bearings and seals.
f. Complete brake system components.
g. Steering system cylinders, valves, and pump.
h. Hydraulic system pump, valves, one cylinder of each size, control levers, and any hose and fitting where leakage occurred during and after the tests.
i. Fork carriage assembly.

Additional disassembly and examination of this truck shall be made at the option of the contracting officer. The truck shall be examined in accordance with table III, column 1. Record complete description of the condition of all parts and assemblies examined, and take pictures of any deficiency. Each evidence of corrosion which affects the functions of the truck or evidence of permanent deformation, breakage, or excessive wear of any component shall constitute a defect. Manufacturing tolerances listed in the contractor's quality control program shall be made available upon request and shall be used as the basis for determining excessive wear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

4.6.2.40 Nuclear-biological-chemical (NBC) protection. The forklift shall be tested in accordance with test method No. 34. Nonconformance to 3.38 shall constitute failure of this test.

4.6.2.40.1 Electromagnetic pulse (EMP). The Government will evaluate the schematics and electrical diagrams to determine possible problem areas that may be encountered on the end item. When specified (see 6.2), first article forklift shall be subjected to non-destructive EMP testing by the Government at a Government facility.

4.6.2.41 DCA capability. The contractor will perform a 100 percent visual inspection of all DCA wiring harnesses prior to installation on the forklift to insure wires and connections are free of error. After installation on the forklift, test the DCA harness (reference chapter 5 of design guide for DCA) on each vehicle with the DCA tester (GFE) prior to interfacing with STE/ICE as requiredunder 4.6.2.41.1. Nonconformance to 3.41 shall constitute failure of the DCA.

4.6.2.41.1 DCA - STE/ICE interfaces. Upon completion of inspection and tests specified in 4.6.2.41, test the DCA for all measurements specified in 3.41 using STE/ICE. Nonconformance to 3.41 shall constitute failure of DCA.

4.6.2.42 Heater. The heater shall be tested in accordance with SAE J1129. Nonconformance to 3.27.4 shall constitute failure of this test.

4.7 Inspection comparison. The Government-may select forklifts at any time during the contract production period and subject these forklifts to the examination specified in 4.6.1 and column 1 of table III, and to the tests marked "X" in column 1 of table IV to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on units selected at random from those which have been accepted by the Government and will not include the previously inspected first article forklifts. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.7.1 Inspection failure. Failure of an inspection comparison forklift to meet any requirement specified herein during and as a result of the examination and tests specified in 4.7 shall be cause for rejection of the inspection comparison forklift(s) and shall be cause for refusal by the Government to continue acceptance of production forklifts until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

by the contractor at no cost to the Government on forklifts previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all forklifts accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.8 Inspection of packaging. The preservation, packing, and marking of the forklift truck shall be inspected as specified in Appendix B of MIL-STD-162.

5. PACKAGING

5.1 Preservation, packing and marking. Each forklift truck shall be preserved, packed and marked in accordance with the requirements of MIL-STD-162 for type I mobile shipment. For all degrees of preservation, liquid cooling systems shall be preserved by filling the system with equal parts of water and antifreeze conforming to MIL-A-46153. The degree of preservation shall be level A, B, C or commercial; and the degree of packing shall be level A, B, or commercial as specified (see 6.2). Commercial preservation and packing shall be in accordance with ASTM D 3951.

6. NOTES

6.1 Intended use. The forklift is intended for use as a materials handling forklift with a capability of unloading, transporting, and loading boxes, containers, palletized ammunition loads, and MLRS pods. The mobility of the forklift, with and without payload, is intended to cover working areas where high flotation and traction characteristics are required.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable and exception thereto (see 2.1.1).
c. When first article tests are not required (see 3.2.1).
d. Time frame required for submission of the first-article model and number of forklifts required (see 3.2.1).
e. When the Government will conduct any or all of the first article examination and tests. When the Government will conduct some but not all of the first article model examination and tests, the contracting officer should specify time frame and which examination and tests will be conducted by the Government, and which examination and tests shall be conducted by the contractor (see 3.2.1).
f. When additional or specific information is required on plates (see 3.32).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

g. Color(s) required (see 3.33).
h. When vehicles procured for Air Force shall be marked other than in accordance with MIL-STD-1223 (see 3.34).
i. Degree of preservation and of packing required (see 5.1).
j. When DCA is not required (see 3.41).
k. When a third first article test vehicle is to be furnished for Electromagnetic Pulse (EMP) testing by the Government (see 3.38.1).

6.3 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of 2 or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the first article test results and disposition of the documents first article.

6.4 Incident report. The contracting officer should require the contractor to furnish a written report within 24 hours of any incident of equipment malfunction or failure during the conduct of the test. As a minimum, the report should describe components and parts affected, test and operating conditions, date of incident, hourmeter reading, how detected, description of incident, and corrective action taken.

6.5 Noise. When the noise level of the forklift is 85dB(A) or greater a yellow with black lettering caution plate stating "CAUTION. HEARING PROTECTION REQUIRED", shall be mounted easily readable by the operator and appropriate discussion of the noise hazard shall be incorporated in the manuals and should include the requirement for hearing protection, the noise level of the forklift, the distance from the forklift at which 85dB(A) will always be met, and what operational situations or system configuration will reduce the level to 85dB(A).

6.6 Fording test. The contracting officer should arrange for the contractor to perform the fording test specified in 4.6.2.31 at a Government facility when desired by the contractor, on a "Rent-Free" basis.

6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

6.8 Contaminant tolerance profile. The contracting officer should arrange to furnish the computer program for Contaminant Tolerance Profile required in 4.6.2.21.5, when requested by the contractor.

6.9 Government-furnished equipment. The contracting officer should arrange to furnish the equipment specified in 3.40.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

6.9.1 Government-loaned equipment. The contracting officer should arrange to loan the equipment specified in 3.40.1.

6.10 Definitions.

6.10.1 Load center. The horizontal longitudinal distance from the intersection of the horizontal load carrying surfaces and vertical load-engaging faces of the forks to the center of gravity of the load.

6.10.2 Rated capacity load. Rated capacity load shall have a weight and load center as specified herein. Height of the rated load shall be at the option of the contractor.

6.10.3 Carry position. Carry position is defined as the distance from the heel of the forks to the ground with the forks tilted fully to the rear and shall be 24 inches.

Custodians:
Army - ME
Navy - SA
Air Force - 99

Preparing activity:
Army - ME

Project 3930-0559

Review activities:
DLA - CS
Army - AT, MT
Air Force - 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

FOR

TRUCKS, LIFT, FORK, DIESEL-ENGINE-DRIVEN:

PNEUMATIC-TIRED, ROUGH TERRAIN

10. SCOPE

10.1 Scope. The test methods contained in this appendix are to determine whether forklifts procured under this specification conform to the requirements set forth.

20. REFERENCED DOCUMENTS

20.1 Government documents. The following document forms a part of this appendix to the extent Specified herein.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

B 93.28 Calibration of Liquid Automatic Particle Counters Using "AC" Fine Test Dust.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 1

MAXIMUM LIFT HEIGHT - LOW ENGAGEMENT HEIGHT - FORK REACH

1. TEST COURSE:

   a. Level flat surface.
   b. Level, flat surface with sharp drop-off over an edge.

2. TEST APPARATUS:

   a. Linear measurement equipment.
   b. Liquid level or clinometer.
   c. Straight edge.

3. TEST PROCEDURE:

   a. Lift the rated load to the full extent of boom travel. Adjust the fork tilt to level the load. Measure the true vertical distance from the surface to the top surface of the forks (this is the maximum lift height).
   b. Position the forklift on the edge of the drop-off. Lower the forks (without load) over the edge to the full extent of boom travel. Adjust the fork tilt to level the top surface of the forks. Measure the true vertical distance between the surface on which the forklift is positioned and the top surface of the fork. (This is the low engagement height).
   c. Raise forks to 60 in. (±2 in) above the ground. Measure the horizontal distance from the vertical plane, established by placing a straightedge against the forward most part of the front tires, to the heel, front face, of the fork.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 2

LIFTING SPEED - LOWERING SPEED

1. TEST APPARATUS:

   a. Linear measurement equipment.
   b. Stopwatch.

2. TEST PROCEDURE:

   a. Record time in seconds required to raise rated load (see 3.9.6) from ground to maximum lift height.
   b. Record time to lower rated load at maximum speed (full-open valve) to 3- to 4-foot height. Load to be abruptly stopped at the 3- to 4-foot height. Record height at stop.
   c. Repeat steps "a" and "b" a minimum of 3 times.
   d. Compute lifting speed and lowering speed and use the fastest rate obtained from each as the established speeds.
   e. Repeat steps "a" through "d" without load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 3

TRAVEL SPEED

1. TEST COURSE:

The test course shall be a dry, level surface of sufficient length to attain maximum speed prior to entering measured distance, plus measured distance, plus sufficient stopping distance.

2. TEST APPARATUS:

a. Linear measurement equipment.
b. Stopwatch or electronic timer.

3. TEST PROCEDURE:

a. Drive the forklift to attain maximum speed prior to entering the measured test course (do not exceed an operating speed at which the loaded forklift cannot be controlled). While accelerating, perform gear or range changes under full throttle. Forks shall be in the carry position, (full carriage tilt backward).
b. Drive through the measured distance at maximum speed, recording the length of the distance and the time required to traverse it. The measured distance shall be not less than 88 feet.
c. Turn the forklift around and repeat the test approaching the measured distance from the opposite end. Repeat for a total of six runs, three in each direction through the measured distance.
d. Conduct procedure 3a through 3c for the following:

(1) Forward with rated load.
(2) Rearward with rated load.
(3) Forward without load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 4

UNDERCLEARANCE, ANGLES OF APPROACH AND DEPARTURE

1. TEST COURSE:

   a. Level, flat surface.
   b. Ramp inclined to 23 degrees, (at least the length of the wheelbase of the vehicle).

2. TEST APPARATUS:

   a. Linear measurement equipment.

3. TEST PROCEDURE:

   a. Test course 1a. Raise the rated load to carry position, (full carriage tilt backward). Measure the vertical distance from the surface to the lowest point on the vehicle, excluding wheels, tires, forks, and fork carriage. This is the underclearance.
   b. Test course 1b. Drive the forklift with rated load from one horizontal surface over the ramp to the other horizontal surface for a total of four times, ascending and descending the ramp in both forward and reverse. Forks may be adjusted as necessary to clear the ramp. No part of the forklift, except the tires, shall come in contact with the ramp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 5

FORK TILT - TILT SPEED - TILT CYLINDER CAVITATION

1. TEST COURSE:

Level, flat surface.

2. TEST APPARATUS:

a. Clinometer.
b. Stopwatch or electronic timer.
c. Hydraulic pressure gage capable of reading below atmospheric pressure.

3. TEST PROCEDURE:

a. Carrier tilt.

(1) Place forklift on level, flat surface, using clinometer to insure forklift is level.
(2) With the fork heels resting on the ground, tilt the carrier rearward and record the angle of the carrier from vertical.
(3) With the forks raised to maximum lift height, tilt the carrier forward and record the angle of the carrier from vertical.
(4) Tilt the carrier to the point where the forks are level on the ground. Operate the boom throughout the range of vertical travel and record the range of angular variation of the forks (carrier).

b. Tilt speed.

(1) Lift the rated load about midway between ground level and maximum lift height.
(2) Tilt the load to the minimum specified forward tilt.
(3) Tilt the load from minimum specified forward tilt, to or past minimum specified rearward tilt, and record the time required.
(4) Repeat the procedure tilting from rearward to forward.

c. Tilt cylinder cavitation.

(1) Install the pressure gages to read hydraulic pressure on both ends of the tilt cylinder.
(2) Lift the rated load midway between ground level and maximum lift height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 5 (CONT'D)

(3) With the engine at idle low speed, slowly tilt the load from full rearward to full forward 10 degrees below horizontal and back again not less than ten times. Tilt forward shall be done with control valve wide open 5 times and "feathered" 5 times. Observe and record any evidence of cavitation in the tilt circuit or loss of operator control. Record pressure readings. NOTE: Pressure readings are not required for determining tilt cylinder cavitation for quality conformance testing purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 6

DRIFT

1. **TEST COURSE:**

   Level, flat surface.

2. **TEST APPARATUS:**

   a. Temperature thermocouple and potentiometer or equivalent temperature measuring device.
   b. Linear measurement equipment.

3. **TEST PROCEDURE:**

   a. Install the thermocouple in the volumetric center of the hydraulic-system oil reservoir. Heat the hydraulic oil by exercising hydraulic functions until the oil temperature exceeds 120° F. Maintain oil temperature above 120° F for the duration of the test.
   b. Raise rated load to 24 inches above ground with forks in true horizontal position measured. Mark reference point.
   c. Hold the load for 10 minutes and record the boom cylinder and hydraulic tilt cylinder retraction or travel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 7

LONGITUDINAL GRADEABILITY - EMERGENCY STOPPING

1. TEST COURSE:

The length of the test course shall be not less than three times the wheelbase of the forklift, graded to the specified slope, within plus or minus 1 percent grade. Grade resistance shall be sufficient to prevent significant wheel slip.

2. TEST APPARATUS:

Speed indicator.

3. TEST PROCEDURE:

a. Drive the forklift with rated load forward up the slope, entering the course at a speed of not less than 2 mph, nor more than 4 mph. Continue through the course, maintaining a speed of not less than 2 mph. Make a total of three such passes up each slope specified for ascending operation.
b. Use the same procedure as described in "a", moving forward down the slope specified for descending operation.
c. Drive the forklift with rated load forward onto the slope specified for brake operation, then stop and hold the forklift with the service brakes for not less than 1 minute, with the forklift in neutral gear range. Set the parking brake, lower the load, release the service brake, and hold for not less than 1 minute. Shift into forward, raise the load, release the parking brake, and continue up the slope off the course.
d. Use the same procedure as described in "c", moving forward down the slope.
e. Position the forklift with rated load at the top of and facing down the slope specified for braking operation. Shut off the engine and allow the forklift to roll down the slope in neutral gear range, until a speed of 2 mph is attained. Apply the emergency brake provisions (parking or service brake as applicable) and bring the forklift to a stop. Release the brake, allow the forklift to begin to roll, and apply the brake again to stop the forklift, and repeat for a total of six dead engine stops.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 8

DYNAMIC STABILITY

1. TEST COURSE:

The length and width of the test course shall be not less than the forklift curb clearance circle diameter, graded to the specified slope, within plus or minus 1 percent grade.

2. TEST PROCEDURE:

a. Drive the forklift with rated load onto the slope and perform a complete forward circle, at maximum steer angle, while on the slope.
b. Repeat the procedure in "a", steering in the opposite direction.
c. Repeat the procedures in "a" and "b" without rated load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 9

STATIC STABILITY

1. **TEST COURSE:**

   The test course shall be a hard, level surface with provision for anchoring the forklift to prevent overturning.

2. **TEST PROCEDURE:**

   a. Anchor the-rear of the forklift with a device with enough slack to allow the forklift to tip but not overturn.
   b. Steer forklift to maximum steer angle.
   c. Apply 1.5 times the rated load, at the specified load center, to the forks with the forks horizontal, centered on the carriage, and at the maximum forward position (with respect to the chassis) in the lifting arc.
   d. Repeat "c" above with the forklift at the opposite maximum steer angle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 10

STEERING

1. TEST COURSE:

   The test course shall be a dry, level surface in accordance with figures A-1 and A-2.

2. TEST APPARATUS:

   Speed indicator.

3. TEST PROCEDURE:

   a. Obstacle course No. 1 in accordance with figure A-1. Drive the forklift forward, without load, over the test course twice once in each direction at a speed not less than the specified minimum speed without load (see 3.9.4).
   b. Repeat the procedure in "a", with rated load in carry position, (full tilt backward) at a speed not less than the specified minimum speed with load (see 3.9.4).
   c. Obstacle course No. 2 in accordance with figure A-2. Drive the forklift forward, without load, over the test course, at full-load governed speed in first gear. Repeat with load in carry position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 11

REAR AXLE OSCILLATION

1. TEST APPARATUS:

   Linear measurement equipment.

2. TEST PROCEDURE:

   a. Raise the truck, keeping the truck horizontal, to sufficient height to allow the rear axle to oscillate from stop to stop.
   b. Attach the clinometer to the rear axle.
   c. Pivot the rear axle fully clockwise. Measure and record the vertical distance that the tire traveled from horizontal.
   d. Pivot the rear axle fully counterclockwise. Measure and record the vertical distance that the tire traveled from horizontal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 12

STEERING WHEEL AND HANDBRAKE FORCE

1. TEST APPARATUS:

   Force measurement equipment.

2. TEST PROCEDURE:

   a. With the engine operating, determine the tangential force at the steering wheel rim required to turn the wheel from stop to stop in both directions.
   b. Count the number of revolutions required to turn the wheel from stop to stop. Record the highest force observed.
   c. Determine the force necessary to apply the parking brake at the center of the handgrip, tangential to the arc of its travel for pivoted handles, or parallel to the path of its travel for pull-type levers. Record the highest force observed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 13

HIGHWAY AND RAIL TRANSPORTABILITY

1. TEST COURSE:

   a. Paved roadway.
   b. Railroad hump facility.

2. TEST APPARATUS:

   a. Towing vehicle with pintle hook and speed indicator.
   b. Suitable rail-hump equipment.
   c. Tow bar, medium duty capacity, MS500048.

3. TEST PROCEDURE:

   a. Highway transportability (towing).

      (1) Disengage the driveline using one man provided with common tools. Record the time and tools necessary to perform the operation.
      (2) Attach the towbar and safety chains to the towing vehicle and pull the forklift for not less than 50 miles at 25 mph, plus or minus 5 mph. Observe tracking ability and note any loss of control.
      (3) At the conclusion of the 50-mile-towing, disconnect the forklift from the towing vehicle, reengage the driveline and operate the forklift to observe for damage.

   b. Rail transportability (rail hump).

The truck shall be blocked, braced, and tied clown in accordance with procedures contained in section 6, figure 54 of Association of American Railroads (AAR) Rules Governing the Loading of Department of Defense Material on Open Top Cars. The metal banding shown in the figure should be replaced with wire rope cables that form loops (AAR manual, section 1, rule 15 n, sketch 1) between the tiedown provisions and appropriate stake pockets. Hump the car, with the truck tied down at a speed of not less than 8 mph against five unloaded boxcars with their brakes set. The truck shall face in the direction of five cars. Repeat the procedures at not less than 8 mph with the rear of the truck in the direction of the five cars. The truck may be reversed by either reloading it in the specified direction on the flatcar or by reversing the direction of the flatcar. Once the test has begun, there shall be no readjustment of load, nor any reconditioning of the blocks, chocking material, or tiedowns except to reverse direction of the truck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

After each impact, the truck and tiedowns shall be inspected to determine the amount of load shift, permanent deformation to components of the truck, or other evidence of possible failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 14

OVERLOAD

1. TEST COURSE:

The test course shall be a flat, level surface with provisions for anchoring the forklift to prevent tipping and for blocking the front wheels to prevent overloading the tires.

2. TEST APPARATUS:

a. Test loads or other apparatus to apply load to forks.
b. Magnetic particle or dye penetrant capability.

3. TEST PROCEDURE:

a. Anchor the forklift to prevent tipping. Raise the forks to provide not less than 8 inches ground clearance to level forks.
b. Apply three times the rated load on the forks at the specified load center distance, and hold for 5 minutes.
c. Sideshift the forks fully to the right and apply two times the rated load on the forks at the specified load center distance and hold for 5 minutes.
d. Sideshift the forks fully to the left and repeat the procedure in "c".
e. Remove the load and examine the forklift for damage.
f. Inspect truck structure, frame, lift mechanism, and hydraulic system for evidence of deformation, fractures, leakage, broken welds, etc.
g. Inspect forks a minimum of 6 inches each side of heel by magnetic particle of dye penetrant method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 15

TORQUE CONVERTER

1. TEST APPARATUS:

   a. Timing devices.
   b. Thermocouple and potentiometer or equivalent temperature measuring device.
   c. Tachometer.
   d. Thermometer.
   e. Pressure measurement device.

2. TEST PROCEDURE:

   a. Install exhaust system pressure measurement device no more than 2 inches beyond the header outlet. Record exhaust pressure during torque converter stall, procedure 2e.
   b. Install thermocouple to measure oil temperature at the outlet from the converter.
   c. Thermostat shall not be blocked open.
   d. With the ambient temperature not less than 25° F, operate the forklift until the torque converter oil outlet temperature is a minimum of 157° F.
   e. Attach the forklift pintle hook to a fixed object to prevent forward motion of the forklift by a horizontal force on the pintle hook. Shift into the highest forward gear and stall the torque converter for not less than 30 seconds while the engine is operating at full throttle. The transmission disconnect shall not be used during this test.
   f. Record initial torque converter oil temperature and maximum oil temperature after 30 seconds stall, engine speed at stall, and ambient temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 16

TRANSMISSION DISCONNECT

1. TEST APPARATUS:

   a. Thermocouples and potentiometers or equivalent temperature measuring device.
   b. Timing device.
   c. Linear measurement equipment.

2. TEST PROCEDURE:

   a. Install thermocouples to record temperatures listed below:

      (1) Engine outlet to top tank of the radiator.
      (2) Engine oil sump.
      (3) Transmission sump oil to cooler.
      (4) Transmission oil from cooler.
      (5) Hydraulic tank.
      (6) Ambient air (thermometer may be used).

   b. Block open thermostat.
   c. Place truck on level surface with forks elevated approximately 1 foot from the surface.
   d. With transmission-disconnect pedal fully depressed, transmission in forward low range, continually raise and lower rated load for a minimum of 5 minutes while engine is at governed speed. Record initial and final temperature.

NOTE: Oil temperatures shall not exceed 30° F above ambient at the start of the tests in 2d.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 17

SERVICE BRAKE

1. TEST COURSE:

   The test course shall be a dry, level, improved surface allowing no penetration, with a grade not exceeding ±1 percent.

2. TEST APPARATUS:

   a. Linear measurement equipment.
   b. Detonator, brake apparatus, with powder loads, or equivalent apparatus.
   c. Speed indicator.

3. TEST PROCEDURE:

   a. Connect the detonator to be operated by a switch directly connected to the brake pedal so that it is actuated during the first 1/4 inch of pedal travel. The service brake, without transmission-disconnect, shall be used for this test.
   b. Place the rated load on the forks with the fork carriage tilted backward the maximum possible and in carry position.
   c. Drive the forklift with rated load over the test course. When the forklift reaches the minimum specified speed with load, apply the brakes. Measure the distance between the point of brake pedal application and the point of stoppage. Perform the test four times in forward (two times in each direction) on the course. Observe whether the front wheels lock or any wheel loses contact with the test course. Measure the amount of fishtail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 18

BRAKE FADE

1. TEST COURSE:

The test course shall be a dry, improved surface allowing no penetration, with grades not exceeding ±1 percent.

2. TEST APPARATUS:

a. Speed indicator.
b. Decelerometer.

3. TEST PROCEDURE:

Drive the forklift with rated load at the minimum specified speed and apply the service brakes to produce a deceleration rate of 8 fps per second, ±1 fps per second, until the forklift has slowed to one-half the initial speed. Immediately accelerate the forklift at full throttle in high gear until the travel speed reaches the initial speed. Immediately repeat the test for a total of 35 cycles. On completion of the 35th cycle, accelerate the forklift at full throttle in high gear to the initial speed and immediately conduct a service brake stopping test using procedure in test method No. 17. After the brakes have completely cooled, perform the test consisting of 35 snubs and one measured stop a second time. Make no adjustments or repairs between the two test runs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 19

WET BRAKE

1. TEST COURSE:

Body of fresh water of sufficient depth to permit complete submersion of all four brake drums when installed on the forklift.

2. TEST PROCEDURE:

Drive the forklift with rated load into the water so that all four brake drums are completely submerged. Release the service brakes and allow the forklift to stand for not less than 15 minutes. After 15 minutes have elapsed, drive the forklift from the water and immediately conduct a service brake stopping test from the minimum specified speed with load, using the procedure specified in 3c of test method No. 17. Service brakes shall not be applied after release in the water until the test application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 20

MAINTENANCE

1. TEST FACILITY:

   The test facility shall consist of a shop area of sufficient size to permit unobstructed surveillance of maintenance.

2. TEST APPARATUS:

   a. Common handtools.
   b. Special tools (if furnished by the contractor with the forklift).
   c. Simplified test equipment for internal combustion engines (STE/ICE).

3. TEST PROCEDURE:

   a. Examine the truck for accessibility of major assemblies.
   b. Examine position of drains with respect to accessibility.
   c. Using the tools, demonstrate that the major assemblies are accessible for repair and maintenance.
   d. Demonstrate the accessibility of drains and path of discharge of lubricants and coolants by activating drainage controls.
   e. Perform and time each operation on the maintenance operations list (see 3.7).
   f. Connect the STE/ICE to record all parameters which are to be measured in the Transducer Kit (TK) mode.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 21

PUMP INLET PRESSURE

1. TEST APPARATUS:

   a. Pressure gage (vacuum).
   b. Hydraulic fittings (as required).
   c. Thermocouple.

2. TEST PROCEDURE:

   a. Install a pressure (vacuum) gage in the pump suction line immediate adjacent to the pump and a thermocouple in the hydraulic tank.
   b. Heat the oil to specified temperature.
   c. Run the pump at the maximum speed it can encounter during vehicle operation and record the pump-inlet pressure and temperature.
   d. Repeat for each pump installation on the truck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 22

HYDRAULIC FILTER AND FILTER ASSEMBLIES

1. TEST APPARATUS:

   a. Hydraulic test stand may be used in place of on-vehicle test.
   b. Pressure gages.
   c. Temperature gages.
   d. Flowmeter (when test stand is used).
   e. Provisions for controlling oil temperature, if necessary.

2. TEST PROCEDURE:

   a. Pressurize the housing to not less than the minimum proof pressure (100 psi for return line filters, 30 psi for suction line filter, or 1-1/2 times maximum system pressure for pressure filters). Hold the pressure for not less than 60 seconds and examine for leaks.
   b. Install a new element in the filter housing. Establish maximum flow through the filter at an oil temperature of 150 F, ±5° F. Measure and record the pressure drop across the filter assembly.
   c. Plug the filter element chamber oil exit, or otherwise obstruct all flow through the filter element, leaving the outlet port open. Establish and maintain the oil temperature at 150° F, ±5° F. Increase the upstream pressure to 10 psi more than determined in "b" or to 2 psi for suction line filters. Observe the contamination indicator. Increase upstream pressure until the indicator enters the bypass area or until bypass flow exceeds 5 percent of the maximum system flow, whichever occurs first. Observe and record this pressure (this is the bypass opening pressure). Increase pressure until the maximum system flow is attained through the bypass valve. Observe and record this pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 23

HYDRAULIC SYSTEM ROLL-OFF CLEANLINESS

1. TEST APPARATUS:

Liquid automatic particle counter.

2. TEST PROCEDURE:

a. Connect the hydraulic lines at the cylinders to bypass those cylinders whose capacity is less than 1/2 of the connecting line volume.
b. Run the engine at no-load governed speed pumping the oil through each circuit at a minimum velocity of 25 ft./sec. for not less than 5 minutes. Perform an inline particle count as described in "d" below.
c. When applicable, connect each line to its related component. Operate each function of the system for 5 minutes continuously through full stroke and at maximum rates. Perform the particle count as described in "d" below.
d. The procedure for determining contamination shall be as follows:

(1) Contamination levels shall be determined by particle counts. The particle counter used for evaluation of the samples shall be calibrated in accordance with ANSI Recommended Standard Method for Calibration of Liquid Automatic Particle Counters using "AC" Fine Test Dust (ANSI B93.28). The required counts shall be the average not less than three consecutive counts. Samples may be taken from the reservoir or upstream of the filter(s) used for cleanup.
(2) Use any combination of on-the-forklift and off-the-forklift filtration for cleanup.
(3) Connect the counter sensor to the system, using a bypass line and a branch line. The bypass line shall connect to the system, have a flow rate not less than 5 times the sensor flow rate, and may return fluid directly to the reservoir. The branch line to the sensor shall tee into the bypass line and shall be not more than 12 inches in length. Any flow restriction devices shall be placed downstream of the particle counter sensor. Start engine and operate at not less than 1000 rpm. Record particle counts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 24

CYLINDER PROOF

1. TEST APPARATUS:

   a. Hydraulic test bench or the truck capable of developing two times system working pressure.
   b. Pressure gage.
   c. Thermocouple.

2. TEST PROCEDURE:

   a. Double acting cylinder.

      (1) Position and mechanically hold the piston at the approximate midpoint of the cylinder.
      (2) Fill rod end of the piston with oil.
      (3) With the head end port open, apply an oil pressure equal to 1.5 times the working pressure to the rod end of the piston for minimum of 60 seconds. Release pressure.
      (4) Fill the head end of the piston with oil.
      (5) With the rod end port open, apply an oil pressure equal to 1.5 times the working pressure to the head end of the piston for minimum of 60 seconds. Release pressure.

   b. Alternate procedure for double acting cylinder.

      (1) Extend the cylinder to maximum extension by filling the head end of the cylinder with oil. Apply oil pressure equal to 1.5 times the working pressure at the head port for a minimum of 60 seconds. Release pressure.
      (2) Retract the cylinder by filling the rod end of the cylinder with oil. Apply oil pressure equal to 1.5 times the working pressure at the rod end port for a minimum of 60 seconds. Release the pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 25

HYDRAULIC FITTINGS

1. TEST APPARATUS:

   Common handtools.

2. TEST PROCEDURE:

   a. Remove one hydraulic hose assembly that has permanent-type fittings.
   b. Replace the hose assembly with an equivalent field attachable fitting only to assure interchangeability.
   c. Repeat "a" and "b" above until each hose assembly with permanent-type fittings is replaced with a hose assembly with reusable fittings.
   d. After completing the above test reinstall the original hose assemblies on the truck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 26

SIDESHIFT, OSCILLATION, AND FORK SPREAD

1. TEST APPARATUS:

a. Clinometer.
b. Linear measurement equipment.
c. Stopwatch.
d. Thermocouple.

2. TEST PROCEDURE:

a. Clockwise Oscillation.

(1) With the forklift on a level surface, block up the front axle evenly so that none of the front tires are in contact with the ground. Place rated load on the forks and sideshift the load to extreme left side position. Place a clinometer on the loador carriage.
(2) Oscillate the load to extreme counterclockwise position and record the angle of oscillation relative to the horizontal obtained.
(3) Oscillate the load to clockwise position and record the angle of oscillation relative to the horizontal obtained.
(4) Repeat 2a(2) and 2a(3) at low engine idle and high engine idle a minimum of 3 times each and record time for each.

b. Counterclockwise Oscillation.

(1) With the forklift on a level surface, block up the front axle evenly so that none of the front tires are in contact with the ground. Place rated load on the forks and sideshift the load to extreme right side position. Place a clinometer on the load or carriage.
(2) Oscillate the load to extreme clockwise position and record the angle of oscillation relative to horizontal obtained.
(3) Oscillate the load to extreme counterclockwise position and record the angle of oscillation relative to horizontal obtained.
(4) Repeat 2b(2) and 2b(3) at low engine idle and at high engine idle a minimum of 3 times and record time for each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 26 (CONT'D)

c. Forks and Fork Spacing.

(1) With no load on the forks, move the forks as close together as possible and measure the distance between the inside edges of the forktines. Move the forks as far apart as possible and measure the distance over the outside edges of the forktines.

(2) Measure the forktine length, forktine width, forktine thickness at the heel and at the tip, and the fork taper.

d. Sideshift.

(1) With sideshift carriage and forks centered on the truck, spread the forks to minimum 34 inches (outside to outside).
(2) Sideshift level forks to extreme left position. Note and measure any increase in truck width and whether there are any protrusions beyond the sideshift carriage.
(3) Sideshift forks to extreme right position. Measure sideshift travel. Note and measure any increase in truck width and whether there are any protrusions beyond the sideshift carriage.
(4) Sideshift forks to extreme left position and measure travel.
(5) Place rated load on the forks. Sideshift to the extreme left position. Oscillate to extreme counterclockwise position.
(6) Oscillate the load to extreme clockwise position. Sideshift load to extreme left side position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 27

RAIN

1. TEST APPARATUS:

   a. Timing device.
   b. Measuring device (U.S. Weather Bureau type preferred).
   c. Spray fixture.

2. TEST PROCEDURE:

   a. Subject the forklift to a simulated rainfall of not less than 4 inches per hour. The simulated rainfall shall impinge on the forklift at an angle of 45 degrees, ±5 degrees, with a force equivalent to a 30-mile-per-hour-wind. The simulated rainfall shall disperse uniformly over the surfaces of the forklift.
   b. Expose the top and left side of the forklift to the rain described above for a period of 5 minutes with engine off. With rain still flowing, start engine and allow engine to idle for 2 minutes.
   c. Repeat "b" with the top and front exposed.
   d. Repeat "b" with top and right exposed.
   e. Repeat "b" with top and rear exposed.
   f. Stop the rainfall and allow the forklift to stand for not less than 30 minutes with the engine off. Drain a small quantity of fluid from each fluid reservoir (except cooling system) and examine for presence of water.
   g. Check electrical components, gages, cab (if furnished), and the air cleaner for water entry and damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 28

LOW-TEMPERATURE TEST (-25° F)

1. TEST APPARATUS:

   a. Cold chamber.
   b. Arctic clothing.
   c. Thermocouples with potentiometer(s) or other temperature measuring device.
   d. Battery hydrometer.
   e. Wattmeter or ammeter.
   f. Voltmeter.

2. TEST PROCEDURE:

   a. Service the forklift with applicable lubricants for -25° F operation including engine oil, transmission oil, drivetrain lubricants, hydraulic oil and antifreeze.
   b. Check the specific gravity of battery electrolyte to insure full charge.
   c. Cold soak the forklift to attain a stabilized temperature no warmer than -25° F. During and after this period, examine the forklift for damage. Stabilization is attained when the engine coolant, fuel, lubricating oil, and battery temperatures reach -25° F, as indicated by thermocouples located as follows:

      (1) In the two center cells of each battery.
      (2) In the volumetric center of the hydraulic system oil reservoir.
      (3) In the engine lubricating oil gallery and in the oil sump.
      (4) In the engine coolant in the engine-cooling-jacket discharge pipe.
      (5) In the chamber at a horizontal angle of 45 degrees from the sides and ends of the truck, not less than 3 feet from each corner of the truck at engine-crankshaft level.

   d. Maintain the -25° F ±5° F temperature throughout the entire test.
   e. One operator wearing arctic clothing, including mittens, shall perform all priming and starting operations.
   f. Substitute or supplementary batteries or other electrical cranking energy shall not be used.
   g. Glowplugs or other accessories working off the cranking batteries and auxiliary fluid priming systems which are permanently mounted on the forklift and normally used in starting the engine may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 28 (CONT'D)

h. Start the forklift. Starting should be accomplished within 5 minutes of the initial attempt. Smooth engine running without unnatural or continued control manipulation, and without use of primers and priming fluids, should be obtained within 15 minutes after starting.

i. When started, run engine 15 minutes. After completion of the 15-minute operation, operate the engine as follows:

(1) 10 minutes idling.
(2) 10 minutes half throttle.
(3) 5 minutes full throttle.

Perform the 25-minute cycle three times.

j. Maintain and record temperatures prior to engine starting, immediately after engine starting, and at 10 minute intervals during warmup and cycling, at the following (but not limited to) locations on the forklift:

(1) Battery (unless sealed maintenance-free batteries are furnished).
(2) Hydraulic tank.
(3) Engine oil.
(4) Engine coolant.
(5) Chamber air.

k. During engine cycling, and while wearing arctic mittens and boots, the operator shall perform each of the following:

(1) Engage and disengage power train to the wheels in all gears.
(2) Operate through two complete movement cycles all brakes, shafts and cylinders (as permitted by space limitations in chamber).
(3) Mount to and dismount from the operator's position on the forklift.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 29

PERFORMANCE (FORDING)

1. TEST COURSE:

The test course shall be a sandy beach area and a body of seawater of sufficient depth to permit submersion of the forklift to the depth specified.

2. TEST PROCEDURE:

a. Paint a horizontal white line on each side of the forklift at the specified fording depth.
b. Operate the forklift with rated load as follows:

(1) Drive the forklift into the water to the specified depth, including wave action. Maneuver the forklift for a period of not less than 15 minutes parallel to the beach and toward the beach to a minimum water depth equal to the centerline height of the wheels. Maneuvering shall consist of the following:

(aa) Drive the forklift forward in first gear at maximum safe speed for a period of 3 minutes. Stop the forklift by applying the service brakes.
(bb) Drive the forklift backward in low reverse at maximum safe speed for a period of 3 minutes. Stop the fork lift by applying the service brakes.
(cc) During the 6-minute cycle in (aa) and (bb), the steering system shall be actuated from stop to stop.
(dd) At the and of the 6-minute cycle and while at maximum water depth, operate all hydraulic cylinders, except steering cylinders, through one complete movement cycle.

(2) At the end of the 15-minute period, drive the forklift onto the beach and repeat the maneuvering at maximum attainable speed for a period of 15 minutes.

c. Repeat the procedure in 2(b) for a total of 8 hours per day for 10 days. Prior to leaving the water for the last time during the 8-hour period and while at maximum water depth, shut down the engine and restart it.
d. At the end of each 8-hour period and after scheduled servicing, the forklift shall be parked on the beach in an unprotected location and left until start of the next 8-hour period.
e. Park the forklift in an unprotected location on the beach for 10 days.
f. Repeat the test in 2(c) for 5 days.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 29 (CONT'D)

g. Samples shall be taken from the lowest point of the following at the beginning of the test, at the completion of 5 days of the test, at the completion of 10 days of the test, at the completion of 20 days of the test, and at the conclusion of test:

(1) Torque converter sump.
(2) Engine oil sump.
(3) Transmission.
(4) Transfer case.
(5) Fuel tank.
(6) Hydraulic reservoir.
(7) Each axle.
(8) Each wheel hub (for planetary hubs only).

h. Samples shall be taken not more than 10 minutes after engine shutdown and exercise of all functions on land for not less than 30 minutes. Sample size shall be not less than 200 cubic centimeters each and shall be analyzed for volumetric water content by a means having an accuracy of ±1 percent. Samples shall be replaced with new lubricant.

NOTE: During the performance of this test, the tire-inflation pressure may be reduced consistent with the flotation index calculations stipulated in 3.9.2, Vehicle Flotation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 30

HIGH SPEED

1. TEST COURSE:

The test course shall be a compacted surface of sufficient size to allow continuous travel at wide open throttle in highest gear range.

2. TEST APPARATUS:

a. Speed indicator.
b. Equivalent temperature measuring device.

3. TEST PROCEDURE:

a. Block thermostat in the open position.
b. Install thermocouples in the hydraulic system reservoir at the pump inlet, in the transmission sump, in the transfer case sump, in the engine coolant outlet, in the torque converter outlet line adjacent to the torque converter and engine oil gallery.
c. Record all temperature, including ambient before starting test.
d. Drive the unloaded forklift over the test course for 2 hours at wide open throttle in highest forward gear range. Stop the forklift and record all temperatures immediately, including ambient and universal joint temperatures. Check for universal joint temperature using temperature marker.
e. In not less than 5 minutes after stopping, drive the unloaded forklift for an additional 2 hours as in "d", and record all temperatures immediately upon stopping, including ambient and universal joint temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 31

CONTROLS

1. TEST APPARATUS:

   a. Thermocouples and potentiometer or equivalent temperature measuring device.
   b. Force measurement equipment.
   c. Linear measurement equipment.

2. TEST PROCEDURE:

   a. Install the thermocouple at the hydraulic pump(s) inlet.
   b. With an oil temperature of 160° F, to 180° F, and the engine operating at no load governed speed, measure the force and distance required to shift each hydraulic control valve and transmission control valve at the handgrip to each position.
   c. Apply 50 pounds of force to each hydraulic control valve lever in each shifting direction and maintain the force for not less than 15 seconds.
   d. Apply 100 pounds of force to each transmission control lever in each direction and maintain the force for not less than 15 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 32

PERFORMANCE (DURABILITY COURSE)

1. TEST COURSE:

A test course shall be constructed in accordance with figure A-3.

2. TEST PROCEDURE:

a. Drive the forklift with rated load in carry position (see 6.10.3), over the test course. Average cycle speed over the course shall be between 2.0 mph and 2.5 mph. For this test, the engine governor setting may be changed or a throttle stop may be used to maintain speed throughout the test. Negotiate the course 50 percent of the time in a clockwise direction and 50 percent of the time in a counterclockwise direction. After each 100 hours. operate the sideshift at full speed with rated load on the forks for 200 full-stroke cycles.

NOTES: Sideshift cycles may be operated in 20 cycle intervals to allow sufficient cooling of the system. The hydraulic pump(s) inlet temperature shall not exceed 220° F.

One cycle is defined as sideshifting from extreme left to extreme right and return to extreme left.

The windows and doors may be removed from cab while conducting this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 33

PERFORMANCE (LOAD PLACEMENT)

1. TEST COURSE:

The test course shall be a level, improved surface, laid out in accordance with figure A-3.

2. TEST APPARATUS:

a. Pressure gage.
b. Thermocouple and potentiometers or equivalent temperature measuring devices.
c. Palletized loads (three each rated load), with maximum 6-inch-high fork pockets.
d. Two platforms (one 8 feet 6 inches high, the other 8 feet high).

3. TEST CONDITIONS:

The specified cycles on load placement course shall be distributed equally among courses A, B, and C. Additional time as a result of continued testing may be run on any of the above courses.

4. TEST PROCEDURE:

a. Install the thermocouples at engine coolant into and out of the radiator, transmission sump, hydraulic oil reservoir, hydraulic pump(s) inlet the engine oil sump. Install the pressure gage in the pump test point in the circuit under test.
b. Record the temperatures at the end of each 1/2 hour for one eight hour shift each week of operation.
c. The operator shall not be given any assistance in engaging any loads during this test.
d. Position the platforms at points 3 and 2 on course A with the inside top of the platform at the 25-foot radius.
e. Position the loads at points 1, 4 and 5 on course A with the inside edge of the load at the 25-foot radius.
f. Start at point 1, pick up the load, and move to point 3. Place the load on the platform at point 3 and proceed to point 5. Pick up the load at point 5 and move it to point 2. Place the load on the platform at point 2 and proceed to point 4. Pickup the load at point 4 and move it to point 1. Continue the cycle, moving from point 1 to point 3, from point 3 to 5, etc. The forklift shall maneuver within the area of the course during all operations.
g. Repeat the test in "e", "f", and "g" on course B.
h. Repeat the test in "e", "f", and "g" on course C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 33 (CONT'D)

i. For the purpose of load-transfer-rate calculation, one cycle shall be considered to have been completed each time the three loads are positions 1, 4, and 5 (i.e., five separate load movements per cycle).

NOTE: As an alternative to "e", "h", and "i" above; the course A, B, and C may be run in any order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHOD NO. 34

NUCLEAR-BIOLOGICAL-CHEMICAL PERFORMANCE

1. TEST COURSE:

The test course shall be level, improved surface, laid out in accordance with course B of figure A-4.

2. TEST APPARATUS:


a. Palletized loads (three each rated capacity load), with maximum 6-inch high fork pockets.
b. Two platforms (one 8 feet 6 inches high, the other 8 feet high).
c. The complete protective ensemble.

3. TEST PROCEDURE:

a. While wearing the complete protective ensemble, each and every control (i.e., levers, buttons, switches, pedals, knobs and handles) shall be actuated by the operator. Record any incident of interference caused by the ensemble that is detrimental to the operation of the forklift.
b. On course B, position the platforms at points 3 and 2 with the inside top of the platform at the 50-foot radius.
c. Position the loads at points 1, 4, and 5 on course B with the inside edge of the load at the 50-foot radius.
d. The operator shall not be given any assistance in engaging any loads during this test.
e. Start at point 1, pick up the load, and move to point 3. Place the load on the platform at point 3 and proceed to point 5. Pick up the load at point 5 and move it to point 2. Place the load on the platform at point 4 and move it to point 1. Continue the cycle, moving from point 1 to point 3, from point 3 to 5, etc. The forklift shall maneuver within the area of the course during all operations.
f. Record any detrimental effects the ensemble has on the operational capabilities of the forklift.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

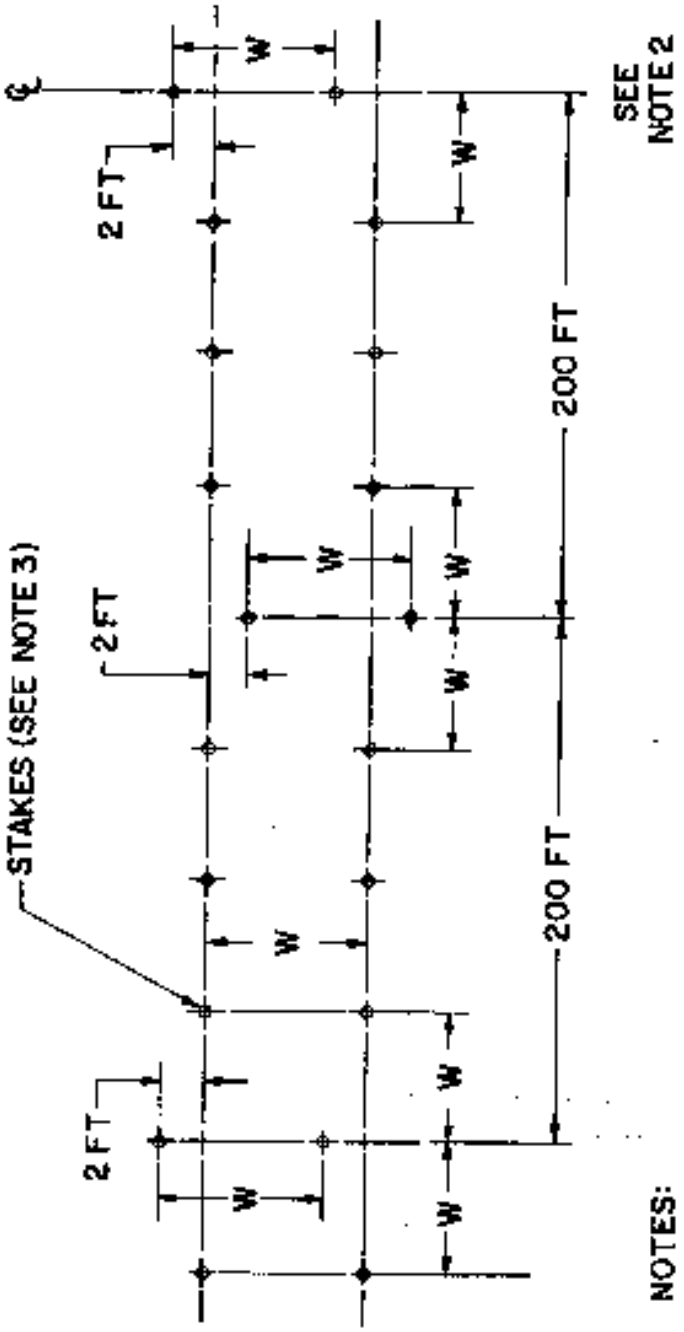

NOTES:
1. W = 1.3 TIMES THE FORKLIFT WIDTH.
2. COURSE SHALL BE SYMMETRICAL ABOUT ℄.
3. STAKES SHALL BE HIGH ENOUGH TO BE EASILY SEEN BY THE OPERATOR WHILE GOING THROUGH THE TEST COURSE.


FIGURE A-1

OBSTACLE COURSE NO.1 FOR STEERING TEST

X-2982A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

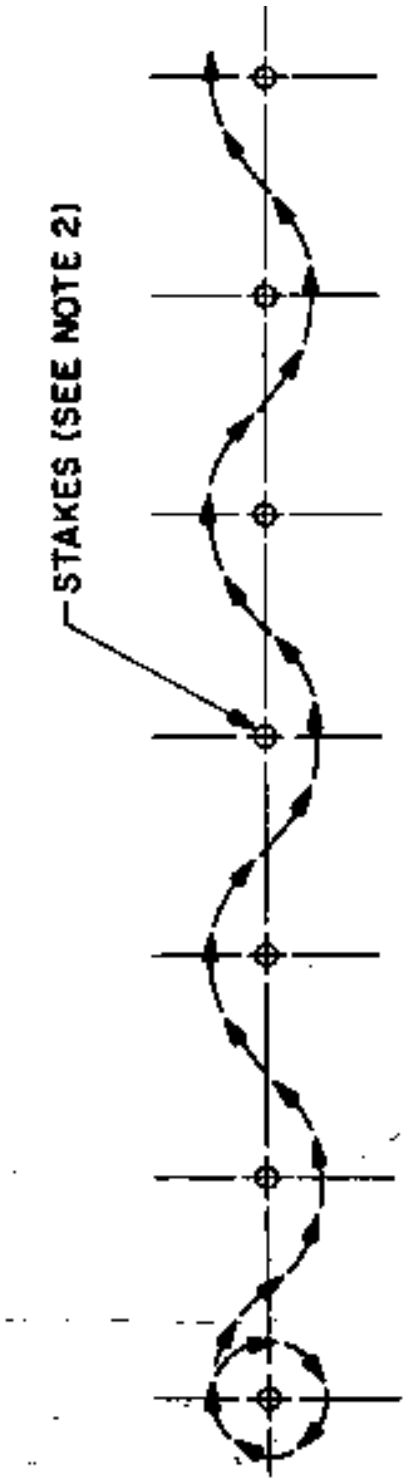

NOTES:

1. THE SPACE BETWEEN THE STAKES SHALL BE EQUAL TO TWO TIMES THE CURB CLEARANCE CIRCLE DIAMETER.
2. STAKES SHALL BE HIGH ENOUGH TO BE EASILY SEEN BY THE OPERATOR WHILE GOING THROUGH THE TEST COURSE.

FIGURE A-2

FIGURE A2. Obstacle course steering test.

X-2983E

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

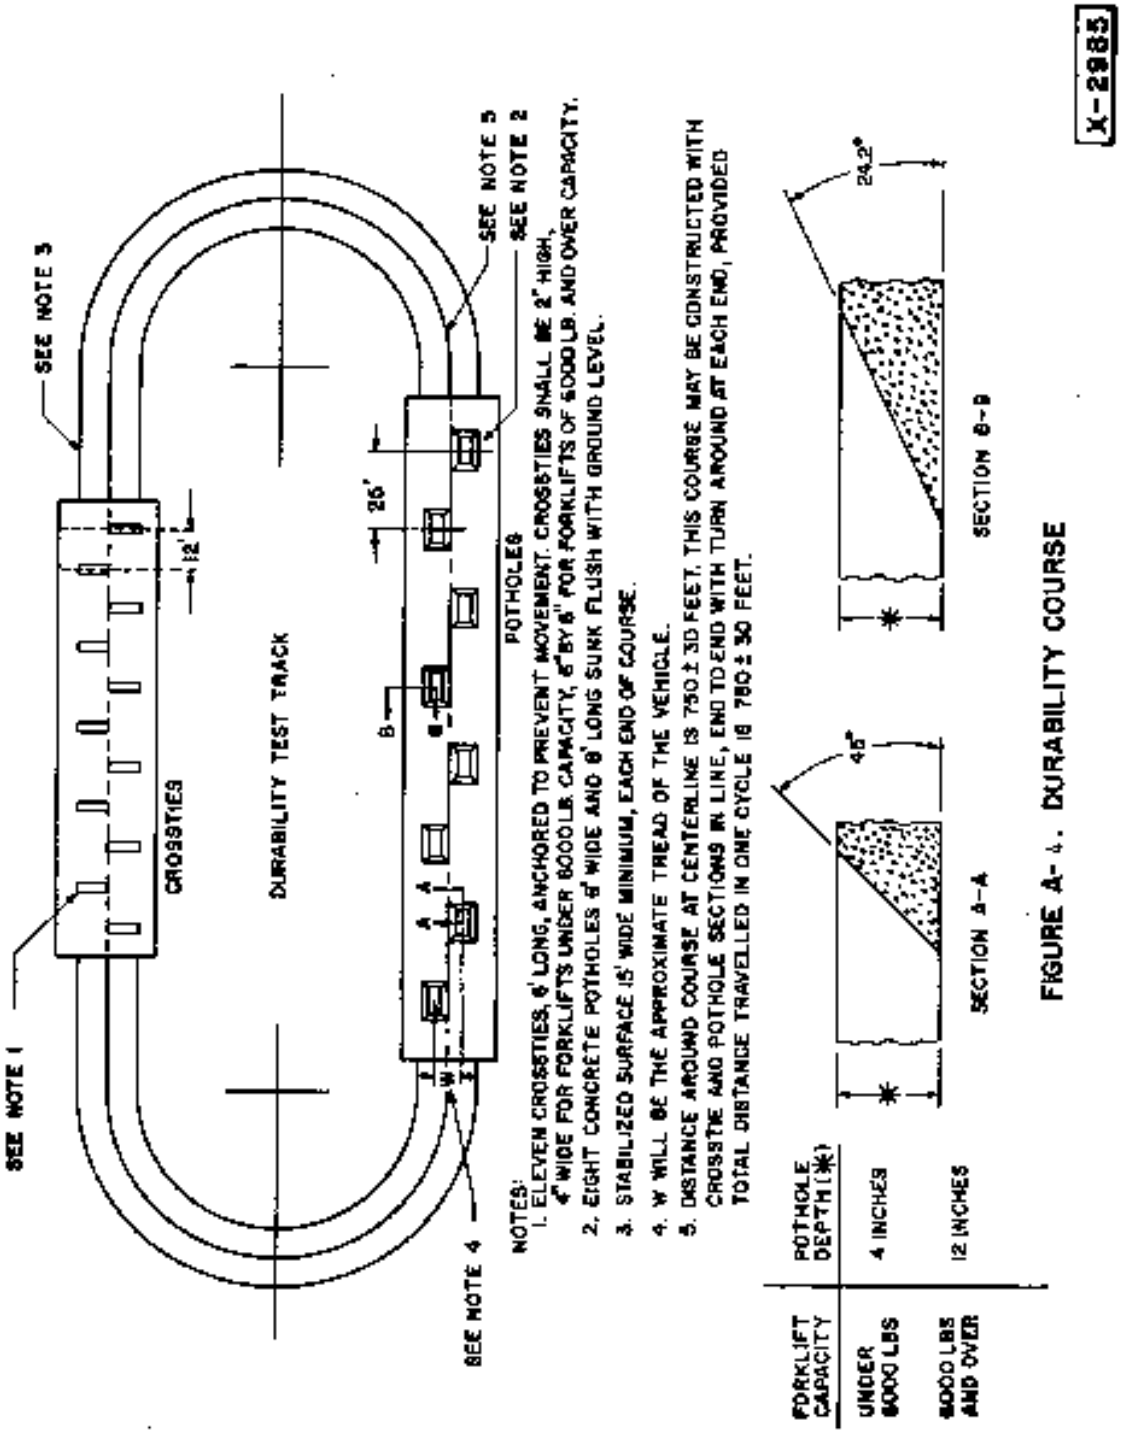


FIGURE A-4. DURABILITY COURSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

APPENDIX

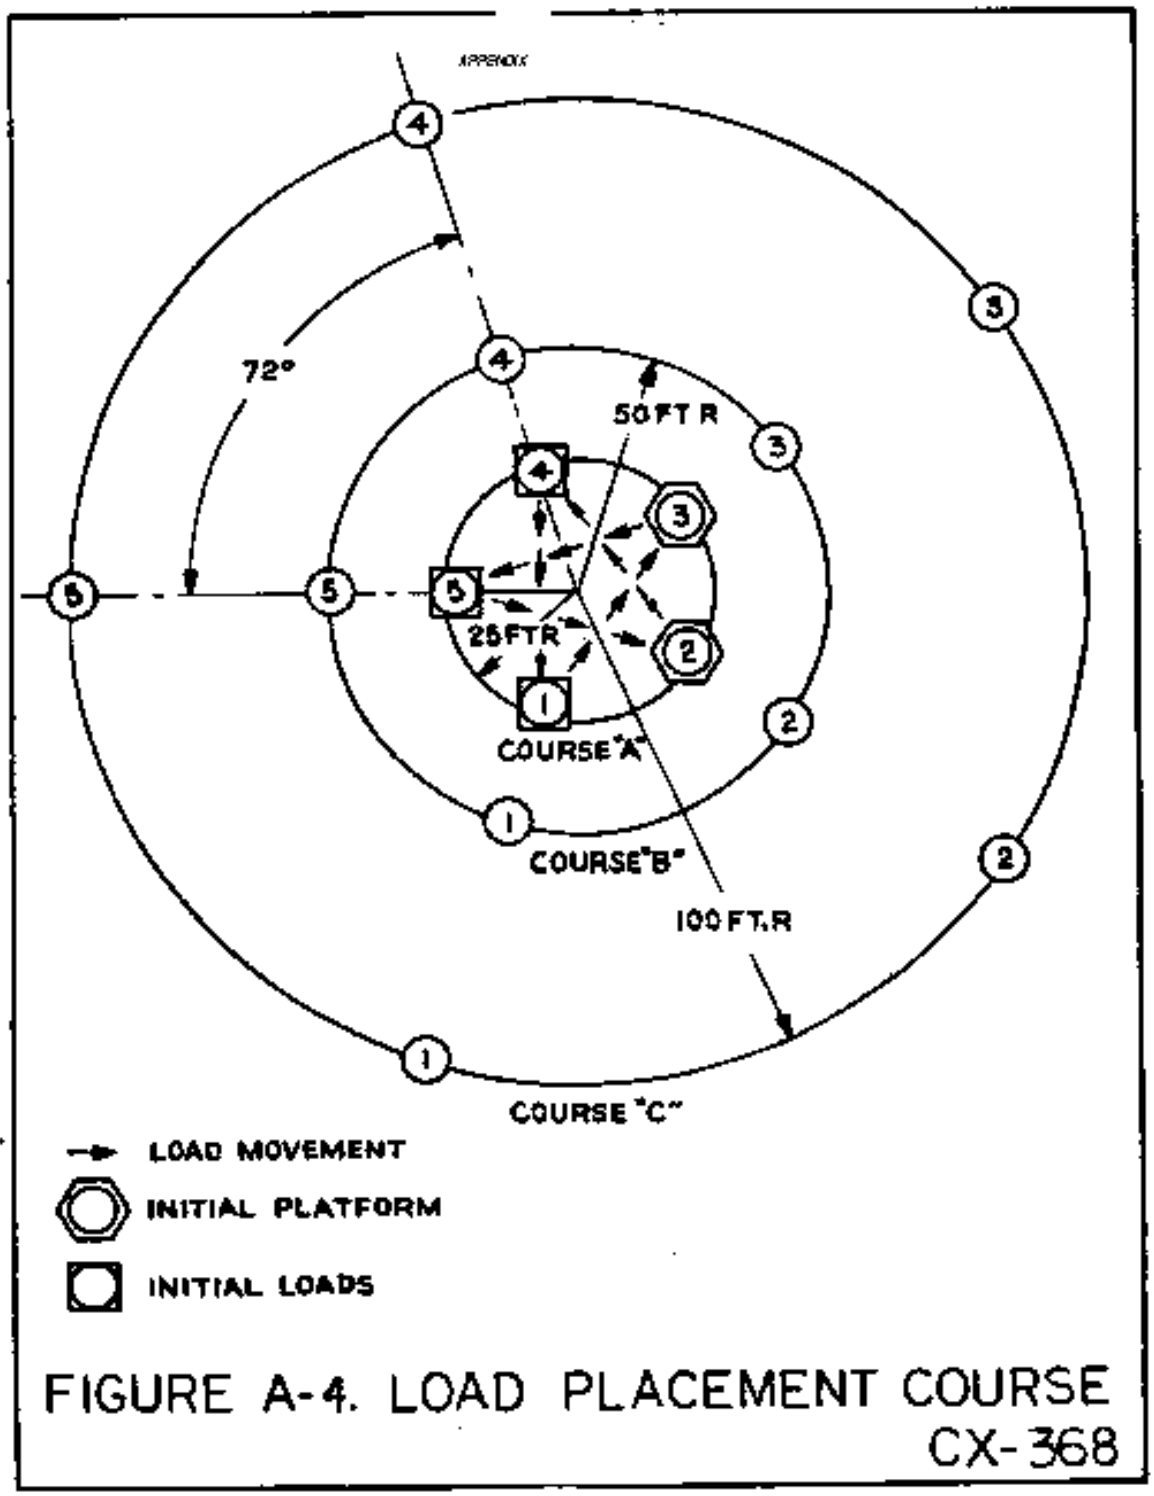


FIGURE A-4. LOAD PLACEMENT COURSE
CX-368

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter must be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-T-52843C	2. DOCUMENT DATE (YYMMDD) 850501

3. DOCUMENT TITLE
TRUCKS, LIFT, FORK, DIESEL-ENGINE-DRIVEN: PNEUMATIC-TIRED, ROUGH TERRAIN; 10,000 POUND CAPACITY AT 48-INCH LOAD CENTER

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME USA TACOM, AMSTA-TR-E-ELE/21 (4EELD)	b. TELEPHONE (Including Area Code) (1) Commercial (810)574-6516	(2) DSN 786-6516
c. ADDRESS (Include Zip Code) US Army Tank-automotive and Armaments Command Attn: AMSTA-TR-E-ELE/21 Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 681-9340	DSN 761-9340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.