MIL-G-52902A(ME)
17 February 1982
SUPERSEDING
MIL-G-52902(ME)
11 May 1976

MILITARY SPECIFICATION

GENERATOR SET, DIESEL ENGINE, TRAILER MOUNTED

5 KW, 60 HERTZ, PU-751/M

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a trailer mounted generator set (hereinafter referred to as a power unit) designated PU-751/M. The power unit consists of a Department of Defense standard, diesel-engine-driven, 5 KW, 60-Hertz generator set, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6115

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping, and Stock.
MMM-A-1617	- Adhesive, Rubber Base, General Purpose.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solids, Sheet Stock.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4- to 3-1/2-Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-1188	- Commerical Packaging of Supplies and Equipment.
MS16992	- Bolt, Lag, Hex Head, Gimlet Point Steel, Galvanized.

2.1.2 Other Government documents, drawing, and publications. The following other Government documents form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

TA13221E7323 - Generator Set, Diesel Engine, Trailer Mounted, 5 KW, 60 Hertz PU-751/M.

(Copies of specifications, standards, and drawings required by contractors in connection with specific acquisition functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The PU-751/M shall be in accordance with Top Assembly TA13221E7323 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviations from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power unit for examination within the time frame specified (see 6.2) to prove prior to starting production that his production methods will produce power units that comply with the requirements of this specification. Examinations shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each PU-751/M
1	Chassis, Trailer, M116A1, 3/4-ton, 2-wheel.	MIL-C-45150	1
2	Generator set, diesel-engine-driven, 5 KW, 60 Hertz DOD Model MEP-002A.	NSN 6115-00-465-1044	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. Workmanship shall be of quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of the examination by the preproduction model shall be cause for disassembly in the presence of a Government representative of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and reexamination shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Components and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power units which conform to all requirements in Section 3 and 5 of this specification and pass all applicable examinations in Section 4 of this specification will be considered acceptable by the Government.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3 1 Examination. The preproduction power unit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

4.4.1 Examination. Each power unit shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power units shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Identification or special marking missing or illegible.
106. Workmanship not as specified.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107. Materials, containers, or procedures not as specified. Each incorrect material, container, or procedure shall constitute one defect.
108. Power unit not preserved as specified.
109. Fire extinguisher not removed and preserved as specified.
110. Ground wire not disconnected and secured as specified. Wire and Terminal not matchmarked as specified.
111. Tarpaulin roof support and bows not secured as specified.
112. Hammer, oil drain line and ground rods not secured as specified.
113. Repair parts and maintenance tools not preserved as specified.
114. Technical publications not preserved and secured as specified.
115. Tarpaulin not preserved as specified.
116. Trailer chassis components not preserved as specified.
117. Packing not as specified.
118. Depreservation guides not prepared and attached to the power unit as specified.
119. Marking illegible, incomplete, incorrect, or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the preproduction model power unit and production power unit. Government-furnished property (GFP) shall be preserved and packed as specified herein, regardless of the preservation and packing provided at time of receipt by the manufacturer.

5.2 Preservation. Preservation shall be level A, B, or commercial, as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with table I, figures 1, 2, and 3, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, level A. The generator set shall be secured directly through the barrier material to the trailer using the required bolts in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicators and inspection ports shall be installed on an end or side in a location convenient for inspection of the humidity indicators. Before sealing the barrier, the fiberboard cap specified in table I and figure 1 herein shall be installed on the generator set.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF, variety SW, grade 125, style optional and shall be secured to the generator set with tape conforming to PPP-T-97, type IV.

5.2.1.3 Ground Wire. The ground wire shall be disconnected from the ground stud on generator set. Ground stud and ground wire end shall be match marked with tags conforming to UU-T-81, type A. The loose ground wire shall be secured to the clamped wire with tape conforming to PPP-T-97, type IV.

5.2.1.4 Hammer, oil drain line, and ground rods. The hammer, oil drain line, and ground rods shall be secured to the generator set with tape conforming to PPP-T-97, type IV.

5.2.1.5 Trailer assembly.

5.2.1.5.1 Chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A, as specified for mobile vehicles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

5.2.1.5.2 Tarpaulin roof support. The tarpaulin roof support shall be removed and secured in any available space within the confines of the trailer.

5.2.1.5.3 Tarpaulin. The tarpaulin shall be wrapped in film conforming to L-P-378, type I, class I, grade A, 4 to 8 mil and shall be preserved in a close-fitting box conforming to PPP-B-601, overseas type, style I. Strapping shall not be required.

5.2.1.6 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve and pack the repair parts, if any.

5.2.1.7 Maintenance tools. Maintenance tools if any shall be preserved in accordance with PPP-P-40, level A.

5.2.1.8 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be secured to the generator set outside the method II barrier.

5.2.2 Level B.

5.2.2.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, level B.

5.2.2.2 Fire extinguisher, ground wire, hammer, oil drain line, and ground rods. These items shall be preserved as specified in 5.2.1.2, 5.2.1.3, and 5.2.1.4 for level A.

5.2.2.3 Trailer assembly.

5.2.2.3.1 Chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level B, as specified for mobile vehicles.

5.2.2.3.2 Tarpaulin roof support. The tarpaulin roof support shall be removed and secured as specified in 5.2.1.5.2 for level A.

5.2.2.3.3 Tarpaulin. The tarpaulin shall be preserved as specified in 5.2.1.5.3 for level A, except that the box shall be domestic type.

5.2.2.4 Repair parts, maintenance tools, and technical publications. The repair parts, maintenance tools, and technical publications shall be preserved as specified for level A.

5.2.3 Commercial. Each complete power unit shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. The degree of packing shall be level A, level B, or commercial, as specified (see 6.2).

5.3.1 Level A or B. Packaging shall be in accordance with table I and figures 1, 2 and 3 for level A or B, as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

5.3.2 Commerical. Each complete power unit shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide". One copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved, and packed as specified herein, regardless of the preservation, and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Date of issue of DoDISS applicable to this contract and exceptions there to (see 2.1.1).
(c) Time frame required for submission of the preproduction model (see 3.2).
(d) Time frame required for submission of the preproduction pack (see 5.1).
(e) Degree of preservation and of packing required (see 5.2 and 5.3).
(f) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power units from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power units conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power units in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A462

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

TABLE I. Packaging material.

FIND NO.	IDENTIFICATION	DESCRIPTION	QTY. REQ. LEVEL	
			A	B
1	PPP-B-601, OVERSEAS TYPE, STYLE I (NOTES 1 & 3)	BOX, PLYWOOD, 1/4 THK	1	
	PPP-B-601, DOMESTIC TYPE, STYLE I (NOTES 1 & 3)	BOX, PLYWOOD, 1/4 THK		1
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR	
3	PPP-F-320, TYPE CF, CLASS DOMESTIC	CAP, FIBERBOARD	1	
4	PPP-F-320, TYPE SF, GRADE V3S	FIBERBOARD PAD	AR	
5	MIL-G-12803, TYPE I, RUBBER BINDER, 1-1/2 X 1-1/2 X 1/8	GASKET, 11/16 DIA HOLE	8	
6	MMM-A-1617, TYPE II	ADHESIVE	AR	
7	QQ-S-781, TYPE I OR IV, FINISH B	STRAPPING, STEEL, FLAT, .020 X 3/4	AR	
	QQ-S-781, TYPE I OR IV, FINISH A	STRAPPING, STEEL, FLAT, .020 X 3/4		AR

FIND NO.	IDENTIFICATION	DESCRIPTION	QTY. REQ. LEVEL	
			A	B
8	PPP-T-97, TYPE IV	TAPE, PRESSURE SENSITIVE, 3/4 WIDE	AR	AR
9	WEDGE	LUMBER, SOFTWOOD	2	2
10	MS16992-505, 1/4-10 X 2 LG	BOLT, LAG, HEX HD, GIMLET PT STL, GALV	4	4
11	BLOCKING	LUMBER, SOFTWOOD, 1X2 NOMINAL	AR	AR
12	BLOCKING	LUMBER, SOFTWOOD, 1X1 NOMINAL	AR	AR
13	PPP-B-601, OVERSEAS TYPE, STYLE I, TYPE I LOAD (NOTE 2)	BOX, PLYWOOD, 1/4 THK	1	
	PPP-B-601, DOMESTIC TYPE, STYLE I, TYPE I LOAD (NOTE 2)	BOX, PLYWOOD, 1/4 THK		1
14	BLOCKING	LUMBER SOFTWOOD, 2*2 NOMINAL	AR	AR

NOTES

1. NO CONTENT WEIGHT, WITHOUT BOTTOM.
2. SIDES TO BE INVERTED TO POSITION CLEATS TO THE INSIDE.
3. TOP TO BE ONE PIECE, 1/2 INCH THICKNESS, AND SHALL COMPLETELY COVER ALL EDGES.
4. ALL DIMENSIONS ARE IN INCHES
5. CAP TO EXTEND DOWN ON SIDES AND ENDS 4 INCHES.

X-3742B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

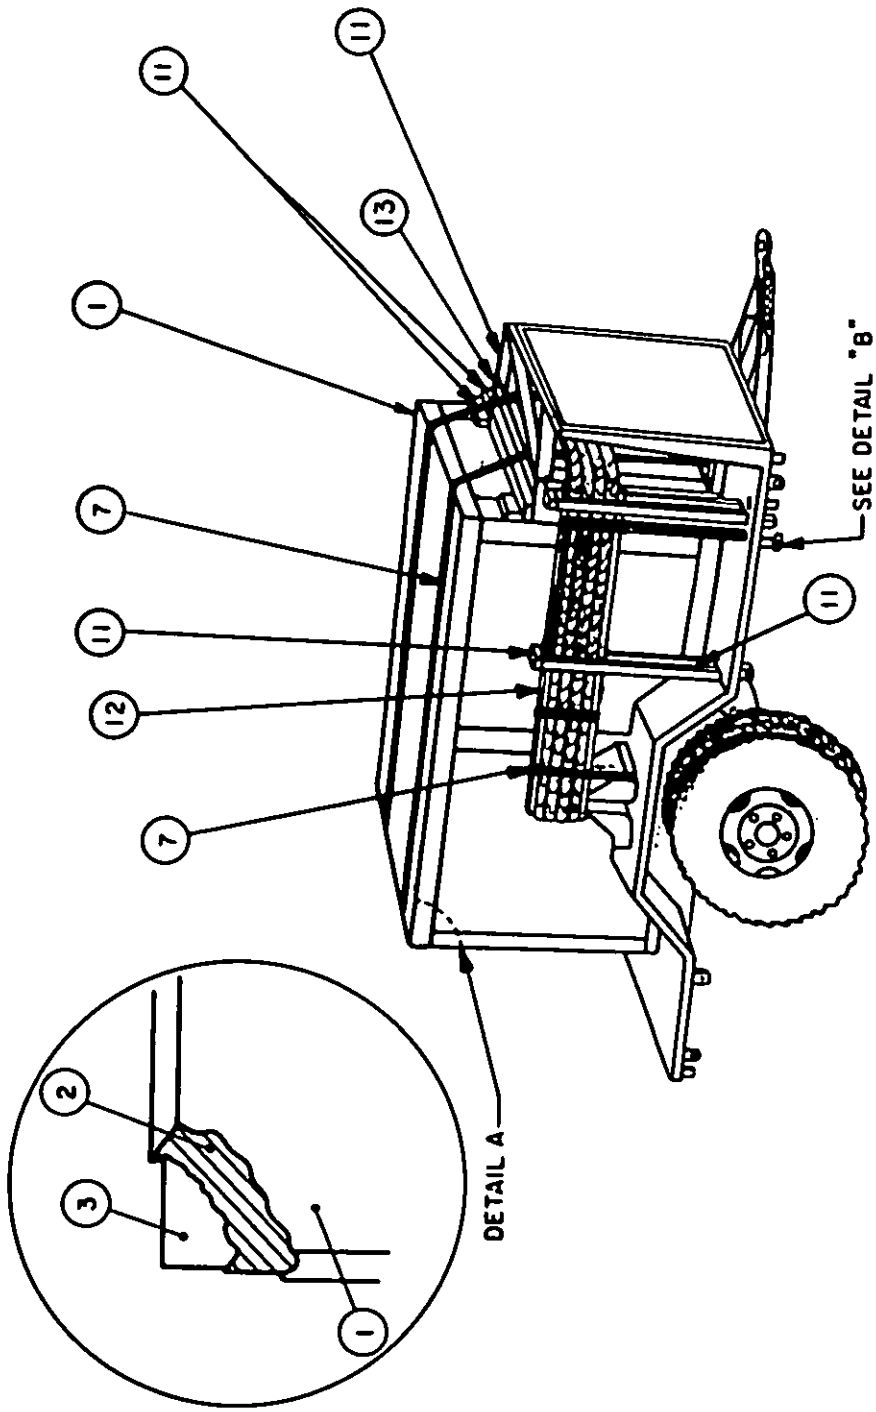


FIGURE 1. Preservation and packing assembly.

X-3743B

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.



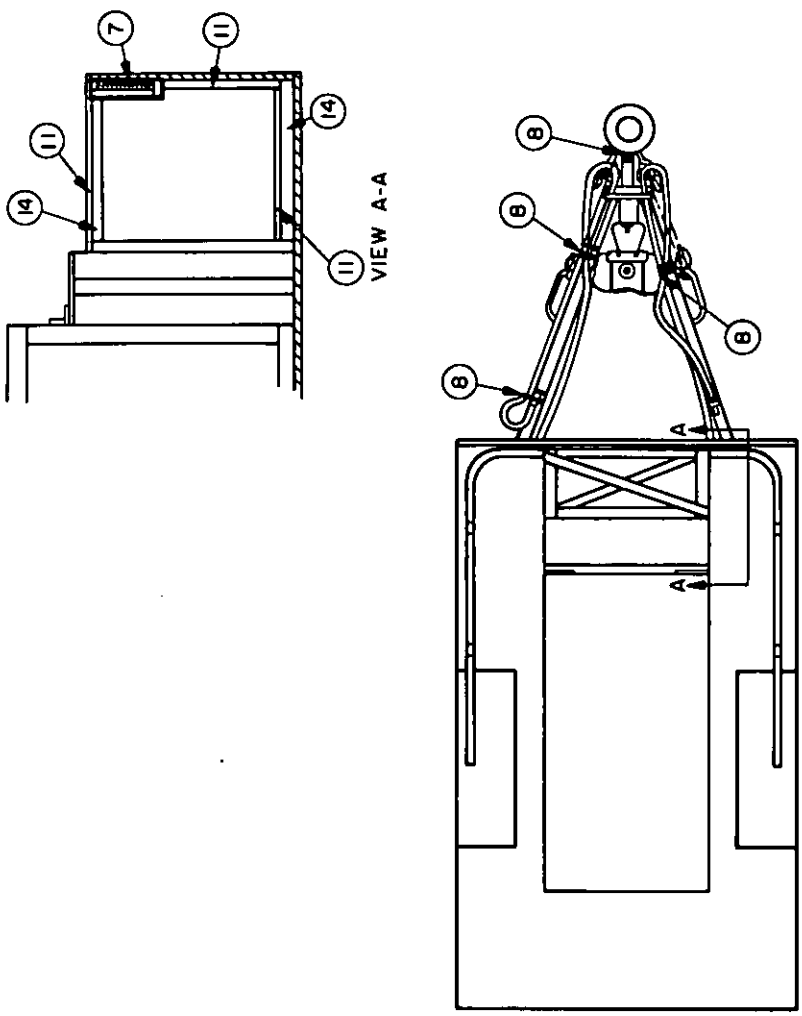


FIGURE 2. Top view of preservation and packing assembly. X-37711

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

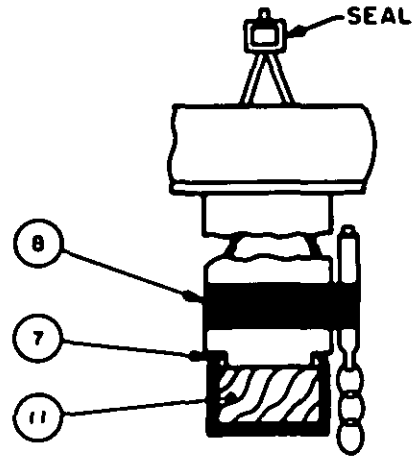

DETAIL B

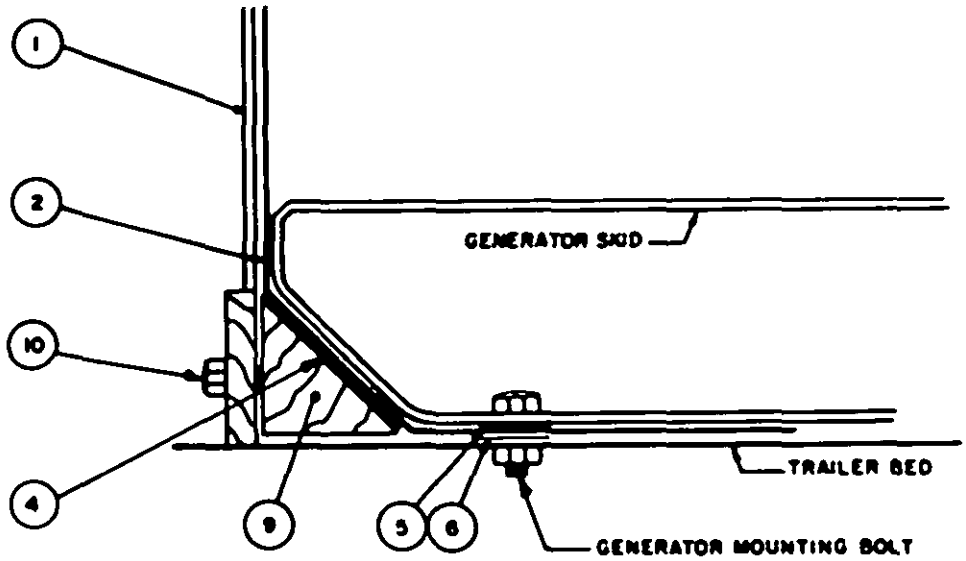

DETAIL C SECURING GENERATOR AND COVER

FIGURE 3 Details of preservation and packing assembly.

X-3744B

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:39Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-G-52902A(ME) Generator Set, Diesel Engine, Trailer Mounted 5 KW, 60 Hertz, PU-751/M

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.