# MILITARY SPECIFICATION

# BOMB, GAS, NONPERSISTENT, GB, 750-POUND MC-1; INERT COMPONENTS FOR

## 1. SCOPE

1.1 This specification covers the inert components of a 750-pound bomb.

## 2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-781 - Steel Strapping, Flat.
PPP-F-320 - Fiberboard; Sheet, Stock and Cut Shapes.
PPP-T-60 - Tape; Pressure Sensitive Adhesive, Waterproof - For Packaging and Sealing.

MILITARY

MIL-W-13748 - Welding, Metal-Arc, Steels, Constructional, Readily Weldable for Highly Stressed Joints.

FSC 1325

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-248 - Qualification Tests for Welders - Other Than Aircraft Weldments.

DRAWINGS

EDGEWOOD ARSENAL

DL14-5-2779 - Bomb, Gas, Nonpersistent, GB, 750 pound, MC-1. (All drawings referenced in this specification are listed on Dwg DL14-5-2779.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal, shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies of these freight classification rules should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago 6, Illinois.)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawing DL14-5-2779 or on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

3.1.2 Components. All components of the bomb shall conform to the specifications and drawings listed on Drawing DL14-5-2779 and subsidiary drawings.

3.2 Assembly. The bomb shall be assembled as shown on Drawing E14-5-2779.

3.3 Welding.

3.3.1 Welds. The welds shall show no evidence of cracks or porosity and be in accordance with Specification MIL-W-13748 when tested as specified in 4.6.1.

3.3.2 Operator. Welding shall be performed only by operators who have met the requirements of Standard MIL-STD-248 for the particular group of materials and types of welding involved.

3.4 Cleaning. The interior of the bomb shall be dry and free from foreign matter.

3.5 Helium leakage. The bomb shall not leak helium at a rate greater than $1 \times 10^{-6}$ atmospheric cubic centimeter per second when tested as specified in 4.6.2.

3.6 Workmanship. The bomb shall be free from contamination (oil or grease) and damage such as dents, cracks or deformation which could affect its use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

4.1.2 Government's responsibility. The Government will be responsible for witnessing the test in 4.6.2.

4.2 Special provisions.

4.2.1 Alternative inspection. The supplier may utilize any alternative inspection procedure which will provide equal or better assurance of quality by submitting a written proposal with justification and obtaining written approval from the Government prior to instituting the procedure. In case of dispute, the procedures of this specification will govern.

4.2.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1, 3.3.2 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.2.3 Substation inspection. If the supplier elects to establish inspection substations for the purpose of conducting inspection for certain listed defects, the Acceptable Quality Levels (AQL's) for each inspection substation shall be equal to the AQL which is the next numerically lower value than the AQL specified for the total listed defects. The requirements of Standard MIL-STD-105 are applicable to each substation and to the end item.

4.3 Lotting. A lot shall consist of the bombs produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions.

4.4 Sampling for examination and nondestructive tests. Sampling shall be conducted in accordance with Standard MIL-STD-105. For welding level S-3 and an AQL of 1.5 shall be used.

4.5 Inspection provisions.

4.5.1 For examination and nondestructive tests. Sample bombs shall be examined and tested in accordance with the classification of defects and Standard MIL-STD-105. For welding, bombs shall be tested in accordance with 4.6.1 and Standard MIL-STD-105 using an AQL of 1.5 percent defective for acceptance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

4.5.2 For critical defects. Each item in the lot shall be inspected for critical characteristics listed in the classification of defects.

4.5.3 Classification of defects (see 6.2).

4.5.3.1 Bomb, gas, nonpersistent; GB, 750 lb, MC-1 (Dwg E14-5-2779).

| Categories | Defects | Acceptance standards |
|---|---|---|
| Critical: | | |
| 1 | Helium leakage | 4.6.2 |
| Major: | AQL 1.0 percent defective | |
| 101 | Filler tube diameter (1.245) incorrect (Dwg B14-5-2722) | |
| 102 | Filling port diameter (1.248) incorrect (Dwg D14-5-2775) | |
| 103 | Bomb overall length incorrect (Dwg E14-5-2778) | |
| 104 | Burster tube camber incorrect (Dwg E14-5-2778) | |
| 105 | Base plate diameter (12.782) incorrect (Dwg E14-5-2778) | |
| 106 | Bomb perpendicularity excessive (Dwg E14-5-2778) | |
| 107 | Bomb eccentricity excessive (Dwg E14-5-2778) | |
| 108 | Helium inspection symbol missing (Dwg E14-5-2779) | |
| 109 | Component missing or incorrectly assembled (Dwg E14-5-2779) | |
| 110 | Interior not clean or dry (Dwg E14-5-2778) | |
| 111 | Workmanship | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

4.6 Tests.

4.6.1 Welding. The welds shall be examined in accordance with Specification MIL-W-13748 for conformance to 3.3.1.

4.6.2 Helium leakage. The bomb shall be tested for helium leakage using a Government approved helium leak testing device. Prior to test the recessed shipping plugs (Dwg 8796792 and 8796788) shall be removed.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging, level C.

5.1.1 Bomb. The filler hole cover and plug shall be removed from the assembled bomb. The empty bomb casing shall be purged of air with dry nitrogen. The nitrogen shall be sealed in the casing by the replacement of the plug and filler hole cover so that a slight positive pressure of nitrogen is maintained. A tag, conforming to the applicable requirements of Standard MIL-STD-129, shall be attached in a conspicuous location on the bomb. The tag shall state that caution shall be used in removing the plug from the bomb in order to discharge the nitrogen.

5.1.2 Filler tube. Filler tubes shall be preserved and packaged in accordance with the manufacturer's commercial practice for immediate use.

5.2 Packing, level C.

5.2.1 Bomb. The empty bomb processed as specified in 5.1.1 shall be palletized in the manner as shown on figure 1.

5.2.2 Filler tube. Filler tube preserved and packaged as specified in 5.1.2 shall be packed in a manner to insure carrier acceptance at first domestic destination for immediate use. Containers shall comply with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, palletized loads and shipping containers shall be marked in accordance with Standard MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

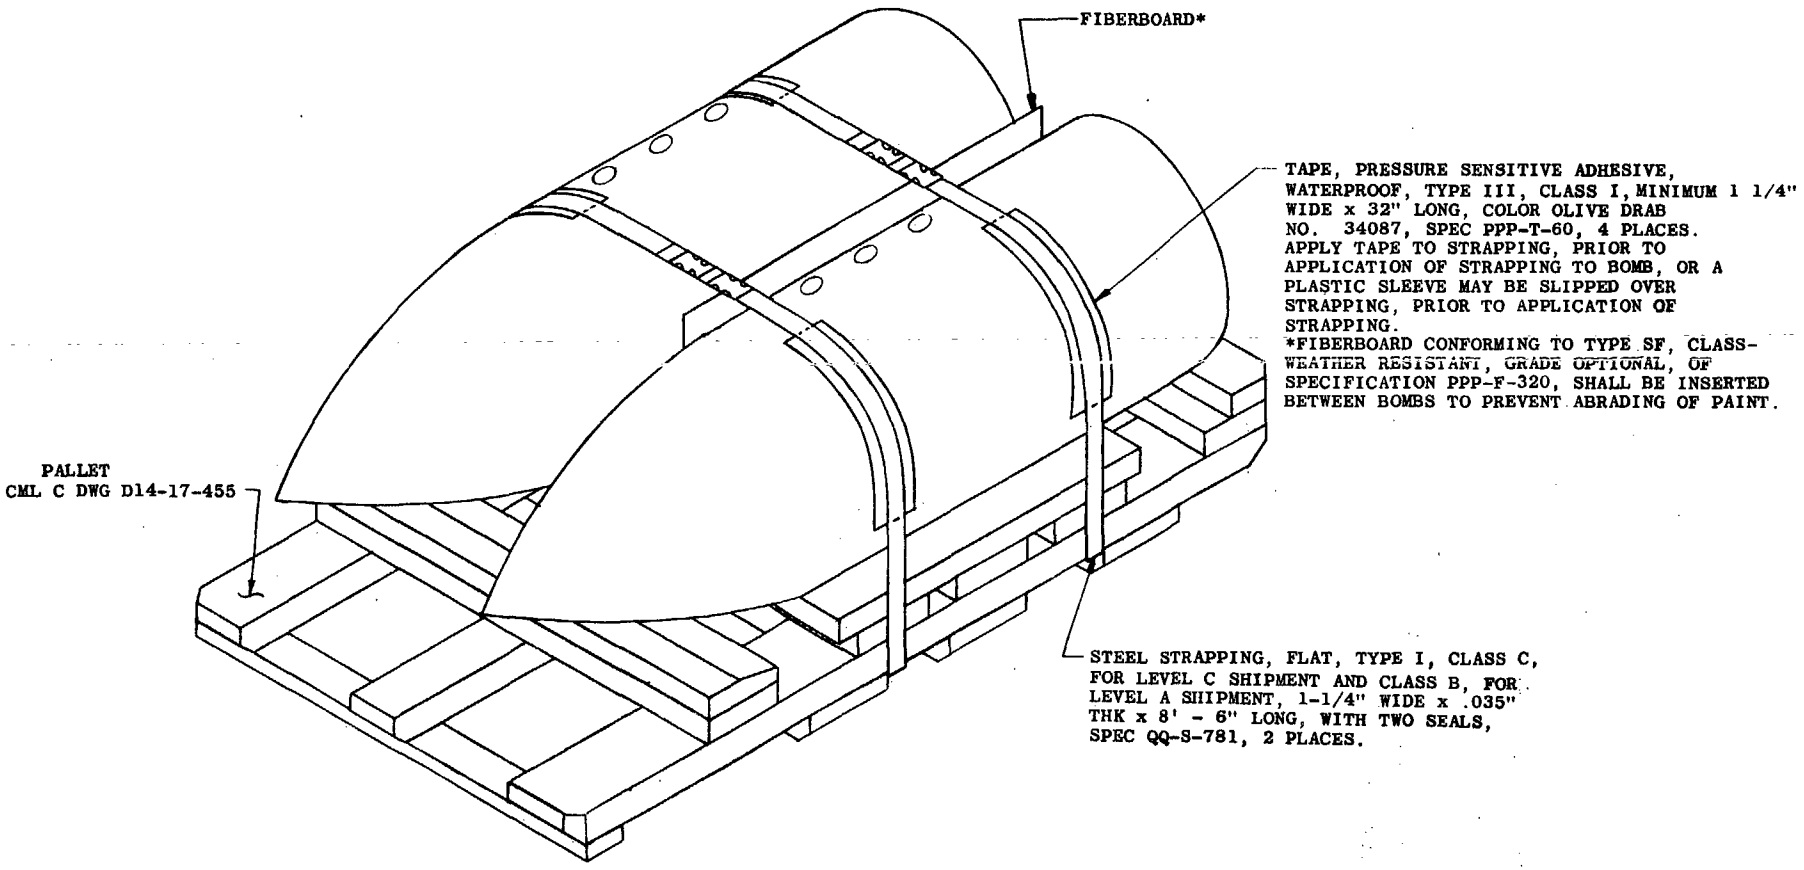



Figure 1 - Palletization of Bombs

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the title, number and date of this specification.

6.2 Supersession data. This specification supersedes Chemical Corps Purchase Description 196-131-738A, dated 3 November 1961.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1325-A104



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.