MIL-B-46968(MU)
27 December 1963
(See section 6)

MILITARY SPECIFICATION

BOMB, GAS, NONPERSISTENT, GB,

750-POUND, (WITHOUT FUZE AND BURSTER)

MC-1, FILLING ASSEMBLY AND MARKING

1. SCOPE

1.1 This specification covers the filling of MC-1, 750-pound bomb with chemical agent GB.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-781 - Steel Strapping, Flat.
PPP-F-320 - Fiberboard; Sheet, Stock and Cut Shapes.
PPP-T-60 - Tape, Pressure Sensitive Adhesive, Waterproof - For Packaging and Sealing.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

FSC 1325

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

DRAWINGS

EDGEWOOD ARSENAL

DL14-5-2736 - Bomb, Gas, Nonpersistent, GB, 750 lb., MC-1.

(All drawings referenced in this specification are listed on Dwg DL14-5-2736.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components. The supplier shall ascertain that all materials and components listed on DL14-5-2736 have met their respective specifications prior to their use.

3.2 Filling, closing, and marking. The bomb shall be filled with GB (see 6.2 and 6.3), closed, and marked as shown on Drawing E14-5-2736. From the time of filling until completion of test in 4.6.2, the bomb shall be kept in a nose-down position.

3.3 Agent leakage and contamination. The exposed surfaces of the bomb shall be free from agent contamination and not leak agent when tested as specified in 4.6.1 (see 6.3).

3.4 Helium leakage. The bomb shall not leak helium through the closure at a rate greater than 1×10^{-6} atmospheric cubic centimeter per second when tested as specified in 4.6.2.

3.5 Filling level. The height of GB in the filled bomb shall be within the applicable limits shown in table I when tested as specified in 4.6.3. The filling level shall be determined from the base plate in the area marked "h" (Dwg E14-5-2736).

Table I. Filling height

Temperature (°F)	"h" height (inches)	
	Max "h"	Min "h"
40-50	6.937	6.094
50-60	6.719	5.859
60-70	6.500	5.625
70-80	6.250	5.422
80-90	6.047	5.187
90-100	5.828	4.984

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 Government's responsibility. The Government will be responsible for witnessing the test in 4.6.2.

4.2 Special provisions.

4.2.1 Alternative inspection. The supplier may utilize any alternative inspection procedure which will provide equal or better assurance of quality by submitting a written proposal with justification and obtaining written approval from the Government prior to instituting the procedure. In case of dispute, the procedures of this specification will govern.

4.2.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.3 Lotting. A lot shall consist of the bombs filled by one manufacturer, on one filling line, from the same material and under essentially the same filling conditions. However, no more than one lot of agent shall be represented in any one lot of filled bombs.

4.4 Sampling for examination and nondestructive test. Sampling shall be conducted in accordance with Standard MIL-STD-105.

4.5 Inspection provisions.

4.5.1 For examination and nondestructive test. Sample bombs and the level A preparation for delivery thereof shall be examined and tested in accordance with the classification of defects and Standard MIL-STD-105.

4.5.2 For critical defects. Each item in the lot shall be inspected for critical characteristics listed in the classification of defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

4.5.3 Classification of defects.

4.5.3.1 Bomb, gas, nonpersistent, GB, 750 lb., (w/o fuzing) (Dwg E14-5-2736).

Categories	Defects	Acceptance standards
Critical:		
1	Decontamination and leakage	4.6.1
2	Helium leakage	4.6.2
Major:	AQL 1.0 percent defective	
101	Marking incorrect	
102	Filling excessive	4.6.3
103	Component missing	
Minor:	AQL 2.5 percent defective	
201	Marking missing or illegible	
202	Protective finish missing or incorrect	
203	Filling insufficient	4.6.3

4.5.3.2 Preparation for delivery (section 5).

Categories	Defects
Critical:	None defined
Major:	AQL 2.5 percent defective
101	Pallet incorrect
102	Tape missing
103	Strapping incorrect
104	Pallet damage (broken or wracked)
105	Marking incorrect, missing or illegible

4.6 Tests.

4.6.1 Agent contamination and leakage. Contamination and leakage shall be determined by the use of an approved Edgewood Arsenal GB agent detector system.

4.6.2 Helium leakage test. Prior to closing, the void above the agent shall be evacuated to a pressure not greater than 3.5 pounds per square inch absolute (psia) and filled with helium to a pressure of 15 psia. The closure area shall be sealed off by a test head manifold to a vacuum system and a mass spectrometer type helium leak

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

detector. The test head shall be evacuated to and maintained at a pressure lower than 20 microns of mercury during test. The leak detector shall be calibrated to respond to a leak of 1×10^{-6} atmospheric cubic centimeters (cc) per second of helium at the test head when a standard leak is introduced into the system at that point.

4.6.3 Filling level. The height of GB in the filled bomb shall be located radiographically with the bomb oriented in the nose-down position.

5. PREPARATION FOR DELIVERY

5.1 Packing, level A. The filled bombs shall be palletized for shipment in the manner as shown on figure 1.

5.2 Marking. In addition to any special marking required by the contract or order, the palletized bombs shall be marked in accordance with Standard MIL-STD-129, except that filling identification color code marking shall be as shown on Drawing E14-5-2736.

6. NOTES

6.1 Ordering data. Procurement documents should specify the title, number, and date of this specification.

6.2 Filling and closing. Care should be taken to prevent wetting the interior closure with GB and thereby making void the results of the helium test.

6.3 Caution. Because of the hazards attending the filling of munitions with GB, suppliers are advised to exercise all necessary precaution to protect personnel from injury during filling and handling.

6.4 Safety classification. This item is a group A (special), explosive hazard class II (Edgewood Arsenal Safety Directive No. 385-10).

6.5 Component specifications. The following specifications are required for the manufacture of the bomb:

MIL-B-46966(MU) - Burster, Bomb, M32.

MIL-B-46967(MU) - Bomb, Gas, Nonpersistent, GB, 750-Pound MC-1; Inert Components For.

6.6 Supersession data. This specification supersedes Chemical Corps Purchase Description 196-131-739, dated 3 November 1961.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1325-A105

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

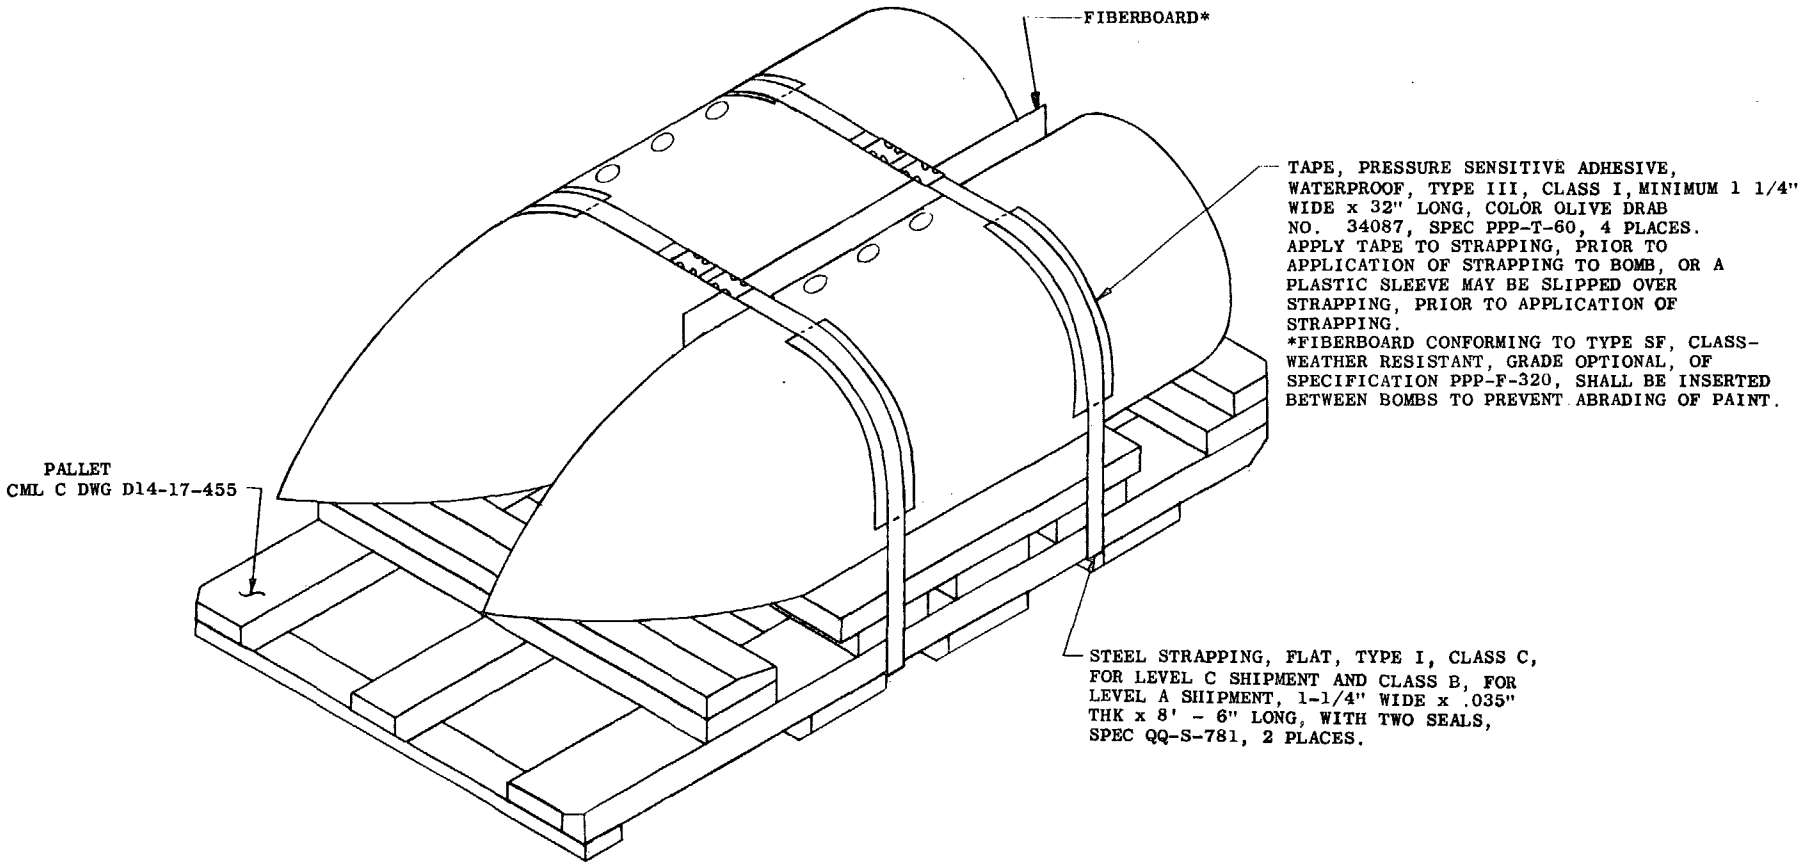


Figure 1 - Palletization of Bombs

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.