INCH-POUND

MIL-T-48588B (AR)
26 June 1992
SUPERSEDING
MIL-T-48588A (AR)
31 August 1984

MILITARY SPECIFICATION

TEST SET, INVERTER, CONVERTER PANEL ASSEMBLY: 11747097

This specification is approved for use by the U. S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements and tests for one type of Inverter, Converter Panel Assembly Test Set, hereinafter referred to as the "panel assembly" which forms a part of the Electronics System Test Set Type AN/TSM-100A, used on the Vulcan Air Defense Weapon System (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-T-28800 - Test Equipment for use with Electrical and Electronic Equipment, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (See 6.4)

U. S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11729017	-	Wire Runs List, Inverter, Converter Panel Assembly
11747097	-	Test Set, Inverter, Converter Panel Assembly
11747104	-	Electrical Schematic, DC Converter and Inverter Test Set
12950877	-	Requirements for Soldering Electrical and Electronic Asssemblies

SPECIAL PACKAGING INSTRUCTION

PS 11747097	-	Packaging of Test Set, Inverter, Converter Panel

(Copies of drawings, publications and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 11747097, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the panel assembly shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The panel assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as specified in MIL-T-28800 for Type 1, Class 3, Style F test equipment.

3.3.2 Shock. The panel assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude Operating. The panel assembly shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The panel assembly shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between +32 deg F and +131 deg F.

3.3.4.2 Non-operating (storage). The panel assembly shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg F for a period of 24 hours and +160 deg F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The panel assembly shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical.

3.4.1 Continuity. The test set shall demonstrate continuity and all switches shall be tested in all positions for each switch function in accordance with the wiring runs list 11729017 and electrical schematic drawing 11747104. The wiring runs list shall take precedence over the schematic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3.5 Functional.

3.5.1 Current meters. Current meters M1 through M4 shall meet the requirements specified in Table I when input voltages and conditions are applied as specified in Table I.

TABLE I. Current meters input voltages and requirements.

METER	INPUT VOLTAGE	LOAD RESISTOR: SWITCH-POSITION	REQUIREMENT
M1	24.0 Vdc ± 4% @ TP7	1.2 ohms ± 1% @ J1-K; --	M1 read 20 Adc ± 5%
M2	19.5 Vdc ± 4% @ P1-26	3.9 ohms ± 1% @ J2-A; S3-4, S9-2	M2 read 5 Adc ± 5%
M3	26.0 Vdc ± 4% @ TP15	5.2 ohms ± 1% @ J3-A; --	M3 read 5 Adc ± 5%
M4	120 Vac ± 4% 400 Hz @ P1-27	60.0 ohms ± 1% @ J1-C; S1-4, S6-2	M4 read 2 Adc ± 5%

3.5.2 Torque resistors. Torque resistor R1 shall be capable of sustaining 35 Vdc ± 2% across its terminals without resultant damage, likewise R2 shall be capable of sustaining 40 Vdc ± 2%.

3.6 First article. When specified in the contract or purchase order, sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the requirements of Note 2 of drawing 12950877.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+60°F to +90°F (+16°C to +32°C)
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg (700 to 815 mmHg)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Sample. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

Name	Drawing	Quantity
Panel Assembly	11747097	1

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

wise specified, tests shall be conducted with the ref...

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

a. The contractor's quality program or detailed inspection plan shall provide assurance of compliance of all characteristics with the applicable drawings and specifications utilizing as a minimum the conformance criteria specified in this document and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

b. Alternative inspection procedures, methods or equipment, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the procuring contracting officer for evaluation and approval by the Government. When required, the contractor shall demonstrate that the effectiveness of the proposed alternative(s) is equal to or better than the specified quality assurance provisions herein. In cases of dispute as to whether the contractor's proposed alternative(s) provide equal assurance, the provisions of this specification shall apply. All approved alternative inspection provisions shall be specifically incorporated into the contractor's quality program plan or detailed inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

4.5 Special sampling. One panel assembly out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE IV. Test equipment list.

ITEM NUMBER	DESCRIPTION
1. Power Supply	Minimum requirements: 0-80 Vdc adjustable, 0-20 Amps, load regulation 0.5% or less, ripple less than 0.5%
2. Sinusoidal Source	Minimum requirements: 120 VAC, 400 ± 5 Hz, 2 amps

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3.	Digital Voltmeter	Minimum requirements: 4 1/2 digits 0-100 Vdc, 0-130 VAC True RMS, VAC accuracy .5% at 400 Hz input resistance 1 Megohms or greater
4.	Switch (ST)	SPDT
5.	Resistor (RL1)	1.2 ohms, ± 1%, 540 watt
6.	Resistor (RL2)	3.9 ohms, ± 1%, 110 watt
7.	Resistor (RL3)	5.2 ohms, ± 1%, 150 watt
8.	Resistor (RL4)	60 ohms, ± 1%, 275 watt
9.	Resistor (RT1)	237 ohms, ± 1%, 5.2 watt
10.	Resistor (RT2)	158 ohms, ± 1%, 10.2 watt
11.	Test Harness	Per Figures 1, 2, 3, 4, and 5

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. This test shall be performed as specified in MIL-T-28800 for Type 1, Class 3, Style F test equipment with the exception that Step 4.c Resonance Dwell does not apply. The panel assembly shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the panel assembly shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the panel assembly shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude operating. This test shall be performed as specified in Procedures II, Method 500, of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.7.3 Performance.

4.7.3.1 M1 current meter. Connect test equipment and panel assembly as shown in Figure 1. Adjust power supply to obtain full scale deflection of current meter. The DVM shall indicate 24.0 Vdc ± 4% to insure conformance to 3.5.1.

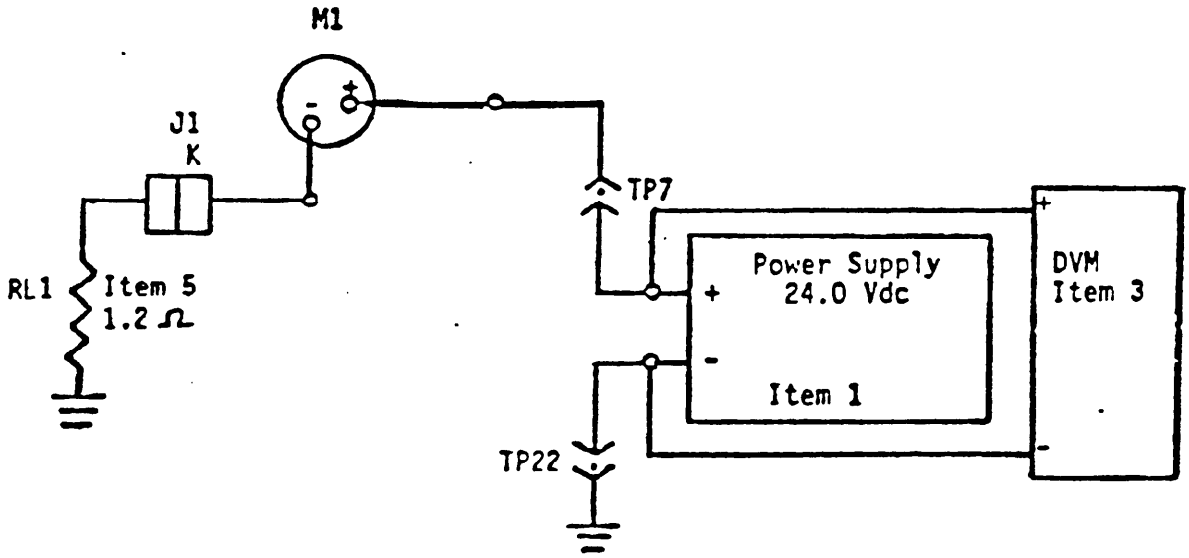


Figure 1. M1 current meter setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.7.3.2 M2 current meter. Connect test equipment and panel assembly as shown in Figure 2. Set switch S3 to position 4 and S9 to position 2. Adjust power supply to obtain full scale deflection of current meter. The DVM shall indicate 19.5 Vdc ± 4% to insure conformance to 3.5.1.

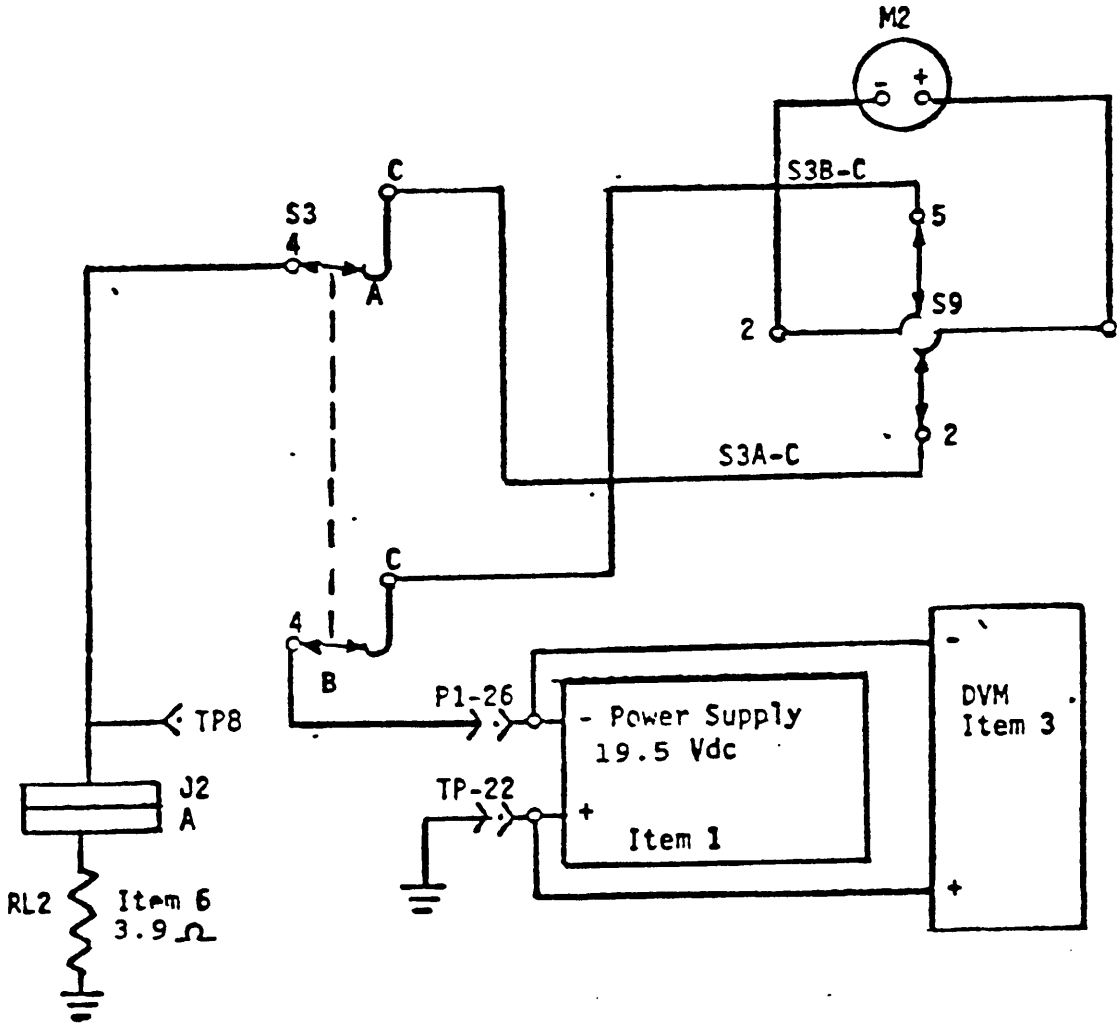


Figure 2. M2 current meter setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.7.3.3 M3 current meter setup. Connect test equipment and panel assembly as shown in Figure 3. Adjust power supply to obtain full scale deflection of current meter. The DVM shall indicate 26.0 Vdc ± 4% to insure conformance to 3.5.1.

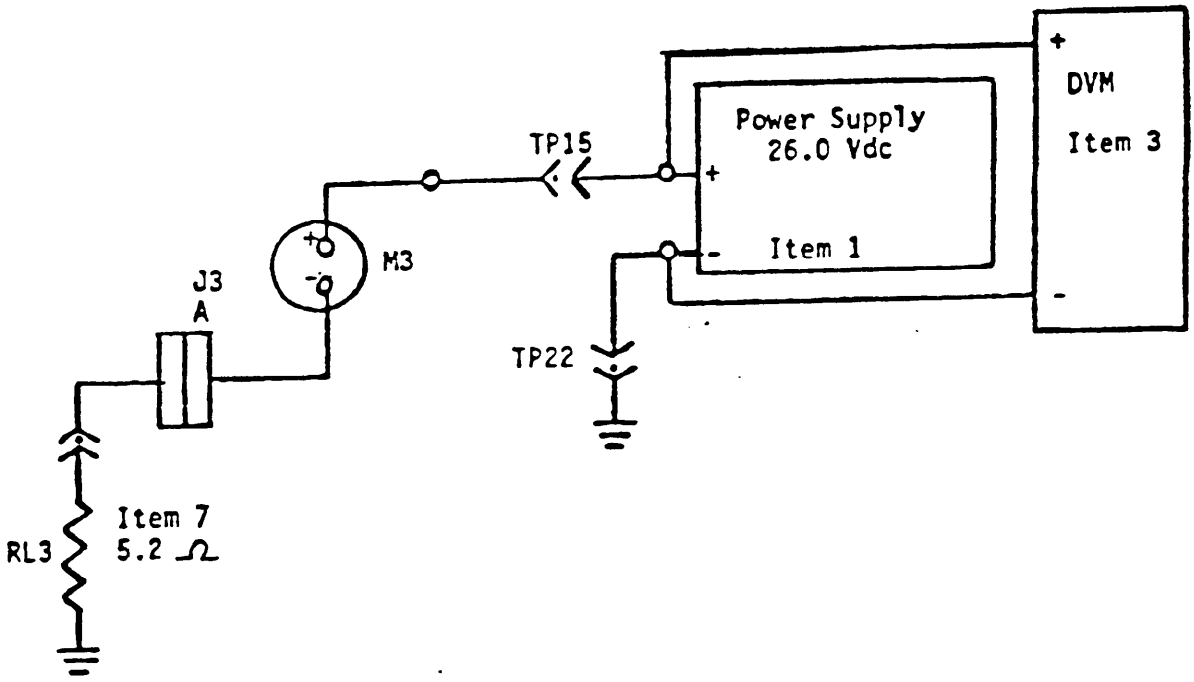


Figure 3. M3 current meter setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.7.3.4 M4 current meter. Connect test equipment and panel assembly as shown in Figure 4. Set S1 to position 4 and S6 to position 2. Adjust power supply to obtain full scale deflection of current meter. The DVM shall indicate 120 Vac ± 4% to insure conformance to 3.5.1.

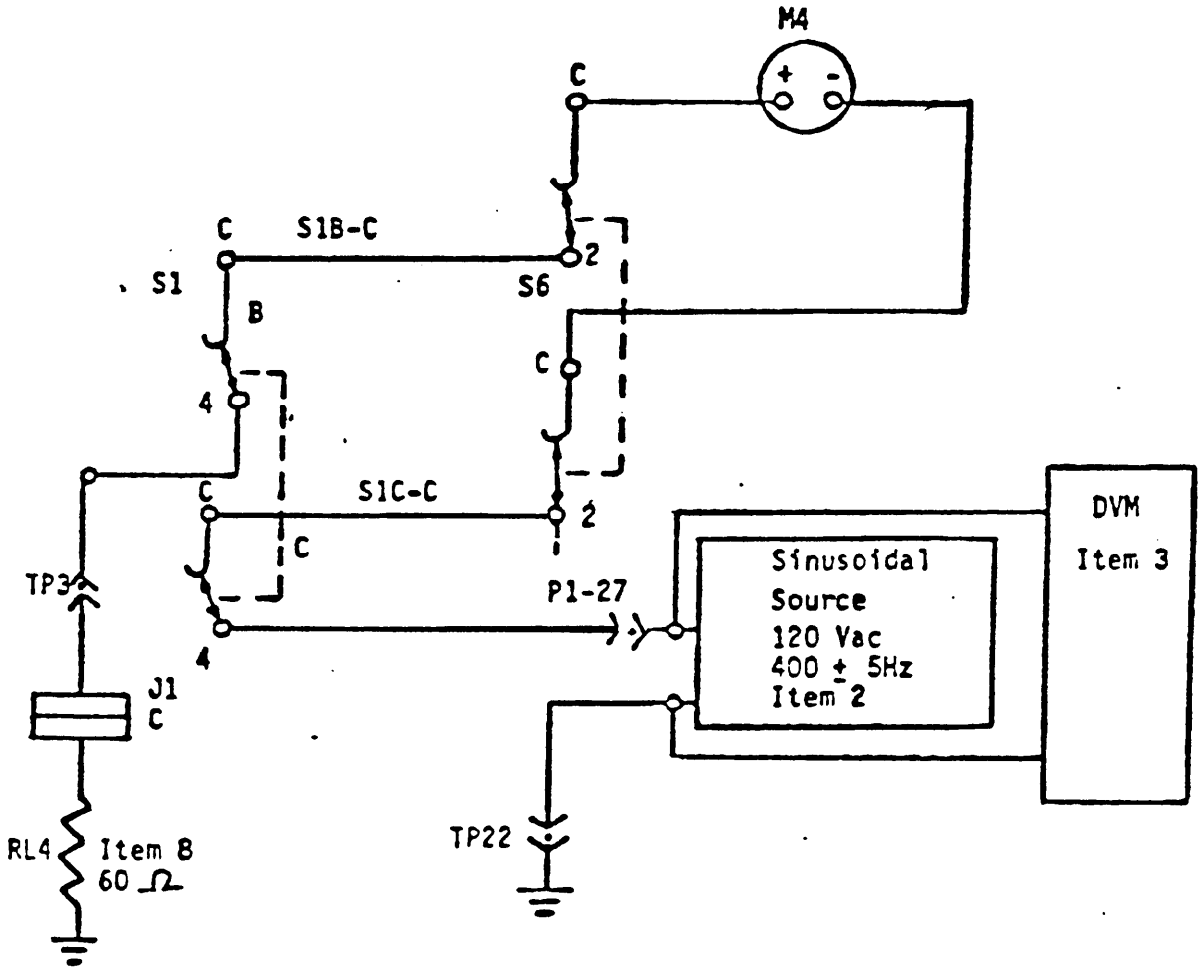


Figure 4. M4 current meter setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.7.3.5 R1 torque resistor. Connect test equipment and panel assembly as shown in Figure 5. Set S7 to position 2 (Normal Load) and ST to 2 position 1. Adjust power supply to 70.0 ± 0.2 Vdc and read 35 Vdc ± 2% on digital voltmeter to insure conformance to 3.5.2.

4.7.3.6 R2 torque resistor. Connect test equipment and panel assembly as shown in Figure 5. Set S7 to position 3 (Full Load) and ST to position 2. Adjust power supply to 80.0 ± 0.2 Vdc and read 40 Vdc ± 2% on digital voltmeter to insure conformance to 3.5.2.

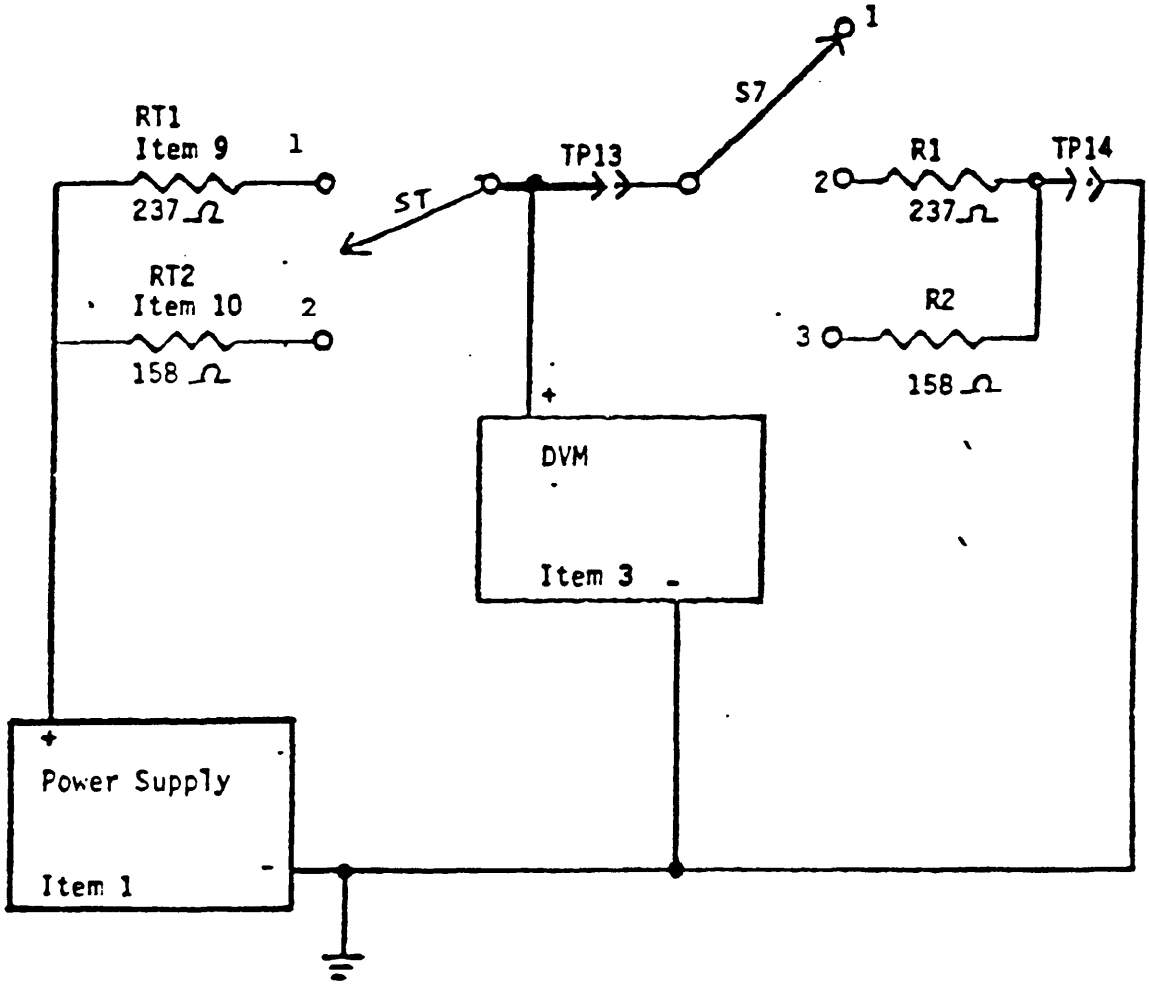


Figure 5. Torque resistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.8 Soldering. Soldering processes shall be inspected to the requirements and acceptance criteria of Note 2 of drawing 12950877 as specified in paragraph 3.7.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instruction PS 11747097. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The panel assembly is designed for rack-mounting into the AN/TSM-100A Electronics System Test Set, which is used for troubleshooting and performance checking of specific weapon system components used on the VADS.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Applicable stock number.
d. First article sample requirements.
e. Packaging requirements, if other than specified in Section 5.
f. Serialization requirements, if applicable.
g. Certification of conformance for each lot of shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Electronics System, AN/TSM-100A
Fire Control System (FCS)
Vulcan Air Defense System (VADS)

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A309)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revisio letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization t waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-48588B (AR)	26 June 1992

3. DOCUMENT TITLE: TEST SET, INVERTER, CONVERTER PANEL ASSEMBLY: 11747097

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL,NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — *Previous editions are obsolete.* — 198/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.