MIL-M-52182E
AMENDMENT 1
6 July 1988

MILITARY SPECIFICATION

MELTER, ASPHALT

This amendment forms a part of MIL-M-52182E, dated 24 January 1984, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

6.1.1, under SPECIFICATIONS, MILITARY, delete MIL-T-22085 in its entirety and add:

"MIL-R-196 Repair Parts, Accessories and Kits, Mechanical, Packaging of.
"MIL-C-46168 - Coating, Aliphatic Polyurethane, Chemical Agent Resistant."

Under STANDARDS, MILITARY, delete "MIL-STD-1188" in its entirety and add:
"MIL-STD-1791 - Design for Internal Aerial Delivery in Fixed Wiring Aircraft."

2.2, delete "AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI) in its entirety and substitute:

ASSOCIATION OF AMERICAN RAILROADS (AAR)

Rules Governing the Loading of Department of Defense Material on Open Top Cars, section 6.

(Application for copies should be addressed to the Association of American Railroads, 50 F Street, Washington DC 20001.)

"AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

B31.1 - Code for Pressure Piping.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)"

PAGE 3

2.2, under AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM), add:

"D 3951 - Standard Practice for Commercial Packaging."

AMSC N/A FSC 3895
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:09Z
Check the source to verify that this is the current version before use.

PAGE 5

3.4.11, line 4, delete "ANSi B31.1" and substitute "ASME B31.1".

PAGES 7 and 8

"3.13 Transportability. The asphalt melter shall be capable of being transported by military or commercial trailers, trains, vessels, aircrafts and can withstand the impact forces encountered in shipment without damage or permanent deformation. The asphalt melter shall be equipped with tiedown and slinging provisions.

"3.13.1 Tiedown provisions. The tiedown provisions shall conform to MIL-STD-209, for type II equipment, class 2 or 3 provisions and in MIL-STD-1791, for equipment restraint criteria. The tiedown provisions shall satisfactorily complete the pull testing as specified without weld failure, permanent deformation, connecting structural components.

"3.13.2 Slinging provisions. The slinging provisions shall conform to MIL-STD-209, class 1 or 3, type II. The provisions shall enable the complete asphalt melter to be lifted in the normal operating position, and the dedrumming tunnel to be lifted and placed in melting and storage tank. The provisions shall be located so that not less than one inch clearance is maintained between slings and all exterior parts and shall be fastened to members which will withstand stresses in the amount and direction of pull specified for the provisions without weld failure, permanent deformation, cracking, loosening, or breaking of the provision or its connecting structural components. Slinging provisions may also be used as tiedown provisions when such provisions meet the requirements specified in 3.13.1. All slinging/tiedown provisions shall be labeled "LIFT", "TIEDOWN" or "LIFT TIEDOWN", as appropriate, in 1-inch high letters.

"3.13.3 Air transportability. The asphalt melter shall be air transportable in C-130, C-141, and C-5A aircraft in accordance with MIL-STD-1791. Dissassembly to achieve air transportable configuration shall be accomplished in not more than 2 hours, and reassembly shall be accomplished in not more than 2 hours, using only 2 people and common took, and lifting devices available in the military unit.

'*3 .13.4 Rail transportability. The asphalt melter shall be rail transportable in CONUS and NATO countries without restrictions. The asphalt melter, shall have a dimensional profile within the Gabarit International de Chargement (GIC) outline diagram (see figure 2) when loaded on a 50-inch high rail car. The asphalt melter shall be capable of with shock loads resulting from rail impact testing in accordance with 4.5.2.8 without failure, damage, or permanent deformation.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.

"3.13.5 Highway transportability. The asphalt melter, when loaded on a semitrailer tractor, shall be within the highway permit limits of all states.

PAGE 9

3.19, delete in its entirety and substitute:

3.19 Treatment and painting. The portions of the asphalt melter normally painted, internally and external, shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2), top coat color shall be camouflage green 383 conforming to MIL-C-46168. When specified (see 6.2), the asphalt melter shall be overcoated in accordance with the Government furnished camouflage patterns with MIL-C-46168 top coat of the colors specified in the camouflage patterns except the first article may be camouflage green 383. Heat resistant paint conforming to MIL-P-14105 shall be used on parts of the asphalt melter subjected to a temperature of 400 °F or higher. Color per MIL-P-14105 shall be in accordance with FED-STD-595, lusterless dark green number 34079 unless otherwise specified. As soon as practicable after cleaning and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated with one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current materials according to manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects."

3.19.1 ~~Camouflage~~ pattern data. When specified (see 6.2), the contractor shall provide camouflage pattern data.

3.19.2 Government furnished property. When specified (see 6.2), the following property in the quantity indicated will be furnished by the Government (see 6.7).

Item No.	Description	Quantity
1	Camouflage paint pattern	As required"

PAGE 11

4.5.1, item 117, delete in its entirety and substitute: After item 123, add:

117. Tiedown provisions not as specified.
117a. Slinging provisions not as specified.
117b. Air transportability requirements not met.
117c. Rail transportability requirements not met.
117d. Highway transportability requirements not met.
"123a. Color not as specified (see 3.19).
123b. Camouflage pattern data not provided when specified (see 3.19.1)."

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.

4.5.2.3, lines 17 thru 21, delete "The continuous time period shall.....the recorded continuous time period " and substitute "The continuous time period shall begin at the start of the second charge."

4.5.2.6 thru 4.5.2.7.2, delete in their entirety and substitute:

"4.5.2.6 Tiedown provisions. The tiedown provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.13.1. Inability to meet the requirements of 3.13.1 shall constitute failure of this test.

"4.5.2.7 Slinging provisions. The slinging provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.13.2. Inability to meet the requirements of 3.13.2 shall constitute failure of this test.

"4.5.2.8 Rail impact test. The first article asphalt melter shall be tested in accordance with the following rail impact test procedure:

Step 1. From one to five railcars shall be positioned on a level section of track. The following conditions shall be satisfied:

a. The total weight of the car(s) shall be at least 114,000 kilograms (250,000 pounds).
b. The couplers between any cars shall be compressed to take up any slack.
c. All of the air and hand brakes on the car(s) used shall be set.
d. Any load in or on the car(s) shall be secured to prevent sliding or shifting; any movement greater than 5 centimeters (1.97 inches) shall be justification for retest.
e. The end of the buffer car to be struck must have a standard draft gear.

Step 2. Mount the test item on the test car. The test car shall be equipped with standard draft gears and conventional under frames. Mounting of the test item shall incorporate the standard loading and bracing method as shown in section 6 of the Association of American Rail Roads (ARR) "Rules Governing the Loading of Department of Defense Materiel on the Open Top Cars." No exotic or unusual tiedown methods shall be used; any nonstandard loading and bracing must be approved by the Military Traffic Management Command Transportation Engineering Agency (MTMCTEA). ATTN: MTT-TR, P.O. Box 6276, Newport News, VA 23606-0276 prior to testing. The arrangement of the test item and its blocking and tiedown to be tested shall be identical to that proposed and approved by MTMCTEA (if nonstandard).

Step 3. Situate the test car between the buffer cars and the locomotive, and pull the test car at least 65 meters (200 feet) from the buffer car(s) along a level section of track (a minimum distance to achieve the required locomotive speeds) l

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.

Step 4. Position the knuckles of the buffer and test cars for coupling.

Step 5. Install a timing device to measure the test car speed (±.1 km/hr) just prior to impact with the buffer car(s). Suggested methods include electronic timing (microswitches) and radar. The use of torpedoes and a stopwatch is permissible but not recommend because of the inaccuracies involved.

Step 6. Push the test car toward the buffer car(s) and, by using the locomotive's speedometer or other means, release the test car when the desired test speed is reached, thus allowing the test car to freely impact the buffer car(s).

Step 7. Repeat step 6 until the test car(s) has impacted the buffer car three times at the same end, once each at speed of 6.4, 9.7 and 13.0 km/hr (4, 6, and 8 mph), +0.8 km/hr (0.5 mph) or -0.0 km/hr. Reverse the test car and repeat the 13.0 km/hr (8 mph) for a total of 4 impacts.

NOTE: Adjustment of the lading or securing mechanism or allowed without a complete retest.

"4.5.2.6.1 Failure criteria. Failure to meet the requirements of 3.13.4 and 4.5.2.8 rail impact test and the operational test shall constitute failure of this test."

PAGES 14 and 15

4.7.1.3, line 2, delete "2.5" and substitute "1.0".

Defects 124 thru 136, delete in their entirety and substitute:

"124. Materials, methods, and containers not as specified. Each incorrect material, method, or container shall be considered one defect.
125. Tunnel not placed and secured in the tank as specified.
126. Drains in the tank not left open as specified.
127. Oil lines not closed and capped as specified.
128. Surfaces requiring a contact preservative in accordance with referenced document not coated as specified.
129. Drum hoist not placed in box, immobilized, and box sealed as specified.
130. Technical publications not preserved as specified.
131. Repair parts not preserved in accordance with the referenced document.
132. Maintenance tools not preserved in accordance with the referenced document.
133. Consolidation not as specified.
134. Box not as specified for consolidation.
135. Packing not as specified for all levels.
136. Marking missing, illegible, incorrect, or incomplete."

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.

5.1, line 1, delete "commercial" and substitute "C".

5.1.1.4, delete in its entirety and substitute:

"5.1.1.4 Technical publications. Technical publications, when applicable, shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3."

PAGE 16

5.1.1.5, delete in its entirety and substitute:

"5.1.1.5 Repair parts. Repair parts, when applicable, shall be preserved in accordance with level A of MIL-R-196."

5.1.1.7, lines 4 thru 6, delete the last sentence in its entirety and substitute: Components that do not fit in the accessory box, technical publications, repair parts, and maintenance tools shall be consolidated together in a close fitting box conforming to PPP-B-601, overseas type, style optional."

5.1.2, delete in its entirety and substitute:

"5.1.2 Level C. Each complete asphalt melter and all items issued with the asphalt melter shall be preserved in accordance with MIL-P-116, method III."

5.2, delete "commercial" and substitute "C".

5.2.2, delete in its entirety and substitute:

"5.2.2 Level C. Each complete asphalt melter, preserved as specified in 5.1, shall be packed for mobile Shipment. Disassembled components and accessories shall be packed so as to protect against physical and enviromental damage during shipment, handling and storage."

5.3 thru 5.3.2, delete in their entirety and substitute:

"5.3 Marking. Marking shall be in accordance with MIL-STD-129."

PAGE 17

6.2, item "l", delete in its entirety and substitute:

"l. Level of preservation and packing (see 5.1 and 5.2).

"m. When camouflage data will be provided (see 3.19.1)."

After 6.2, add:

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.

"6.2.1 Data requirements. When this specification is used for an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.410-6 are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph No.	Data requirements	Applicable DID No.
a. 3.19.1	Color photograph prints	DI-MISC-30192
b. 3.19.1	Camouflage line art data	DI-MISC-30176"

(Data item descriptons related to this specification, and identified in section 6 will be approved and listed as such in DOD 5000.19L, Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

After 6.6, add:

"6.7 Government-furnished property. The contracting officer should arrange to furnish the property listed in 3.19.2."

Add new figure 2 after page 18.


Custodians:
Army - ME
Navy - YD

User activity:
Army - AT

Preparing activity:
Army-ME

Project 3895-9292

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.

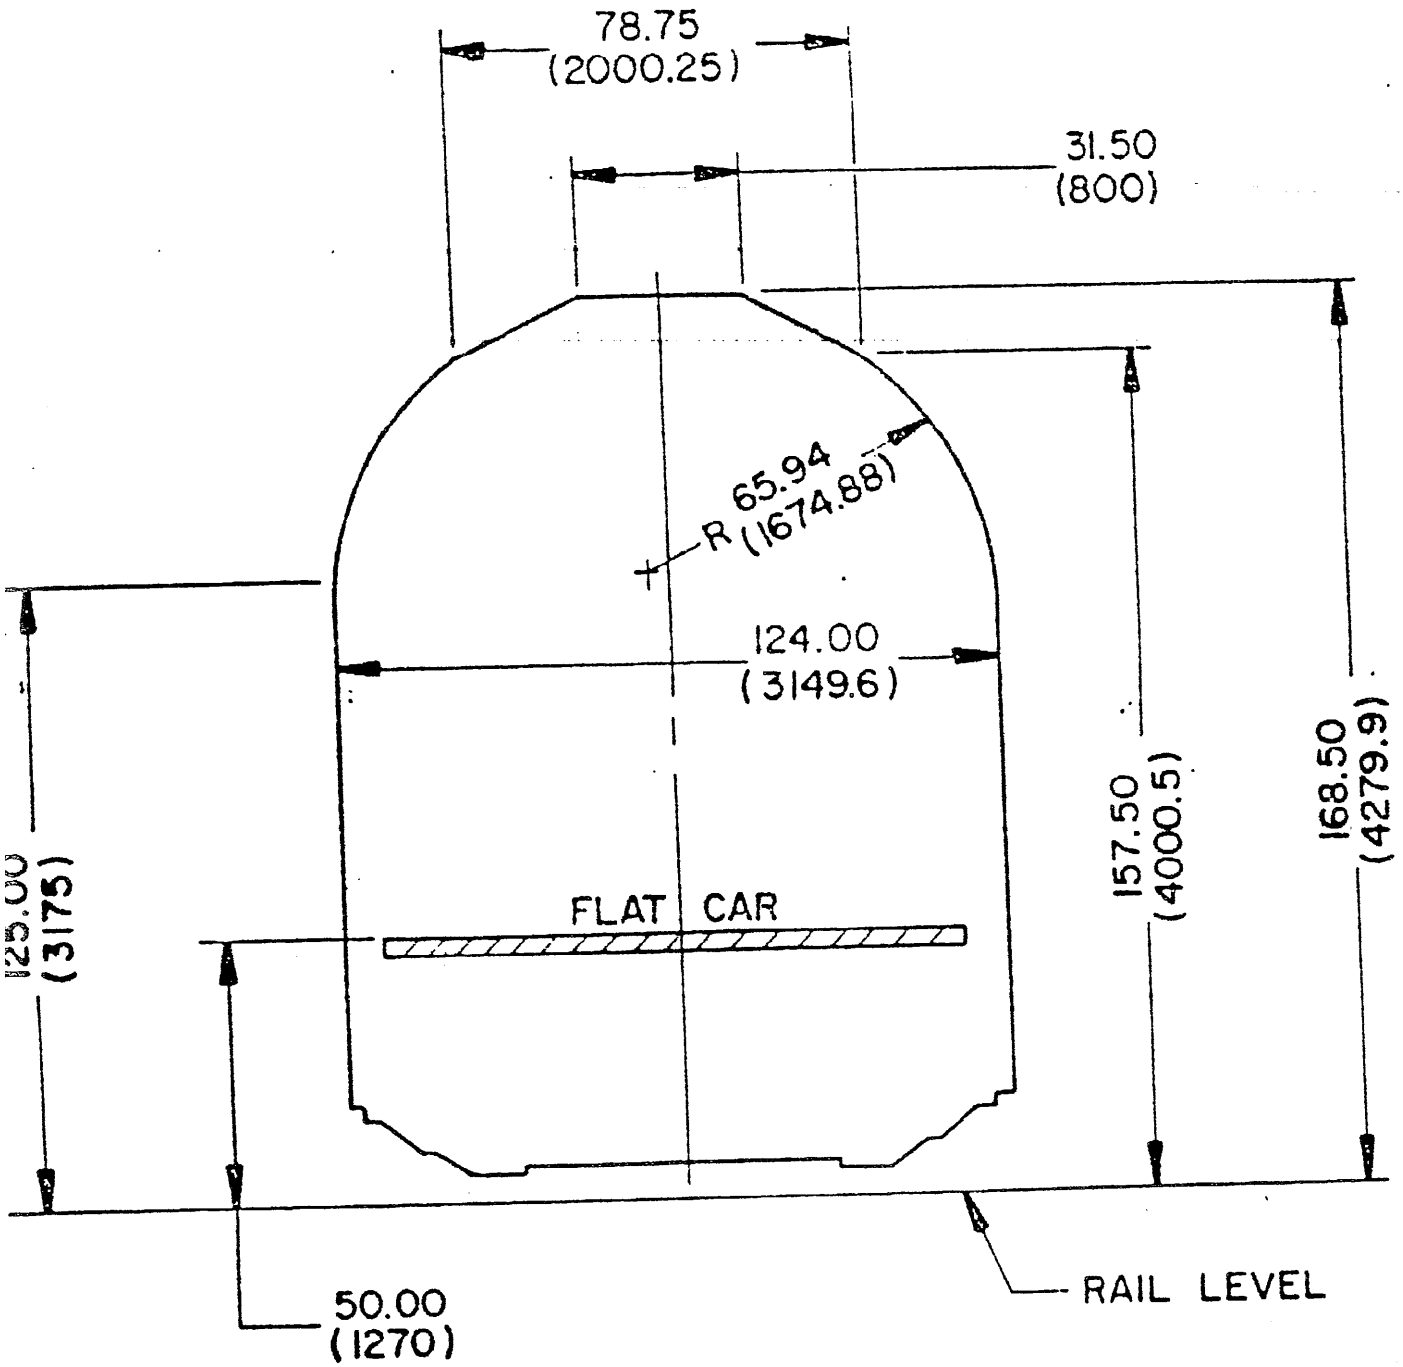

NOTE: DIMENSIONS SHOWN: INCHES (MILLIMETERS)

FIGURE 2. Gabarit International De Charqment (GIC) clearance diagram.

X 4093C

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:09Z
Check the source to verify that this is the current version before use.