MILITARY SPECIFICATION

PLUG, ELECTRICAL, SURFACE TO SURFACE, FOR M75E1 ADAPTION KIT

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of plug entitled Plug, Electrical, which is used in the Nike Hercules warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1168	- Lot Numbering of Ammunition.
MIL-STD-1460	- Soldering of Electrical Connections and Printed Wiring Assemblies, Procedure For.

DRAWINGS

ORDNANCE CORPS

8800516	- Container, Metal, Ammunition, for Plug, Electrical Surface to Surface, M75E1.
8801520	- Plug, Electrical.
8801792	- Contact, Electrical.
8804159	- Contact, Electrical.
8804160	- Electrical Contact Assembly.
8804162	- Electrical Contact Assembly.
8804163	- Electrical Contact Assembly.
8804168	- Wiring Schematic.
8804209	- Screw, Regulator.
8804238	- Electrical Contact Assembly.
8804240	- Arm, Start Lever.
EL-8815541	- Equipment List.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:41Z
Check the source to verify that this is the currentversion before use.

PUBLICATIONS

INTERSTATE COMMERCE COMMISSION

49 CFR 71-78-Interstate Commerce Commission Rules and Regulations for the Transportation of Explosives and Other Dangerous Articles.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The plug shall comply with all requirements specified on the drawing (dwg) 8801520, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. A six letter serial number shall be assigned to the item. Serial numbers required on these items shall be obtained by means of a letter addressed to: Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTENTION: SARPA-QA-T-M. The letter of request shall include:

a. Exact nomenclature of the item as specified on the applicable drawing.
b. Name of the contractor.
c. Contract number or procurement request order number.
d. Number of serial numbers required.

3.4.1 Records shall be made of the serial numbers of the Explosive Actuators mounted in each plug, together with the serial number of the plug. These numbers shall be recorded in the Master Control Sheets.

3.5 Presealing test (timing solenoid). The preset time period shall be 35 plus or minus (±) 0.1 seconds for both timer A (TA) and timer B (TB) when tested as specified in 4.4.2.1, and 35 ± 1.4 seconds for both (TA) and (TB) movements when tested as specified in 4.4.1.2.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:41Z
Check the source to verify that this is the current version before use.

3.6 Interconnection continuity and resistance. There shall be point-to-point continuity in accordance with the wiring schematic (see dwg 8804168) and the voltage drop across pins shall be 0.150 volts maximum when tested as specified in 4.4.2.

3.7 Contact resistance. The resistance of each circuit involving contacts shall not exceed 0.20 ohm for switches in series, 0.10 ohm for individual switches, and 0.40 ohm for the monitoring switches in series when tested as specified in 4.4.3.

3.8 Explosive actuator bridge wire resistance. The bridge wire resistance shall be 4.5 ± 0.5 ohms between pins S and U and pins T and U when tested as specified in 4.4.4.

3.9 Insulation resistance. The insulation resistance of all circuits in the assembly shall not be less than 20 megohms when tested as specified in 4.4.5.

3.10 Environmental testing. The plug shall comply with MIL-STD-810, visual inspection and failure criteria, section 3. The plug shall also comply with 4.3.3.2 before and after each environmental test. Testing shall be as specified in 4.4.6. Tests shall be conducted in the order specified.

3.10.1 Vibration. The electrical plug shall show no evidence of electrical or mechanical damage, such as visible loosening or deformation of any component, and shall meet the requirements of 3.6 through 3.7 after subjection to frequencies varying from five to 55 Hertz (Hz) at a constant double amplitude of 0.02 inch and from 55 to 500 Hz at a constant acceleration of 10 gravity units (g), when tested as specified in 4.4.6.1.

3.10.2 Acceleration. The electrical plug shall show no evidence of damage or malfunction, such as opening of contacts or deformation of any component, and shall meet the requirements of 3.6 through 3.9 during and 3.6 through 3.8 after subjection to a constant acceleration, for at least 10 seconds, of 50 g's in both directions of the line of forward motion of the carrying vehicle and a constant acceleration, for at least 10 seconds, of 20 g's in both directions of each of the other two major axes when tested as specified in 4.4.6.2.1.

3.10.3 Shock. The electrical plug shall show no evidence of damage or malfunction, such as cracking, loosening of components, or opening of contacts, and shall meet the requirements of 3.6 through 3.7 after subjection to three impact shocks of 60 g's with a minimum duration of 10 ± 1 milliseconds when tested as specified in 4.4.6.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

3.10.4 Seal leakage. The plug leakage shall not exceed 1x10-6 cubic centimeters per second when tested as specified in 4.4.6.4.

3.10.5 Sealed plug-low temperature. The preset time shall be 35 + 1.14 seconds for TA to TB movements when tested as specified in 4.4.6.3.

3.11 Soldering. All soldering shall comply with the requirements specified in MIL-STD-1460.

3.12 Dimensions and tolerances. Dimensions and tolerances which effect external profile, functioning, safety or which effect assembly with components external to the plug electrical are mandatory.

3.13 Workmanship.

3.13.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.13.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.13.3 Burrs. Parts shall be free from burrs.

3.13.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.13.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent. All parts shall be vapor degreased with trichlorethylene. Parts are not to be dipped into solution, but suspended above so that vapor condensation can form and run off of parts. Part numbers 8801792, 8804159, 8804160, 8804162, 8804163, 8804238 shall be cleaned in isoproypl alcohol, followed by rinse with clean isopropyl alcohol which shall be blown off with dry nitrogen. Parts and assemblies shall be stored in dust proof containers when not in an operation phase, and assembly shall take place in an atmosphere free from large dust particles, metal filings, or other contaminants. The assembly shall be tested in an atmosphere free from large dust particles, metal filings, or other contaminants.

3.13.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 15 complete assemblies (see dwg 8801520) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I

First article inspection and tests

Inspection or Test	Dest	Non Dest	Testing Sequence Sample Nos. 1-5	6-15
1. Classification of characteristics (see 4.3.2.1)		X		
2. Presealing test (timing solenoid) (see 3.5)		X	1	1
3. Interconnection continuity and resistance (see 3.6)		X	2	2
4. Contact resistance (see 3.7)		X	3	3
5. Explosive actuator bridge wire resistance (see 3.8)		X	4	4
6. Insulation resistance (see 3.9)		X	5	5
7. Seal leakage (see 3.10.4)		X	6	*6
8. Vibration (see 3.10.1)	X			7
9. Acceleration (see 3.10.2)		X		8
10. Shock (see 3.10.3)	X			9
11. Sealed plug-low temperature (see 3.10.5)		X	7	10

*To be performed a second time on samples 6 through 15 prior to Sealed plug-low temperature test.

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table II and Table III), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:41Z
Check the source to verify that this is the current version before use.

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:41Z
Check the source to verify that this is the current version before use.

Table III
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Assembly, prior to sealing (see dwg 8801520).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Leads damaged or of incorrect color	Visual
	102. Incorrect interconnection of pins	Visual
	103. Cold solder connections	Visual
	104. Excessive solder	Visual
	105. Incorrect stripping or wire	Visual
	106. Any component loose or missing	Visual/Manual
	107. Distance from bottom of pin to bottom of electric wire contact	Gage
	108. Distance from bottom of reset contact to top of stop, min	Gage
Minor:		
	201. Evidence of poor workmanship (see 3.13)	Visual

4.3.2.1.2 Plug, electrical (see dwg 8801520).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Marking missing, incorrect, or unidentifiable	Visual

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:41Z
Check the source to verify that this is the current version before use.

102. Any crack or fracture.....Visual
103. Any contact damaged, loose, or missing.....Visual/Manual
104. Improper soldering (see 3.11).....Visual
*105. Height of pin(s) (pins of the same diameter must all appear to be within 1/16 inch in height relative to adjacent pins).....Visual/Gage
106. Keyway orientation improper.....Visual
107. Objective evidence relative to material missing or improper (see 3.1).....Visual
108. Serialization improper or missing (see 3.4).....Visual

*In the event pin(s) don not appear to be within 1/16 inch in height relative to adjacent pins, Gage (see 4.3.4) shall be used to determine the variation from the normal height. Reject any pin that varies by more than 0.063 inch max from the normal pin height of the individual connector. The normal height of the individual connector pins shall be determined by calculating the average height from measurements taken of pins adjacent to the pin that appears to be defective. The forward metal edge of the connector shall be utilized as the reference surface for all measurements of connector pins.

Minor:
201. Protective finish damaged to the extent of exposing base metal.....Visual
202. Evidence of poor workmanship (see 3.13).....Visual

4.3.2.1.3 Preparation for delivery (see dwg 8800516).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:
101. Preservation, marking and packaging not in accordance with dwg.....Visual
102. Packing not in accordance with drawing and 49 CFR-71-78 (see 5.2.1).....Visual

Minor:
201. Evidence of poor workmanship (see 3.13).....Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Presealing test	Critical
b. Interconnection continuity and resistance	Critical
c. Contact resistance	Critical
d. Explosive actuator bridge wire resistance	Critical
e. Insulation resistance	Critical

None of these tests are considered destructive and samples so tested may be returned to the lot.

4.3.3.1 Presealing test. Each plug prior to sealing shall be subjected to this test (see 4.4.1). If any electrical plug fails to comply with the requirement of 3.5, it shall be classified defective and removed from the lot.

4.3.3.2 Interconnection continuity and resistance, contact resistance, explosive actuator bridge wire resistance, and insulation resistance. Each sealed plug prior to shipment shall be subjected to these tests (see 4.4.2 thru 4.4.5). If any electrical plug fails to comply with the requirements of 3.6 thru 3.9, it shall be classified defective and removed from the lot.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8815541). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3)
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Presealing test (timing solenoid). Timing functions shall be observed and recorded in the Master Control Sheet. These tests shall be performed using a solenoid to raise the start lever arm 8804240. The solenoid must raise the start lever arm a distance of 0.241 ± 0.015 inches in 75 milliseconds or less.

4.4.1.1 Regulation test. Both sections of the electrical plug, TA (Pins G and O) and TB (Pins H and O) shall be adjusted by means of the regulator screw 8804209. The adjustment shall be in accordance with 4.4.1.2 except that the accuracy shall be ± 0.1 seconds for both TA and TB. The number of cycles required for the regulation and time of final cycle of timers TA and TB shall be recorded.

4.4.1.2 Timing test in solenoid test fixture.

4.4.1.2.1 Ambient temperature. Upon application of a 28 volt dc potential to the test fixture starting solenoid. the electrical plug shall simultaneously start the timing periods of TA and TB. At the end of the preset times, TA and TB switches shall open. The preset time period shall be 35 ± 1.4 seconds for both TA and TB movements.

4.4.1.2.2 High temperature (160 + 5°F). The electrical plug shall be subjected to a temperature of ± 160 + 5°F for 1 hour and upon application of a 28 volt dc. At the end of the preset times, TA and TB switches shall open. The preset time period shall be 35 ± 1.4 seconds for both TA and TB movements.

4.4.2 Interconnection continuity and resistance. The resistance of the interconnections listed in Table IV shall be measured by a volt-ampere method with a current flow of 10 + 0.20 amperes. The voltage drop shall be 0.150 volts, maximum measured across pins on the mating connector. Each reading shall be observed and recorded in the Master Conrol Sheet.

Table IV

From Pin	To Pin	From Pin	To Pin	From Pin	To Pin
A	F	L	k	Y	Z
A	E	S	M	Y	j
A	J	c	W	Z	j
F	E	c	X	T	N
F	J	c	d	P	R
E	J	W	X	h	e
K	L	W	d	G	B
K	k	X	d	a	f

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:41Z
Check the source to verify that this is the current version before use.

4.4.3 Contact resistance. The contact resistance of each primary switch individually, both primary switches in series, and the monitor switches in series shall be measured. The contact resistance of both primary switches (pins G and H) in series and the monitor switches (pins U and b) in series shall not exceed 0.20 ohm. The contact resistance of each individual primary switch (pins G and O and pins H and O) shall not exceed 0.10 ohm. The contact resistance of the monitor switches (pins U and b) in series shall not be greater than 0.40 ohms. Each reading shall be observed and recorded on Master Control Sheets.

4.4.4 Explosive actuator bridge wire resistance. The bridge wire resistance shall be measured, and the current through the bridge wire shall not exceed 25 milliamperes. The bridge wire resistance shall be 4.5 ± 0.5 ohms between pins S and U and pins T and U. Each reading shall be observed and recorded in the Master Control Sheets.

4.4.5 Insulation resistance. The insulation resistance shall be measured with a test potential of 500 ± 50 volts dc applied successively between each pin and all other pins and the connector shell. Exceptions are directly interconnected pairs and the monitor switches (pins U and b), the primary switches (pins G, H, and O), and the explosive actuator circuit (pins U,S, and T). The insulation resistance shall be 20 megohms minimum. Each reading shall be observed and recorded in the Master Control Sheets.

4.4.6 Environmental testing (see 3.10).

4.4.6.1 Vibration. The electrical plug shall be vibrated through a frequency range of 5 to 500 to 5 Hz in 5 minute cycles for a period of 10 minutes in each of three mutually perpendicular axes at an applied double amplitude of 0.02 inch in the frequency range of 5 to 55 Hz and an applied constant acceleration of 10 g's in the 55 to 500 Hz range, see figure 1. During this test, the primary switches shall be monitored to ensure that no opening or chattering occurs. Upon completion of this test, the electrical plug shall meet the requirements of 4.4.2 through 4.4.5.

4.4.6.2 Acceleration and shock. The assembly's primary switches shall be monitored during these tests to ensure that no opening of contacts occurs.

4.4.6.2.1 Acceleration. The assembly shall be subjected to a constant acceleration of 50 g's for at least 10 seconds applied in both directions of the line of forward motion of the carrying vehicle and of 20 g's for at least 10 seconds in both directions of each of the other major axes, see figure 1. The electrical plug shall be tested as specified in 4.4.1 through 4.4.5 after completion of the acceleration test.

4.4.6.2.2 Mechanical shock. The electrical plug shall be subjected to three impact shocks of 60 g's in each direction along each of its three mutually perpendicular axes with a minimum duration of 10 ± 1 millisecond, see figure 1. Upon

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

completion of these tests the electrical plug shall be tested in accordance with 4.4.2 through 4.4.5.

4.4.6.3 Sealed plug - low temperature. The electrical plug shall be subjected to a temperature of -65 + 5°F for 1 hour and upon application of a 28 vdc potential to the test fixture solenoid, the electrical plug shall simultaneously start the timing peroids of TA and TB. At the conclusion of the preset times, TA and TB switches shall open. Following this test, the hermetic seal shall be broken and the assembly examined for the presence of the helium gas tracer.

4.4.6.4 Seal leakage. After the assembly has been flushed, pressurized and sealed, (see dwg 8801520), it shall be placed in a suitable chamber, which shall be evacuated at a pressure of 2 to 3 mm Hg absolute, and the helium leakage rate shall be determined.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The plug shall be packaged in accordance with dwg 8800516 using the specified moisture barrier.

5.1.2 Level C. The plug shall be packaged in accordance with dwg 8800516 except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. The plug shall be packed in accordance with dwg 8800516 and the Interstate Commerce Commission Regulations for Transportation of Explosives and other Dangerous Articles, paragraph 73.66 (see Code of Federal Regulations 49 CFR-71-78).

5.3 Marking. Marking shall be as specified in accordance with dwg 8800516.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 3.4 and 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T.


6.4 Supersession data. This specification supersedes the requirements of Purchase Description X-PA-PD-1191 dated 30 November 1959 and Amendment 7 dated 21 June 1961.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. NUOR-A044

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

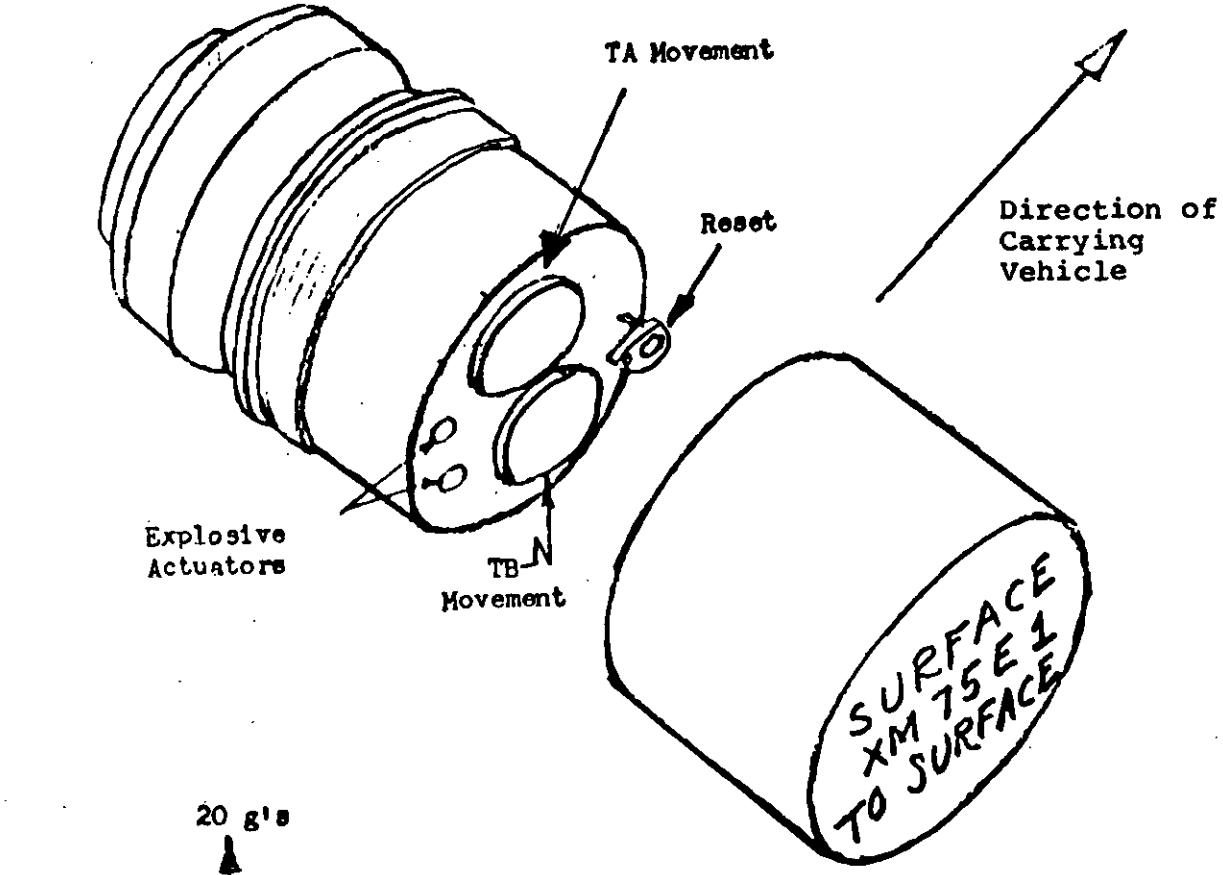

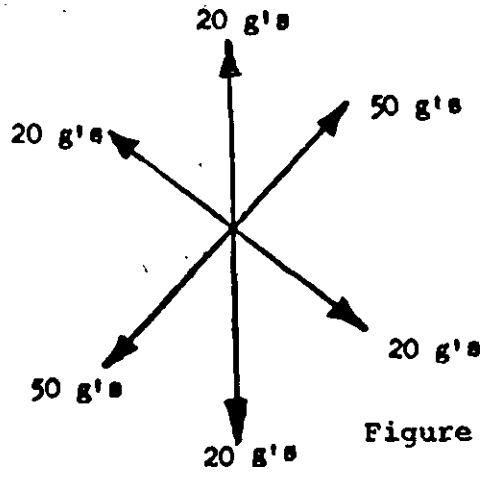


Figure 1 Direction of Acceleration Forces

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:41Z
Check the source to verify that this is the current version before use.