MIL-C-45924(WC)
AMENDMENT 3
11 June 1976
SUPERSEDING
AMENDMENT 2
18 December 1975

MILITARY SPECIFICATION

CONTROL PANEL, GUNNER

This amendment forms a part of Military Specification MIL-C-45924(WC), dated 26 March 1974.

Page 1

Paragraph 2.1 - Under "SPECIFICATIONS" add the following specification:

"MIL-A-45967 - Armament Subsystem, Helicopter: M28A1".

Under "STANDARDS" add the following standard:

"MIL-STD-781 - Reliability tests: Exponential Distribution"

Page 5

Add the following paragraphs:

"3.6 Reliability. When specified (see 6.2), the gunner control panel shall have a minimum acceptable Mean-Mission-Between-Failure (MMBF) of not less than 1085 missions with a desired and specified MMBF of 1627 missions. A mission is defined as those functions of the gunner control panel necessary to simulate the expenditure of 4,000 rounds of 7.62mm ammunition and 283 rounds of 40mm ammunition during a two hour flight. A failure will be defined as a non-occurrence of the appropriate event when the required control switches are actuated. Testing shall be as specified in 4.4.

3.6.1 Reliability criteria. The above reliability requirements are based on a minimum acceptable Mean-Time-Between-Failure (MTBF) of 2170 hours.

FSC 1090

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.

3.7 Environmental conditions. When specified (see 6.2), the gunner control panel shall be capable of satisfying the environmental conditions in accordance with MIL-A-45967. When subjected to the environmental conditions, the gunner control panel shall not exhibit any detrimental damage or deterioration which would prevent acceptable performance. Testing shall be as specified in 4.4.

3.8 Electromagnetic interference (EMI). When specified (see 6.2), the gunner control panel shall be capable of satisfying the EMI requirements in accordance with MIL-A-45967. Testing shall be as specified in 4.4."

Paragraph 4.4, Line 6 - Delete: "and such other inspection as is necessary to determine compliance with the requirements of the contract", and substitute "and, when specified (see 6.2), the reliability test (see 3.6 and 4.6.2), environmental conditions test (see 3.7 and 4.6.3), electromagnetic interference test (see 3.8 and 4.6.4), and such other inspection as is necessary to determine compliance with the requirements of the contract."

Add the following paragraphs:

"4.6.2 Reliability test. When specified (see 6.2), the reliability test shall be performed by repeating the test cycle defined in 4.6.2.1. For each test cycle, the failure versus test cycle data shall be cumulatively plotted. Testing shall be terminated whenever a decision point, as defined in Figure 1, has been reached.

4.6.2.1 Reliability test cycle. One test cycle (representing the functions necessary to perform one mission) shall be completed by performing the test cycle specified in 4.6.1. Procedures to verify requirements for the Weapon Switch (3.3.3.5), the Gunner-in-Control Lamp (3.3.4.3), and the Weapons Unclean Lamp (3.3.4.9), shall be repeated five times during each test cycle.

4.6.2.2 The contractor shall also provide replacement parts as required to complete the testing.

4.6.2.3 At the option of the contractor, the test may be interrupted at the end of a cycle and the test restarted later at the point at which it was interrupted.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T04:16Z
Check the source to verify that this is the current version before use.

4.6.2.4 Complete, accurate records shall be kept for each reliability test, showing each failure and part replacement, including an indication of when each failure occurred. In addition, complete, accurate records shall be kept for all time losses attributable to the panel, including the time for each stoppage.

4.6.3 Environmental conditions test. When specified (see 6.2), tests shall be performed for each environmental condition in accordance with the applicable method and procedure specified in MIL-A-45967. The control panel shall be operated during these tests in accordance with the functional test method of 4.6.1. Open areas of the control panel shall be covered to simulate aircraft installation for the humidity, salt, sand and dust tests.

4.6.4 Electromagnetic interference (EMI) test. When specified (see 6.2), the EMI test shall be performed in accordance with the EMI requirements specified in MIL-A-45967. The control panel shall be operated during the EMI test in accordance with the functional test method of 4.6.1."

Page 8

Paragraph 6.2.1 - Add the following:

"i. Reliability, environmental conditions and electromagnetic interference requirements and tests, when required (see 3.6, 3.7, 3.8, 4.4, 4.6.2, 4.6.3 and 4.6.4.)."

Page 9

Add the following "Figure 1" as last page to the specification.


Custodian:
Army - WC

Preparing Activity:
Army - WC

Project No. 1090-A037

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.

Decision Risks: 30%
Discrimination Ratio: 1.5:1
MIL-STD-781 Test Plan VII

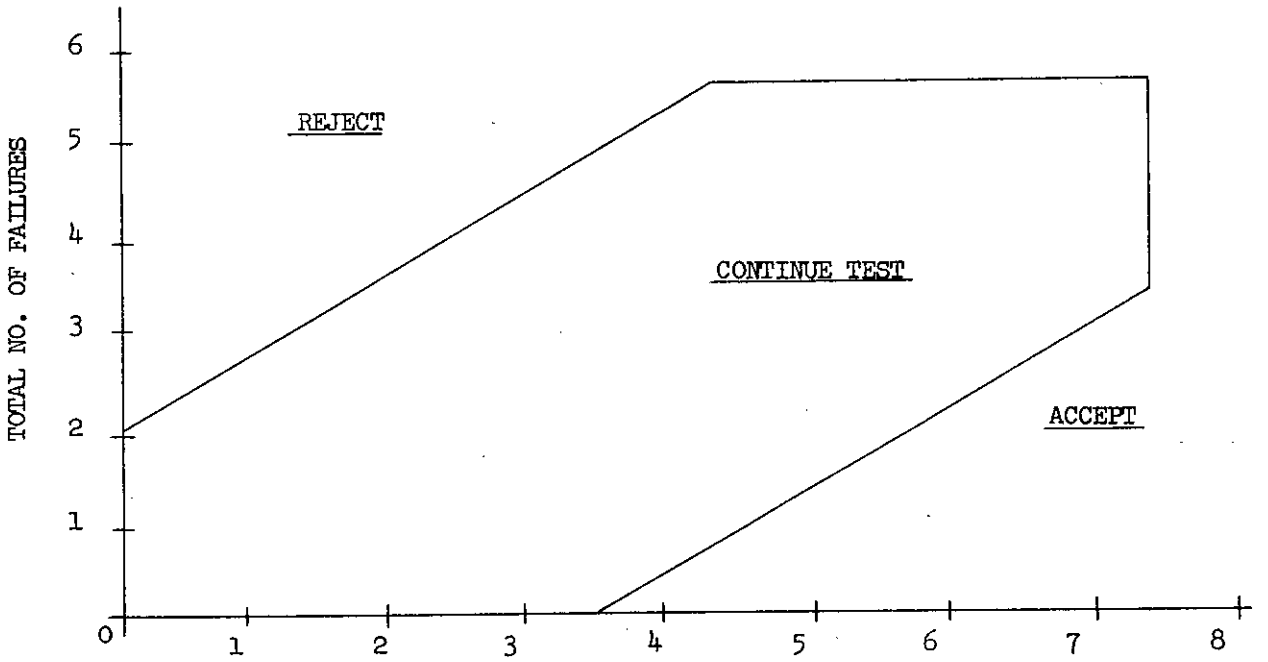

NO. OF FAILURES	REJECT (EQUAL OR LESS)	ACCEPT (EQUAL OR MORE)
0	N/A	3418
1	N/A	4736
2	N/A	6054
3	1318	7373
4	2637	7373
5	3955	7373
6	7373	N/A

FIGURE I

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.