MIL-S-45927(WC)

23 July 1974
SUPERSEDING
(See Section 6)

MILITARY SPECIFICATION

SIGHTING STATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of sighting station to be used in the M28A1 Helicopter Armament Subsystem. The sighting station provides the means for controlling the position of the aircraft turret in the flexible mode for firing either or both the 7.62 mm and 40mm weapons.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-W-13855	-	Weapons, Small Arms and Aircraft Armament Subsystems, General Specification For.
MIL-F-13926	-	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of.
MIL-P-14232	-	Parts, Equipment and Tools for Army Materiel, Packaging and Packing of.
MIL-I-45607	-	Inspection Equipment Acquisition, Maintenance and Disposition of.
MIL-A-45967	-	Armament Subsystem Helicopter: M28A1

FSC 1090

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109	-	Quality Assurance Terms and Definitions.
MIL-STD-781	-	Reliability Tests: Exponential Distribution.

DRAWINGS

Rock Island Arsenal

F11687657	-	Sighting Station, Assembly
IEL11687657	-	List of Inspection Equipment

(Product drawings referenced in this specification form a part of F11687657; acceptance inspection equipment drawings form a part of IEL11687657.)

PUBLICATIONS

Rock Island Arsenal

P11687657	-	Packaging Data Sheet for Sighting Station Assembly

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Requirements for submission of the first article shall be as specified in the contract (see 6.2). Unless otherwise specified (see 6.2), the first article shall include the pilot pack (see 5.1).

3.2 Materials, construction and design. Sighting stations shall conform to the materials, construction and design requirements specified herein, on Drawing F11687657, and in MIL-F-13926 and MIL-W-13855.

3.2.1 Weight. The weight of the sighting station shall not exceed 18.5 pounds.

3.3 Functional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

3.3.1 Power input. The sighting station shall meet the requirements specified herein when supplied with 28 ± 0.1 volts direct current (vdc) applied to the resolver amplifier, pin H of A2P1. All other power requirements shall specify 22-30 vdc with a maximum current of 0.85 amperes (amps) and a reference signal of 115 ± 6 vdc, 400 hertz (Hz) with a maximum current of 0.1 amps.

3.3.2 Reticle illumination. The reticle illumination circuit shall energize when 22-30 vdc is applied to pin $\bar{E}$ of A2P1 (pin $\bar{F}$ grounded) and shall illuminate one reticle lamp filament as selected by the filament select switch. The reticle intensity control (rheostat) shall be capable of adjusting the reticle image intensity from maximum to minimum brightness. Reticle intensity shall be sufficient to assure viewing of high and low contrast targets under bright and low light level conditions The axis of the reticle shall not deviate more than 5.0 mils when the sighting station is subjected to a vibration of 43.2 Hz at 3 g's.

3.3.3 Azimuth sight position. A voltage of 10 ± 0.1 volts-root-mean-square (vrms), at 400 Hz (reference to ground) shall be applied to each azimuth resolver assembly input (one at a time).

3.3.3.1 Input voltages applied first to pin G and then to pin W of A2P1 shall produce output voltages at:

a. Pin C of A2J1 with sight at zero azimuth and elevation. The measured voltage shall be equal to the input voltage ± 12 millivolts (mv) and be in time phase, ± 2° with the input voltage.
b. Pin K of A2P1 when sight is at zero elevation and rotated to 90° right or left azimuth. The output voltage shall increase from zero volts and be equal to the input voltage, ± 12 mv. As the sight is rotated right, the output voltage shall be in time phase, ± 2° with the input voltage and as the sight is rotated left, the output voltage shall be 180 ± 2° out of time phase with the input voltage.

3.3.3.2 Input voltages applied to pin T of A2P1 shall produce output voltages at:

a. Pin K of A2P1 with sight at zero azimuth and elevation. The measured voltage shall be equal to the input voltage, ± 12 mv and shall be in time phase, ± 2° with the input voltage.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T04:16Z
Check the source to verify that this is the currentversion before use.

b. Pin C of A2J1 when sight is at zero elevation and rotated to 90° right or left azimuth. The output voltage shall increase from zero volts and be equal to the input voltage, ± 12 mv. As the sight is rotated right, the output voltage shall be 180° ± 2° out of time phase with the input voltage and as the sight is rotated to the left, the output voltage shall be in time phase ± 2° with the input voltage.

3.3.4 Elevation sight position. A voltage of 10 ± 0.1 vrms at 400 Hz (reference to ground) shall be applied to each elevation resolver assembly input (one at a time).

3.3.4.1 Input voltages applied to pin W of A2P1 shall produce output voltages at:

a. Pin E of A2J1 when sight is at zero azimuth and elevation. The measured voltage shall be not less than 9.5 vrms and 180° ± 2° out of time phase with the input voltage.
b. Pin E of A2P1 when the sight is moved in elevation or depression, the output will increase from zero volts. In depression, the output voltage shall be in time phase ± 2°; in elevation, the output voltage shall be 180° ± 2° out of time phase with the input voltage.

3.3.4.2 Input voltages applied to pin N of A2P1 shall produce output voltages at:

a. Pin E of A2P1 when sight is at zero azimuth and elevation. The measured voltage shall be equal to the input voltage ± 12 mv, and shall be in time phase, ± 2, with the input voltage.
b. Pin E of A2J1 when the sight is at zero azimuth and the sight is moved in elevation or depression the output will increase from zero volts. In depression, the output voltage shall be in time phase ± 2°; in elevation, the output voltage shall be 180° ± 2° out of time phase with the input voltage.

3.3.4.3 Range compensation. A range adjustment shall be provided from 0 to 1600 meters. An input voltage of 10 ± 0.1 vrms, 400 HZ applied to the elevation resolver assembly at pin C of A2J1 shall produce an output voltage at pin C of A2P1 of zero vrms, 400 Hz, ± 12 mv. As the range adjust dial is increased toward 1600 meters, the output signal shall increase linearly to 9 ± 1.0 vrms, 400 Hz, at 1600 meters when operating with an instrument load of 1.0 megohm or larger. If a dead spot exists on the range dial, it shall be below zero at zero elevation and zero azimuth.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.

3.3.5 Compensation switch. The toggle switch when actuated shall superimpose velocity to the turret control system (continuity between pins A and Z of A2P1).

3.3.6 Trigger switches. Low speed and high speed operation of each machine gun shall be controlled by 2 two-position trigger switches. These switches shall be mechanically adjusted so that the operator will have positive (feel) indication when changing from first to second position. Right and left grenade launcher operation shall be controlled by the 40mm firing buttons. (Low Speed operation - continuity between B and D of A2P1 when either right or left trigger switches are actuated to the first position.) (High Speed operation - continuity between Pins B and C of A2P1 when either right or left trigger switches are actuated to the second position.) (40mm operation - continuity between Pins B and S of A2P1 when either right or left firing buttons are pressed.)

3.3.7 Sight action switches. The actuation of the sight action switches shall indicate electrical continuity between the sighting station and the turret and permit slewing of the turret from the sight. (Continuity between Pins A and Y of A2P1 when either the right or left action switch is depressed.)

3.3.8 Weapons select switches. A toggle switch shall provide for the selection of either left or right hand weapons or both weapons simultaneously when similar weapons are installed in the right or left hand position. (Continuity between pins R and L and pins R and F of A2P1 for the "BOTH" position of S9. Continuity between pins R and L of A2P1 for the right gun position. Continuity between pins R and F of A2P1 for the left gun position.)

3.3.9 Indicator lamp. The pilot-in-control (amber) lamp shall illuminate when +23 vdc is applied to pin A of A2P1 (pin F grounded). The lamp shall be capable of being dimmed from a full bright to a complete blackout condition.

3.3.10 Stow locks. Stow locks shall be capable of locking the sight in the zero azimuth and elevation positions.

3.3.11 Ground safety lever. The ground safety lever when located at its lower assembled position shall prevent the sight from being depressed more than 41° maximum. When placed in the upper position the lever shall permit full 50° depression of the sight head.

3.3.12 Sight elevation upper limits. The sight controlled by the elevation azimuth cam mechanism shall elevate to the following degrees (°) relative to the stated azimuth positions:

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the currentversion before use.

Azimuth Position	Elevation (± 11 Mils)
0°	17.5°
57° Left & Right	17.5°
75° Left & Right	14.83°
109° Left & Right	9.75°

3.3.13 Sight elevation lower limits. The sight shall be capable of a minimum depression of 50° between the following azimuth positions:

0° to 109 ± 1° right
0° to 109 ± 1° left

3.3.14 Sight deviation (azimuth). When the sight is positioned at 109.5° left or right azimuth, the cross hair shall not deviate more then ± 13 mils in azimuth and be between 8 mils in elevation and 12 mils in depression from the established target point.

3.3.15 Reticle cross hair alinement. The reticle cross on the sight shall be no more than ± 10 mils in azimuth and ± 6 mils in elevation from the zero reticle target point when the telescope is aligned on its target.

3.3.16 Filter. The light filter shall be capable of rotation from a plane perpendicular to the line of sight to a plane parallel with the line of sight without binding or interference.

3.4 Interchangeability. Unless otherwise specified on the drawings, all replacement parts shall be interchangeable. (In normal assembly operations, there shall be no objections interposed to preferential assembly of parts provided all parts are dimensionally and functionally acceptable.) Testing shall be as specified in 4.5.3.3.

3.5 Reliability. When specified in the contract (see 6.2), the sighting station shall have a minimum acceptable Mean-Mission-Between-Failure (MMBF) of not less than 227 missions. A mission is defined as those functions of the sighting station necessary to simulate the expenditure of 4,000 rounds of 7.62mm ammunition and 265 rounds of 40mm ammunition during a two hour flight. A failure is defined as a non-occurrence of the appropriate event when power is applied and the required control switches are actuated. Testing shall be as specified in 4.4.

3.5.1 Reliability criteria. The above reliability requirements are based on a minimum acceptable Mean-Time-Between-Failure (MTBF) of 455 hours. Testing shall be as specified in 4.4.

3.6 Environmental conditions. When specified in the contract (see 6.2), the sighting station shall be capable of satisfying the specific environmental conditions in accordance with MIL-A-45967 for the subsystem. When subjected to the environmental conditions, the sighting station shall not exhibit any detrimental damage or deterioration which would prevent acceptable performance. Testing shall be as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.

3.7 Electromagnetic interference (EMI). When specified in the contract (see 6.2), the sighting station shall be capable of satisfying the specific requirements in accordance with MIL-A-45967 for the subsystem. When subjected to the EMI requirements, the sighting station shall not exhibit any detrimental damage or deterioration which would prevent acceptable performance. Testing shall be as specified in 4.4.

3.8 Marking. Each sighting station shall be marked in accordance with the applicable drawing and MIL-W-13855. Each sighting station shall be identified by a serial number assigned by the procuring activity (see 6.2).

3.9 Workmanship. Workmanship shall be in accordance with MIL-W-13855 and MIL-F-13926.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.4 First article inspection. The first article (initial production unit(s) shall be submitted for inspection in accordance with contract requirements (see 6.2). The first article shall be representative of the production processes used during quantity production. The first article shall be subjected to quality conformance inspection specified herein, and when specified in the contract, the reliability test (see 3.5 and 4.6.3), environmental test (see 3.6), and electromagnetic interference (EMI) test (see 3.7), and such other inspection as is necessary to determine that all the requirements of the contract have been met.

4.5 Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.

4.5.1 Inspection lots. The formation, size, and presentation of inspection lots shall be in accordance with MIL-STD-105 and MIL-W-13855. Sighting stations shall be assembled from component parts that have met all inspection requirements specified herein.

4.5.2 Examination.

4.5.2.1 Component parts and concurrent repair parts. Examination of parts shall be performed in accordance with the criteria specified in the contract (see 6.2). The contractor's examination of parts shall be accomplished prior to their assembly into the end item or submission for acceptance as repair parts.

4.5.2.2 Sighting station. Each sighting station shall be visually and manually examined to determine conformance with the material, construction, and design requirements of 3.2. Each step in the examination shall include a visual examination for proper cleaning and presence of the specified protective coating and to determine the general quality, completeness of manufacture, assembly, and workmanship. The examination provisions shall be applied at the earliest practical point in manufacture at which it is feasible to inspect for acceptance without risk of change in the characteristic by subsequent operations. Reinspections of these characteristics on the completed product is not required provided assurance exists that the characteristic has not been changed, degraded or damaged by subsequent manufacturing, assembly or handling, and that adequate inspection records are maintained. Sighting stations failing to meet the requirements shall be rejected.

4.5.2.2.1 Weight. Examine the first three sighting stations for compliance with the weight requirements specified in 3.2.1.

4.5.2.2.2 Manually examine sighting station stow locks to determine compliance with 3.3.10.

4.5.2.2.3 Manually rotate each sighting station light filter to determine compliance with 3.3.16.

4.5.2.2.4 Visually examine all markings to assure they are clear and legible.

4.5.2.2.5 Visually examine the identification plate for compliance with the applicable drawing, for secure assembly (see 3.8), serialization and to assure that all pertinent data has been applied.

4.5.3 Testing.

4.5.3.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete sighting station. If test requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

cited herein are not met, acceptance of the sighting station shall be deferred and the contractor shall accomplish as applicable, the following actions.

a. Conduct a failure analysis study performing a dimensional physical and visual examination of the components which are suspected to be the cause of failure or malfunction.
b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.
c. Examine sighting stations, partially assembled sighting stations and components (including components and sub-assemblies at in-process or final assembly) to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.
d. Submit the results of the failure analysis and the corrective actions taken to the Government for review and approval prior to submitting a reconditioned lot or reconditioned sighting station for retest.

4.5.3.2 Function testing. Each sighting station shall be function tested to determine compliance with 3.3.1 thru 3.3.16 using the test method specified in 4.6.1. Sighting stations failing to meet these requirements shall be rejected.

4.5.3.3 Interchangeability testing. A sample of 3 sighting stations shall be selected from each of the first three months production and from each alternate months production thereafter, and tested for interchangeability (see 3.4) using the test method specified in 4.6.2. Sighting stations selected for interchangeability shall have been found satisfactory in all examinations and tests. Sighting stations shall be function tested after interchange of parts. Failure of the interchangeability test shall be cause for rejection of that month's production. Prior to submission as a reconditioned lot, the supplier's corrections shall be effected on all sighting stations of the lot and on all assemblies and component parts not yet accepted. Sample size and test methods for reconditioned lots shall be the same as for the original lot. Failure of any interchangeability test shall also be cause to perform an interchangeability test on the next two months production.

4.5.3.4 Component parts and concurrent repair parts testing. Raw material testing, part testing, and certification shall be performed in accordance with the criteria specified in the contract (see 6.2). This will include chemical analysis and physical tests of materials, tests of protective finish, heat treatment, bonding, and function of parts as applicable. The contractor shall accomplish these tests prior to assembly of parts into the end item.

4.5.4 Packaging examination and testing. Unless otherwise specified (see 6.2), the packaging examination and testing shall be in accordance with MIL-P-14232.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

4.5.5 Inspection equipment.

4.5.5.1 Acquisition, maintenance and disposition. Unless otherwise specified (see 6.2), responsibility for acquisition, maintenance and disposition of acceptance inspection and test equipment prescribed on the List of Inspection Equipment, IEL11687657 and for all other inspection equipment required to perform inspection prescribed by applicable specifications, shall be in accordance with MIL-I-45607.

4.5.5.2 Accuracy of standard measuring equipment. When commercial and modified commercial inspection and test equipment is used, it must be capable of repetitive measurements to an accuracy of 10 percent of the total tolerance of the characteristic being inspected.

4.6 Test methods.

4.6.1 Function test. The sighting station shall be function tested in accordance with the functional test procedure specified on IEL11687657 (ref 10557120). The test equipment required to perform this test shall include a direct current power supply capable of supplying 28 ± 2 vdc at 5 amps.

4.6.2 Interchangeability test. Three sighting stations shall be tested for interchange of parts by disassembling and reassembling parts as specified below. Interchange of parts shall be accomplished by marking the sighting stations #1, #2, and #3 and recording the serial number of each assembly. Three trays shall be placed in front of each sighting station to be disassembled and the trays marked as follows:

Sight #1	Sight #2	Sight #3
1A, 1B, 1C	2A, 2B, 2C	3A, 3B, 3C

Each sighting station shall be disassembled and the parts placed into either Group A, Group B or Group C, according to the group listing of parts below. Interchange and reassemble the trays of parts so that the interchanged sights shall consist of the following groups:

Interchanged Sight #1	Interchanged Sight #2	Interchanged Sight #3
1A, 2B, 3C	1B, 2C, 3A	1C, 2A, 3B

Commercial parts such as screws, nuts, washers, and pins shall be placed in the same tray as their mating or associated part. The commercial parts have not been listed in the group parts list below. Any commercial part rendered unserviceable by disassembly shall be replaced without penalty to the interchangeability test. Any noncommercial part rendered unserviceable by disassembly shall be cause for failure of the inter-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

changeability test. After interchange of parts, each reassembled sight shall be function tested in accordance with 4.6.1.

GROUP A	GROUP B	GROUP C
11687566	11687567	11687575
11687576	11687584	11687567
11687569	11687582	11687576
11687581	11687587	11687583
11687579	11687657	11687636
11687589		11687585
11687637		11687628
11687512	Less Other	11687640
11687513	Parts Listed	11687634
	Hereon	11687526

4.6.3 Reliability test. The reliability test shall be performed by repeating the test cycle defined in 4.6.3.1 to determine compliance with 3.5. For each test cycle, the failure versus test cycles data shall be cumulatively plotted. Testing shall be terminated whenever a decision point, as defined in Figure 1, has been reached.

4.6.3.1 Reliability test cycle. One test cycle (representing the functions necessary to perform one mission) shall be completed by performing the applicable electrical test procedures, contained on the operating instruction specified in IEL11687675 (ref 10557120), used to demonstrate the corresponding requirements of 3.3 as follows:

a. With the Direct Current input at 23 ± 1.0 VDC and Alternating Current input as specified in the Operating Instruction:

(1) Weapon Selector Test repeat 5 times.
(2) Action Switch Test repeat 5 times.
(3) Action and Trigger Switches Test repeat 3 times.
(4) Compensation Switch Operation repeat 6 times.
(5) Reticle Lamp Test one time.
(6) Action and 40mm Fire Switches Test repeat 3 times.

b. With the Direct Current input at 29 ± 1 VDC and Alternating Current input as specified in the Operating Instruction:

(1) Weapon Selector Test repeat 5 times.
(2) Action Switch Test repeat 5 times.
(3) Action and Trigger Switches Test repeat 3 times.
(4) Compensation Switch Operations repeat 6 times.
(5) Reticle Lamp Test once.
(6) Action and 40mm Fire Switches Test repeat 3 times.

c. One complete reliability test cycle shall include all tests specified in a and b above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

4.6.3.2 The contractor shall provide replacement parts as required to complete the testing.

4.6.3.3 At the option of the contractor, the test may be interrupted, during or at the conclusion of a cycle and the test restarted later at the point at which it was interrupted.

4.6.3.4 Complete, accurate records shall be kept for each reliability test, showing each failure and part replacement including an indication of when each failure occurred. In addition, complete, accurate records shall be kept for all the losses attributable to the sighting station, including the time for each stoppage.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. The pilot pack shall consist of a complete sighting station packaged in accordance with Packaging Data Sheet P11687657 for the level of protection specified in the contract (see 6.2), packed level C and forwarded in accordance with 3.1.

5.2 Preservation, packaging, packing and marking. The sighting station shall be preserved, packaged, packed and marked in accordance with Packaging Data Sheet P11687657 for the level of protection specified in the contract (see 6.2).

5.3 Repair parts. Repair parts shall be preserved, packaged, packed and marked in accordance with the Packaging Data Sheet or other requirements, and for the level of protection specified in the contract (see 6.2).

6. NOTES

6.1 Intended use. The sighting station is intended for use on, but not limited to the M28A1 Helicopter Armament Subsystem.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. List of drawings and specifications pertaining to the sighting station showing applicable revision dates.
c. Shipping instructions for first article and pilot pack (see 3.1, 4.4 and 5.1).
d. Reliability, environmental and electromagnetic interference (EMI), when required (see 3.5, 3.6, 3.7 and 4.4).
e. Block of serial numbers (see 3.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

f. Criteria for inspection of component parts and concurrent repair parts (see 4.5.2.1 and 4.5.3.4).
g. Packaging examination and testing, if different (see 4.5.4).
h. List of inspection equipment, responsibilities for acquisition, maintenance, and disposition of, if other than as specified (see 4.5.5.1).
i. Selection of applicable levels of preservation, packaging and packing (see 5.1 and 5.2).
j. Packaging instructions for repair parts (see 5.3).

6.2.2 Contract data requirements. When warranted, the requirements for records of examination and tests will be listed directly on a DD Form 1423 incorporated into the contract.

6.2.3 Management control system requirements. When warranted, the contract should specify the application of MIL-Q-9858 or MIL-I-45208 on the Management Control Systems Summary List, DD Form 1660.

6.2.4 Unless otherwise specified (see 6.2), the contract should specify the application of MIL-I-45607 and MIL-C-45662 on the Management Control Systems Summary List, DD Form 1660.

6.3 Supersession data. This specification includes the requirements of U.S. Army Weapons Command Purchase Description USAWECOM PD-32 Amendment 1 dated 31 March 1972.


Custodian:
Army - WC

Preparing activity:
Army - WC

Project number:
1010-A068

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

Decision Risks: 30%
Discrimination Ratio: 1.5:1
MIL-STD-781B - Test Plan VII

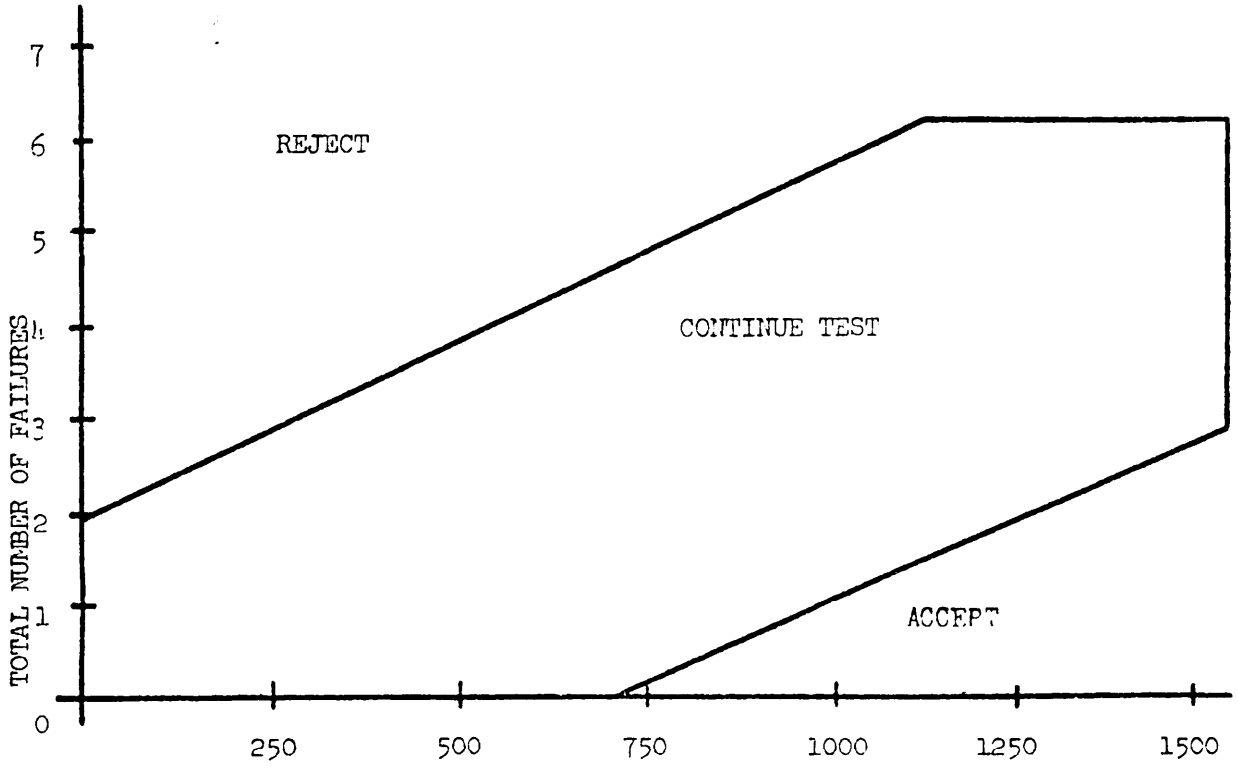

NO. OF FAILURES	REJECT (EQUAL OR LESS)	ACCEPT (EQUAL OR MORE)
0	N/A	716
1	N/A	992
2	N/A	1268
3	276	1545
4	552	N/A
5	829	N/A
6	1545	N/A

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-45927(WC) Sighting Station

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Rock Island Arsenal
ATTN: SARRI-LE-S
Rock Island, Illinois 61201

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.