MIL-S-12781C
11 December 1979
SUPERSEDING
MIL-S-12781B
12 November 1974

MILITARY SPECIFICATION

SINK, PHOTOGRAPHIC PROCESSING, AND SINK, LITHOGRAPHIC PROCESSING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a photographic film and print processing sink and a lithographic plate processing sink.

1.2 Classification. The sinks shall be of the following types and sizes, as specified (see 6.2):

Type I - Sink, Photographic Processing, 36- by 46-inches (914 by 1168 millimeters (mm))
Type II - Sink, Lithographic Processing, 32- by 36-inches (813 by 914 mm)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

FSC 3610
FSC 6740

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

L-P-383	- Plastic Material, Polyester Resin, Glass Fiber Base, Low Pressure Laminated.
HH-I-585	- Insulation, Thermal (Vermiculite).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-B-1055	- Barrier Material, Waterproofed, Flexible.
PPP-T-76	- Tape, Packaging, Paper, (for Carton Sealing).

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.
DOD-P-15144	- Paint, Formula No. 34 (Binder for Anti-Sweat Coatings) (Metric).

STANDARDS

FEDERAL

FED-STD-H-28	- Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 36 - Structural Steel.
A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.
A 177 - High-Strength Stainless and Heat Resisting Chromium-Nickel Steel Sheet and Strip.
A 249 - Welded Austenitic Steel Boiler, Superheater, Heat-Exchanger, and Condenser Tubes.
A 269 - Seamless and Welded Austenitic Stainless Steel Tubing for General Service.
A 312 - Seamless and Welded Austenitic Stainless Steel Pipe.
A 380 - Cleaning and Descaling Stainless Steel Parts, Equipment, and Systems.
B 209 - Aluminum-Alloy Sheet and Plate.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY (AWS)

A5.4 - Specification for Corrosion-Resisting Chromium and Chromium-Nickel Steel Covered Welding Electrodes.
A5.9 - Specification for Corrosion-Resisting Chromium and Chromium-Nickel Steel Bare and Composite Metal Cored and Stranded Arc Welding Electrodes and Welding Rods.

(Application for copies should be addressed to the American Welding Society, Inc., 2501 Northwest Seventh Street, Miami, FL 33125.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Description. The sinks shall consist of a trough mounted on a metal base. The sink shall support 1,000 pounds (453.6 kilograms (kg)) vertically with a force of 100 pounds (45.4 kg) applied laterally from any direction. The top edge of the sink (exclusive of back splash panel, if any) shall be 37-inches, plus or minus 1-inch (940 mm, plus or minus 25.4 mm) above the floor. Inside dimensions shall be exclusive of dump gutter (if any).

3.2 First article (first produced sink). The contractor shall furnish one sink for examination and testing within the time frame specified (see 6.2) to prove that his production methods will produce sinks that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.5). Materials shall be corrosion-resistant or treated to resist corrosion. Where contact of dissimilar metals could result in corrosion or galvanic action, they shall be separated by interposing a material compatible to each of them in accordance with MIL-T-704.

3.3.1 Corrosion-resisting steel.

3.3.1.1 Tubing. Corrosion-resisting tubing shall conform to ASTM A 249 or A 269, Grade TP 316.

3.3.1.2 Pipe. Corrosion-resisting pipe shall conform to ASTM A 312, Grade TP 316.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

3.3.2 Aluminum. Aluminum for drainboards shall conform to ASTM B 209, Alloy 3003, Temper H14 or H18.

3.3.3 Alternate materials. Alternate materials shall be used only when specified (see 6.2).

3.3.3.1 Glass-reinforced laminates. Glass-reinforced laminates shall conform to L-P-383, Type I, Fabric No. 112.

3.3.3.2 Steel. Alternate corrosion-resisting steel sheet or strip shall conform to ASTM A 177.

3.3.3.3 Aluminum. Alternate aluminum alloy for drainboards shall conform to ASTM B 209, Alloy 1100, Temper H16 or H18.

3.4 Screw threads. All threads shall conform to FED-STD-H-28.

3.5 Trough. The sink trough shall be corrosion-resistant steel conforming to ASTM A 167, Type 316 (UNS No. S31600); or, when alternate materials are permitted, may be glass-reinforced laminate. The steel shall be not less than 0.05-inch (18 gage) thick. Top and inside surfaces shall be Finish No. 4; the outside shall have a mill finish. Steel joints shall be welded; plastic joints, on glass-reinforced laminate, shall be cemented with an epoxy resin cement. The bottom of the trough shall be sloped toward the drain to assure complete drainage when the sink is level. The trough shall be supported and braced to prevent buckling and sagging when filled with water. The trough shall not leak.

3.5.1 Undercoating. The underside of the trough and the outer surface of the trough wells shall be coated with a paint conforming to DOD-P-15144, except that 4 percent tetrachlorophenol, based on the total solids in the paint, shall be incorporated into the paint. Vermiculite conforming to HH-I-585, Type II and Class 2 shall be used to give anti-sweat properties. The paint shall be applied to a 5 mil wet film thickness. While the paint is still wet, the vermiculite shall be blown on or applied to give a smooth even coat free of wet spots or thin spots. After the paint has dried, the vermiculite shall be overcoated with a coat of binder paint and allowed to dry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

3.5.2 Drain. A drain of not less than 1-inch (25.4 mm) inside diameter shall be located not more than 3 inches (76.2 mm) from the back and not more than 3 inches (76.2 mm) from the right side of the sink as viewed from the front. The bottom surface of the drain shall be installed so as to completely drain the sink. Surfaces exposed to chemicals in the sink shall be corrosion-resistant steel.

3.5.3 Outlet. A corrosion-resistant steel standpipe not less than 0.75 inch (19 mm) inside diameter, fitting snugly into the drain, shall be supplied. The standpipe may be threaded but shall be removable and installable without tools. In addition, an overflow outlet of not less than 1.25 inches (31.8 mm) in diameter, or equivalent capacity, in the side of the trough, and a drain plug or stopper secured to the sink by a chain, shall be furnished. The length of the standpipe, or height of the outlet, shall be 4 inches (101.6 mm) above the bottom of the sink; the pipe or outlet shall have a corrosion-resistant steel strainer, or outlet cap.

3.6 Base frame. The base frame shall be angular corrosion-resisting steel, or of steel conforming to ASTM A 36, and shall be rigid when assembled. The mounting holes in the foot plates shall be accessible. The frame shall be bolted and fitted together so as to be readily assembled or disassembled with common handtools for shipment and storage.

3.6.1 Shelf. A steel shelf shall be bolted to the legs 9 inches, plus or minus 1 inch (229 mm, plus or minus 25.4 mm), above the floor. The shelf shall support a uniform load of not less than 500 pounds (226.8 kg) without buckling or otherwise distorting.

3.7 Identification marking. Sinks shall be identified in accordance with MIL-STD-130.

3.8 Treatment and painting. The portions of the sink normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704. Corrosion-resisting steels shall be cleaned in accordance with ASTM A 380.

3.9 Type I. Type I sinks shall be as shown in Figure 1. Steel foot plates not less than 2.50-inches (63.5 mm) square shall be welded to the bottom of each leg. A 0.375 inch (9.5 mm) hole shall be drilled through each foot plate to facilitate bolting the sink to the floor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

3.10 Type II. Type II sinks shall be as shown in Figure 2. Steel foot plates in accordance with Figure 3 shall be welded to the bottom of each leg. The assembled sink shall withstand the shocks and vibrations of cross-country road travel when tested as specified in 4.5.2.3.

3.10.1 Drainboard. The drainboard shall be 34 by 28-inches (864 by 711 mm) and fabricated of the same steel as the trough, or of 0.1875-inch (4.8 mm) aluminum. All edges of the drainboard shall be rolled over or rounded. Means shall be provided so that the edge of the drainboard nearest the front of the sink may be raised and lowered not less than 4.50-inches (114 mm) and held in position on three intermediate stops.

3.10.2 Sprinkler pipe. Sprinkler pipes shall be corrosion-resistant pipe or tubing. Holes 0.07-inch (1.8 mm) in diameter (No. 50 drill) shall be drilled perpendicular to the axis of the pipe and parallel to each other, on 0.50-inch (12.7 mm) centers, along the entire length of the pipe that is within the trough. The pipe shall be mounted in such a manner that the streams of water spray down the inclined plane of the drainboard. If the pipe enters the trough through the sidewall, the hole through which it enters shall be watertight. Water in the pipe shall be controlled by a globe valve located outside the trough on the right side front corner as viewed from the front. A feed pipe shall extend from the valve to the back of the sink; its end shall be threaded. Pipes shall be not less than 0.75-inch (19 mm) inside diameter.

3.10.3 Storage cabinet. Each sink shall have a storage cabinet located in the base of the sink. The doors shall be equal size and shall open to the full height and width of the cabinet. Each door shall have two hinges, one recessed door handle, and one spring latch for securing the door to the cabinet frame. The cabinet shall be corrosion-resisting steel conforming to ASTM A 167, Type 316 (UNS No. S31600), or glass-reinforced laminate conforming to L-P-383.

3.11 Workmanship.

3.11.1 Welding. The surfaces of parts to be welded shall be free from scale, paint, grease, and other foreign matter. Welded joints shall transmit stress without permanent deformation or failure when

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

the parts connected by the welds are subjected to proof and service loading. Welding on corrosion-resisting steel shall be accomplished by inert gas, atomic hydrogen, or shielded-arc method. The welds shall be ground flush when practicable, polished, and passivated. Welding rods and bare electrodes shall conform to AWS A5.9, Class ER 316. Shielded metal arc electrodes shall conform to AWS A5.4, Class E 316. Where embrittlement of the joined metal may result, preheating or annealing or both shall be employed. Precautions shall be taken to avoid overheating, and heated metal shall be allowed to cool slowly.

3.11.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause damage to the material. Corners shall be square and true. Flame-cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.11.3 Bolted connections. Bolt holes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts conforming to SAE J429 or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement. Bolts shall protrude not more than 2 full threads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

4.1.1 Material inspection. The contractor is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

(a) First produced sink inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First produced sink inspection.

4.3.1 Examination. The first produced sink shall be examined as specified in 4.5.1. Presence of one or more defect shall be cause for rejection.

4.3.2 Tests.

4.3.2.1 Type I sink. The first produced Type I sink shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.3.2.2 Type II sink. The first produced Type II sink shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the defects specified in 4.5.1. AQL shall be 4.0 percent defective.

4.4.3 Tests.

4.4.3.1 Type I sink. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.1 and 4.5.2.2. AQL shall be 2.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

4.4.3.2 Type II sink. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.1 and 4.5.2.2, and, when specified herein, as specified in 4.5.2.3. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The sinks shall be examined as specified herein for the following defects:

101. Materials not as specified.
102. Parts or components not as specified, missing, or damaged.
103. Drainage not as specified.
104. Dimensions not as specified.
105. Identification marking missing, incomplete, or illegible.
106. Treatment and painting not as specified.
107. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Leakage. With the stopper in place, fill the sink to the bottom of the overflow outlet with water to which 3 ounces (0.09 liter) of potassium permanganate or equal have been added for color (this test to be performed before the application of paint and vermiculite. Wipe all exterior surfaces of the sink clean and dry and place white paper on the floor to cover the projected area of the sink, plus an additional 6 inches (152.4 mm) on all sides. After the colored water has been in the sink for not less than 1 hour, examine the outside of the sink, wipe it with a clean white cloth, and examine the paper. Any evidence of leakage shall constitute failure of this test.

4.5.2.2 Strength. Load the assembled sink (including base frame) uniformly with a dead weight of 1,000 pounds (453.6 kg); apply a lateral force of 100 pounds (45.4 kg) to the top edge of the sink perpendicular to each of the four sides in turn. Load the shelf uniformly with a dead weight of 500 pounds (226.8 kg). Any evidence of buckling, twisting, warping, or permanent deformation shall constitute failure of this test.

4.5.2.3 Road. When specified for Type II sinks, (see 6.2) and prior to any other tests except 4.5.2.1, mount the sink securely on a truck and drive the truck not less than 20 miles (32 kilometers (km)). Not

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

less than 10 miles (16 km) shall be traversed at average speed of not less than 10 mph (16 km/h) over unsurfaced, stabilized, or partially surfaced earth or gravel roads. The route shall be approved by the contracting officer. The test shall include 10 abrupt starts and 10 abrupt stops. Make 5 sharp turns at maximum safe speeds in each direction (right and left). At the completion of the run, examine and test the sink, including the leakage test specified in 4.5.2.1 and the strength test specified in 4.5.2.2. Any evidence of damage or leakage shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

108.	Materials or containers not as specified for Level A or Level B. Each incorrect material or each incorrect container shall be considered one defect.
109.	Sinks not prepared for delivery disassembled.
110.	Components other than the trough not wrapped or boxed as specified for Level A.
111.	Trough not inverted over the other components for Level A.
112.	Blocking, bracing, anchoring, and cushioning not in accordance with the referenced standard for Level A or Level B.
113.	Marking illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each sink shall be disassembled in accordance with the recommendations of the manufacturer. The disassembled components other than the trough, shall either be wrapped with paper conforming to PPP-B-1055, Class C-1, with the wrap secured with tape conforming to PPP-T-76; or preserved in a box conforming to PPP-B-636, W5c, style optional, and sealed in accordance with the box specification appendix, Method V.

5.1.2 Commercial. Each sink shall be disassembled in accordance with the recommendations of the manufacturer and preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial, as specified (see 6.2).

5.2.1 Level A. The components comprising a complete sink shall be packed in a close-fitting box conforming to PPP-B-601, Overseas Type, style optional, Grade B or PPP-B-621, Class 2, style optional. The trough shall be placed in the box in the inverted position over all of the other components. Blocking, bracing, and anchoring of all components within the box to prevent movement and damage shall be in accordance with MIL-STD-1186.

5.2.2 Level B. The components comprising a complete sink shall be packed in a close-fitting box conforming to PPP-B-640, Class 2, style optional. The components shall be placed in the box in a manner to afford minimum cube. Blocking, bracing, and cushioning of all components within the box to prevent movement and damage to the contents shall be in accordance with MIL-STD-1186.

5.2.3 Commercial. The components comprising a complete sink shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Type I sinks are for use in developing large photographic materials. Type II sinks are for use in the processing of offset lithographic press plates. Both types are used in mobile truck- or van-mounted field sections.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type of sink required (see 1.2).
(c) Time frame required for submission of first produced sink (see 3.2).
(d) When alternate materials may be used (see 3.3.3).
(e) When road test is required (see 4.5.2.3).
(f) Degree of preservation and degree of packing required (see 5.1 and 5.2).

6.3 First produced sink. Any changes or deviations of production sinks from the approved first produced sink during production will be subject to the approval of the contracting officer. Approval of the first produced sink will not relieve the contractor of his obligation to furnish sinks conforming to this specification.

6.4 Figures. Figures 1, 2, and 3 show types of items which have been found acceptable; however, the figures are not intended to preclude the furnishing of other designs which conform to this specification. However, the dimensions of Figures 1, 2, and 3 apply.

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

Custodians:
Army - ME
Navy - SA
Air Force - 99


Review activity:
DLA - GS

User activities:
Army - GL
Navy - MC

Preparing activity:
Army - ME

Project 3610-0306

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

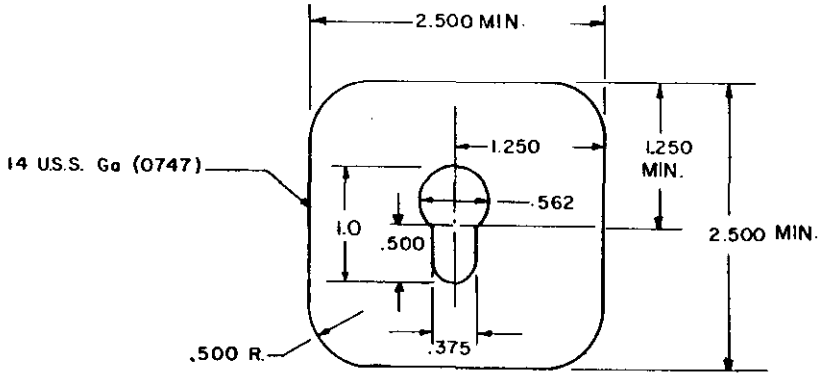


FOOT PLATE
STEEL

INCHES	MILLIMETERS
.375	9.525
.500	12.700
.562	14.288
.250	31.750
.500	63.500

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH= 25.4 mm.

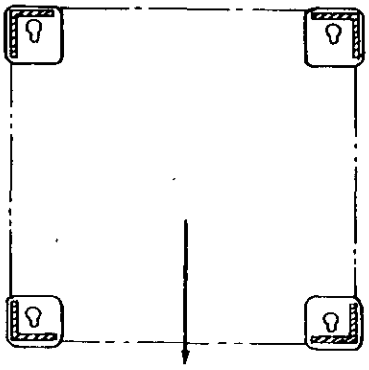

FRONT
VIEW SHOWING
POSITIONING OF FOOT PLATES
ON SINKS


FIGURE 3. Foot plates.

X-2988A


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.

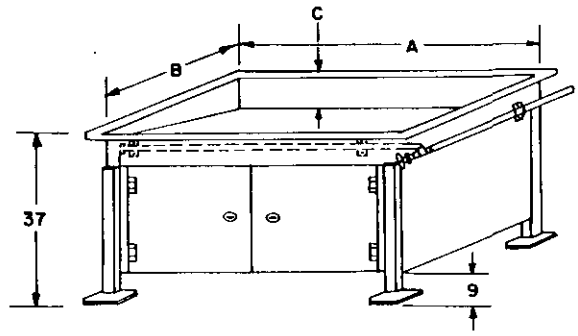

SINK

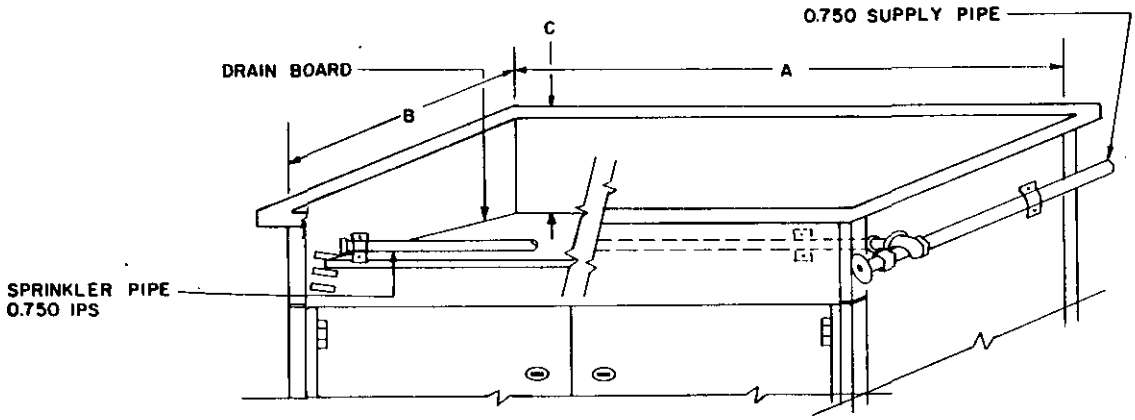

SPRINKLER PIPE AND DRAIN BOARD DETAIL


DIMENSIONS (inside)	TROUGH	
	(inches)	(millimeters)
A	34 +2 −0.25	864 + 51 − 6.35
B	32 ±0.25	813 ± 6.35
C	6-3/4 ± 1.50	172 ± 38.1

INCHES	MILLIMETERS
0.750	19.050
9.0	229.0
37.0	940.0

FIGURE 2. Lithographic sink.

X 2987A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

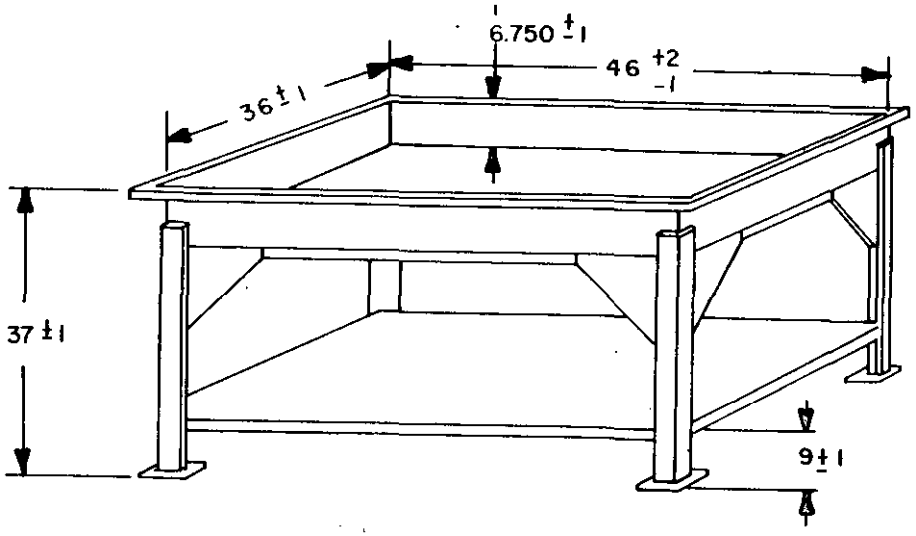

NOTES:

1. ALL TROUGH DIMENSIONS ARE INSIDE DIMENSIONS.
2. DIMENSIONS ARE IN INCHES.
3. METRIC EQUIVALENTS (TO THE NEAREST mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.

INCHES	MILLIMETERS
6.750 ±1	171 ± 25
9.000 ±1	229 ± 25
36.000 ±1	914 ± 25
37.000 ±1	940 ± 25
46.000 +2 -1	1168 + 51 - 25

FIGURE 1. Photographic sink.

X2986A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

FOLD

MERADCOM
DRDME-DS
Ft. Belvoir, VA 22060

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

Commander
US Army Mobility Equipment Research &
Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-S-12781C Sink, Photographic Processing and Sink, Lithographic Processing

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. *REMARKS*

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.