MILITARY SPECIFICATION

INSTALLATION FIXTURE KIT,

ROLLER, MINE CLEARING: TRACK-WIDTH, TANK-MOUNTED

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE .

1.1 Scope. This specification defines an installation fixture kit used in attaching the retrofit kit to the M60 series tank to which the mine clearing roller system is mounted.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood, Cleated-Plywood.

MILITARY

MIL-T-704	Treatment and Painting of Materiel.
MIL-I-6866	Inspection, Penetrant Method Of.
MIL-P-15024/6	Plate, Identification.
MIL-C-16173	Corrosion Preventive Compound, Solvent Cutback, Cold-Application.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-101	Preservation, Packaging, and Packing Materials, Test Procedures.

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-130	Identification Marking of US Military Property.
MIL-STD-1188	Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards,required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13222E0009	- Installation Fixture Kit, Mine Clearing Roller System.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in tbe current DoDISS and the supplement thereto, if applicable.

AMERICAN WELDING SOCIETY (AWS)

D1.1	- Structural Welding Code, Section 5, Qualification.

(Application for copies should *be* addressed to the Ameri.can Welding Society, 2501 Northwest Seventh Street, Miami., FL 33125.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. Requirements for the installation fixture kit shall be in accordance with Top Assembly, TA13222E0009 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviations from the prescribed dimensions or tolerances is permissible wiithout prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the kit. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative,

3.2 First article (first produced kit). The contractor shall furnish one or more kits as specified (see 6.2), for examination and testing within the time-frame specified (see 6.2), to prove that his production methods will produce kits that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.4).

3.4 Safety. Nonfunctional sharp edges, projecting points, and excessive length of fastening devices shall be avoided.

3.5 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being exchanged one for the other without alteration of the parts themselves or of adjoining parts and without selection for fit or performance.

3.6 Treatment and painting. The portions of the kit normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type A, color forest green. Nonpermissible galvanic couples (dissimilar metals) as defined in MIL-T-704 shall be insulated as specified.

3.7 Identification marking. The kit shall be identified in accordance with MIL-STD-130. The marking shall be applied to the installation fixtures by stenciling or engraving as specified on the drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

3.7.1 Stenciling. The nomenclature and identification marking, as shown on the drawings, shall be stenciled near the center of each fixture. The letters shall be gothic capitals, and the numerals shall be 2 inches high where space permits. On small components, the stenciling shall be as large as practicable.

3.7.2 Instruction plates. Each kit shall be equipped with an instruction plate giving reference to the retrofit kit installation manual. The instruction plate shall conform to MIL-P-15024/6. The plate shall be attached by screws, bolts, or rivets in a location where the plate will be both visible and legible.

3.8 Workmanship. Each installation fixture shall be clean and free from sand, dirt, fins, pits, scale, corrosion, burrs, sharp edges, cracks, poor or unsound welds, or any other defects that could impair the mounting of the kit.

3.8.1 Metal fabrication. Metal used in fabrication shall be free of kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. All bends shall be made with controlled means to ensure uniformity of size and. shape. Precaution shall be taken to avoid overheating. Heated aluminum shall be allowed to cool by natural convection. External surfaces shall be free from burrs, sharp edges, and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.8.2 Welding. The surfaces of parts to be welded shall be free from rust, corrosion, scale, paint, grease, and mill scale that can be removed by chipping and wire brushing, and other foreign matter. Welds shall withstand stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch unless appropriate bridging techniques are used. The welding process used in fabrication of fixtures shall be in accordance with TA13222EO009. No deviations from these requirements are permissible without prior Government approval.

3.8.2.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

AWS D1.1, Structural Welding Code, Section 5, Qualification.
ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

Contractors who make only horizontal welds need not qualify welders for "all position welding." Subject to approval by the Government, the contractor's standard welder qualification may be substituted for the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equip ment operators are capable of producing quality welds i.n accordance with AWS or ASME codes.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:48Z
Check the source to verify that this is the currentversion before use.

3.8.3 Inspection. Inspect all welds with dye penetrant in accordance with MIL-I-6866. No cracks are permissible. Workmanship specimens that are required by the applicable specifications shall be approved by quality assurance representatives of the. contracting activity.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified (see 6.2), the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. Inspection records and examinations and tests performed by the contractor shall be kept complete and available to the Government for a period of 4 years following-completion of the contract. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, drawings, and tolerances as applicable.

4.1.2 Disassembly inspection. Failure of any examination or test by the initial production installation fixtures shall be cause for disassembly, in the presence of a Government representative, of the initial production installation fixtures to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the initial production installation fixtures. Reassembly with replacement parts and retesting shall be the responsibility of the contractor.

4.1.3 Parts and components. Upon fabrication, parts and components shall be inspected for compliance with the referenced specifications, standards, drawings, and tolerances as shown on the drawings.

4.2 Classification of inspections. Inspection shall be classified as follows:

a. Initial production inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection comparision (see 4.6).
d. Inspection of packaging (see 4.7).

4.3 Initial production inspection. When specified (see 6.3), one or more initial production kits from the first five units being fabricated by production tooling will be selected by the Government for examination and tests. These kits will be examined for compliance with the drawings and characteristics listed in column 3 of table I and subjected to the tests specified. in column 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

of table II to determine conformance to the requirements of this specififcation. The inspection will be performed by the contractor at the contractor's location and witnessed by Government inspectors. Acceptance of an initial production kit shall not exclude remaining kits from quality conformance inspections and acceptance provisions specified in 4.4. In addition to any cost specified as part of the initial production test, the Government reserves the right to conduct any or all other tests contained in this specification as a part of the initial production test. Failure of such additional tests shall have the same effect as failure of those tests specified as initial production test.

4.3.1 Inspection failure. Failure of an initial production kit to meet any requirement specified herein during, and as a result of, examination tests Specified in 4.3 and 4.4 shall be cause ftm rejection of the initial production installation fixture and shall be cause for refusal by the Government to continue acceptance of production kits until evidence has been provided by the contractor that correct ive action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on installation fixtures previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all kits accepted prior to the completion of initial production inspection are similarly deficient, unless evidence to the contrary is furnished by the contractor amid such evidnce is acceptable to the contracting officer.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance. with MIL-STD-105.

4.4.2 Examination.

4.4.2.1 Samples. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in column 3 of table I. Acceptable quality level (AQL) shall be 2.5 percent defective for major defects and 4.0 percent for minor defects.

4.4.3 Tests.

4.4.3.1 Samples. Samples selected in accordance with 4.1.1 shall be subjected to the tests specified in column *3* of table II. Failure of any test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T21:48Z
Check the source to verify that this is the currentversion before use.

4.5 Inspection schedule.

4.5.1 Examination.

TABLE I. Examination schedule.

Initial Production	Quality Conformance	Characteristics	Requirement Paragraph
1	2	3	4
		MAJOR	
X	X	101. Dimensions and weight are not as specified.	3.1.1
X	X	102. Parts and components are not complete.	3.1.1
X	X	103. Safety is not as required.	3.4
X	X	104. Workmanship is not as specified.	3.8
X	X	105. Welding certification is not furnished.	3.8.2.1
X	X	106. Parts are not inter-changeable.	3.5
X	X	107. Material is not as specified.	3.3
		MINOR	
X	X	201. Treatment and finish are not as specified.	3.6
X	X	202. Identification marking is not as specified.	3.7
X	X	203. Stenciling is not as specified.	3.7.1
X	X	204. Instruction plate is not as specified.	3.7.2

4.5.2 Tests.

4.5.2.1 Test conditions. Unless otherwise specified in this specification, conformance tests shall be performed by the contractor at the contractor's location and witnessed by Government inspectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

4.5.2.2 Test schedule.

TABLE II. Test schedule.

Initial Production	Quality Conformance		Test Paragraph	Requirement Paragraph
1	2	3	4	5
X	X	Production pack	4.7.1.1	3.5

4.5.2.3 Test procedures (initial production testing}. One or more intial production kits, selected at random, shall be examined for the characterisitics listed in column 3 of tabIe I and subjected to the test specified in column 3 of table II to determine conformance.

4.6 Inspection comparison. The Government may select fixtures at any time during the initial production period and subject these kits to the examinations specified in 4.4.2 and the tests specified in 4.5.2 to determine conformance to the requirements of this specification. The inspection will be performed by the contractor at the contractor's location and witnessed by Government inspectors on fixtures selected at random from those which have been accepted by the Government but wilI not include the previously inspected initial production fixtures. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and. all other tests contained in this specification as part o:f the inspection comparison. Failure of such additional tests shall have the same effect as failure of those tests specified. as i.nspection comparison..

4.6.1 Inspection failure. Failure of an inspection comparison kit to meet any requirement specified herein during and as a result of the examination and tests specified in 4.5.2 shall be cause for rejection of the inspection comparison fixture and shall be cause for refusal by the Government to continue acceptance of initial production kits until remedial evidence has been provided by the the contractor, at no cost to tie Government, on kits accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence thst all kits accepted prior to the completion of inspection comparison are similarly deficient, unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.7 Inspection of packaging.

4.7.1 Examination The preproduction pack shall be examined for the defects specified in table III. Presence of one or more defects shall be cause for rejection.

4.7.1.1 Tests. The kit, prepared for shipment shall be subjected to the pendulum impact test in accordance with FED-STD-101, test method 5012. At the conclusion of the test, any shifting of packed components, loosening or breaking of holdown provisions, ties, blocking or bracing, or any damage to system components shall constitute failure of the test and because for rejection.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:48Z
Check the source to verify that this is the current version before use.

4.7.2 Quality conformance inspection of pack.

4.7.2.1 Unit of product. For purposes of inspection, a complete kit prepared for shipment as specified iishall be considered a unit of product.

4.7.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.7.2.3 Examination. Each sample installation fixture shall be examined for the characteristics as listed in table III. AQL shall be 2.5 percent defective.

TABLE III. Examination schedule.

Number	Characteristic	Requirement paragraph
Major		
108.	Preservation is not as specified.	5.2
109.	Packing for level A is not as specified.	5.3.1
110.	Box for level A is not as specified.	5.3.1
111.	Packing for commercial is not as specified.	5.3.2
112.	Blocking for level A is not as specified.	Appendix
113.	Marking is missing, illegible, incomplete or incorrect.	5.4

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination and testing within the time frame specified (see 6.2), to prove prior to starting production packaging that the applied preservation, packing and marking comply with the packaging requirements of this specification, Examination and tests shall be those specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.2). The preproduction pack may be prepared utilizing either the preproduction model or a production kit. When the preproduction model is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the preproduction model and production kit.

5.2 Preservation. Any uncoated ferrous surfaces of the kit shall be coated with preservative conforming to MIL-C-16173, grade 1, or equivalent.

5.3 Packing. Packing shall be level A or commercial as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

5.3.1 Level A. The kit shall be packed in a box conforming with PPP-B-601, overseas type, style I. The box shall be reinforced with flat steel strapping in accordance with the box specification. Components and blocking shall be in accordance with Packaging Data Sheets (Appendix).

5.3.2 Commercial. A complete kit shall be packed in a container in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military. Marking for shipment and storage shall be in accordance with MIL-STD-129.

5.4.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The kit is used to locate and mount the components of the retrofit kit (TA13222E0025) to the M60 series tank. The retrofit kit, in turn provides "hard points" for the installation of the mine cleaning roller system on an unmodified M60 series tank.

6.2 Ordering data. The basic acquisition document Should specify the following:

a. Title, number and date of this specification.
b. Time frame required for submission of preproduction model and number of kits required (see 3.2).
c. Time frame required for submission of initial production model and number of kits required (see 3.2).
d. Government and contractor testing responsibilities,
e. Data requirements.
f. Degree of packing required [see 5.3).

6.3 Initial production inspection. The quantity of initial production kits required for tests and examinations shall be specified by the contract or the contracting officer.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Review activity:
Army - AT

Preparing activity:
Army - ME

Project 1095-A151

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

APPENDIX

INSTALLATION FIXTURE

KIT

10. SCOPE. This appendix covers packaging data sheets.

20. APPLICABLE DOCUMENTS

20.1 Government documents:

SPECIFICATIONS

MILITARY

MIL-B-121	- Barrier Material, Greaseproof, Waterproof, Flexible.
MIL-P-14232	- Parts, Equipment and Tools for Army Material, Packaging of.

STANDARDS

MILITARY

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEET	Sheet of 1	Sheets 5	FSCM	Part Number 13222E0009P	National Stock Number

Federal Item Name: Fixture Kit									Original Date 5/5/79
Item Weight 99	Item Cube 26.48 cu. ft.		Item size 61" x 30" x 25						Revision Date
Level A Unit Pack	Unit Pack Qty		Method	Cleaning			Drying		MIL-P-116
	Step	Drawing Specification	Size	Style	Type	Grade	Class		Unit Pack
Preservative	1A	MIL-C-16173	SIZES ARE SHOWN			1			Size 1" 63" x 32" x 27-2
Preservative									
Intimate wrap									Weight 240#
Cushioning			ON						
Desiccant									Cube 32 cu. ft.
Container	3C	PPP-B-601		I	O/S				
Barrier	2B	MIL-B-121	BILL OF MATERIALS			A	1		
Container									
Closure									
Bag									
Closure									Preparing Activity
Intermediate Pack	Int Pack Qty None		Item Characteristics (MIL-STD-647)						Approval
	Step	Drawing Specification	Size	Style	Type	Grade	Class		
									Source DF
Marking Para 3.7	Inspection-MIL-P-14232 Provision -		Level A Packing Req	Level B Unit Pack Req					Level B Packing Req

Specifications, standards, and drawings listed of the issue in effect on date of invitation for bid form a part of this instruction. Preservation, packing and marking for the item identified shall be in accordance with this data sheet and the referenced and applicable general requirements of specification MIL-P-14232. Terms of measurement for unit pack, size, weight and cube are as follows - size: feet and hundredths of a foot; weight: pounds and hundredths of a pound; cube: feet and thousandths of a foot.

Notes: A - Apply to unpainted, unplated metal surfaces.
B - Barrier material as required to prevent part contact with wood.
C - See sheets 2 and 3 for size and use.

NONMANDATORY DESIGN

STA Form 6165 (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029 Until Revision Is Complete

Source: https://assist.dla.mil -- Downloaded: 2026/0-22T21:48Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of	Sheets	FSCM	Part No	National Stock Number	Revision	Date
	2	5		13222E0009P			

NUMBER	DESCRIPTION	SIZE	SPECIFICATION DATA	QTY.
#1	BARRIER MATERIAL	AS REQ.	MIL-B-121 TYPE I GRADE CLASS I	AS REQ.
#2	BOX	63" x 32" x 27-1/2"	PPP-B-601 STYLE I OVERSEAS TYPE	1
#3	BLOCKING	SEE SHEET #3	MIL-STD-731 GROUP II OR III CLASS 2 WOOD	SEE SHT #3
#4	BAND, PERFORATED.	3/4" x 12" 3/4" x 6"		2 3

NONMANDATORY DESIGN

Approval

STA FORM 6165 A (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029A Until Revision Is Complete


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.


APPENDIX

PACKAGING DATA SHEET (CONTINUED)	SHEET OF 3	SHEETS 5	FSCM 97403	PART NO. 13222E0009P	NATIONAL STOCK NUMBER	REVISION	DATE

BLOCK NUMBER **SIZE**

1. 4 PCS 2 X 6 X 30
2. 2 PCS 1 X 6 X 60-1/2
3. 1 PC 2 X 2 X 6
4. 1 PC 2 X 2 X 30
5. 1 PC 2 X 4 X 30



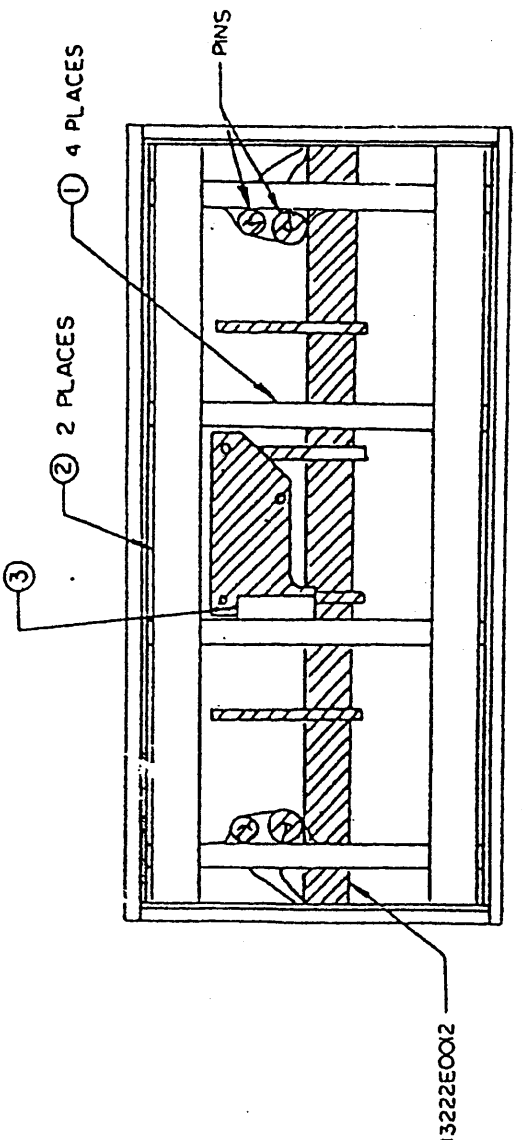


NOTE:
ALL DIMENSIONS ARE IN INCHES

NONMANDATORY DESIGN

X-3788 APPROVAL

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:48Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEET (CONTINUED)	SHEET OF 4	SHEETS 5	FSCM 97403	PART NO. 13222E0009P	NATIONAL STOCK NUMBER	REVISION	DATE

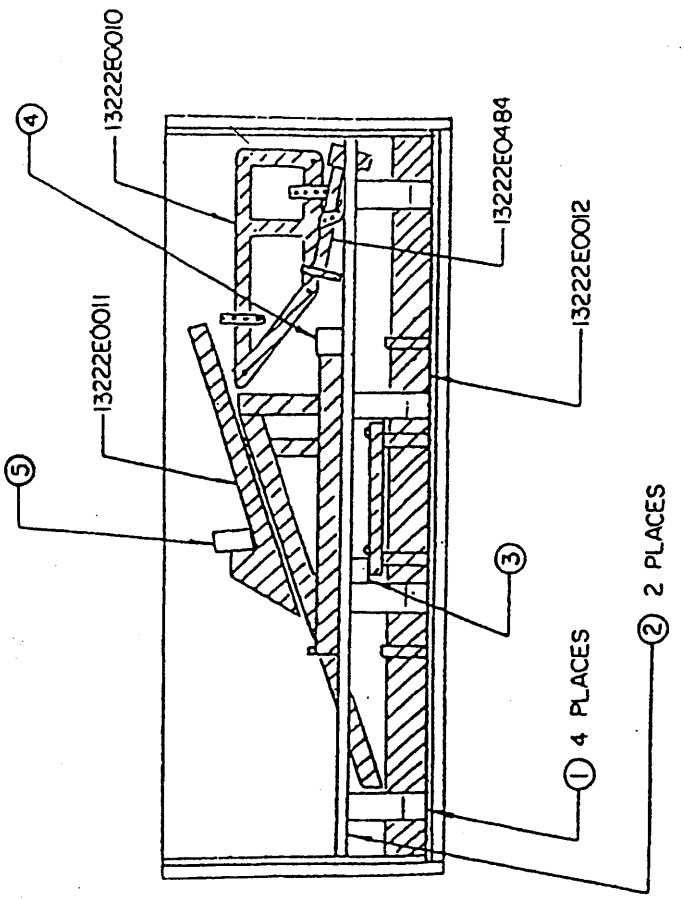

X-3789

APPROVAL

NONMANDATORY DESIGN

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of 5	Sheets 5	FSCM	Part No 13222E0009P	National Stock Number	Revision	Date

INSTRUCTIONS:

1 - CUT REQUIRED BLOCKING (SEE SHEETS 3 and 4)
2 - PUT P/N 13222E0012 IN BOX. USE GD.A BARRIER MATERIAL WHERE REQUIRED TO PREVENT PART CONTACT WITH WOOD (SEE SHT. 3).
3 - POSITION BLOCKING #1 (4 Pcs.) (SEE SHEET #3) OVER P/N 13222E0012. ATTACH TO BOX SIDES.
4 - ATTACH PINS TO BLOCKING #1 AS SHOWN USING 2 PCS. 3/4 x 12" PERFORATED BAND. USE GD.A BARRIER MATERIAL TO PREVENT PINS CONTACT WITH BANDS AND WOOD. (SEE SHEET # 3).
5 - POSITION AND ATTACH BLOCKING #2 AND #3 TO BLOCKING (#1), 4 PLACES. (SEE SHEETS #3 & #4).
6 - PUT P/N 13222E0011 IN BOX. USE GD.A BARRIER MATERIAL TO PREVENT PART CONTACT WITH WOOD (SEE SHEET #4).
7 - POSITION AND ATTACH BLOCKING #4 AND #5 TO SIDES OF BOX (SEE SHEET #4).
8 - POSITION P/N 13222E0484 ON BLOCKING #2. USE 1 PC PERFORATED BAND TO SECURE TO BLOCKING. USE GD.A BARRIER MATERIAL TO PREVENT PART CONTACT WITH WOOD AND BANDING.
9 - POSITION P/N 13222E0010 ON SIDE OF BOX (SEE SHEET #4). ATTACH PART TO SIDE OF BOX USING 2-3/4 PERFORATED BANDS. USE GD.A BARRIER MATERIAL TO PREVENT PART CONTACT WITH WOOD AND BANDING.
10 - CLOSE BOX AND INSTALL BANDING.

Approval

NONMANDATORY DESIGN

STA FORM 6165 A (TEMP) 8 Apr 76 To Be Used In Lieu Of AMC Form 1029A Until Revision Is Complete

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T21:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:48Z
Check the source to verify that this is the current version before use.