MIL-M-52016C
29 October 1984

SUPERSEDING
MIL-M-52016B
20 May 1976

MILITARY SPECIFICATION

MELTER, ICE AND SNOW, DIRECT FIRED: LIQUID-FUEL, WICK-TYPE, BASE-MOUNTED, 25 GALLON PER HOUR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a 25-gallon-per-hour ice and snow melter.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard Boxes.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.

MILITARY

MIL-P-116	- Preservation Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-1283	- Can, Gasoline, Military, 5-Gallon.
MIL-G-3056	- Gasoline, Automotive, Combat.
MIL-P-15024/6	- Plates, Identification, Equipment.
MIL-T-19646	- Thermometer, Remote Reading, Self-Indicating Dial, Gas Actuated.
MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government drawings. The following Government drawings form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13222E1460	- Melter, Ice and Snow, Base-Mounted, 25-GPH.

(Copies of specifications, standards and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASME	- Boiler and Pressure Vessel Code, Section IX, Welding Qualification.
ANSI/AWS D1.1	- Structural Welding Code, Qualification.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The melter shall be as shown on TA13222E1460 and as specified herein. The general configuration is illustrated in Figure 1 (see 6.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the melter. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or the designated representative.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein and as shown on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.3.1 Material deterioration and control. The melter shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.3.1.1 Dissimilar Metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

3.3.2 Burner wicking. The burner wicking shall be approximately 1/4-inch outside diameter and shall be made of glass fiber sleeving and filler. The sleeving shall be fabricated of electrical grade, continuous filament, fiber yarn having a nominal average fiber diameter of 0.00038 inch (ECG 150-1/3). The sleeving shall have 44 carriers with 2 ends per carrier braided over 2, and shall have 23 picks per inch, plus or minus 2 picks. The filler shall be made of electrical grade, staple fiber yarn having a nominal average fiber diameter of 0.00038 inch (ESG 2.8/1); there shall be 8 ends laid parallel. The finished wicking (sleeving with filler) shall be heat-cleaned 15 hours at not less than 500° F and 65 hours at not less than 650° F.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:06Z
Check the source to verify that this is the current version before use.

3.3.3 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the melter may be newly fabricated from recovered materials to the maximum extent practicable, provided the melter produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the melter.

3.4 Environmental conditions.

3.4.1 Operating temperature. The melter shall perform as specified herein in any ambient temperature from minus 60° F to plus 32° F.

3.4.2 Storage temperature. The melter shall not be damaged by storage in an ambient temperature of plus 155° F for 4 hours daily, nor in an ambient temperature of minus 60° F for 6 hours daily.

3.5 Leakage. The inner casing of the melter shall be free from leaks when tested as specified in 4.5.2.5.

3.6 Performance. The melter shall have a heat transfer rate of not less than 50,000 British thermal units per hour (Btu/hr) when tested as specified in 4.5.2.6.

3.7 Safety. An isolated handle shall be provided to facilitate the opening and closing of the hinged cover. A fuel pet cock shall be located in the fuel line to check fuel flow.

3.8 Identification marking. The melter shall be identified in accordance with MIL-STD-130. Identification plates and transportation data plates shall conform to MIL-P-15024/6. Each plate shall be attached to the melter by screws, bolts, or rivets in a location above the water line of the melter where the plate will be both visible and legible.

3.9 Instruction plates. The melter shall be provided with instruction plates or diagrams, including warnings and cautions describing any special or important procedures to be followed in assembling, operating, or servicing the melter. The warning "No Smoking During Operation" shall be included. Instruction plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. Each plate shall be attached by screws, bolts, or rivets in a location above the water line of the melter where the plates will be both visible and legible.

3.10 Treatment and painting. The exposed portions of the melter that will not be in contact with melting ice and snow shall be cleaned, treated, and painted in accordance with MIL-T-704, type B.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:06Z
Check the source to verify that this is the current version before use.

3.11 Government-loaned property. Unless otherwise specified (see 6.2), the following property in the quantities indicated shall be loaned by the Government (see 6.4).

Item No.	Description	Identification	Quantity
1.	Can, gasoline, 5-gallon	MIL-C-1283 NSN 7240-00-222-3088	1

3.12 Workmanship.

3.12.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame-cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges, and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.12.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter. Parent materials, weld filler materials, and fabrication techniques shall be as required to enable the melter to conform to the examination and test requirements specified in Section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch unless appropriate bridging techniques are used. Unless otherwise specified (see 6.2), the welding process used in fabrication of the melters shall be at the option of the contractor.

3.12.3 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the types of welding operations to be performed and that such qualification is effective as defined by the particular code:

ANSI/AWS D1.1, Structural Welding Code, Section 5, Qualification.

ANSI/ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

Contractors who make only horizontal welds need not qualify welders for "all position welding". Subject to approval by the Government, the contractor's standard welder qualification may be substituted in lieu of the above codes

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:06Z
Check the source to verify that this is the current version before use.

provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with ANSI/AWS or ANSI/ASME codes.

3.12.4 Bolted connections. Boltholes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement. Bolts shall not protrude more than two full threads.

3.12.5 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.12.6 Cleaning. The melter shall be thoroughly cleaned of all cutting oil, grease, residue of tests, dirt, metal scrap, and other contaminants. Cleaning shall be accomplished in a manner that will not leave a residue or otherwise make the melter unsuitable for its intended use. The melter shall be completely drained and dried before packaging.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.1.2 Disassembly inspection. Failure of any examination or test by the first article melter shall be cause for disassembly, in the presence of the Government representative, of the first article melter to the extent necessary to determine the cause of failure. Each disassembled part shall be inspected in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the first article melter. Reassembly with replacement parts and retesting shall be the responsibility of the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article melter shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or for performing the disassembly inspection specified in 4.1.2.

4.3.2 Tests. Prior to the examination contained in 4.3.1 and the final assembly of the melter, the inner casing assembly shall be tested as specified in 4.5.2.5. After successful completion of the examination specified in 4.5.1, the first article melter shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection or for performing the disassembly inspection specified in 4.1.2.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be conducted in accordance with MIL-STD-105, inspection Level S-3.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 4.0 percent defective for major defects and 6.5 percent defective for minor defects.

4.4.3 Tests.

4.4.3.1 Individual. Each melter inner casing assembly shall be tested as specified in 4.5.2.5 prior to the examination specified in 4.5.1.

4.4.3.2 Samples. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.6. AQL shall be 4.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The melters shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

Major

101. Nonconformance to drawings.
102. Materials not as specified.
103. Materials are not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable and operating environments.
104. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
105. Contractor does not have documentation available for identification of material, material finishes or treatment.
106. Burner wicking not as specified.
107. Used, rebuilt or remanufactured components, pieces or parts incorporated in the melter.
108. The melter does not meet the operating temperature as specified.
109. The melter does not meet the storage temperature as specified.
110. The inner casing of the melter does not meet the leakage requirement as specified.
111. Performance not as specified.
112. Safety not as specified.
113. Instruction plates not as specified.
114. Workmanship not as specified.
115. Metal fabrication not as specified.
116. Welding and weldments not in accordance with requirements.
117. Welding certification not available.
118. Bolted connections not as specified.
119. Riveted connections not as specified.

Minor

201. Identification marking missing, incomplete, or not legible.
202. Treatment and painting not as specified.
203. Cleaning not as specified.

4.5.2 Tests.

4.5.2.1 Test equipment. Test equipment shall include, but shall not be limited to, the following:

Scale, weighing	- Accurate to within plus or minus 2 percent at any scale reading.
Thermometer	- Conforming to MIL-T-19646, class A.
Gasoline	- Conforming to MIL-G-3056, type I.
Can, gasoline, 5-gallon	- Conforming to MIL-C-1283, NSN 7240-00-222-3088.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:06Z
Check the source to verify that this is the currentversion before use.

4.5.2.2 Low temperature. Conduct the low temperature test in accordance with MIL-STD-810, test method 502.2, procedure I, storage temperature minus 60° F for not less than 6 hours daily; operating temperature minus 60° F. At the operating temperature perform the effective heat transfer test specified in 4.5.2.6.

4.5.2.3 High temperature. Conduct the high temperature test in accordance with MIL-STD-810, test method 501.2, procedure II, storage temperature plus 155° F for not less than 4 hours daily; operating temperature plus 32° F. At the operating temperature perform the effective heat transfer test specified in 4.5.2.6.

4.5.2.4 Failure criteria. Nonconformance to 3.4 shall constitute failure of these tests.

4.5.2.5 Leak. Each inner casing assembly shall be leak tested prior to installation of the outer wall casing. The interior and exterior surfaces of the inner casing assembly shall be free of cutting oil, grease, dirt, and all other contaminants. Cleaning shall be accomplished in a manner that will not leave a residue or otherwise make the melter unsuitable for tests. The inner casing assembly shall be filled with water colored with red or green certified food coloring and allowed to remain undisturbed for not less than 30 minutes. The outside surfaces shall then be wiped with a clean white cloth or paper towel. Any discoloration on the cloth or paper towel shall constitute failure of this test.

4.5.2.6 Effective heat transfer rate. Not less than 200 pounds of tap water shall be added to the melting reservoir of the melter. The temperature of the water shall be not less than 10° F lower than the ambient temperature. Operate the melter for 30 minutes. The weight and temperature of the water in the melting reservoir shall be recorded not less than once each 10-minute period for the 30 minutes. At the end of the 30-minute operating period, the melter shall be shut down and the temperature and weight of the remaining water shall be recorded. The effective heat transfer rate shall be calculated as follows:

$$H = \frac{W_1 (t_2 - t_1) + (W_1 - W_2)\ 970.3}{T/60}$$

Where H = effective heat transfer rate, Btu/hr.

W_1 = weight of water at start of the test, pounds.

W_2 = weight of the water at end of test, pounds.

t_1 = temperature of water at start of test, °F.

t_2 = temperature of water at end of test, °F.

T = length of time to heat water from t_1 to t_2, minutes.

Nonconformance to 3.6 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:06Z
Check the source to verify that this is the currentversion before use.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

120.	Disassembly not as specified for level A.
121.	Unprotected exterior metal surfaces requiring the application of a preservative not coated with preservative as specified for level A.
122.	Burner openings not covered as specified for level A.
123.	Exhaust stack not stored as specified for level A.
124.	Maintenance tools not preserved in accordance with referenced document for level A.
125.	Consolidation not as specified for level A.
126.	Blocking bracing, and anchoring not as specified for level A or B.
127.	Strapping not as specified for level A.
128.	Commercial packaging not in accordance with referenced document.
129.	Marking illegible, incorrect, incomplete, or missing for level A, B, or commercial.

5. PACKAGING

5.1 Preservation. The degree of preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. The exhaust stack, fuel can bracket assembly, gasoline can adapter, torch, and any other components protruding beyond the frame that would increase cubage shall be removed.

5.1.1.2 Unprotected surfaces. Unprotected exterior metal surfaces of components of the melter requiring the application of a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative. Preservative shall not be applied to any surface that will come in contact with melted ice and snow. The preservative shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:06Z
Check the source to verify that this is the currentversion before use.

5.1.1.3 Burner. Openings into the burner shall be covered with barrier material conforming to MIL-B-121, type II, grade A, class 2, and secured in place with tape conforming to PPP-T-60, type IV.

5.1.1.4 Exhaust stacks. The disassembled exhaust stacks shall be placed in the storage space provided in the base of the melter and secured in a manner to prevent movement.

5.1.1.5 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3.

5.1.1.6 Repair parts. Repair parts shall be preserved in accordance with MIL-P-116.

5.1.1.7 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, level A.

5.1.1.8 Consolidation. The repair parts, tools, technical publications, and components removed by disassembly, other than the exhaust stacks (see 5.1.1.4), shall be placed in a box conforming to PPP-B-636, W5c or W6c, as applicable. The items shall be cushioned in the box to prevent movement and damage. The box shall be placed and secured inside the melter casing in such a way as to prevent movement.

5.1.2 Commercial. Commercial preservation shall be in accordance with ASTM D 3951.

5.2 Packing. The degree of packing shall be level A, level B, or commercial, as specified (see 6.2).

5.2.1 Level A. Each complete melter, preserved as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-621, class 2, style optional or PPP-B-601, overseas type, style optional. The contents shall be blocked, braced, and anchored within the box in accordance with MIL-STD-1186. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be finish B. When specified (see 6.2), strapping shall be finish A.

5.2.2 Level B. Each complete melter, preserved as specified in 5.1, shall be packed as specified in 5.2.1 for level A, except that boxes shall be domestic type or class, as applicable, and strapping shall be either finish A or B. As an alternative, each melter shall be packed in a fiberboard box conforming to PPP-B-640, class 2, style optional. Fiberboard boxes shall be waterproof sealed as specified in the appendix to the box specification.

5.2.3 Commercial. Commercial packing shall be in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Military. Marking for military levels of preservation shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial preservation and packing shall be in accordance with ASTM D 3951. In addition, weight and cube data shall be marked on the shipping container.

6. NOTES

6.1 Intended use. The melter is intended for use in areas where ice and snow are the only available sources of water supply.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article is required for inspection and approval, and number of units required (see 3.2).

c. When Government-loaned property is not required (see 3.11).

d. When the welding process shall not be at the option of the contractor (see 3.12.2).

e. Degree of preservation and packing required (see 5.1 and 5.2).

f. When strapping shall be other than as specified (see 5.2.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first produced melter. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Government-loaned property. The contracting officer should arrange to loan the property specified in 3.11, when applicable (see 6.2).

6.5 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each melter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:06Z
Check the source to verify that this is the current version before use.

6.6 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions regarding shipment of melters.

6.7 Information figure. Figure 1 shows a type of melter which has been found acceptable. The figure is included for illustration only and is not intended to preclude the furnishing of another melter which conforms to this specification.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review activities:
Army - MD
Navy - MC
DLA - CS

Preparing activity:
Army - ME

Project 4610-0102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

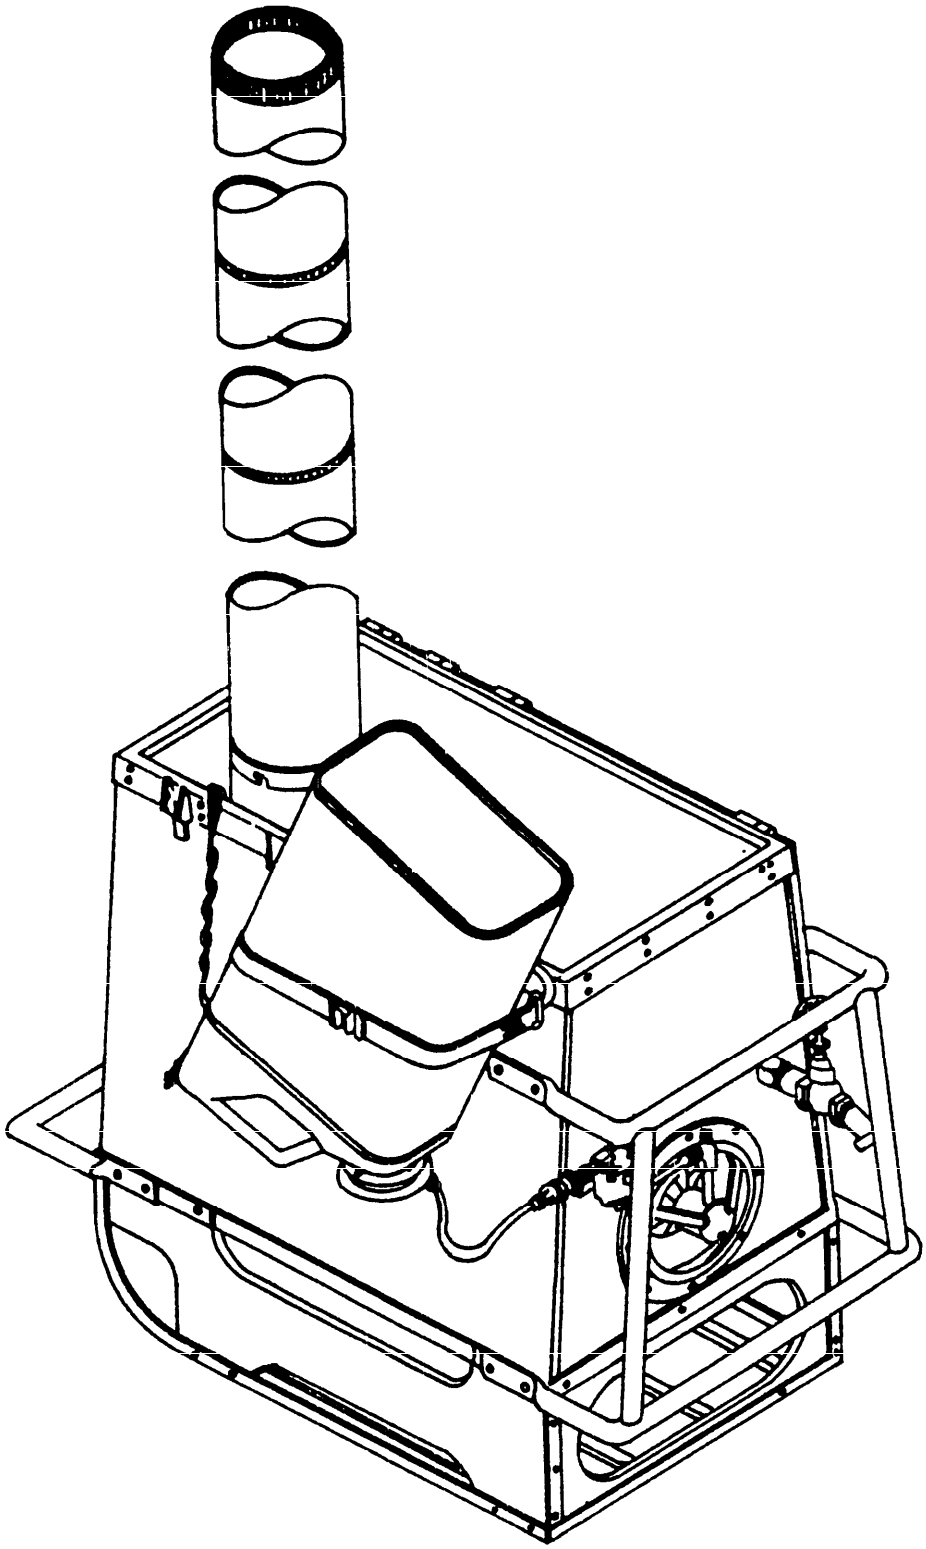


FIGURE 1. Melter, ice and snow, liquid fuel fired.

X-3120A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

EPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

FICIAL BUSINESS
NALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Ft. Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-52016C	Melter, Ice and Snow, Direct Fired: Lig-Fuel, Wick-Type, Base-Mtd, 25 Gallon Per Hour

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.