MILITARY SPECIFICATION

AMPLIFIER, AUDIO FREQUENCY AM-7162/VIC-2(V)

This specification is approved for use within the U.S. Marine Corps, the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding General, Marine Corps Research, Development and Acquisition Command (Attn: Code PSI-C), Washington, D.C. 20380-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5830

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This specification establishes the performance, design, test, manufacture and acceptance requirements for the Amplifier, Audio Frequency: AM-7162/VIC-2(V). The item shall be referred to herein as the "AM-7162" or "Unit". The AM-7162 is a rugged, compact unit in a water-tight case which provides control and amplification of intercom and radio audio signals distributed through the varied system configurations of the Intercommunications Set AN/VIC-2(V).

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-20	-	Bag, Cotton, Mailing.
PPP-B-76	-	Tape, Pressure Sensitive Adhesive, Packaging, Paper (For Carton Sealing).
PPP-T-97	-	Tape, Pressure Sensitive Adhesive, Filament Reinforced.
PPP-P-291	-	Paperboard, Wrapping and Cushioning.
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-B-565	-	Box, Wood, Wirebound.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Box, Wood, Nailed and Lock-corner.
PPP-B-636	-	Box, Shipping, Fiberboard.
QQ-A-591	-	Aluminum Alloy Die Castings.
QQ-S-781	-	Strapping, Steel, and Seals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	-	Preservation, Methods of
MIL-L-3661	-	Lampholders, Indicator Lights, Indicator Light Housings and Indicator Light Lenses, General specification for
MIL-P-11268	-	Parts, Materials and Processes Used in Electronic Equipment
MIL-F-14072	-	Finishes for Ground Electronic Equipment
MIL-S-19500	-	Semiconductor Devices, General Specification for
MIL-C-29455(MC)	-	Control, Intercommunications Set C-11133/ VIC-2(V) and C-11135/VIC-2(V)
MIl-C-29456(MC)	-	Control, Intercommunications Set C-11134/ VIC-2(V)
MIL-M-38510	-	Microcircuits, General Specification for
MIL-P-39019	-	Circuit Breakers, Magnetic, Low-Power, Sealed, Trip Free, General Specification for
MIL-C-46168	-	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-P-55110	-	Printed Wiring Boards
MIL-C-55181	-	Connector, Plug and Receptacle, Intermediate Power (Electrical Waterproof) Type MW, General Specification for

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Units Loads
MIL-STD-275	-	Printed Wiring for Electronic Equipment
MIL-STD-276	-	Impregnation of Porous Nonferrous Metal Castings
MIL-STD-454	-	Standard General Requirements for Electronic Equipment
MIL-STD-461	-	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	-	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-471	-	Maintainability Demonstration
MIL-STD-781	-	Reliability Testing for Engineering Development, Qualification and Production
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines
MIL-STD-1275	-	Electrical Circuit, 28 Volt DC Transient Characteristics for Military Vehicles

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

HANDBOOKS

MILITARY

MIL-HDBK-781 - Reliability Test Methods, Plans and Environments for Engineering Development, Qualification and Production.

2.1.2 Other Government documents. The following other Government document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be that in effect on the date of solicitation.

NACSEM 5100 (CONFIDENTIAL) Compromising Emanations Laboratory Test Standard Electromagnetics.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets on MS standards) the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific grammation has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection(see 4.4 and 6.3).

3.2 Standard sample. A standard sample of the AM-7162 will be available for inspection at Government facilities by prospective bidders. Unless otherwise specified herein or in the invitation for bids, physical construction of the equipment shall conform to the sample and incorporate all the features of the sample. In case of a conflict between the specified performance characteristics for the equipment and the performance of the sample, the specified performance characteristics govern.

3.3 Parts, materials and processes. The parts, materials and processes shall conform with the requirements of MIL-P-11268.

3.4 Design and construction. The AM-7162 shall be of rugged, compact design and the construction capable of withstanding the rigid mechanical and climatic environmental conditions specified herein, without damage or degradation of performance. The AM-7162 shall conform with all applicable design and construction requirements of MIL-STD-454 and the requirements as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.4.1 Impedances

3.4.1.1 Source impedances. The AM-7162 shall accept a minimum of four microphone inputs, three radio receiver inputs (two of which may be receiver/transmitters), one accessory audio input, and one field telephone line input. Selection or control for these inputs shall be normally derived by logic levels from crew member control boxes. Distribution of the selected inputs shall be accomplished by switching circuits contained within the AM-7162. Source impedances for the input signals shall be as specified in table I.

TABLE I. AM-7162 source impedances

Function	Source impedance
Microphone	1.5k ohms ± 10% in series with 1 microfarad capacitor. (Pin K of J504, J505, J506, and J507)
Radio Receiver	1000 ohms ± 10% (Pin H of J501, J503, and J510)
Accessory Audio	1000 ohms ± 10% (E501 and E502)
Field Telephone (line)	680 ohms ± 10% (E503 and E504)

3.4.1.2 Load impedances. The AM-7162 shall provide two audio outputs for each of four crew member control boxes through four separate connectors. One audio output shall be intercom; the other shall be receive audio. The three receiver inputs and a summation of the three inputs (ALL) shall be switched by the AM-7162 to each of the receive audio lines in response to logic signals received from the respective crew control box. Intercom audio, field telephone and audio accessory input signals shall be summed and switched by the AM-7162 to each of the intercom lines in response to one or more logic signals received from any of the four crew control boxes. Microphone inputs from crew control boxes shall be switched to one of the two receiver transmitters in response to logic signals received from the respective control box. Microphone audio shall also be switched to the intercom amplifier to generate intercom audio in response to logic signals received from the respective control box. Also when intercom audio is switched to the intercom amplifier, the amplifier output shall be outputted at the field telephone terminals. In addition, power for the crew control boxes shall be provided at four separate connectors. Proper loads for these outputs are shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. AM-7162 load impedances

Function	Load impedance
Receive Audio	33K ohms ± 10% (Pin L of J504 thru J507)
Intercom Audio	33k ohms ± 10% (Pin E of J504 thru J507)
Microphone	150 ohms ± 10% (Pin U of J501 thru J503)
Field Telephone (line)	680 ohms ± 10% (E503 and E504)
Control Box Power	620 ohms ± 10% (Pin C of J504 thru J507)

3.4.2 Housing assembly. The housing shall be fabricated from aluminum alloy 380 in accordance with QQ-A-591 and shall be impregnated in accordance with MIL-STD-276. After impregnation, the housing shall be capable of withstanding 5 pounds-force per square inch (PSI) pressure without leakage.

3.4.3 Cover assembly. The cover assembly shall provide a waterproof seal for the housing assembly and a means for mounting the unit in the vehicle.

3.4.4 Functional controls. At minimum, the following function controls shall be provided.

3.4.4.1 Power circuit breaker. The power circuit breaker, switch operated, shall provide overload protection for the AM-7162 circuits.

3.4.4.2 Power indicator. A power indicator lamp shall indicate that power is being applied.

3.4.4.3 Power switch. A three position rotary switch shall be incorporated for the main power selection. The switch shall provide a NORMAL position (power supplied for radio and intercom, derived from an associated receiver), an INTERCOM only position (intercom power only), and an OFF position.

3.4.4.4 Intercom accent switch. A two-position rotary (ON/OFF) intercom accent switch, shall control radio signal volume. When in the ON position, the AM-7162 shall attenuate the receive audio 6 dB ± 2 dB relative to the intercom audio to the vehicle commander position.

3.4.4.5 Radio transfer switch. A three position-rotary switch shall provide for radio selection and control. The selections shall be COMMANDER PLUS CREW, COMMANDER ONLY, and LISTENING SILENCE.

3.4.4.6 Installation switch. A three-position rotary, screwdriver set, switch shall be incorporated to accommodate varied system configurations. The positions shall be INTERCOM ONLY, OTHER (varied installation), and a RETRANSMIT position (radio relay).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.4.5 Interchangeability. The AM-7162 shall be interchangeable in accordance with requirement 7 of MIL-STD-454.

3.5 Hardware

3.5.1 Connectors, receptacle. The connectors, receptacle shall meet the requirements of MIL-C-55181.

3.5.2 Switches and controls. The switches shall conform to requirement 58 of MIL-STD-454. Control knobs shall be fabricated from aluminum alloy 380, in accordance with QQ-A-591.

3.5.3 Printed wiring boards. The printed wiring boards shall meet the requirements of MIL-STD-275 and MIL-P-55110.

3.5.4 Semiconductor devices. The discrete semiconductor devices shall be JAN types where possible, and shall meet the requirements of the applicable detailed specification of MIL-S-19500.

3.5.5 Microcircuits. The microcircuits shall conform to requirement 64 of MIL-STD-454. At a minimum, all devices shall conform to MIL-M-38510, level B requirements.

3.5.6 Capacitors. The selection and application of capacitors shall be in accordance with requirement 2 of MIL-STD-454, and shall meet the P level (established reliability) requirements, except for CKR type which shall meet the R level requirements.

3.5.7 Transformers, inductors, and coils. The selection and use of transformers, inductors, and coils shall conform to requirement 14 of MIL-STD-454.

3.5.8 Resistors. The selection and application of resistors shall be in accordance with requirement 33 of MIL-STD-454, and shall meet the R level (established reliability) requirements.

3.5.9 Relays. The selection and application of relays shall conform to requirement 57 of MIL-STD-454, and shall meet the P level (established reliability) requirements.

3.5.10 Indicator housing and lens. The indicator housing and lens shall meet the requirements of MIL-L-3661.

3.5.11 Circuit breaker. The circuit breaker shall meet the requirements of MIL-P-39019.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.6 Reliability. The reliability of the AM-7162 shall be such that when the AM-7162 is combined in an intercommunication system with five Control Boxes (four C-11133 and one C-11135) or four Control Boxes (three C-11133 and one C-11134), the overall system upper test Mean Time Between Failures (0_0) (MTBF) as defined in MIL-STD-781 shall be 6038 hours. The lower test MTBF (0_1) of the system shall be 1250 hours.

3.7 Maintainability. Based on the five (5) echelon maintenance concept, the maximum Mean Time To Repair (MTTR) for the AM-7162 shall be as specified herein.

3.7.1 First (1st) echelon (operator crew). The MTTR is not applicable at this echelon.

3.7.2 Second (2nd) echelon (organizational maintenance). The MTTR at this echelon shall be 0.5 hour for the isolation, removal and replacement of a faulty unit.

3.7.3 Third (3rd) echelon (field service support). The MTTR at this echelon shall be 1.0 hour for the isolation, removal and replacement of failed printed wiring board, wiring and chassis mounted parts repair, and verification of repair.

3.7.4 Fourth (4th) echelon (field service support group). The MTTR at this echelon shall be 2.1 hours for the repair of printed wiring boards and other repairs beyond the capability of 3rd echelon skills and support equipment.

3.7.5 Fifth (5th) echelon (depot maintenance). The MTTR at this echelon shall be 3 hours.

3.8 Performance.

3.8.1 Audio output levels. Under standard or service conditions as pacified in 3.4.6 and 3.4.7 and output circuits terminated in the impedances specified herein (3.4.1.2), the AM-7162 shall meet the audio output levels specified in table III with nominal input signals as specified in table IV.

TABLE III. Audio output levels

Function	Output level
Receive audio	3.1 volts rms ± 3 dB (RT 1, RT 2, or Aux.) 2.0 volts rms ± 3 dB (ALL) with only one input summed
Intercom audio	3.2 volts rms ± 3 dB
Microphone audio	0.09 volts rms minimum
Field telephone (line)	0.45 volts rms ± 3 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE IV. Audio input levels

Signal	Level
Input Voltage	27.5 volts dc
Radio audio input	17.0 volts rms
Microphone audio input	1.5 volts rms, open ckt., 1500 ohm source, AC coupled through a 1uf non-polar capacitor
Logic voltage:	
(1) HI	11 ± 2 volts dc
(2) LO	2 volts dc maximum

3.8.2 Logic control. The AM-7162 shall provide a logic control that shall interrupt outgoing radio Push-to-Talk (PTT) action when intercom PTT is input.

3.8.3 Distortion. Total harmonic distortion shall not exceed 3 percent while the unit is operating under standard or service conditions measured at 1 kHz ± 10%.

3.8.4 Input power. Power consumption with an input of 27.5 ± 5 percent volts dc shall not exceed 25 watts under steady state conditions and a configuration of one AM-7162, four C-11133 and one C-11135 control sets.

3.8.5 Input voltage. The AM-7162 shall operate as specified herein when the input voltage is between +22 and +30 volts dc, having a ripple up to 6.0 volts peak to peak, and frequency components within the range of 50 hertz (Hz) to 200 kilohertz (kHz). The Unit shall be capable of withstanding reverse power source connections and the following transients without damage:

a. Amplitude of spikes, ±250 volts, rise time 50 nanoseconds, frequency of oscillation 250 kHz, and a decay time of 50 microseconds.

b. Amplitude of voltage surge, + 100 volts, for a duration of 50 milliseconds.

3.8.6 Isolation. The AM-7162 shall provide a minimum of -50 dB isolation between active receive/transmit audio lines, and a minimum of -50 dB between active intercom/transmit audio lines.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.8.7 Internal noise. While operating under standard or service conditions, the AM-7162 shall have an output less than 10 millivolts with the respective intercom, receive, or microphone input circuits shorted to ground.

3.8.8 Stability. While operating under standard conditions with input and output circuits terminated in the impedances specified herein, (3.4.1.2) the AM-7162 shall be stable and shall show no evidence of inadvertent outputs, nor shall damage result with input/output terminations open or shorted.

3.8.9 Frequency characteristics. The frequency response of the AM-7162 in the range of 150 Hz to 5000 Hz shall not exceed the limits specified in table V while operating under standard or service conditions relative to the output at 1000 Hz.

TABLE V. Frequency characteristics

Frequency	Intercom output	Receive output	Microphone output	Line output
50 Hz	-3 dB ±4 dB			
300 Hz	-1 dB ±4 dB	-1 dB ±3 dB	-1 dB ±3 dB	-4 dB ±3 dB
1000 Hz	0 dB	0 dB	0 dB	0 dB
3000 Hz	-2 dB ±4 dB	-1 dB ±3 dB	-1 dB ±3 dB	-2 dB ±5 dB
5000 Hz	-15 dB min.			

3.8.10 Compatibility. The AM-7162 shall be compatible with the AN/VIC-2(V) Intercommunications set interface. Changes to existing vehicular cabling (cordage) shall not be required. When used, VIC-2(V) crewmember control sets, as specified in MIL-C-29455(MC) and MIL-C-29456(MC), shall be installed for functional compatibility (see figure 1).

3.8.11 Tempest. The AM-7162 shall meet the TEMPEST requirements of specification, NACSEM 5100.

3.9. Human factors. Human engineering design criteria shall be in accordance with MIL-STD-1472.

3.10 Safety. Safety design criteria shall be in accordance with Requirement 1 of MIL-STD-454. The unit shall not present physiological hazards to operator/maintenance personnel.

3.11 Environmental requirements. The AM-7162 shall be capable of operating, as specified herein, during and after exposure to the following service conditions and induced environmental conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

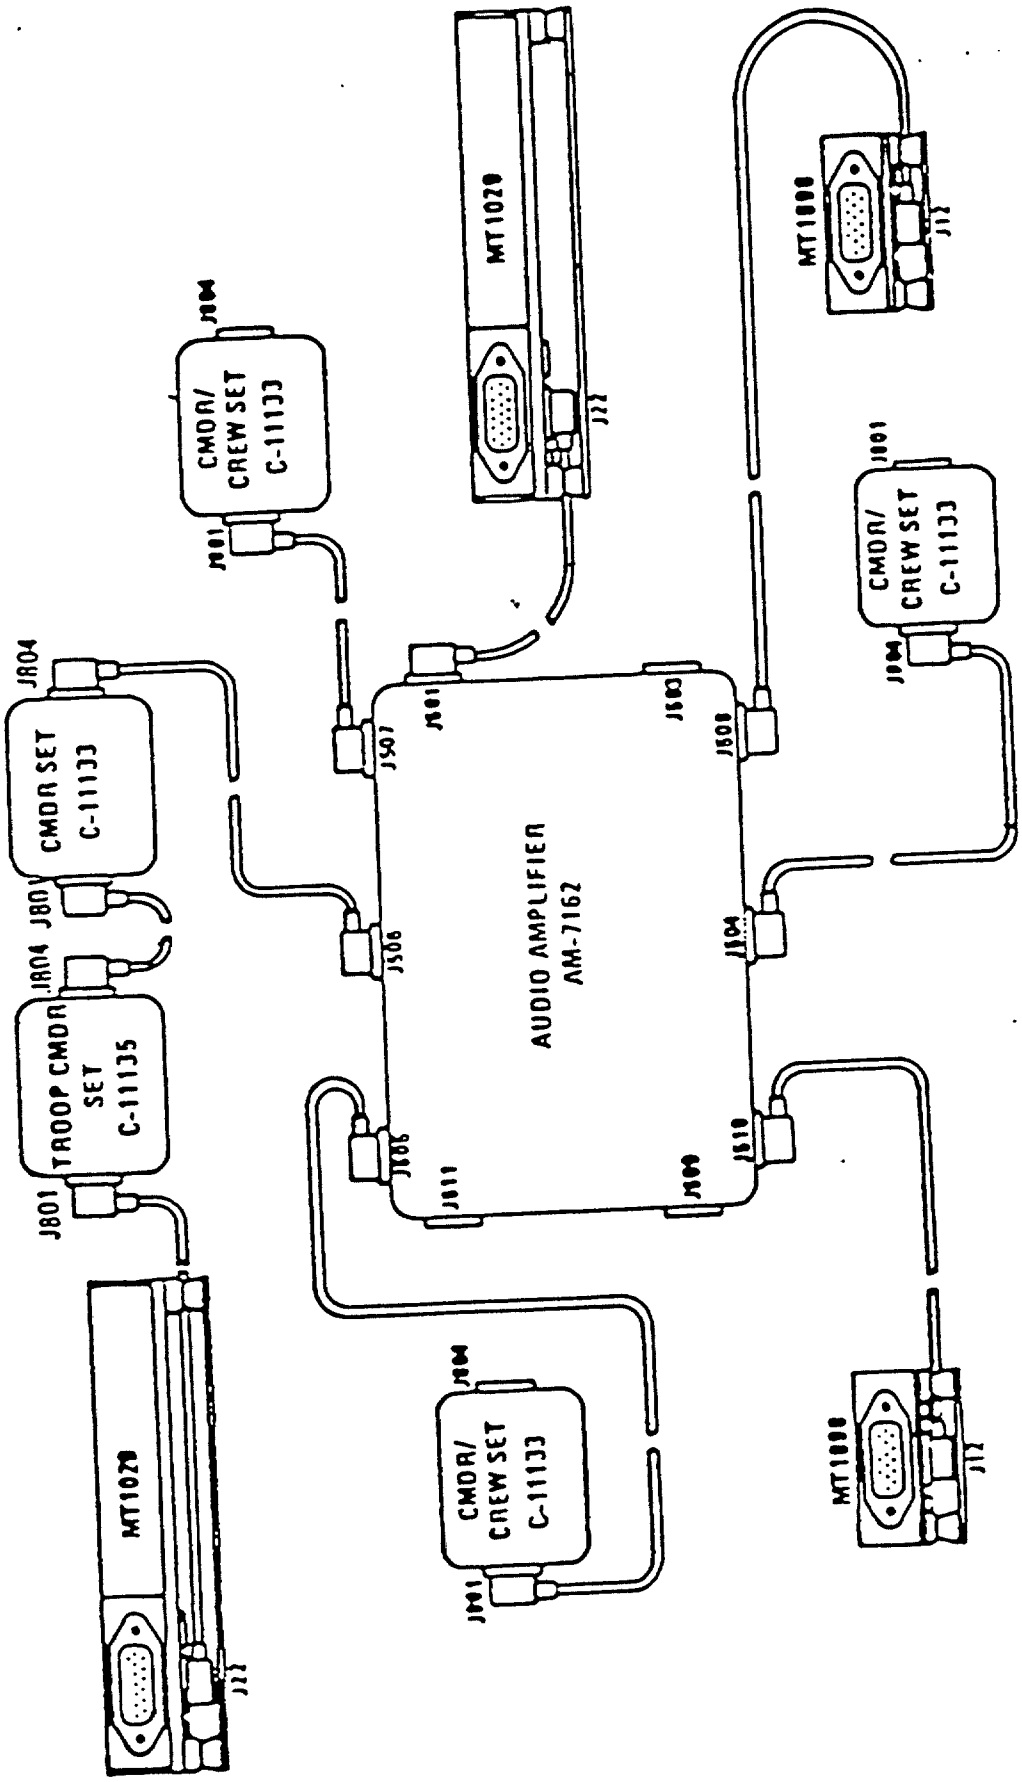


FIGURE 1. AN/VIC-2 Interfaces. (Typical Installation)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.11.1 High temperature. The AM-7162 shall be capable of operating, as specified herein, during and after exposure to high temperatures up to 68°C.

3.11.2 Low temperature. The AM-7162 shall be capable of operating, as specified herein, during and after exposure to low temperature conditions to -57°C.

3.11.3 Altitude. The AM-7162 shall operate, as specified herein, during and after exposure to operating altitudes from sea level to 15,000 feet and after exposure to nonoperating and storage altitudes from sea level to 40,000 feet.

3.11.3.1 Air-seal. The AM-7162 case (housing) shall provide a means to enable an air-seal test through the power light cover. With cover in place, the AM-7162 shall be capable of sustaining an internal decreased pressure of 1 pound-force per square inch for 1 minute with a loss of vacuum no greater than 0.01 pound-force per square inch.

3.11.4 Humidity. The AM-7162 shall operate as specified herein, after exposure to the following humidity conditions:

a. Operating, non-operating and storage	Minimum: 20 percent from minimum operating temperature to 16°C. Maximum: 100 percent including condensation from minimum operation temperature to +27°C.
b. Dew point	For minimum, the relative humidity shall be based on a dew point of -7°C. For maximum the relative humidity shall be based on a dew point of +27°C.

3.11.5 Fungus. The AM-7162 shall be resistant to fungi in both the operating and non-operating conditions.

3.11.6 Salt fog. The AM-7162 shall be capable of operating, as specified herein, and not exhibit physical defects after exposure to a salt fog environment.

3.11.7 Immersion. The AM-7162 shall operate, as specified herein, after being subjected to water immersion for a period of 2 hours.

3.11.8 Vibration. The unit shall be capable of operating, as specified herein, after subjection to the transportation and ground vehicle vibration stresses of figures 514.3-1 thru 514.3-20 of MIL-STD-810, method 514.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.11.9 Explosive atmosphere. The unit, when operating in an explosive atmosphere, shall not cause ignition of such an atmosphere, and shall operate, as specified herein, during and after such exposure.

3.11.10 Shock. The AM-7162 shall be capable of operating as specified herein after exposure to the functional shock conditions specified in MIL-STD-810, Method 516.3.

3.12 Electromagnetic interference suppression. While operating under standard or service conditions, the AM-7162 shall not be a source for conducted or radiated emissions, nor shall the AM-7162 be degraded in its performance characteristics, or malfunction, as a result of encountering radiated (magnetic/electric fields) or conducted emissions. The AM-7162 shall meet the following requirements of MIL-STD-461.

3.12.1 Conducted emission. The AM-7162 shall meet the limits for CE01 and CE03. Emissions in the frequency range of 30 Hz to 50 megahertz (MHz) shall not appear on the dc power leads, control leads, signal leads (except intended leads), and interconnecting cables in excess of the values shown in figures 4-1 through 4-6 of MIL-STD-461.

3.12.2 Radiated susceptibility (RS03). The AM/7162 shall not exhibit any malfunction or degradation of performance when subjected to radiated electric fields (E) less than or equal to the following:

Frequency Range	E-Field (Volts/Meter)
14 kHz to 2 MHz	1
2 to 30 MHz	10
30 to 2000 MHz	5
2 to 10 GHz	5
Above 10 GHz	20

3.12.3 Conducted susceptibility. The AM-7162 shall meet the limit for CS01 without malfunction or degradation of performance when subjected to electromagnetic energy injected on the dc power leads equal to or less than the values shown in Figure 4-7 of MIL-STD-461.

3.13 Dimensions. The AM-7162 shall not exceed the following dimensions, excluding protrusions, such as connectors, mounting bosses, controls, lights, etc.

a. Width, 10.0 inches
b. Height, 6.0 inches
c. Depth, 4.0 inches

3.14 Weight. The AM-7162 shall not exceed 10 pounds 8 ounces in weight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.15 Finish. The AM-7162 shall be painted in accordance with MIL-F-14072 Film 'Y'. The finish coat shall conform with MIL-C-46168 (383 Green).

3.16 Marking. The internal and external identification markings of the subassemblies, parts, and the AM-7162 shall be in accordance with requirement 67 of MIL-STD-454.

3.17 Workmanship. All fabrication, solder operations, and assembly operations shall be in compliance with requirements 5, 9, 47 and 69 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(1) First article inspection (see 4.4)

(2) Quality conformance inspection (see 4.5)

4.3 Inspection conditions. The following parameters shall be used while conducting laboratory tests to establish normal performance characteristics under standard conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

Parameter	Conditions
a. Temperature	Room ambient (23 ±10°C)
b. Altitude	Normal ground (sea level + 5000 feet
c. Humidity	Room ambient (50 ± 30%)
d. Input power	27.5 volts dc ± 10%

4.4 First article test inspection. All first article tests, examinations, and inspections, as specified herein, shall be conducted by the contractor. The procuring activity or Government representative shall be notified prior to initiation of test.

4.4.1 First article test quantities. First article test and inspections shall be conducted on six (6) Amplifiers, Audio Frequency AM-7162. Reliability tests shall be conducted on 1 to 3 AM-7162 Amplifiers selected by the contractor which have not been subjected to group (4) thru (7) tests as defined in 4.4.2.

4.4.2 Classification of first article tests and inspections. The first article tests and inspections shall be classified into eight (8) major groups. The groups and the first article unit numbers allocated to each group shall be as specified in table VI. Units undergoing group (4) thru (8) tests must have successfully passed all of group (1), (2) and (3) tests.

TABLE VI. First article tests and inspections

Group	AM-7162	Reqt units	Test Method Para
(1) Parts, materials, processes	All	3.3	4.6.1
(2) Standards of manufacture and workmanship	All	3.14,15,	4.6.6 16,17 3.9,3.10
(3) Electrical	All	3.4.4,	4.6.5 3.8
(5) EMI	1	3.12	4.6.7
(4) Electrical and Mechanical Interchangeability	1,2	3.4.5	4.6.8
(6) Environmental	2-5	3.11	4.6.9
(7) TEMPEST and Maintainability demonstration	6	3.8.11, 3.7	4.6.13 4.6.11
(8) Reliability tests	7-9	3.6	4.6.10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.4.3 First article approval. Upon satisfactory completion of all group (1) through (8) tests, examinations, and inspections as specified in 4.4.2, first article approval shall be granted by the procuring activity. Any design, material or performance defects made evident during the inspections and tests shall be corrected by the contractor. Required corrections, if any, shall apply to any production units if prefabricated prior to first article approval.

4.5 Quality conformance inspections. The production units shall be inspected for quality conformance in accordance with the provisions of MIL-STD-105, single sampling. Except where otherwise specified, inspection level II shall be used. Evidence of noncompliance shall constitute cause for rejection and for units already accepted by the Government it shall obligate the contractor to make necessary corrections as approved by the procuring activity.

4.5.1 Inspection lot. The production end item AM-7162 shall be assembled into identifiable lots as defined in MIL-STD-105 and in the contract. Production units shall in all respects, including design, construction, workmanship, performance and quality, be equal to the approved first article units. Discrete lots shall be formed from units passing the group A inspections as defined in 4.5.2.

4.5.2 Group A inspection. Each end item AM-7162 shall be inspected for conformance to the inspections specified in table VII.

TABLE VII. Group A inspection

Inspection	Requirement paragraph	Test method paragraph
(1) End item electrical		
Functional controls	3.4.4	4.6.5.1
Audio input output	3.8.1	4.6.5.2
Logic and RADIO TRANS switch	3.8.2	4.6.5.3
Distortion	3.8.3	4.6.5.4
Input power	3.8.4	4.6.5.5
(2) End item air-seal	3.4.3.1	4.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.5.3 Group B inspection. The group B inspections shall consist of the inspections specified in table VIII. Group B inspections shall be performed on sample units selected from lots that have been subjected to and passed the Group A inspections. Special inspection level S-4 of MIL-STD-105 shall apply. Unless otherwise specified herein, the inspections and tests shall be conducted under standard conditions as specified in 4.3.

TABLE VIII. Group B inspections

Inspection	Requirement paragraph	Test method paragraph
Input voltage	3.8.5	4.6.5.6
Electrical and mechanical interchangeability)	3.4.5	4.6.8
Immersion	3.4.7	4.6.9
Isolation	3.8.6	4.6.5.7
Internal noise	3.8.7	4.6.5.8
Stability	3.8.8	4.6.5.9
Frequency response	3.8.9	4.6.5.10

4.5.4 Group C inspection. Group C inspections shall be performed on units that have passed group A inspection. Group C inspections shall consist of the inspections and tests specified in table IX. The contractor may elect to run all tests of a given sub-group on the same unit(s) or may elect to perform the tests on multiple units.

TABLE IX. Group C inspections

Sub Group	Type inspection	Requirement paragraph	Test method paragraph
I (Note 1)	Weight and dimensions	3.13 and 3.14	4.6.6
	High Temp / Low Temp.	3.11.1 / 3.11.2	4.6.9 / 4.6.9
	Altitude	3.11.3	4.6.9
	Vibration	3.11.8	4.6.9
II (Note 2)	Humidity	3.11.4	4.6.9
	Shock, ballistic	3.11.10	4.6.9
III (Note 3)	Fungus	3.11.5	4.6.9
	Salt fog	3.11.6	4.6.9
	EMI	3.12	4.6.7
IV (Note 4)	Maintainability	3.7	4.6.14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

Note 1: 1 unit from the first 50 produced; 1 unit selected from each two (2) months of production thereafter.

Note 2: 2 units selected from the first 50 produced; 2 units selected from each four (4) months of production thereafter.

Note 3: 1 unit from first production lot.

Note 4: 1 unit from first production lot; to be performed by the Government.

4.5.5 Group D inspection (reliability tests). Reliability testing shall be conducted as defined in 4.6.10. Samples for group D reliability testing shall be selected from lots which have successfully passed group A tests. The contractor shall select from one to three systems as defined in 4.6.10.2 from the first lot of production units.

4.5.5.1 Disposition of units subjected to group-D tests. Units subjected to group D tests are not considered usable "In-the-field". Disposition and marking of these units will be specified in the terms and conditions of the contract. Prior to shipment, refurbishment of any first article or production units which receive reliability, salt spray, or fungus tests shall be limited to refurbishment of the units to the performance level only.

4.5.6 Inspection of packaging. The preparation for delivery (packaging and procedures) shall be inspected in accordance with the provisions of MIL-P-116 to determine conformance with the requirements of section 5.

4.5.7 Accept/reject criteria. The accept/reject criteria and procedures shall conform to MIL-STD-105. Unless otherwise specified, the contractor shall reserve the right to repair or correct rejected items and resubmit for inspection as witnessed by a Government representative.

4.6 Methods of inspection.

4.6.1 Parts, materials, and processes. Verification that parts, materials, and processes have been selected and approved in accordance with MIL-P-11268 shall be made by inspection of contract records and purchase orders. Vendor certifications for each batch or lot of items received shall be inspected to insure that all specified requirements will have been met. This inspection applies to requirement 3.3 for vendor procured parts, materials, and processes. It does not, however, relieve the contractor of his responsibility to conduct additional inspections, parts screening, or tests where necessary to control quality and assure compliance with the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.2 Standards of manufacture and workmanship. Visual and mechanical inspections shall be conducted on all units including chassis mounted parts and wiring, printed wiring boards, subassemblies, and connectors to insure conformance with the finish marking and workmanship requirements of 3.15, 3.16 and 3.17. The equipment shall also be examined to ensure compliance with the human factors and safety requirements of 3.9 and 3.10 respectively.

4.6.3 Bounce preconditioning. Each AM-7162 shall be subjected to bounce preconditioning on a Package Tester, type 1000-SC, L.A.B. Corporation, Skaneatles, New York, or equal. Bounce preconditioning shall be performed by adjusting the package tester table until a 1/32 inch gage strip will slide freely under an edge of the Unit (approximately 250 to 300 revolutions per minute). After one (1) ± .1 minutes of preconditioning, the Unit shall be capable of meeting all requirements, as specified herein, without subsequent repair, processing or alignment.

4.6.4 Electrical preconditioning. Each AM-7162 shall be subjected to electrical preconditioning after bounce preconditioning (4.6.3). At a minimum, the preconditioning (burn-in) shall be for a period of 48 hours with an input voltage of 27.5 ± 10% volts dc and at a temperature of 49°C ± 5°C (111°F to 129°F). While operating, 11 ± 2 volts dc (HI) logic signals shall be applied sequentially at J505H, J505D and J505F at intervals of 10 ± 1 minutes for 10 seconds minimum. Additionally, the AM-7162 shall be vibrated at any non-resonant frequency between 20 and 60 Hz, 2.2g peak ± 10%, for a duration of 10 ± 1 minutes during each hour of operation. The last (8) hours shall be failure free. In the event of failure during this period, repairs shall be made and the entire test repeated.

4.6.5 Electrical tests and inspections. The following tests shall be conducted under the standard conditions of 4.3. Source impedances shall be as specified in 3.4.1.1 and standard (nominal) input signals shall be as specified in table IV. Where not specified, tolerances for table IV are ± 10%.

4.6.5.1 Functional controls (see Figure 2). The following tests shall be performed to verify conformance with requirement 3.4.4.

a. With 27.5 ± 10% volts dc applied to pin B of J508, set the main power switch to INT ONLY, power circuit breaker ON, and installation switch to INT ONLY, the POWER light shall light indicating power to the AM-7162 from a separate source to provide independent intercom operation.

b. Set the Installation switch in OTHER. The POWER light shall go off and shall remain off when the Installation switch is placed in the RETRANS position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

c. Place the functional controls as shown in Figure 2 and apply 27.5 ± 10% volts dc to pin B of J501, 27.5 ± 10% volts dc shall appear on pin D of J501 (radio relay power control).

d. Apply 27.5 ± 10% volts dc to pin C of J501. The POWER light shall light. Place the MAIN PWR switch to INT ONLY, the POWER light shall remain lighted. Set the MAIN PWR switch to the OFF position the POWER light shall go off.

e. Set the INT ACCENT switch in the ON position. Observe that radio volume is decreased at J504.

4.6.5.2 Audio input/output test. With the functional controls of the AM-7162 placed in the positions shown in figure 2, radio and microphone audio signals, and their respective logic control signals shall be inserted into the input/output connectors (receptacles) as specified in Table IX. Audio input levels shall be as specified in Table IV at 1000 Hz +10%. Audio outputs shall be measured at the receptacle pins as indicated in table X and shall comply with the output levels specified in table III.

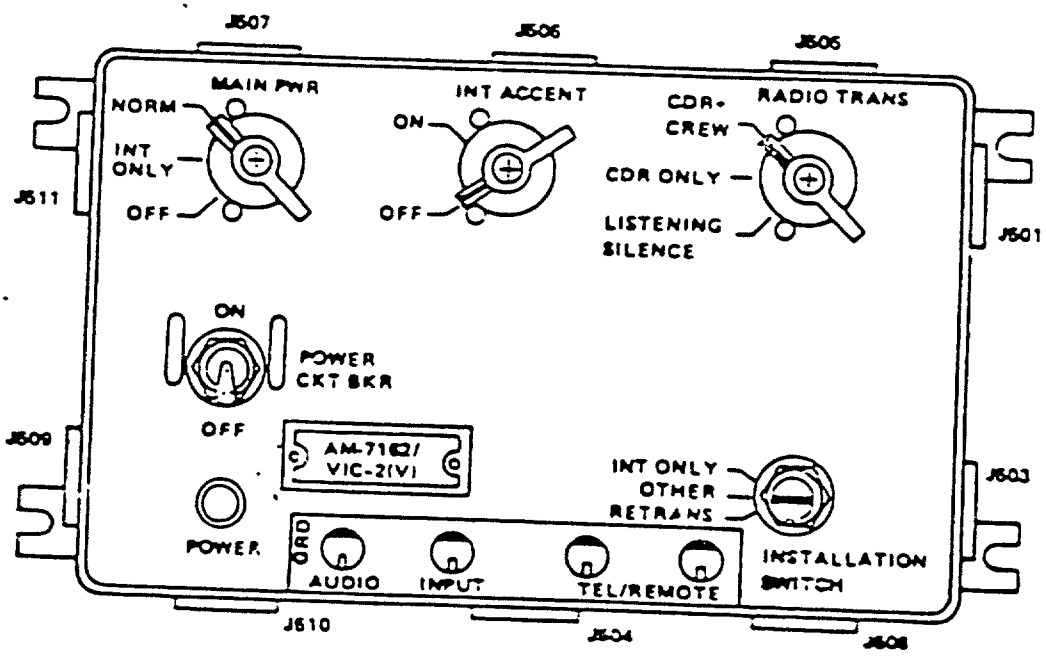


FIGURE 2. AM-1762 input/output receptacles and functional controls

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE X. Audio input/output test points

Receive audio output		
Radio audio input	HI logic input	Receive audio output
J510H	J505B	J505L
J503H	J505J	J505L
J501H	J505M	J505L
J510H	J506B	J506L
J503H	J506J	J506L
J501H	J506M	J506L
J510H	J507B	J507L
J503H	J507J	J507L
J501H	J507M	J507L
J510H	J504B	J504L
J503H	J504J	J504L
J501H	J504M	J504L
Intercom audio output		
Microphone audio input	HI logic input	Intercom audio output
J505K	J505H	J505E
J506K	J506H	J506E
J507K	J507H	J507E
J504K	J504H	J504E
Microphone audio output		
Microphone audio input	HI logic input	Microphone audio output
J505K	J505D	J501U
J506K	J506D	J501U
J507K	J507D	J501U
J504K	J504D	J501U
J505K	J505F	J503U
J506K	J506F	J503U
J507K	J507F	J503U
J504K	J504F	J503U
ALL audio output		
Radio audio input	HI logic input	ALL audio output
J501H	J505M and B	J505L
J503H	J505M and B	J505L

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE X. Audio input/output test points - Continued

J510H E502 E502 E502 E502	J505M and B J505M and B J506M and B J507M and B J504M and B	J505L J505L J506L J507L J504L
Line audio output		
Microphone audio input J505K	HI logic input J505H	Line audio output E503 to E504 with 680 ohm load

4.6.5.3 Logic and RADIO TRANS switch control test.

a. With the functional controls placed as shown in figure 2, logic signals shall be inserted and ground measurements taken at the receptacle pins specified in Table X.

b. Place the RADIO TRANS switch in the LISTENING SILENCE position with the same logic inputs inserted. Pin S of J501 and J503 shall not ground under these conditions.

c. Place the RADIO TRANS switch in the CDR ONLY position, and apply logic inputs to J504D and F only. Pin S of J501 and J503 respectively shall ground.

d. With the logic input signals of Table XI applied place the RADIO TRANS in the CDR + CREW position and insert a HI logic signal into pin H of J505. Pin S of J501 and 503 shall be ungrounded.

TABLE XI. LOGIC and RADIO TRANS test points

HI logic input	Pin S ground
J50	J501
J506D	J501
J507D	J501
J504D	J501
J505F	J503
J506F	J503
J507F	J503
J504F	J503

NOTE: "Ground" is defined as continuity of less than 100 ohms to chassis. In the ungrounded condition, Pin S shall be at least 10k ohms continuity to chassis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.5.4 Distortion. Total harmonic distortion, shall be measured at 1 kHz ± 10% for each audio output measured in the audio input/output test (4.6.5.2) Distortion shall comply with the requirements of 3.8.3.

4.6.5.5 Input power. The AM-7162 shall be tested for total power consumption with the configuration shown in figure 1. A C-11133 shall be used in place of the C-11134. The configuration may be simulated or actual at the option of the procuring agency. If actual conditions are imposed, the Government shall furnish the necessary vehicular cabling (cordage, special CX type), and VIC-2(V) type control sets. If the VIC-2(V) control sets are to be furnished concurrently, the cordage only will be required (lengths and types to be determined during contract negotiation). When tested under these conditions, the AM-7162 (as a system) shall meet the requirements as specified in 3.8.4.

4.6.5.6 Input voltage test. When tested as specified in 4.6, the input voltage shall be adjusted to +22 + 5% volts dc and +30 ± 5% volts direct current (dc) respectively. At each of these imposed voltages, input power shall be reversed at the source connections with subsequent reversal to proper polarity. The Unit shall then be subjected to the transient test procedures specified in paragraphs 6.2.3 and 6.2.4 of MIL-STD-1275 under steady-state conditions (27.5 ±10% volts dc). Under these conditions, the AM-7162 shall meet the requirements specified in 3.8.5.

4.6.5.7 Isolation. While operating under these test conditions, isolation between active audio signal lines shall be tested, at J501U and J503U by measuring undesired audio referenced to desired audio, and shall meet the requirements specified in 3.8.6.

4.6.5.8 Internal noise. While operating under the same test conditions with respective inputs shorted, the Unit shall meet the requirements of 3.8.7.

4.6.5.9 Stability. The AM-7162, operating under the test conditions specified, shall be tested for inadvertent outputs or oscillations. The Unit shall also be tested with its inputs/output terminations open and shorted. Under these conditions, the AM-7162 shall meet the requirements specified in 3.8.8.

4.6.5.10 Frequency response test. Operating under the test conditions specified in 4.6.5.2, the frequency response of the AM-7162 shall be measured at 150 Hz, 300 Hz, 1000 Hz, 3000 Hz and 5000 Hz. Frequency response outputs shall comply with the requirements of table V.

4.6.6 Weight and dimensions. Visual and mechanical inspections shall be made to determine compliance with requirements of 3.13 and 3.14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.7 EMI tests. Tests shall be conducted in accordance with the procedures of MIL-STD-462, to demonstrate compliance with the requirements of 3.12.

4.6.8 Electrical interchangeability tests. In a system test configuration as depicted in figure 1, two (2) AM-7162 units shall be interchanged and tested to verify compliance with the requirements of 3.4.5.

4.6.9 Environmental tests. Environmental tests shall be conducted in accordance with the procedures of MIL-STD-810 and table XII. First article environmental tests shall be conducted in the sequence and on designated units as shown in table VI. Production environmental test sequence and unit designation is defined in 4.5.4, table IX.

TABLE XII. Environmental tests

Test	MIL-STD-810 procedure	Requirement paragraph	First Article Unit No.
High Temperature	Method 501.2, procedure II, maximum temp: 68°C.	3.11.1	2
Low Temperature	Method 502.2, procedure II, minimum temp:-57°C.	3.11.2	2
Altitude (low pres)	Method 500.2, procedure I.	3.11.3	2
Air-seal	Note: MIL-STD-810 is not applicable. Remove the POWER light indicator cover. Reduce internal pressure through POWER light valve by 2 pounds-force per sq. in. measure pressure for 1 minute. Loss shall not exceed 0.1 pound-force PSI	3.11.3.1	2
Humidity	Method 507.2, procedure I, cycles 2 and 3 and procedure II cycle 5.	3.11.4	4
Fungus	Method 508.3,(see Note 1.)	3.11.5	5
Salt fog	Method 509.2, procedure I. All connectors shall be covered.	3.11.6	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE XII. Environmental tests - Continued

Test	MIL-STD-810 procedure	Requirement paragraph	First Article Unit No.
Immersion (leakage)	Method 512.2, procedure I.	3.11.7	2
Vibration	Method 514.3,categories 1, 8, 10 procedure I.	3.11.8	3
Explosive atmosphere	Method 511.2, procedure I, at simulated altitude of 15,000 feet	3.11.9	3
Shock	Method 516.3, procedure I.	3.11.10	5

Note 1: The fungus test Accept/Reject criteria shall be based on the following:

To pass,the complete equipment assembly should not exhibit fungus growth greater than grade 2 as shown in table 508.3-I of MIL-STD-810.

4.6.10 Reliability tests. The contractor shall select from one to three first article units subjected to combined environmental, reliability tests in accordance with the approved test plan and procedures as specified in 4.6.10.1. The combined test plan and procedures shall include, at a minimum, the test conditions specified in 5.4 of MIL-HDBK-781, and the conditions specified herein.

4.6.10.1 Test plan and procedures. An integrated reliability test plan and reliability test procedure shall be prepared by the contractor in accordance with the requirements of MIL-STD-781. The test shall be a fixed length test, test plan number 10-3 of MIL-HDBK-781. The producers and consumers risks for this test shall be 10 percent. The accept/reject criteria shall be as specified for test 10-3, MIL-HDBK-781. Failure of any component in the test configuration other than the AM-7162, C-11133, or C-11134 shall be considered as non-relevant. All other failures shall be in consonance with 4.7 of MIL-STD-781.

4.6.10.2 AM-7162 test configurations. The test configuration shall contain one (1) AM-7162, four (4) C-11133 controls, and one (1) C-11135 control. Cable assemblies shall be furnished by the Government as Government furnished equipment (GFE) in quantities and lengths to be determined. Failures during test of any GFE items or items other than the procured units shall not be considered relevant failures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.11 Maintainability demonstration. A maintainability demonstration shall be conducted in accordance with the procedures of test method 4 of MIL-STD-471 with a sample size of ten (10) tasks minimum. The acceptance criteria, as defined in test method 4, must be equal to or less than the requirements specified in 3.7. At the option of the procuring activity, the maintainability demonstration may use the failures incurred during the reliability testing as part of the sample. This option, if selected, will be stated in the terms of the contract.

4.6.12 Interface compatibility test. One AM-7162, three C-11133 and one C-11134 first article units shall be tested to demonstrate the AN/VIC-2(V) system interface compatibility in accordance with 3.8.10.

4.6.13 TEMPEST qualification. TEMPEST testing will be conducted by the contractor or certified sub-contractor using first article test units to demonstrate compliance with specification NACSEM 5100. The Contractor shall be responsible to correct any design deficiency identified during testing.

4.6.14 Quality conformance inspections prior to preparation for delivery. All production end item units and those successfully completing group B, C and D inspections shall be subjected to the end item operational acceptance tests specified below. With function controls placed as shown in figure 2, under standard conditions (paragraph 4.3), with proper impedances (paragraph 3.4.1) and inputs as specified in table IV, perform the following tests:

a. Place radio audio into J501H, HI logic into J505M, and observe receive audio at J505L. Remove HI logic, audio should be attenuated at least 30 dB.

b. Place Microphone audio into J505K, HI logic into J505H and observe Intercom audio at J505E. Remove HI logic, audio should be attenuated at least 30 dB.

c. Place HI logic into J505D, J501S should ground. Remove HI logic, J501S ungrounds.

5. PACKAGING

5.1 Preservation level A. Preservation shall be level A as specified (see 6.2).

5.1.1 Cleaning. The AM-7162 shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.2 Drying. The AM-7162 shall be dried in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

5.1.3 Unit packaging. Each AM-7162 shall be packaged in accordance with method III of MIL-P-116. The mounting hardware kit, P/N 393857 shall be stowed in a cotton mailing bag conforming to PPP-B-20, positioned on the front of the amplifier and secured with tape conforming to PPP-T-76. The unit shall be cushioned by wrapping in a double thickness of paperboard conforming to PPP-P-291, Type III. The cushioned unit shall be placed within a close-fitting fiberboard box conforming to Type CF weather-resistant, single wall, grade W6C requirements of PPP-B-636. The box shall be closed in accordance with the appendix of PPP-B-636. All seams and joints shall be sealed with tape, not less than 2 inches wide, conforming to PPP-T-76.

5.1.4 Unit package size. The unit package shall not exceed 0.24 cubic feet.

5.2 Packing. The packing shall be level A, B, or C as specified (see 6.2). Shipping containers for all levels shall be capable of stackability and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of units packaged as specified in 5.1.3, shall be packed within close-fitting fiberboard boxes conforming to PPP-B-636, Type CF, class weather-resistant. Box closures shall be as specified in the Appendix of PPP-B-636. To facilitate palletization, the fiberboard boxes, herein after referred to as containers, shall be uniform in size and contain equal quantities of the packaged items to the greatest extent practicable.

5.2.1.1 Palletized load. A quantity of containers packed as specified in 5.2.1, shall be placed on a pallet, load type conforming to MIL-STD-147. A fiberboard cap shall be employed over the load, having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, Type SF, class weather-resistant, W5s. The load shall be bonded to the pallet by strapping.

5.2.1.2 Less than palletized load. When quantities per destination are less than a pallet load, the containers, packed as specified in 5.2.1, shall be waterproofed with tape conforming to PPP-T-76, in accordance with the taping requirements of the Appendix of PPP-B-636. A quantity of the waterproofed containers shall be placed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, Style 4, Class 2; or PPP-B-585, Style 2 or 3 of Class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 inch by 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification. If not specified in the specification, the skids shall be applied in a manner which will

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or Appendix thereto except that metal strapping shall conform to QQ-S-781, Type 1, Class 1, regular duty, Finish B, Grade 2.

5.2.2 Level B packing. A quantity of units packaged as specified in 5.1.3, shall be packed as specified in 5.2.1. A quantity of containers, packed as specified in 5.2.2, shall be palletized as specified in 5.2.1.1. When quantities per destination are less than a pallet load, 5.2.1.2 is applicable except that the containers shall be reinforced by pressure-sensitive filament tape conforming to PPP-T-97, Type IV, as specified in the annex to PPP-B-636.

5.2.3 Level C packing. A quantity of units packaged as specified in 5.1.3, shall be packed as specified in 5.2.1, except that the fiberboard shall be class domestic. A quantity of containers, shall be palletized as specified in 5.2.1.1, except that the fiberboard cap shall be class domestic. When quantities per destination are less than a pallet load, the fiberboard boxes shall be used as the shipping container.

5.3 Marking. Interior packages and exterior shipping containers shall be marked in accordance with the provisions in MIL-STD-129, and any special markings in accordance with the terms and conditions specified in the contract.

6. NOTES

6.1 Intended use. The AM-7162 is intended for use as an intra- vehicular communications and intercom distribution facility in military tracked vehicles such as: armored personnel carriers, tanks, and howitzers.

6.2 Ordering data. The procuring agency should exercise any options offered herein, and procurement documents should specify the following:

(1) Title, number, and date of this specification.

(2) Quantity of AM-7162 units, and subassemblies by type designation.

(3) Levels of Preservation, and packing including quantities per shipment (see section 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article inspection is required, the item(s) should be the first production item. The first articles should consist of the number of units specified in 4.4.1. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Standard sample. The standard sample will be Government furnished equipment (GFE) and will be provided to the contractor upon contract award.

6.5 Subject term (key word) listing.

Communication
Control
Intercommunications

Preparing activity:
Navy - MC
Project No. 5830 - N078

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-29457(MC)	AMPLIFIER, AUDIO FREQUENCY AM-7162/VIC-2(V)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.