MILITARY SPECIFICATION

CONTROL, INTERCOMMUNICATION SET

C-11134/VIC-2(V)

This specification is approved for use within the U.S. Marine Corps, the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Beneficial comment (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding General, Marine Corps Research, Development and Acquisition Command (Attn: Code PSI-G), Washington, D.C. 20380-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5830

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This specification establishes the performance, design, test, manufacture and acceptance requirements for the intercommunication control set C-11134/VIC- 2(V), critical item. The item shall be referred to herein as the "C-11134", "Control Box" or "Unit". The C-11134 Box, as specified herein, is a rugged, compact unit in a water-tight case containing audio frequency amplifiers for a microphone signal input/output and a headset signal input/output. The Unit also contains necessary circuitry for selective crewmember intercom/radio audio and push-to-talk (PTT) Control as required for the varied system configurations employed in particular military vehicles (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbook form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-20	-	Bag, Cotton, Mailing.
PPP-B-76	-	Tape, Pressure Sensitive Adhesive, Packaging, Paper (For Carton Sealing).
PPP-T-97	-	Tape, Pressure Sensitive Adhesive, Filament Reinforced.
PPP-P-291	-	Paperboard, Wrapping and Cushioning.
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-B-585	-	Box, Wood, Wirebound.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Box, Wood, Nailed and Lock-corner.
PPP-B-636	-	Box, Shipping, Fiberboard.
QQ-A-591	-	Aluminum Alloy Die Castings.
QQ-S-781	-	Strapping, Steel, and Seals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-R-94	-	Resistors, Variable, Composition general specification for
MIL-P-116	-	Preservation, Methods of
MIL-L-3661	-	Lampholders, Indicator Lights, Indicator Light Housings, and Indicator Light Lenses, General Specification For
MIL-P-11268	-	Parts, Materials and Processes Used in Electronic Equipment
MIL-F-14072	-	Finishes for Ground Electronics Equipment
MIL-S-19500	-	Semiconductor Devices, General Specification for
MIL-C-29455(MC)	-	Control Intercommunication Set, C-11133/VIC-2(V) and C-11135/VIC-2(V)
MIL-C-29457(MC)	-	Amplifier, Audio Frequency: AM-7162/VIC-2(V)
MIL-M-38510	-	Micro-Circuits, General Specification for
MIL-C-46168	-	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-P-55110	-	Printed Wiring Boards
MIL-C-55116	-	Connectors, Miniature Audio, Five-Pin
MIL-C-55181	-	Connector, Plug & Receptacle, Intermediate Power (Electrical, Waterproof) Type MW, General Specification For

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-275	-	Printed Wiring for Electronic Equipment
MIL-STD-276	-	Impregnation of Porous Nonferrous Metal Castings
MIL-STD-454	-	Standard General Requirements for Electronic Equipment
MIL-STD-461	-	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	-	Electromagnetic Interference Characteristics, Measurements of
MIL-STD-471	-	Maintainability Demonstration
MIL-STD-781	-	Reliability Testing for Engineering Development, Qualification and Production
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

HANDBOOKS

MILITARY

MIL-HDBK-781 - Reliability Test Methods, Plans and Environments for Engineering Development, Qualification and Production

2.1.2 Other Government documents. The following other Government document, forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be that in effect on the date of the solicitation.

NACSEM 5100 (CONFIDENTIAL) - Compromising Enamations Laboratory Test Standard Electromagnetics.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.4 and 6.3).

3.2 Standard sample. A standard sample of the equipment will be available at Government facilities for inspection by prospective bidders. Unless otherwise specified herein or in the invitation for bids, physical construction of the equipment shall conform to the sample and the equipment shall incorporate all the features of the sample. In case of conflict between specified performance characteristics for the equipment and the performance of the sample, the specified performance characteristics shall govern.

3.3 Parts, materials, and processes. The parts, materials, and processes shall conform with the requirements of MIL-P-11268.

3.4 Design and construction. The Control Box shall be of rugged, compact design and the construction capable of withstanding the rigid mechanical and climatic environmental conditions specified herein, without damage or degradation of performance. The Unit shall conform with all applicable design and construction requirements of MIL-STD-454 and the following requirements as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.4.1 Impedances

3.4.1.1 Source impedance. The Control Box shall accept four audio inputs: Intercom, Receiver, Microphone and C-2296 Microphone. The control of intercom and receiver audio is accomplished by logic outputs of the C-11134. The microphone audio is produced by an audio accessory and is amplified within the C-11134 before being output. The C-2296 Microphone is an input from the C-2296/VRC Control Box. Source impedance for the Unit shall be as specified in table I.

TABLE I. C-11134 source impedances

Function	Source impedance
Intercom Audio (J904-E)	1k ohms ± 10%
Receiver Audio (J904-L)	1k ohms ± 10%
Microphone Audio (J902-D)	150 ohms ± 10%
C-2296 Microphone Audio (J901-K)	1.5k ohms ± 10%

3.4.1.2 Load impedances. The Control Box shall output receive logic, PTT Logic, headphone audio, C-2296 audio, and microphone audio. The proper loads for these outputs are shown in table II.

TABLE II. C-11134 load impedances

Function	Load impedance
Receive Logic (J904-B,J,M)	47k ohms ± 10%
PTT Logic (J904-D, F, H)	12k ohms ± 10%
Headphone Audio (J902-B)	680 ohms ± 10%
Microphone Audio (J904-K)	150 ohms ± 10%
C-2296 Audio (J901-J)	5k ohms ± 10%
Filtered dc Voltage (J901-C)	.2K ohms ± 10%

3.4.2 Housing assembly. The housing shall be fabricated from aluminium alloy 380 in accordance with QQ-A-591 and shall be impregnated in accordance with MIL-STD-276. The housing assembly shall be capable of withstanding 5 pounds-force per square inch (PSI) pressure for a period of 10 minutes without leakage.

3.4.3 Cover assembly. The cover assembly shall provide a waterproof seal for the housing assembly and a means for mounting the Unit in the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.4.4 Functional controls. Functional controls are illustrated in figure 1 and described in table III. The following functional controls shall be provided.

3.4.4.1 Monitor switch. A five position rotary switch shall select the desired radio and intercom operations. Switch functions are shown in table III.

3.4.4.2 Control switch. A three position control shall allow two-way signaling between the C-11134 operator and the C-2296/VRC operator. Switch functions are shown in table III.

3.4.4.3 Volume control. The volume control shall vary the headphone audio level. The Control shall be Type C (MIL-R-94) Taper, 10k ohms ± 20% maximum resistance.

3.4.4.4 Signal light. The signal light activates when the control switch is set to EXT and SIG positions. When the control switch is set to OFF, the light will light each time the H-207/VRC push-to-talk switch of the C-2296/VRC is pressed.

3.4.5 Interchangeability. The Control Box shall be interchangeable in accordance with requirement 7 of MIL-STD-454.

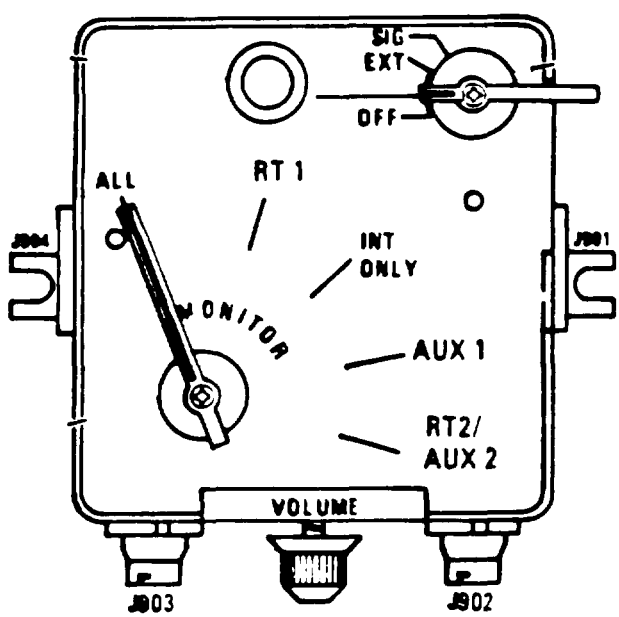


FIGURE 1. C-11134 functional controls

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE III. Switch functions

Position	Function
Monitor Switch	
All	Monitor all receiver/ transmitters; Key RT1 transmitter.
RT 1	Monitor RT1 receiver/trans- mitter; Key RT1 transmitter.
INT Only	Monitor and key intercom.
AUX 1	Monitor AUX 1 receiver; key RT1 transmitter.
RT 2/AUX 2	Monitor RT2 receiver/trans- mitter; Key RT2 transmitter.
SIG-EXT-OFF SWITCH	
SIG	Nonlocking position; causes call indicator light connected to the C-2296/VR and the C-11134 indicator light to light.
EXT	Connects the radio and intercom functions of the MONITOR switch to the C-2296/VRC and causes the indicator light to light.
OFF	Disconnects the C-2296/VRC from the radio and intercom systems. Enables the indicator to light when the Handset H-207/VRC switch is pressed and the signaling tone to be heard in the handset of the C-11134.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.5 Hardware

3.5.1 Connectors, receptacle. The connectors, receptacle shall meet the requirements of MIL-C-55181 for J901 and 904 and MIL-C-55116 for J902 and 903 respectively.

3.5.2 Switches and controls. The switches shall conform to requirement 58 of MIL-STD-454. The volume control shall meet the requirements of MIL-STD-454, requirement 28 and MIL-R-94 and shall be fabricated from aluminum alloy 380 in accordance with QQ-A-591.

3.5.3 Printed wiring boards. The printed wiring boards shall meet the requirements of MIL-STD-275 and MIL-P-55110.

3.5.4 Semiconductor devices. The discrete semiconductor devices shall be JAN types where possible, and shall meet the requirements of the applicable detailed specification of MIL-S-19500.

3.5.5 Microcircuits. The microcircuits shall conform to requirement 64 of MIL-STD-454. At a minimum, all devices shall conform to MIL-M-38510, level B requirements.

3.5.6 Capacitors. The selection and application of capacitors shall be in accordance with requirement 2 of MIL-STD-454, and shall meet the P level (established reliability) requirements, except the CKR types which shall be the R level.

3.5.7 Transformers, inductors, and coils. The selection and use of transformers, inductors, and coils shall conform to requirement 14 of MIL-STD-454.

3.5.8 Resistors. The selection and application of resistors shall be in accordance with requirement 33 of MIL-STD-454, and shall meet the R level (established reliability) requirements.

3.5.9 Relays. The selection and application of relays shall conform to requirement 57 of MIL-STD-454, and shall meet the P level (established reliability) requirements.

3.5.10 Indicator lamp. The indicator lamp and lens shall meet the requirements of MIL-L-3661.

3.6 Reliability. The reliability of the Control Box shall be such that when the Control Box is combined in an intercommunication system with one AM-7162, three C-11133 control boxes and one C-11134, the overall system upper test mean time between failures (0_0) as defined in MIL-STD-781 shall be 6038 hours. The lower test TBF (0_1) of the system shall be 1250 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.7 Maintainability. Based on the five (5) echelon maintenance concept, the maximum Mean Time To Repair (MTTR) for the Control Boxes shall be as specified herein.

3.7.1 First (1st) echelon (operator crew). The MTTR is not applicable at this echelon.

3.7.2 Second (2nd) echelon (organizational maintenance). The MTTR at this echelon shall be a maximum of 0.5 hour for the isolation, removal, and replacement of a faulty unit.

3.7.3 Third (3rd) echelon (field service support). The MTTR at this echelon shall be 0.75 hour for the isolation, removal, and replacement of failed printed wiring board, wiring and chassis mounted parts repair, and verification of repair.

3.7.4 Fourth (4th) echelon (field service support group). The MTTR at this echelon shall be 2.1 hours for the repair of printed wiring boards and other repairs beyond the capability of 3rd echelon skills and support equipment.

3.7.5 Fifth (5th) echelon (depot maintenance). The MTTR at this echelon shall be 3 hours.

3.8 Performance

3.8.1 Logic control. The Control Box shall provide a logic control that shall interrupt receive logic signals during radio PTT action to prevent undesirable receive line to transmit line crosstalk.

3.8.2 Key control. The Control Box shall output necessary logic or PTT action to key on radios or intercom circuits of the AM-7162.

3.8.3 Distortion. Total harmonic distortion for the headphone audio shall not exceed 5 percent while the Unit is operating under standard or service conditions measured at 1 kilohertz (kHz) audio frequency with volume controls set to produce a headphone audio level of 7 volts rms ± 10 percent (%). Distortion for preampaudio shall not exceed 2% under standard conditions at 1 kHz.

3.8.4 Input power. The power consumption with an input of 27.5 volts dc shall not exceed 7 watts under steady conditions.

3.8.5 Audio output levels. Under standard or service conditions as specified in 4.3 and output circuits terminated in the impedances specified herein (3.4.1), the Control Box shall meet the audio output levels specified in table IV with nominal input signals as specified in table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE IV. Audio output levels

Function	Output level
Headphone audio (J902-B) Microphone audio (J904-K)	12 volts rms min. 0.09 volt rms min.

TABLE V. Standard input signals

Signal	Input level
Input voltage	27.5 ± 1 volts dc
Receiver audio input	3.1 volts rms
Microphone audio input	7 millivolts rms
Intercom audio input	3.2 volts rms
C-2296 Microphone Audio input	2.5 volts rms open circuit from a 1.5k ohm ± 10% ac coupled source

3.8.6 Input voltage. The Control Box shall operate as specified herein when the input voltage is between +22 and +30 volts dc.

3.8.7 Isolation. The Control Box in a system configuration shall provide a minimum of -50 dB isolation between active recieve/transmit audio lines and a minimum of -50dB between active intercom/transmit audio lines measured at the transmit audio output of the AM-7162.

3.8.8 Internal noise. While operating under standard or service conditions, the Control Box shall have an output less than 100 millivolts rms (headphone output), and 10 millivolts rms (microphone output) with the respective intercom, receive, or microphone input circuits shorted to ground.

3.8.9 Stability. When operated under standard conditions with input and output circuits terminated and for the impedances specified in 3.4.1, the Control Box shall be stable and shall show no evidence of inadvertent outputs, nor shall damage result with input/output terminations open or shorted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.8.10 Frequency characteristics. The frequency response of the Control Box in the range of 150 Hz to 5000 Hz shall not exceed the limits specified in table VI while operating under standard conditions relative to the output at 1000 Hz.

TABLE VI. Frequency characteristics

Frequency	Headphone output	Mic. output
150 Hz	-3 dB ± 3 dB	-6 dB ± 3 dB
300 Hz	-1 dB ± 3 dB	-2 dB ± 3 dB
1000 Hz	0 dB	0 dB
3000 Hz	-1 dB ± 3 dB	-2 dB ± 3 dB
5000 Hz	-3 dB ± 3 dB	-3 dB ± 3 dB

3.8.11 Compatibility. The Control Box shall be compatible with the AN/VIC-2(V) Intercommunications set interface. Changes to existing vehicular cabling (cordage) shall not be required. When used, the AM-7162 units as specified in MIL-C-29457(MC) shall be installed for functional compatibility (see figure 2).

3.8.12 TEMPEST. The Control Boxes shall meet the TEMPEST requirements of specification, NACSEM 5100.

3.9 Human factors. Human engineering design criteria shall be in accordance with MIL-STD-1472.

3.10 Safety. Safety design criteria shall be in accordance with Requirement 1 of MIL-STD-454. The Control Box shall not present physiological hazards to operator/maintenance personnel.

3.11 Environmental requirements. The Control Box shall be capable of operating, as specified herein, during and after exposure to the following service conditions, and induced environmental conditions.

3.11.1 High temperature. The Control Box shall be capable of operating, as specified herein, during and after exposure to high temperatures up to 68°C.

3.11.2 Low temperature. The Control Box shall be capable of operating, as specified herein, during and after exposure to low temperatures conditions down to -57°C.

3.11.3 Altitude. The Control Box shall operate as specified herein during and after exposure to operating altitudes from sea level to 15,000 feet and after exposure to nonoperating and storage altitudes from sea level to 40,000 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

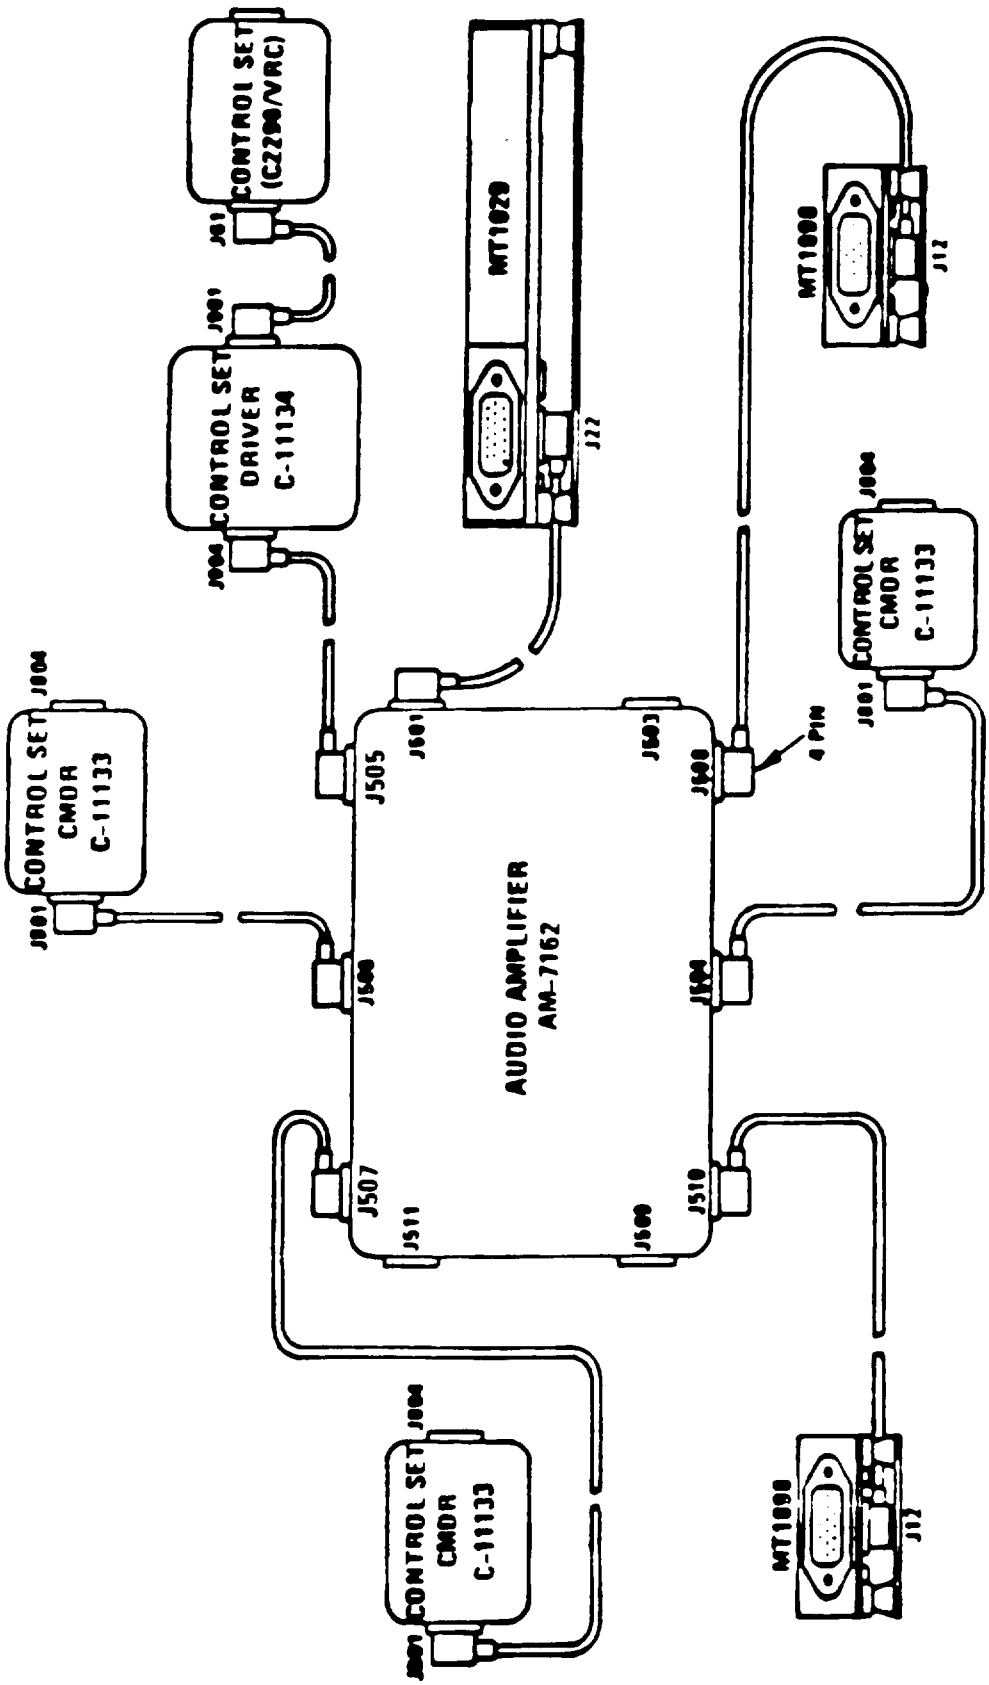


FIGURE 2. AN/VIC -2 Interfaces (Typical Installation)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.11.3.1 Air-seal. The Control Box case (housing) shall provide a means to enable an air-seal test through a seal screw. With cover in place, the unit shall be capable of sustaining an internal decreased pressure of 1 pound-force per square inch for one (1) minute with a loss of vacuum of no greater than 0.01 pound/square inch.

3.11.4 Humidity. The Control Box shall operate as specified herein after exposure to the following humidity conditions:

(1)	Operating, non-operating and storage	Minimum: 20 percent from minimum operating temperature to 16°C. Maximum: 100 percent including condensation from minimum operation temperature to +27°C.
(2)	Dew point	For minimum, the relative humidity shall be based on a dew point of -7°C. For maximum the relative humidity shall be based on a dew point of +27°C.

3.11.5 Fungus. The Control Box shall be resistant to fungi in both the operating and non-operating conditions.

3.11.6 Salt fog. The Control Box shall operate, as specified herein, and not exhibit physical defects after exposure to a salt fog environment.

3.11.7 Immersion. The Control Box shall operate, as specified herein, after being subjected to water immersion for a period of 2 hours.

3.11.8 Vibration. The Control Box shall operate as specified herein, after subjection to the transportation and ground vehicle vibration stresses of figures 514.3-1 thru 514.3-20 of MIL-STD-810, method 514.3.

3.11.9 Explosive atmosphere. The Control Box when operating in an explosive atmosphere, shall not cause ignition of such an atmosphere, and shall operate as specified herein, during and after such exposure.

3.11.10 Shock. The Control Box shall operate as specified herein, after exposure to the functional shock conditions as specified in MIL-STD-810, Method 516.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.12 Electromagnetic interference suppression. While operating under standard or service conditions, the Control Box shall not be a source for conducted or radiated emissions, nor shall the Unit be degraded in its performance characteristics, or malfunction, as a result of encountering radiated (magnetic/ electric fields) or conducted emissions. The Unit shall meet the following requirements of MIL-STD-461.

3.12.1 Conducted emission. The Control Box shall meet the limits for CE01 and CE03. Emissions in the frequency range of 30 Hz to 50 megahertz shall not appear on the dc power leads, control leads, signal leads (except intended leads), and interconnecting cables in excess of values shown in figures 4-1 through 4-6 of MIL-STD-461.

3.12.2 Radiated susceptibility (RS03). The Control Box shall not exhibit any malfunction or degradation of performance when subjected to radiated electric fields (E) less than or equal to the following:

Frequency Range	E-Field (Volts/Meter)
14 kHz to 2 MHz	1
2 to 30 MHz	10
30 to 2000 MHz	5
2 to 10 GHz	5
Above 10 GHz	20

3.12.3 Conducted susceptibility. The Control Boxes shall meet the limit for CS01 without malfunction or degradation of performance when subjected to electromagnetic energy injected on the dc power leads equal to or less than the values shown in figure 4-7 of MIL-STD-461.

3.13 Dimensions. The Control Box shall not exceed the following dimensions, excluding protrusions such as connectors, mounting bosses, controls, lights, etc.

a.	Width	4.8 inches
b.	Height	6.0 inches
c.	Depth	4.0 inches

3.14 Weight. The Control Box shall not exceed 3 pounds in weight.

3.15 Finish. The Control Box Case and cover shall be painted in accordance with MIL-F-14072 finish 'Y'. The finish coat shall conform with MIL-C-46168 (383 Green).

3.16 Marking. The internal and external identification markings of the subassemblies, parts, and the Unit shall be in accordance with requirement 67, MIL-STD-454.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

3.17 Workmanship. All fabrication, solder operations, and assembly operations shall be in compliance with requirements 5, 9, 47 and 69 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirments specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First Article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed under the following standard conditions.

Parameter		Conditions
a.	Temperature	Room ambient (23 $\pm$ 10°C)
b.	Altitude	Normal ground (sea level + 5000 feet)
c.	Humidity	Room ambient (50 $\pm$ 30%)
d.	Input power	27.5 volts dc $\pm$ 10%

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. All first article tests, examinations, and inspections, as specified herein, shall be conducted by the contractor. The procuring activity or Government representative shall be notified prior to initiation of test.

4.4.1 First article test quantities. First article test and inspections shall be conducted on six (6) Control Boxes. Reliability tests shall be conducted on one to three (1-3) Control Boxes selected by the contractor which have not been subjected to group (4) thru (7) tests as defined in 4.4.2.

4.4.2 Classification of first article tests and inspections. The first article tests and inspections shall be classified into eight (8) major groups. The groups and the number of first article unit numbers allocated to each group are specified in table VII. Units undergoing group (4) thru (8) tests must have successfully passed all of group (1), (2) and (3) tests.

TABLE VII. First article tests and inspections

Group	C-11134 Units	Requirement Paragraph	Test Method Para.
(1) Parts, materials, and processes	All	3.3	4.6.1
(2) Standards of manufacture and workmanship	All	3.13, 3.17 3.9, 3.10	4.6.2
(3) Electrical	All	3.4.4, 3.8.1, 3.8.10	4.6.5
(4) Electrical and Mechanical interchangeability	1,2	3.4.5	4.6.8
(5) EMI	1	3.12	4.6.7
(6) Environmental	2-5	3.11	4.6.9
(7) TEMPEST and Maintainability demonstration	6	3.8.12, 3.7	4.6.11 4.6.13
(8) Reliability tests	7-9	3.6	4.6.10

4.4.3 First article approval. Upon satisfactory completion of all group (1) thru (8) tests, examinations, and inspections as specified in 4.4.2, first article approval shall be granted by the procuring activity. Any design, material or performance defects made evident during the inspections and tests shall be corrected by the contractor. Required corrections, if any, shall apply to any production units if prefabricated prior to first article approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspections. The production Units shall be inspected for quality conformance in accordance with the provisions of MIL-STD-105, single sampling. Except where otherwise specified inspection level II shall be used. Evidence of noncompliance shall constitute cause for rejection and for units already accepted by the Government it shall obligate the contractor to make necessary corrections as approved by the procuring activity.

4.5.1 Inspection lot. The production units shall be assembled into identificable lots as defined in MIL-STD-105 and in the contract. Production units shall in all respects, including design, construction, workmanship, performance and quality, be equal to the approved first article units. Discrete lots shall be formed from units passing the group A inspections as defined in 4.5.2.

4.5.2 Group A inspection. Each Control Box C-11134 shall be inspected for conformance to the inspections specified in table VIII.

TABLE VIII. Group A inspection

Inspection	Requirement paragraph	Test method paragraph
End item electrical		
Functional controls	3.4.4	4.6.5.1
Logic control	3.8.1	4.6.5.2
Key control	3.8.2	4.6.5.3
Distortion	3.8.3	4.6.5.4
Input power	3.8.4	4.6.5.5
Audio output	3.8.5	4.6.5.6
End item air-seal	3.11.3.1	4.6.9

4.5.3 Group B inspection. The group B inspections shall consist of the inspections specified in table IX. Group B inspections shall be performed on sample units selected from lots that have been subjected to and have passed the group A inspections. Special inspection level S-4 of MIL-STD-105 shall apply. Unless otherwise specified herein, the inspections and tests shall be conducted under standard conditions as specified in 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE IX. Group B inspections

Inspections	Requirement paragraph	Test method paragraph
Input voltage	3.8.6	4.6.5.7
Electrical and Mechanical Interchangeability	3.4.5	4.6.8
Immersion	3.11.7	4.6.9
Isolation	3.8.7	4.6.5.8
Internal noise	3.8.8	4.6.5.9
Stability	3.8.9	4.6.5.10
Frequency Response	3.8.10	4.6.5.11

4.5.4 Group C inspections. Group C inspections shall be performed on Units that have passed group A inspection. The group C inspections shall consist of the inspections and tests specified in table X. The contractor may elect to run all tests of a given subgroup on the same Unit(s) or may elect to perform the test on multiple Units.

TABLE X. Group C inspections

Sub Group	Inspection	Requirement paragraph	Test method paragraph
I (Note 1)	Weight and dimensions	3.13 and 3.14	4.6.6
	High Temp.	3.11.1	4.6.9
	Low Temp.	3.11.2	4.6.9
	Altitude	3.11.3	4.6.9
	Vibration	3.11.8	4.6.9
II (Note 2)	Humidity	3.11.4	4.6.9
	Shock	3.11.10	4.6.9
III (Note 3)	Fungus	3.11.5	4.6.9
	Salt Fog	3.11.6	4.6.9
	EMI	3.12	4.6.7
IV (Note 4)	Maintainability	3.7	4.6.11

Note 1: 1 Unit selected from the first 50 produced; 1 unit selected from each four (4) months of production thereafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

Note 2: 2 Units selected from the first 50 produced; 2 Units selected from each eight (8) months of production thereafter.

Note 3: 1 Unit selected from the first production lot.

Note 4: 1 Unit selected from the first production lot; to be performed by the Government.

4.5.5 Group D inspection (reliability tests). Reliability testing shall be conducted as defined in 4.6.10. The samples for Group D Reliability testing shall be selected from lots which have successfully passed Group A tests. The contractor shall select from four to ten systems as defined in 4.6.10.2 from the first lot of production units.

4.5.5.1 Disposition of units subjected to Group-D Tests. Units subjected to Group-D Tests are not considered usable "In-the-field". Disposition and marking of these units will be specified in the terms and conditions of the contract. Prior to shipment, refurbishment of any first article or production units which receive reliability, salt spray, or fungus tests shall be limited to refurbishment of the Units to the performance level only.

4.5.6 Inspection of packaging. The preparation for delivery (packaging and procedures) shall be inspected in accordance with the provisions of MIL-P-116 to determine conformance with the requirements of Section 5.

4.5.7 Accept/reject criteria. The accept/reject criteria and procedures shall conform to MIL-STD-105. Unless otherwise specified in the terms and conditions of the contract, the contractor shall reserve the right to repair or correct rejected items and resubmit for inspection as witnessed by a Government representative.

4.6 Methods of inspection

4.6.1 Parts, materials, and processes. Verification that parts, materials, and processes have been selected and approved in accordance with MIL-P-11268 shall be made by inspection of contract records and purchase orders. Vendor certifications for each batch or lot of items received shall be inspected to insure that all specified requirements will have been met. This inspection applies to requirement 3.3 for vendor procured parts, materials, and processes. It does not, however, relieve the contractor of his responsibility to conduct additional inspections, parts screening, or tests where necessary to control quality and assure compliance with the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.2 Standards of manufacture and workmanship. Visual and mechanical inspections shall be conducted on all units including chassis mounted parts and wiring, printed wiring boards, subassemblies, and connectors, to insure conformance with the finish, marking and workmanship requirements of 3.15, 3.16 and 3.17. The equipment shall also be examined to ensure compliance with the human factors and safety requirements of 3.9 and 3.10 respectively.

4.6.3 Bounce preconditioning. Each Control Box shall be subjected to bounce preconditioning on a package tester, type 1000-SC L.A.B. Corporation, Skaneatles, New York, or equal. Bounce preconditioning shall be performed by adjusting the package tester table until a 1/32 inch gage strip will slide freely under an edge of the Unit (approximately 250 to 300 revolutions per minute). After one (1) ± .1 minute of preconditioning, the Unit shall be capable of meeting all requirements, as specified herein, without subeequent repair, processing or alignment.

4.6.4 Electrical preconditioning. Each Control Box shall be subjected to electrical preconditioning after bounce preconditioning (4.6.3). At a minimum, the preconditing (burn-in) shall be for a period of 48 hours with an input voltage of 27.5 ± 10% volts dc and at a temperature of 49°C ± 5°C (111°F to 129°F). While operating, ground shall be applied sequentially at J902C and J903C at intervals of 10 ± 1 minutes for 10 seconds minimum. Additionally, the Unit shall be vibrated at any nonresonant frequency between 20 and 60 Hz, 2.2g ± 10%, for a duration of 10 ± 1 minutes during each hour of operation. In the event of failure during this period, repairs shall be made and the entire test repeated. The last eight (8) hours shall be failure free.

4.6.5 Electrical tests and inspections. The following tests shall be conducted under the standard conditions of 4.3. Impedance shall be as specified in 3.4.1 and standard (nominal) input signals shall be as specified in table V. The volume control shall be set for a headphone audio level of 7 Vrms ± 10%. When measured, HI logic levels shall be 11 ± 2 volts dc. LOW logic levels shall be 2 volts dc maximum.

4.6.5.1 Functional controls (see figure 2). To verify conformance with requirement 3.4.4, the following tests shall be performed under standard conditions.

4.6.5.1.1 Monitor switch. Place the Monitor selector switch in the positions shown and observe a HI logic voltage at the pins indicated. (Note: Of pins B, J and M, those not HI must be LOW.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

Switch position	HI logic location (Connector J904)
All	Pins B and M
RT 1	Pin M
AUX 1	Pin B
RT 2/AUX 2	Pin J

4.6.5.1.2 Volume control. Rotate the volume control clockwise to the maximum volume position and measure that the headphone audio varies in amplitude at least 40-to-1 from minimum amplitude to maximum amplitude.

4.6.5.2 Logic control test. With the monitor selector switch in the ALL or AUX 1 position, ground pin C of J902. Of pins B, J, or M of J904 only pin M shall be a logic HI.

4.6.5.3 Key control test. With a ground on pin C of J903, a HI logic voltage shall be observed at J904 Pin H. With a ground on pin C of J902, a HI logic voltage shall be observed at J904 pin D with the monitor selector selector switch in ALL, RT 1, or AUX 1 positions. The HI logic will be observed at pin F if the monitor selector switch is placed in the RT 2/AUX 2 position. With a ground on pin D of J901, a HI logic voltage shall be observed at J904 pin H with the control switch in the EXT position. In the OFF position HI shall go LOW. With a ground on pin H of J901, a HI logic shall be observed at J904 pin D with the monitor selector switch in All and the control switch in the EXT position. In the OFF position HI logic shall go LOW.

4.6.5.4 Distortion. The total harmonic distortion of preamp audio headphone audio, shall be measured under standard conditions, at 1 kHz ± 10%, and at a headphone audio level of 7 Vrms ± 10%, to verify the requirements of 3.8.3.

4.6.5.5 Input power. The Control Box shall be tested for power consumption under standard test conditions and signal inputs of table V. The Unit shall meet the requirements as specified in 3.8.4.

4.6.5.6 Audio output. Operating under the standard input signals specified in table V and with the Control Box volume control rotated to maximum output position, the audio outputs of the Unit shall meet the requirements specified in 3.8.5.

4.6.5.7 Input voltage test. Operating under the standard input signals in table V, the input voltage shall be adjusted to +22 ± 5% volts direct current (dc) and +30 ± 5% volts dc respectively. Under these conditions, the Control Box shall meet the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.5.8 Isolation. While operating as a system under an approved test plan, isolation between active audio signal lines shall be measured at the AM-7162 transmit audio outputs, and shall meet the requirements specified in 3.8.7.

4.6.5.9 Internal noise. While operating under the signal input signals of table V, internal noise shall be measured to determine compliance with 3.8.8.

4.6.5.10 Stability. The Control Box operating under the signal input conditions of table V, shall be tested for inadvertent output or oscillations. The Unit shall also be tested with its input/output terminations open and shorted. Under these conditions, the Units shall meet the requirements specified in 3.8.9.

4.6.5.11 Frequency response test. Operating under the signal input conditions of table V the Control Box shall be tested to verify that the output audio responses meet the requirements of 3.8.10.

4.6.6 Weight and dimensions. Visual and mechanical inspections shall be made to determine compliance with the requirements of 3.13 and 3.14.

4.6.7 EMI tests. The Tests shall be conducted in accordance with the procedures of MIL-STD-462, to demonstrate compliance with the requirements of 3.12.

4.6.8 Electrical interchangeability tests. In a system test configuration with an AM-7162, four (4) C-11133 Units (see figure 2) one (1) C-11134 Unit shall be interchanged with a different C-11134 Unit and tested to demonstrate the requirements of 3.4.5.

4.6.9 Environmental tests. Environmental tests shall be conducted in accordance with the procedures of MIL-STD-810 and table XI. First article environmental tests shall be conducted in the sequence and on designated units as shown in table VII. Production environmental test sequence and unit designation is defined in 4.5.4, table X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE XI. Environmental tests

Test	MIL-STD-810 procedure	Requirement paragraph	First Article Unit no.
High Temper-ture	Method 501.2, procedure II, maximum temp: 68°C.	3.11.1	2
Low Temper-ature	Method 502.2 procedure II, minimum temp: -57°C.	3.11.2	2
Altitude. (low pressure)	Method 500.2, procedure I.	3.11.3	2
Air-seal	MIL-STD-810 is not applicable. Remove the Seal Screw. Reduce the internal pressure through the Seal Screw valve by 1 pound-force per square inch. Set Valve off and measure the pressure for one minute. The loss shall not exceed 0.01 pound-force per square inch.	3.11.3.1	2
Humidity	Method 507.2, procedure I, cycles 2 and 3 and procedure II cycle 5.	3.11.4	4
Fungus	Method 508.3, (see Note 1.)	3.11.5	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

TABLE XI. Environmental tests - continued

Test	MIL-STD-801 procedure	Requirement paragraph	First Article Unit no.
Salt fog	Method 509.2, procedure I. All connectors shall be covered.	3.11.6	3
Immersion (leakage)	Method 512.2, procedure I.	3.11.7	2
Vibration	Method 514.3, categories 1,8,10 Procedure I.	3.11.8	3
Explosive Atmos-phere	Method 511.2, procedure I, at simulated altitude of 15,000 feet	3.11.9	3
Shock	Method 516.3, procedure I.	3.11.10	5

Note 1: The fungus test Accept/Reject criteria shall be based on the following:

To pass, the complete equipment assembly should not exhibit fungus growth greater than grade 2 as shown in Table 508.3-I of MIL-STD-810.

4.6.10 Reliability tests. The contractor shall select from four to ten first article units to subject to combined environmental reliability tests in accordance with the approved test plan and procedures as specified in 4.6.10.1. The combined test plan and procedures shall include, at a minimum the test conditions specified in 5.4 of MIL-HDBK-781, and the conditions specified herein.

4.6.10.1 Test plan and procedures. An integrated reliability test plan and reliability test procedure shall be prepared by the contractor in accordance with the requirements of MIL-STD-781. The test shall be a fixed length test, test plan number 10-3 of MIL-HDBK-781. The producers and consumers risks for this test shall be 10 percent. The accept/reject criteria shall be as specified for test 10-3, MIL-HDBK-781. Failure of any component in the test configuration other than the AM-7162, C-11133, or C-11134 shall be considered as non-relevant. All other failures shall be in consonance with 4.7 of MIL-STD-781.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

4.6.10.2 Control box test configuration. The test configuration shall contain one (1) AM-7162, three (3) C-11133 controls and one (1) C-11134 control. Cable assemblies shall be Government furnished equipment (GFM) in quantities and lengths to be determined. Failures during test of any GFE items or items other than the procured units shall not be considered relevant failures.

4.6.11 Maintainability demonstration. A maintainability demonstration shall be conducted in accordance with the procedures of Test Method 4 of MIL-STD-471 with a sample size of ten (10) tasks minimum. The acceptance criteria, as defined in Test Method 4, must be equal to or less than the requirements specified in 3.7. At the option of the procuring activity, the maintainability demonstration may use the incurred failures during the reliability testing as part of this sample. This option, if selected, will be stated in the terms of the contract.

4.6.12 Interface compatibility test. One AM-7162, three C-11133 and one C-11134 first article units shall be tested to demonstrate the AN/VIC-2 (V) system interface compatibility in accordance with 3.8.11.

4.6.13 TEMPEST qualification. TEMPEST testing will be conducted by the contractor or certified sub-contractor using first article test units to demonstrate compliance with specification NACSEM 5100. The contractor shall be responsible to correct any design deficiency identified during testing.

4.6.14 Quality conformance inspections prior to preparation for delivery. All production end item units and those successfully completing Group B, C and D inspections shall be subjected to the end item operational acceptance tests specified below.

	Requirement paragraph	Test method paragraph
a. Logic Control	3.8.1	4.6.5.2
b. Key Control	3.8.2	4.6.5.3
c. Audio Output	3.8.5	4.6.5.6

5. PACKAGING

5.1 Preservation. Preservation shall be level A as specified herein.

5.1.1 Cleaning. The Units shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.2 Drying. The Units shall be dried in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

5.1.3 Unit packaging. Each Control Box shall be packaged in accordance with Method III of MIL-P-116. The mounting hardware kit (P/N 393852) shall be stowed in a cotton mailing bag conforming to PPP-B-20 and positioned on the front of the Control Box and secured with tape conforming to PPP-T-76. The Unit shall be cushioned by wrapping a double thickness of paperboard conforming to PPP-P-291, Type III. The cushioned unit shall be placed within a close-fitting fiberboard box conforming to Type CF weather-resistant single wall, grade W6C requirements of PPP-B-636. The box shall be closed in accordance with the appendix of PPP-B-636. All seams and joints shall be sealed with tape, not less than two inches wide, conforming to PPP-T-76.

5.1.4 Unit package size. The unit package shall not exceed 0.24 cubic feet.

5.2 Packing. The packing shall be level A, B, or C as specified in accordance with the terms and conditions of the contract. Shipping containers for all levels shall be capable of stackability and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A packing. A quantity of Control Boxes, packaged as specified in 5.1.3 shall be packed within close fitting fiberboard boxes conforming to PPP-B-636, Type CF, class weather-resistant. Box closures shall be in accordance with the PPP-B-636 Appendix. To facilitate palletization, the fiberboard boxes, hereafter referred to as containers, shall be uniform in size and contain equal quantities of the packaged items to the greatest extent practicable.

5.2.1.1 Palletized load. A quantity of containers shall be placed on a pallet, packed as specified in 5.2.1, load type conforming to MIL-STD-147. A fiberboard cap shall be employed over the load, having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, type SF, weather resistant class grade W5s. The load shall be bonded to the pallet by strapping.

5.2.1.2 Less than palletized load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.1.1 shall be waterproofed, with tape Conforming to PPP-T-76 in accordance with the taping requirements of PPP-B-636. A quantity of the waterproofed containers shall be placed within a closefitting box conforming to PPP-B-601, overseas type; PPP-B-621, Style 4, Class 2; or PPP-B-585, Style 2 or 3 of Class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or, more and the weight exceeds 100 pounds, a 3 inch by 4 inch skid, laid flat shall be applied in accordance with the requirements of the container specification. If not specified in the specification, the skids shall be applied in a manner which will adequately

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or Appendix thereto except that metal strapping shall conform to QQ-S-781, Type 1, Class 1, regular duty, Finish B, Grade 2.

5.2.2 Level B packing. A quantity of Control Boxes, packaged as specified in 5.1.3, shall be packed as specified in 5.2.1. A quantity of containers shall be palletized as specified in 5.2.1.1. When quantities per destination are less than a palletized load, the fiberboard boxes shall be the shipping containers and shall be reinforced by pressure-sensitive filament tape conforming to PPP-T-97, Type IV, as specified in the Appendix of PPP-B-636.

5.2.3 Level C packing. A quantity of Control Boxes, packaged as specified in 5.1.3 shall be packed as specified in 5.2.1., except that the fiberboard shall be class domestic. A quantity of TBD containers, shall be palletized as specified in 5.2.1.1, except that the fiberboard cap shall be class domestic. When quantities per destination are less than a pallet load, the fiberboard boxes shall be used as the shipping container.

5.3 Marking. Interior packages and exterior shipping containers shall be marked in accordance with the provisions on MIL-STD-129, and any special markings in accordance with the terms and conditions specified in the contract.

6. NOTES

6.1 Intended use. The C-11134 is intended for use with the AM-7162 as an intravehicular communications and intercom distribution facility in military tracked vehicles such as: armored personnel carriers, tanks, and howitzers.

6.2 Ordering data. The procuring agency should exercise any options herein. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Quantity and type of Control Box and subassemblies by type designation.
c. Levels of preservation and packing including quantities per shipment (see section 5).

6.3 First article. When a first article inspection is required, the item(s) should be the first production items. The first article should consist of the number of units specified in 4.4.1. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitation for bids should provide that the Government reserves the right to waive the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Standard sample. The standard sample will be Government furnished Equipment and will be provided to the contractor upon contract award.

6.5 Subject term (key word) listing.

Communication
Control, Intercommunications
Intercommunications

Preparing Activity
Navy - MC
Project No. 5830 - NC77

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development,
And Acquisition Command (PSI-G)
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-29456(MC)	CONTROL, INTERCOMMUNICATION SET, C-11134/VIC-2(V)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20123:16Z
Check the source to verify that this is the current version before use.