MIL-C-14242B(MU)
20 April 1967
Superseding
See Section 6

MILITARY SPECIFICATION

FOR

CABLE ASSEMBLIES, FUZE CONTROL

1. SCOPE

1.1 This specification covers the following electrical cable assemblies for bomb fuze control:

M48(T8)	M71(T26)	M72(T32)
M49(T15)	M73(T27)	M73C
M50(T16)		

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-B-636 -- Boxes, Fiberboard
UU-T-111 -- Tape; Paper, Gummed (Sealing and Securing)

Military

MIL-B-117 -- Bags and Sleeves, Interior Packaging
MIL-A-2550 -- Ammunition and Special Weapons: General Specification for
MIL-T-5422 -- Testing, Environmental, Aircraft Electronic Equipment
MIL-I-45208 -- Inspection System Requirements and Appendix A to MIL-I-45208 Quality Assurance System (see 6.4)

STANDARDS

MIL-STD-129 -- Marking for Shipment and Storage
MIL-STD-202 -- Test Methods for Electronic and Electrical Component Parts
MIL-STD-331 -- Fuze and Fuze Components, Environmental and Performance Tests for (Test 106 and Test 110)
MIL-STD-1167 -- Ammunition Data Card
MIL-STD-1169 -- Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1235 -- Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

FSC 1325

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

DRAWINGS

Army Materiel Command

EPL-10965760 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M73C
EPL-7542941 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M48(T8)
EPL-7542964 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M49(T15)
EPL-7542942 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M50(T16)
EPL-7542965 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M71(T26)
EPL-7542966 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M72(T32)
EPL-7542967 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M73(T27)
EPL-7542968 -- Engineering Parts List - Contents - Cable Assembly - Fuze Control M74(T28)
IEL-7542941 -- Index to List of Inspection Equipment for Cable Assembly M48(T8), M49(T15), M71(T26), M73(T27), M74(T28, M72(T32), M50(T16),M73C.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 First article approval sample. Prior to the start of regular production except where a new contract follows within 90 days production of acceptable material of identical design, the contractor shall manufacture and submit a sample of 300 cable assemblies and parts as shown in figure 1, using as far as possible the methods and processes proposed for quantity production. However, any deviation from these methods and processes shall be documented and submitted with the first article approval sample. The sample shall conform to the requirements of this specification. Additional samples that may be required because of failure of the sample to meet the requirements of this specification shall be supplied by the contractor at his expense. Until the first article approval sample is approved, further production will be at the risk of the contractor and the Government will not proceed with inspection for acceptance of the production lots until this approval has been obtained.

3.1.2 Supplemental samples. Prior approval of the procuring activity shall be required whenever there is a change in design, material, or process which affects safety, operability, or interchangeability as defined by the Classification of Defects. The decision for requesting a supplemental sample shall rest with the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

1015 Depth of center compartment (page 1 of 2)

3.1.3 Engineering control sample. Ten cable assemblies selected at random from each accepted lot or selected as specified by the Technical Agency shall be shipped within two working days to the Technical Agency designated by the procuring activity.

3.2 Materials, design and construction. The device shall be in accordance with this specification and the documents referenced in section 2.

3.3 Performance requirements.

3.3.1 Insulation resistance. The insulation resistance for any one conductor of the cable assembly shall be not less than 200 megohms when 500 volts direct current (dc) is applied between any conductor and all other conductors shorted together.

3.3.2 Continuity. The resistance of any one conductor of the cable assembly shall be not more than one ohm.

3.3.3 Pull. There shall be no mechanical or electrical failure of the cable assembly when a force of 30 pounds is applied to the plug tip while the plug is held by the ground contact.

3.3.4 Extreme temperature. The cable assembly when subjected to each of the extreme temperatures of -65°F(-54°C) and 160°F(71°C) for not less than four hours shall meet the requirement of 3.3.2. and the insulation resistance shall be not less than 20 megohms.

3.3.5 Temperature cycling. The cable assembly after exposure to five temperature cycles between the limits of 160°F(71°C) and -65°F(-54°C) shall meet the requirements of 3.3.2 and the insulation resistance shall be not less than 20 megohms.

3.3.6 Salt spray. The cable assembly after exposure to salt spray for 50 hours shall meet the requirement of 3.3.2 and the insulation resistance shall be not less than 20 megohms.

3.3.7 Humidity. The cable assembly after exposure to ten humidity cycles between the limits of 100°F(38°C) and 160°F(71°C) at a relative humidity greater than 95 percent shall meet the requirement of 3.3.2 and the insulation resistance shall be not less than 20 megohms.

3.3.8 Salt immersion. The cable assembly after the receptacle has been immersed in a salt solution for a period of 24 hours shall meet the requirement of 3.3.2 and the insulation resistance shall be not less than 20 megohms.

3.3.9 Accelerated aging. The cable assembly after exposure to 1,000 fifteen-minute cycles in a vacuum-steam-pressure chamber which simulates tropical conditions shall meet the requirement of 3.3.2 and the insulation resistance shall be not less than 20 megohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.3.10 Fungus resistance. The cable assembly shall not support the growth of organisms normally encountered in semi-tropical climates.

3.3.11 Strength of spring clip. The mating component shall insert with a maximum force of 22 pounds. The spring clip shall retain the mating component with a minimum withdrawal force of 40 pounds and shall release the mating component with a maximum force of 90 pounds. There shall be no gap between the receptacle and the gage greater than 0.015 inch when a withdrawal force of 30 pounds ± 1 pound is applied in a longitudinal direction. The rate of insertion and withdrawal shall be in the range of eight inches to nine inches per minute.

3.3.12 Workmanship. All parts shall be manufactured and finished in accordance with the highest grade practices for similar type items where satisfactory functioning is expected after extended periods of storage under the extreme conditions encountered in service use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Contractor quality assurance system. The contractor shall provide and maintain an adequate quality assurance system in compliance with MIL-I-45208 and Appendix A.

4.2 Government verification. All quality assurance operations performed by the contractor shall be subject to Government verification in compliance with MIL-I-45208 and Appendix A.

4.3 First article approval sample. The first article approval sample as specified in 3.1.1 shall be inspected and tested in accordance with the first article approval sample flow chart, figure 1 (inspection groups A and B). The tests shall be performed by the contractor under the observation of the quality assurance (QA) representative and a representative of the cognizant Technical Agency. The contractor shall supply complete data in reproducible form on the contractor tests of the first article approval sample units. The data and tested samples shall be delivered to the Technical Agency.

4.3.1 Acceptance of first article approval sample. If the sample passes the criteria of specified inspections and tests, it shall be approved. If the first article approval sample fails in any of the inspections and tests, the results shall be analyzed by the Government. These results, together with the engineering analysis of the units shall form a basis for corrective action. Depending upon the degree of corrective action deemed necessary by the Government, the first article approval sample may be:

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

a. Accepted, provided recommended changes are made by the contractor prior to the start of regular production.
b. Rejected, and new samples for approval required for the tests failed.
c. Rejected, and a complete new first article approval sample required for approval.

In all cases, the contractor shall comply with any required changes to the satisfaction of the Government in future production.

4.3.1.1 Reinstitution of tests. Acceptance of the first article approval sample does not relieve the contractor from meeting all requirements of this specification throughout the life of the contract. When evidence shows failure to continue to meet first article approval test requirements, the Government reserves the right to require tightened inspection on a lot basis, consisting of the reinstitution of such portions of the first article approval tests needed to verify the effectiveness of the corrective action.

4.4 Acceptance inspection. Inspection shall be as specified in MIL-A-2550 and in this document. The inspection called for in Classification of Defects (4.4.5) and Acceptance Tests (4.4.6) shall be conducted by the contractor under the observation of the Government inspector unless otherwise directed by the procuring activity.

4.4.1 Lot formation. A lot shall consist of devices produced by one manufacturer in accordance with stabilized methods and techniques, the same drawing and drawing revision, the same specification and specification revision (except for those introduced on a without obsolescence basis) under conditions of continuous production free from interruptions other than those due to the end of a shift or day.

4.4.2 Sampling. Sampling shall be in accordance with MIL-STD-1235, Plan CSP-A, and this document.

4.4.3 Lot acceptance. Lots shall be accepted on the basis of MIL-STD-1235, Plan CSP-A, this document and more specifically, the Classification of Defects (4.4.5), Acceptance Tests (4.4.6), and Material and Component Certification (4.4.7).

4.4.4 Data recording. A written record shall be made of all inspections and tests specified in section 4. The data shall be recorded on forms approved by the Government Agency. The forms properly filled out shall be forwarded to the designated Government Agency within two days after the Government acceptance of the item or lot.

4.4.5 Classification of defects. The assembly shall be inspected by using the Classification of Defects and applicable drawings. Any of the defect characteristics may be checked on a higher assembly than is indicated in the classification, if desired by the contractor, but in no case shall be checked on a lower assembly level.

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:58Z
Check the source to verify that this is the current version before use.

4.4.5.1 Receptacle, molded (dwg. C7542952, covering a detail of dwgs. D7542941 and D7542942).

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Depth of contact charging hole from top of receptacle	Gage

4.4.5.2 Ring, lock. (Alternates to be selected by user, see 6.1.1).

4.4.5.2.1 Ring, lock, receptacle, expanding (dwg. C10402534, covering a detail of dwgs. D7542941 and D7542942).

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Inside diameter	Gage
102.	Outside diameter, maximum	Gage
103.	Height, minimum	Gage
104.	Plating damage	Visual (DS-1)

OR

4.4.5.2.2 Ring, receptacle, lock (dwg. B7542940 covering a detail of dwgs. D7542941 and D7542942).

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Major diameter of thread	Gage
102.	Pitch diameter of thread	Gage
103.	Plating damaged	Visual (DS-1)
Minor	AQL 2.50 percent defective	
201.	Alignment of inside diameter with pitch diameter	Gage
202.	Width of slot, minimum	Gage
203.	Depth of slot, minimum	Gage
204.	Burr	Visual
205.	Bottom chamfer missing from thread	Visual

OR

4.4.5.2.3 Ring, receptacle, lock (plastic) (dwg. B11002581 covering a detail of dwgs. D7542941 and D7542942).

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Major diameter of thread	Gage
102.	Pitch diameter of thread	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method of inspection
Minor	AQL 2.50 percent defective	
201.	Alignment of inside diameter with pitch diameter	Gage
202.	Width of lugs, minimum	Gage
203.	Height of lugs, minimum	Gage
204.	Burr or obstruction on thread and mating surface areas	Visual
205.	Bottom chamfer missing from thread	Visual

4.4.5.3 Fuze plug assembly (dwg. D7542943 covering details of D7542941 and D7542942).

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Failure of fuze plug to enter functional gage	Gage
102.	Length of ground contact from shoulder to forward edge of contact surface	Gage
103.	Distance from large shoulder on ground contact to tip of 300-volt pin	Gage
104.	Distance from shoulder on ground contact to rear edge of 24-volt contact surface	Gage
105.	Distance from shoulder on ground contact to far edge of 24-volt contact surface	Gage
106.	Distance from shoulder on ground contact to rear edge of external firing contact surface	Gage
107.	Outside diameter of external firing contact	Gage
108.	Width of groove on ground contact	Gage
109.	Diameter of groove on ground contact	Gage
110.	Outside diameter of forward section of ground contact	Gage
111.	Outside diameter of 300-volt contact pin	Gage
112.	Outside diameter of 24-volt contact	Gage
113.	Length of neck on 300-volt contact pin, minimum.	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

4.4.5.4 Cable assembly, fuze control (dwgs. D7542941 and D7542942).

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Distance from base surface of bottom seal or excess potting compound to bottom surface of receptacle, minimum	Gage
102.	Contact rings not flat with top receptacles	Gage
103.	Potting compound not covering electrical connections or below inside surface of the bottom seal	Visual(DS-2)
104.	Bare wire or solder exposed through molding compound greater than 1/16-in. from point of soldering	Visual
105.	Cordage exposed which changes the contour of the fuze plug	Visual(DS-3)
Minor	AQL 4.00 percent defective	
201.	Outside diameter of bottom seal across legs, minimum	Gage
202.	Height of flange of bottom seal above bottom of receptacle	Visual
203.	Foreign matter	Visual(DS-4)
204.	Plating damaged or defective	Visual(DS-5)
205.	Marking missing, misleading, or illegible	Visual
206.	Assembly damaged other than damaged plating or exposed wire	Visual(DS-6)
207.	Seal and ring assembly not secured under 24-volt contact	Visual-Manual
208.	Marking sleeve not on short length of cable (if applicable)	Visual
209.	Wire not corrugated (if applicable)	Visual
210.	Bare wire or solder exposed through molding compound	Visual

4.4.5.5 Packaging.

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Envelope not completely sealed	Visual
102.	Envelope punctured or torn	Visual
Minor	AQL 1.00 percent defective	
201.	Wrapper missing or improperly assembled	Visual
202.	Marking on envelope missing or illegible	Visual
203.	Cellophane or plastic under lock ring missing or insufficient	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

4.4.5.6 Box (Level A or C), before sealing.

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Item missing	Visual
102.	Box torn or punctured	Visual
103.	Foreign material present	Visual
Minor	AQL 1.00 percent defective	
201.	Carton damaged or contaminated, but not torn or punctured	Visual
202.	Improper sealing of bottom	Visual

4.4.5.7 Box (Level A or C), after sealing.

Categories	Defects	Method of inspection
Major	AQL 0.65 percent defective	
101.	Improperly sealed	Visual
102.	Straps missing or improperly applied	Visual
103.	Sleeve missing	Visual
104.	Marking missing or illegible	Visual
Minor	AQL 1.00 percent defective	
201.	Marking incomplete	Visual

4.4.5.8 Defect standards (DS).

DS-1 -- Spots or scratches exposing base metal, blisters, pitts, nodules, indications of burning, and other defects, each shall be a cause for rejection.

DS-2 -- The assembly shall be classified as defective if the potting compound does not cover all electrical connections or if the compound is below the inside surface of the bottom seal at the edges. Concavity of the surface of the compound due to shrinkage, is acceptable.

DS-3 -- Cordage insulation exposed through the molding compound is acceptable provided: The exposed length is not greater than 1/8 inch; the contour of the fuze plug is not changed; there is evidence that the bonding of the molding compound to the cordage insulation in the area is complete; and there is no break in the cordage insulation. Solder or bare wire exposed through the molding compound at the point of soldering is acceptable provided the contour dimensions are met and the area does not go back longitudinally for a distance greater than 1/16 inch. Failure of the molding compound to bond to the solder is acceptable provided there is evidence of bonding to the contact in the areas immediate to the solder.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

DS-4 -- Evidence of splashed solder, dirt, oil, grease, excess flux, corrosion or other unidentifiable matter shall be cause for rejection. Molding compound on chamfers and flash protruding no higher than diameters of contacts is acceptable. Mold release compound on the bottom seal is acceptable provided the contractor certifies that such compound will not affect the properties of the part.

DS-5 -- Pinpoint spots where plating is missing is acceptable. Scratches other than those caused by the electrical test fixture and areas larger than pinpoints where base metal is exposed, blisters, and pits, each shall be a cause for rejection.

DS-6 -- a. Fuze plug. Insufficient molding compound to fill out the contour of the fuze plug shall be cause for rejection.

b. Receptacle. There shall be no scratches, cracks, or chipping of the molded surface between the two contact rings. All other surfaces shall be free from cracks, but scratches and minor chipping are acceptable.

c. Cordage. There shall be no cordage separation between wires for more than two inches and if not repaired, shall be cause for rejection.

d. Bottom seal. Any bottom seal incompletely formed shall be cause for rejection.

4.4.5.9 Preparation for delivery. By observation of the contractor's packing procedures, the inspector shall ascertain that the requirements of section 5 are met.

4.4.6 Lot acceptance tests. The sample shall be subjected to the following lot acceptance tests. All tests shall be performed by the contractor.

4.4.6.1 Insulation resistance test. Sample cable assemblies shall be selected from each lot in accordance with MIL-STD-1235 Plan CSP-A and using an AQL of 0.015 percent defective. The test shall be performed as prescribed in 4.6.1.

4.4.6.2 Continuity test. Sample cable assemblies shall be selected from each lot in accordance with MIL-STD-1235 Plan CSP-A using an AQL of 0.015 percent defective. The test shall be performed as prescribed in 4.6.2.

4.4.6.3 Extreme temperature test. Thirty-two sample cable assemblies shall be selected from each lot and tested as prescribed in 4.6.3. One failure is permissible. At the option of the contractor, MIL-STD-1235 Plan CSP-A may be used with an AQL of 4.0 percent defective.

4.4.6.4 Temperature cycling test. Thirty-two sample cable assemblies shall be selected from each lot and tested as prescribed in 4.6.4. One failure is permissible. At the option of the contractor, MIL-STD-1235 Plan CSP-A may be used with an AQL of 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

4.4.6.5 Pull and salt spray test. Twenty sample cable assemblies shall be selected from each lot and tested as prescribed in 4.6.5. One failure is permissilbe. At the option of the contractor MIL-STD-1235 Plan CSP-A may be used with an AQL of 4.0 percent defective.

4.4.6.6 Strength of spring clip test. Sample cable assemblies shall be selected from each lot in accordance with MIL-STD-1235 Plan CSP-A using an AQL of 0.015 percent defective and tested in accordance with 4.6.10.

4.4.6.7 Disposition of lot samples and data. The tested lot samples if they have not been destructively tested may be returned to the lot or they may be used in meeting the requirement for an engineering control sample.

4.4.7 Material and component certification. Prior to acceptance under this procurement, the contractor shall demonstrate by means of certification or statements of findings, that only materials and components conforming to the item specification and drawings have been used. Certification statements shall completely identify the material or component, indicate the specification and/or drawing (revisions and dates) applicable, the grade or type to which the material or components were tested, the number of units tested, and quantitative requirements and results obtained during tests. The required data may be from the specific quantity of material or components used in the contract, or from the manufacturing lot from which the materials or components originated.

4.5 Test conditions and equipment.

4.5.1 Test equipment. Test equipment shall be in accordance with IEL7542941 and of sufficient accuracy and quality to permit performance of the required inspection. Test equipment shall be marked to indicate the limit of acceptance for each test, but shall not be so marked as to reveal classified security information. Test procedures and calibration procedures shall conform to MIL-I-45208 with Appendix A. Unless otherwise specified, test equipment accuracy shall be as follows:

4.5.1.1 Meters used shall possess two percent accuracy over the testing range and test voltages shall be accurate to five percent.

4.6 Test procedures. Unless otherwise specified herein, all measurements and tests shall be made in the temperature range of 68°F to 95°F at ambient atmospheric pressure and ambient relative humidity. Where a temperature is specified, it shall be held within 4°F.

4.6.1 Insulation resistance test. A voltage of 500 volts dc shall be applied to each conductor of the cable assembly and all the other conductors shorted together. The resistance shall be measured to determine compliance with 3.3.1.

4.6.2 Continuity test. The resistance between the end of each conductor of the cable shall be measured to determine compliance with 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

4.6.3 Extreme temperature test. The cable assembly shall be subjected to an ambient temperature of -65°F for not less than four hours. Within two minutes after exposure, the assembly shall be tested in accordance with 4.6.1 and 4.6.2. After completion of the low temperature test, the proceudres shall be repeated with the assembly subjected to an ambient temperature of 160°F for not less than four hours (see 3.3.4).

4.6.4 Temperature cycling test. The cable assembly shall be subjected to the temperature cycling test Method 102 of MIL-STD-202 test condition B except that for Step 1, the temperature shall be 160°F. At the completion of the test period, all visible evidence of surface moisture shall be removed from contact areas by blowing, or air drying. Rinsing in distilled water is permitted prior to drying. The assembly shall then be tested within one hour in accordance with 4.6.1 and 4.6.2 and shall meet the requirements of 3.3.5.

4.6.5 Pull and salt spray test. The fuze plug shall be mounted with the ground contact rigidly fixed and the 300-volt pin shall be subjected to a pull of 30 pounds, a minimum of three times. The distance from the ground contact to the tip of the 300-volt pin shall be measured before and after the pull test (see 4.4.5.3, Major 103). After the pull test, the cable assembly shall be subjected to the tests of 4.6.1 and 4.6.2 (see 3.3.3). All defectives shall be removed from the sample. The remaining cable assemblies shall be subjected to the salt spray test Method 101 of MIL-STD-202, test condition "B" for 50 hours (see 3.3.6). At the completion of the test period, all visible evidence of surface moisture and all salt deposits shall be removed by rinsing in distilled water and blotting. Within 15 minutes after salt spray, the assembly shall be subjected to the tests of 4.6.1 and 4.6.2. The total number of defectives shall be those removed after the pull test plus those found after salt spray.

4.6.6 Humidity test. The cable assembly shall be subjected to ten cycles of the humidity test of MIL-T-5422 except that step four shall be omitted. At the completion of the test period, all visible evidence of surface moisture shall be removed from contact areas by blowing, or air drying. Rinsing in distilled water is permitted prior to drying. The assembly shall then be tested within one hour in accordance with 4.6.1 and 4.6.2 and shall meet the requirements of 3.3.7.

4.6.7 Salt immersion test. The receptacle of the cable assembly shall be immersed to a depth of six inches in a ten percent solution of sodium chloride for a period of 24 hours. At the completion of the test period, all visible evidence of surface moisture shall be removed from contact areas by blowing, wiping, or rinsing in distilled water. The assembly shall then be tested within one hour in accordance with 4.6.1 and 4.6.2 and shall meet the requirements of 3.3.8.

4.6.8 Accelerated aging test. The cable assembly shall be subjected to the vacuum-steam-pressure test in accordance with MIL-STD-331, Test 106 except that the word fuze or fuzes shall be replaced with cable assembly or assemblies and any reference to explosives shall be ignored. At the completion of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

test period, all visible evidence of surface moisture shall be removed from contact areas by blowing, wiping, or rinsing in distilled water. The assembly shall then be tested within one hour in accordance with 4.6.1 and 4.6.2 and shall meet the requirements of 3.3.9.

4.6.9 Fungus resistance test. The contractor shall submit a Certificate of Compliance and Analysis for each first article approval sample stating that all material used is fungus resistant. In addition, the representative assemblies shall be tested in accordance with MIL-STD-331, Test 110. Due to the length of time required by this test, if the contractor has submitted a satisfactory certificate, a conditional acceptance of the first article approval sample may be given pending the results of this test (see 3.3.10).

4.6.10 Strength of spring clip test. The spring clip of each cable assembly shall be tested using an approved testing device. The pointed pin fixture shall be inserted and the insertion force measured. Apply a withdrawal force not exceeding two pounds to take up the slack. A dial indicator shall be zeroed at a point on the face of the receptacle. The dial indicator shall have a resolution of not less than 0.0001 inch. The withdrawal force of 30 pounds ± 1 pound shall be applied and the dial indicator read. The pointed pin fixture shall then be withdrawn and the force measured (see 3.3.11).

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be in accordance with MIL-STD-1169 and this document.

5.1.1 Level A and Level C. The same requirements are applicable to both Level A and Level C (see 6.5).

5.1.1.1 Place a protector tube (see dwg. B7542963) on each fuze plug. Fold cordage in approximately eight-inch folds so that the wrapper will cover the cordage lengthwise. Place the wrapper around the folded cordage with the corrugations inward. One end of the wrapper shall be held in place with receptacle, but shall not cover it. The wrapper shall be held in place with gummed kraft tape of one-inch minimum width and 60-pound per ream basis weight.

5.1.1.1.1 The wrapper shall consist of a single face corrugated material with kraft paper backing eight by six inches with corrugations parallel to the longer dimension.

5.1.1.2 One receptacle lock ring shall be placed on the small end of each receptacle. The ring shall be held in place by putting one or more sheets of cellophane, as required, over the receptacle before putting the ring in place. One sheet of the cellophane shall be long enough to fold back and cover the ring during insertion of the cable assembly into the envelope. Alternatively, polyethylene, vinyl, saran, or cellulose acetate may be used in place of cellophane. Open each envelope on a suitable mandrel and insert the wrapped cable assembly, with lock ring in place, receptacle first, into the envelope. Close envelope with heat seal. Fold back corners as required and insert folded envelopes into partitions in the carton or shipping containers, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

5.1.1.2.1 The envelopes shall comply with Type I, Class B specified in MIL-B-117. The inside dimension shall be 3-3/4 inches wide by 12 inches long. The envelope shall be formed by heat sealing with 3/16 inch minimum width seal. A lip of not less than 1/16 inch shall be provided for easy opening.

5.1.1.2.2 The envelope shall be marked in accordance with MIL-STD-129.

5.2 Packing. Packing shall be in accordance with MIL-STD-1169 and this document.

5.2.1 Level A. The shipping container shall be a box complying with Type I, Class 2, Grade 3 (V3C), or Type II, Class 2 or 3, Grade 3 (V3S), Staple RSC-SL or CSSC-SL of PPP-B-636. The inside dimensions shall be 22-1/2 inches by 11-1/4 inches by 9-7/8 inches deep.

5.2.1.1 The shipping container shall be divided into 50 equal cells formed by full height, half-slotted partitions for 50 cable assemblies. The partitions shall be made from V3C or V3S fiberboard.

5.2.1.2 The shipping container shall be sealed and strapped as specified in the Appendix to PPP-B-636.

5.2.1.3 Marking. The shipping container shall be marked in accordance with MIL-STD-129.

5.2.2 Level C. The shipping container shall be a box complying with Type I, Class 1 of PPP-B-636 and shallbe made from 200-pound test A or C flute corrugated fiberboard. Style shall be RSC or CSSC. The inside dimensions shall be 22-1/2 inches by 11-1/4 inches by 9-7/8 inches deep.

5.2.2.1 The shipping container shall be divided into 50 equal cells formed by full height, half-slotted partitions for 50 cable assemblies. The partitions shall be made from 200-pound test A or C flute corrugated fiberboard.

5.2.2.2 The shipping container flaps shall be secured with gummed kraft paper tape not less than three inches wide complying with UU-T-111 for Class 2 tape. The tape shall be centered the full length of the outer flap seams, and extend over each end of the carton at least three inches along the corners of the container. Tape shall be properly moistened and sufficiently compressed to insure tight adhesion to the container. Shipping shall be in accordance with standard commercial regulations and practices.

5.2.2.3 Marking. Marking of the container shall comply with MIL-STD-129, except that if paper labels are used, the size shall be approximately eight inches by five inches and the type shall be approximately 1/4 inch, but not less than 1/8 inch. Components which form a permanent part of the assembly and cannot be detached are not required to be listed in the marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

5.2.3 Dimensions specified herein may be modified if it is determined from first article approval sample pack that such changes are necessary for a snug and proper fit of all parts. Dimensional changes shall not affect the basic design of the pack. Dimensional changes outside the tolerances provided shall be approved by the contracting officer.

5.3 Data cards. Data card information shall be as specified in MIL-STD-1167.

6. NOTES

6.1 Ordering data. Procurement documents should specify the title, number, and date of this specification.

6.1.1 Ring, lock. The contracting officer will specify which lock ring (part number 7542440 (steel), part number 10402534 or part number 11002581 (plastic) shall be delivered.

6.1.2 Samples. The number of units required for delivery should be increased to include the samples as required in 3.1.1 and 3.1.3, since they are not included in the number of units required for delivery.

6.1.2.1 Engineering control samples. These samples are subject to periodic retesting by the Government to insure that the first article approval requirements continue to be met. Failure of these samples will not affect lot acceptance, but may indicate future mandatory action.

6.2 Lots which fail the tests specified in 4.4.6.3, 4.4.6.4 and 4.4.6.5 shall be reported to the procuring activity by the contractor with a recommendation for their disposition.

6.3 HDL test equipment.
Drawing TL6B450 -- List of Test Positions for T8 Cable Assembly
Drawing A8657549 -- Cable Assembly Tester (Pull and Strength of Spring Clip)

6.4 Appendix A to MIL-I-45208. Copies of Appendix A should be obtained from Harry Diamond Laboratories, Attn:AMXDO-EDA, Washington, D.C. 20438.

6.5 Packaging level definitions. (AR 700-15)

Level A, Military Package. Preservation and packaging which will afford adequate protection against corrosion, deterioration, and damage during worldwide shipment, handling, and open storage.

Level C, Minimum Military Package. Preservation and packaging which will afford adequate protection against corrosion, deterioration, and damage during shipment from supply source to the first receiving activity for immediate use or for controlled humidity storage.

6.6 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

6.7 Superseding note. MIL-C-14242B(MU) supersedes MIL-C-14242A(MU) dated 1 February 1966, TL-PD-192 dated 1 March 1965 and Amendment 2 dated 27 July 1965; OAC-PD-137 (Rev. 1) dated 27 August 1959 and Amendment 4 dated 9 December 1964; MIL-C-14242(ORD) dated 31 January 1956.

Custodian:
Army - MU

Preparing Activity:
Army - MU

Project Number 1325-A-201

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

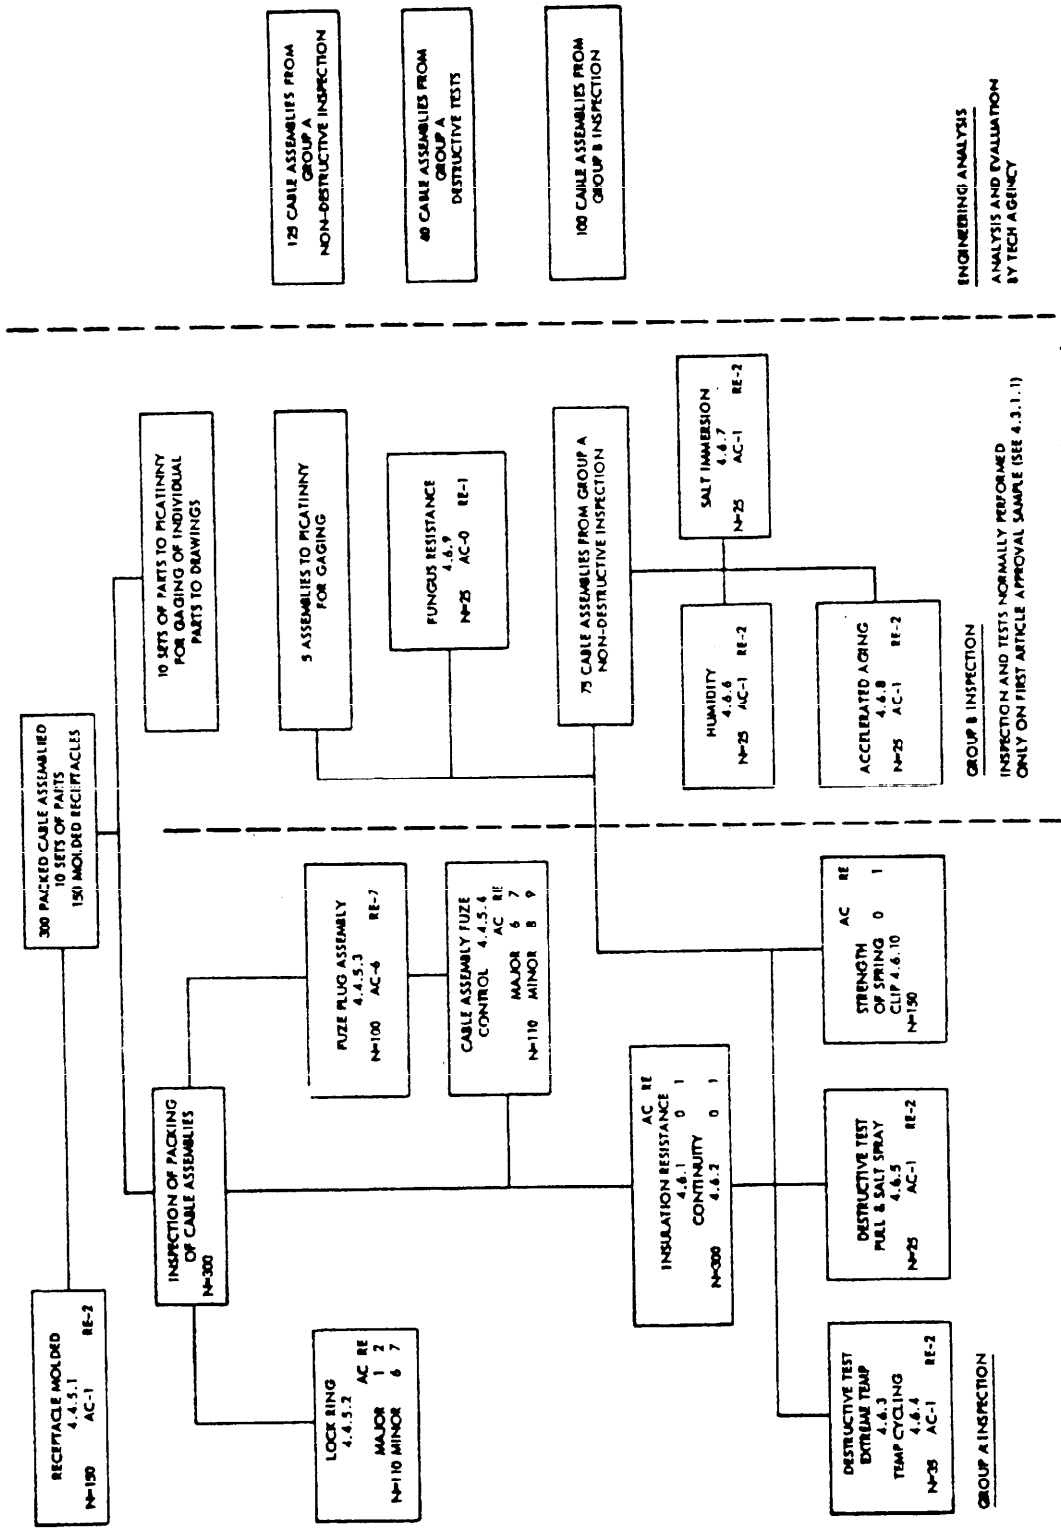


Fig 1. Flow Chart For Inspection and Testing of First Article Approval Sample

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
HARRY DIAMOND LABORATORIES
WASHINGTON, D.C. 20438

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding Officer
US Army Materiel Command
Harry Diamond Laboratories
ATTN:AMXDO-EDB
Washington, D.C. 20438

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION		
ORGANIZATION	CITY AND STATE	
CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.