MIL-C-62092(AT)
5 April 1968
SUPERSEDING
DAPD-311A
27 November 1967

MILITARY SPECIFICATION

CARRIER, GUIDED MISSILE EQUIPMENT, XM730

1. SCOPE

1.1 Scope. This specification covers one type of unarmored, full-tracked vehicle designed as a carrier guided missile equipment for cross country and amphibious operations.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS
Federal
VV-F-800 - Fuel Oil, Diesel.

Military
MIL-P-514 - Plates; Identification, Instruction and Marking Blank.
MIL-R-3065 - Rubber, Fabricated Parts.
MIL-C-62053 - Carrier, Guided Missile Equipment, XM730; Preparation for Storage and Shipment of.

STANDARDS
Federal
Federal Standard No. 595 - Colors.

Military
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130 - Identification Marking of U. S. Military Property.
MIL-STD-193 - Painting Procedures Tactical Vehicles (Tracked and Wheeled).
MIL-STD-210 - Climatic Extremes for Military Equipment.
MIL-STD-417 - Rubber Compositions, Vulcanized General Purpose, Solid (Symbols and Tests).
MIL-STD-461 - Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-642 - Identification Marking of Combat, and Tactical Transport Vehicles.

FSC-2320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

PURCHASE DESCRIPTION
DAPD-296 - Engine, Diesel: 6-Cylinder, V-Type, 210 HP.

PUBLICATIONS
Engineering Parts List
8736744 - Carrier, Guided Missile Equipment, XM730.

SUPPLEMENTARY QUALITY ASSURANCE PROVISIONS
Master Lists
8736744 - Master List of Supplementary Quality Assurance Provisions for Carrier, Guided Missile Equipment, XM730.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

STANDARD
Z24.3-S1.4 - American Standard for Sound Levels.

(Application for copies should be addressed to American Standards Association, 10 E. 40th Street, New York, N. Y.).

3. REQUIREMENTS

3.1 Preproduction model. When specified (see 6.2), a preproduction model of the complete vehicle to be furnished under this specification shall be produced prior to the manufacture or fabrication of vehicles in quantity. The vehicle(s) when completed shall be submitted to the Government for examination and tests to determine conformance to the requirements of this specification. Vehicle(s) submitted by the contractor shall be fully representative of vehicles proposed to be supplied by the vehicle manufacturer from production facilities and tooling under the supply contract.

3.2 First production vehicles. The vehicles selected, shall be fully representative of vehicles proposed to be furnished under the contract, and shall be submitted to the Government for inspection to determine conformance to the requirements of this specification.

3.2.1 Workmanship and reliability. The workmanship shall be of a quality to assure that the vehicle and components thereof are free from any defects that compromise, limit, or reduce the vehicle or component capabilities herein expressed. Vehicles made in accordance with this specification shall be subjected to examinations and tests to prove vehicle capabilities to perform in accordance with the following:

(a) Vehicle shall require only organizational maintenance (first and second echelon) during 2,000 miles of normal operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

(b) Vehicle shall require no replacement or major overhaul of any major automotive component during 4,000 miles of normal operation.
(c) Track shoes shall have a minimum service probability of 75 percent through 2,000 miles of use, and 66 percent survival probability through 2500 miles of use.

3.2.1.1 Reliability operations. To assure that workmanship and reliability requirements are met, during the 4,000 miles of operation the vehicle, combat loaded, shall be operated as follows:

(a)	Hard surface roads	20 per cent, including 0.5 percent towing a similar vehicle using a standard tow bar.
(b)	Gravel and dirt roads	40 percent
(c)	Level cross country	20 percent
(d)	Hilly cross country	20 percent, including 0.5 percent towing a similar vehicle using a standard tow bar.

3.3 Materials.

3.3.1 Qualified products. With respect to all assemblies and component parts requiring product qualification in accordance with the pertinent specifications or drawings listed on the EPL cited in 3.4, and necessary in the construction of this vehicle, the contractor shall be responsible for using only those products which are listed, by part or drawing number as Qualified Products List (QPL) items, on the QPL in the referenced specification or which have been approved for inclusion on such lists. Manufacturer's inspection records shall specifically list such component(s), name of supplier(s) (as listed on the QPL or in the approval letter), and number and date of the QPL from which the selection was made or date of approval letter when products are approved but not as yet listed on the QPL.

3.3.2 Ozone resistant. Rubber products procured under requirements of MIL-R-3065 are to be ozone resistant to the degree specified by the C_1 requirements of MIL-STD-417. Rubber components controlled by detail specifications shall be ozone resistant only when required by the specification referenced on the drawing.

3.4 Construction. Vehicle, components, sub-assemblies, and assemblies shall be fabricated and assembled into a complete vehicle in accordance with drawings listed or referred to in Engineering Parts Lists (EPL) 8736744. All parts, assemblies, and sub-assemblies requiring identification shall be identified in accordance with MIL-STD-130.

3.4.1 Sealing.

3.4.1.1 Seals. When fording or operating amphibiously, the seals shall be capable of preventing the entrance of foreign matter into the bearings, which are exposed to contamination during these operations. All bearing seals shall prevent the leaking of lubricants from the bearings. Water contamination of the sealed bearing lubricants shall be not more than .02 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.4.2 Special equipment. When specified (see 6.2), special equipment shall be furnished as required for vehicles being shipped to specific areas of the world.

3.4.2.1 Winterization equipment. Provisions shall be made for installation of winterization equipment, including personnel heaters. When installed (see 6.2), this winterization equipment shall assure operation under arctic conditions in ambient temperatures of minus 25° to minus 65°F.

3.4.2.1.1 Arctic cab kit. When the arctic cab kit is installed it shall provide added protection for the crew during arctic operations in ambient air temperature down to minus 65°F. When installed there shall be no interference or misalinement.

3.4.2.1.2 Personnel heater installation. When installed, this kit shall provide heat for defrosting of windshield, and added heat in the cab of vehicle.

3.4.2.1.3 Engine stand by coolant heater kit. Provisions shall be made for installation of the engine standby coolant heater kit without interference or misaligment. When installed, this kit shall, by circulating a sufficient quantity of heat through the battery heating pad and engine cooling system, assure engine starting and operation in ambient air temperatures from minus 25° to minus 65°F. The heater shall be capable of operation for a minimum of 12 hours without discharging the battery sufficiently to preclude satisfactory starting.

3.4.2.1.4 Floatation installation. Provisions shall be made to permit the mounting of floatation installation in 1 hour or less (30 minutes preferred), permitting the vehicle to cross rivers during cross-country operations.

3.4.3 Doors, covers, and windows. All doors, covers and windows furnished shall conform to applicable drawings. Doors and windows shall fit and be water, dust, snow proof, and function without interference and misalinement.

3.4.4 Engine. The engine shall conform to DAPD-296 and shall operate throughout all gear ranges without evidencing any leaking of the cooling system, lubricants, and fuel.

3.4.4.1 Engine air induction system. The engine air induction system shall prevent the entrance of foreign matter to the extent specified on applicable drawing.

3.4.5 Exhaust system. The concentration of carbon monoxide in the crew compartment shall not exceed .01 percent. The exhaust system, shall be of leakproof construction and shall be securely mounted.

3.4.6 Fuel system. During vehicle operation, the fuel system shall maintain a continuous supply of fuel to the engine when ascending and descending 60 percent grades in forward and reverse gear, and when vehicle is being operated on 30 percent side slopes, with each side of vehicle up slope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.4.6.1 Fuel cell. Provisions shall be made to assure the internal cleanliness of the fuel cell prior to initial fueling of vehicle. The fuel cell shall be capable of receiving 50 gallons of fuel per minute.

3.4.6.2 Fuel and hydraulic lines. Fuel and hydraulic lines and connections shall be internally clean prior to initial fueling of vehicle. All fuel and hydraulic lines connections and tanks shall be free from leakage.

3.4.6.3 Rack linkage. With rack linkage installed in accordance with applicable drawings, and with the accelerator pushed against the stop, the rack shall be at full open position.

3.4.7 Electrical system.

3.4.7.1 Generating system voltage (alternator). The regulator shall be adjusted, after no less than 20 minutes of operation, with an electrical load that shall cause a 14 volt drop (to warm up the system) across the alternator field. The alternator shall be run at 4000 $\pm$ 100 rpm with an output of 50 $\pm$ 5 amperes and the voltage regulator rheostat adjusted so that the system voltage will be 28. The final voltage, without external load, shall be within the regulation limits of 28 $\pm$ 0.5. All electrical contacts and connections shall maintain positive contact under all vehicle operating conditions.

3.4.7.2 Lights. The internal and external lights as specified on applicable drawings shall operate throughout all vehicle operating conditions. All electrical contacts and connections shall maintain positive contact under all vehicle operating conditions.

3.4.7.3 Heater. The heater shall be capable of starting and continuous operations on 18.5 volts dc.

3.4.7.4 Communications and electrical circuits. The communications and electrical circuits shall be capable of maintaining continuity from end to end, without any short circuits from pin to pin and from each pin to the connector shell.

3.4.8 Controls. All electrical, mechanical, and hydraulic controls shall operate without malfunction, throughout all ranges of operation under all vehicle operating conditions.

3.4.9 Adjustment mechanisms. All adjustment mechanisms shall function, and maintain adjustment settings during all vehicle operating conditions.

3.4.10 Stowed equipment. All interior and exterior on-vehicle-equipment (OVE) items shall be stowed (combat loaded) on the vehicle in spaces provided, to assure that items will not interfere with the operation of vehicle and components in any manner.

3.4.11 Welding repairs. Welding repairs of any type or class shall be made only when, and to the extent specifically authorized by the procuring activity.

3.4.12 Air transportability. The vehicle when mated with it's missile pallet shall be capable of phase II transport in a C-130 aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.4.13 Folding blast covers. Provisions shall be made for made for mounting the folding blast covers which shall provide protection for the crew compartment when launching a missile. The blast covers shall fold open and remain open to permit vehicle operation without fear of cover closing on operator.

3.4.14 Tailgate. The tailgate or door shall hinge downward and support the weight of two men during manual missile loading of the launcher. When closed the tailgate shall be sealed to restrict the entrance of water into the vehicle during fording and floatation operations.

3.5 Break-in run.

3.5.1 Preparation. Prior to break-in run, except for equipment and component installation and servicing performed by the contractor as a final processing of vehicles for acceptance, the vehicle shall be completely assembled and all adjustments completed. Vehicle, including all components requiring lubrication shall be lubricated, and serviced with fuel conforming to VV-F-800. Lubricants and fluids shall be as specified in production lubrication Drawing 10942803 a detail of EPL 8736744. Specific applications by grades or types for various expected seasonal temperature ranges shall be as specified.

3.5.2 Oil pressure and temperature. Prior to the start of the break-in run, the engine shall be operated at 500 to 600 rpm until lubricating oil is at operating pressure and temperature. If at any time during the break-in run the engine has been stopped for at least 15 minutes, the engine shall again be operated, as above, before continuing break-in run. Proper oil pressure and temperature shall be maintained during operation on level ground, 60 percent grades and 30 percent side slope.

3.5.3 Distance operated. Prior to tests, each vehicle shall be given a break-in run on smooth, level, hard-surfaced roads, except a section of the road shall be as shown in figure 1. The vehicle shall be operated as specified in table 1 and over the undulating section in a and b division of the break-in run in both directions for the purpose of observing the function and performance of various parts, assemblies, and controls.

Table I. Speeds and distances for break-in run

Division of run	Speed - MPH	Distance - Miles
a	0 to 10	5
b	11 to 20	5
c	21 to 30	10
d	31 to Max. Governed	10

3.5.4 Reverse operation. After each division of the break-in run, vehicle shall be stopped, the engine allowed to idle for not less than 1 minute, and the vehicle driven in reverse for a distance of not less than 50 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.5.5 Condition after run. After completion of the break-in run, there shall be no indications of damaged components, maladjustment or loss of original adjustment that may cause faulty vehicle operation subsequent to Government acceptance. NOTE: The differential oil filter shall be removed and a new filter installed upon completion of the break-in run.

3.6 Performance. A complete vehicle, loaded with rated payload and serviced shall perform as specified herein. Vehicle, serviced (see 3.5.1) and equipped for prevailing climatic conditions, shall operate as specified without special equipment. Performance shall be demonstrated on smooth, level, hard-surfaced roads free of loose material, except a section of road shall be as shown in figure 1. The engine disconnect clutch shall be considered special equipment.

3.6.1 Environmental. The complete vehicle with rated payload shall operate, in ambient air temperature of plus 115° to minus 25°F, and with special equipment installed, at temperature ranges of minus 25° to minus 65°F. The complete vehicle when in storage shall withstand climatic extremes as specified in MIL-STD-210, without deterioration that may cause failure of any component part of the vehicle.

3.6.2 Cooling system.

3.6.2.1 Engine cooling. With the vehicle operating in ambient temperatures up to 115°F, the engine cooling system shall maintain engine coolant at not more than 230°F, measured at a point in the engine outlet to radiator.

3.6.2.2 Transmission lubricant cooling. With the vehicle operating in ambient temperature up to 115°F, the transmission lubricant cooling system shall maintain lubricant temperature at not more than 300°F measured out of transmission into cooler, except at torque converter speed ratios less than 4/10.

3.6.2.3 Differential oil cooler. With the vehicle operating in ambient temperature up to 115°F, the differential lubricant cooler shall maintain lubricant temperature below 300°F, measured out of differential into the cooler.

3.6.3 Bilge pumps. The bilge pumps, installed in accordance with applicable drawings, shall remove water from the vehicle at a minimum rate of 35 gpm, with a discharge head of 4 1/2 feet and with pump motor operating on 27.5 volts impressed at the motor.

3.6.4 Speeds and vehicle control. The vehicle shall be capable of sustained speeds up to 32 mph, and a maximum speed of 38 mph after 400 mile run-in without damage to power plant and suspension system. With vehicle traveling between 15 mph and maximum speeds the drift shall not exceed 3 feet in 100 feet.

3.6.5 Acceleration. With the vehicle at a standstill position and the transmission in 1-2-3 range, engine at idle speed, the vehicle shall accelerate from 0 to 2[illegible] mph in not more than 18 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.6.6 Engine starting on grades and side slopes. With vehicle standing on a 60 percent grade for not less than 2 minutes with engine operating under no load between 750 and 1000 rpm, the engine shall be stopped for not less than 2 minutes. The engine shall restart in not more than 1 minute when vehicle is headed up and headed down grade respectively. A similar engine starting test shall be conducted on 30 percent side slopes with right and left side of vehicle up slope.

3.6.7 Braking.

3.6.7.1 Stopping and vehicle control. Vehicle shall stop within a distance of 40 feet from point of service brake application when traveling at a speed of 20 mph on smooth, level, hard-surfaced roads free of loose material, and drift not to exceed 3 feet in stopping distance. Steering during stopping operation is not permitted as it would defect the purpose of the operation. However, the driver, as a safety measure shall be prepared to take over steering in case of a severe drift.

3.6.7.2 Holding. With brakes locked for parking, and with transmission in neutral the vehicle shall be held stationary when parked on a 60 percent longitudinal grade. For this operation, vehicle shall be loaded with rated payload.

3.6.8 Turning. Vehicle, on smooth, level, hard-surfaced roads or track, with differential steer, shall make continuous, full 360 degree turns, to right and to left, with rear point of outer edge of vehicle at all times in contact with or within a 50 feet diameter circle. When in pivot steer, the vehicle shall pivot within a 28 foot diameter circle. The applied effort to the steering lever shall not exceed 100 pounds to pivot vehicle.

3.6.9 Water crossing.

3.6.9.1 Leakage. During shallow water crossings and amphibious operation the leakage of water into the hull shall be not more than 3 quarts per minute.

3.6.9.2 Shallow water crossing. Vehicle shall ford shallow, hard-bottom, salt or fresh water up to 40 inches.

3.6.9.3 Amphibious operation. Vehicle, launched amphibiously, with floatation kit installed and loaded with rated payload, shall negotiate water of unlimited depth with height of waves not exceeding 1 foot. When afloat, in calm water, the vehicle shall attain a maximum speed of not less than 3 mph. The vehicle shall be capable of operating within a 30 foot corridor when crossing calm, open water.

3.6.10 Trench crossing. Vehicle shall cross trenches up to 36 inches or more in depth and up to 66 inches in width, without damage to vehicle.

3.6.11 Vertical obstacles. Vehicle operating at low speeds in forward gear shall cross over vertical obstacles up to 24 inches in height, and in reverse gear, obstacles up to 14 inches in height, without damage to vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.6.12 Climbing. Vehicle shall ascend 60 per cent grades in forward and reverse gear from a standstill position on the grade without stalling or damage to power plant.

3.6.13 Winch. The power driven winch shall be capable of a rated line pull of 20,000 pounds at a winding speed of not less than 15 feet per minute, using a single line on a bare drum, under intermittent operation for a period of 4 hours. A self-energizing friction type, safety brake capable of stopping and holding the rated load shall be installed on the winch.

3.6.13.1 Winch controls. The cab mounted controls shall engage the propshaft drive for operation of the winch. The manually operated device furnished shall permit free spooling of the winch drum.

3.6.13.2 Winch shear safety pin. The installed shear pin shall preclude damage to the winch if the line pull exceeds 24000 pounds at a winding speed of 1.8 feet per minute.

3.6.14 Radio suppression. Unless otherwise specified (see 6.2), complete vehicles shall be radio interference suppressed in accordance with tactical vehicle requirements class IIIA of MIL-STD-461.

3.7 Painting, marking and data plates.

3.7.1 Painting. Exterior and interior of vehicle and component assemblies and parts which require painting, shall be prepared and painted in accordance with MIL-STD-193. Colors shall be in accordance with color chips X24087 of Federal STD No. 595.

3.7.2 Marking. Vehicle marking shall be in accordance with MIL-STD-642.

3.7.3 Name, shipping, and service data plates. Data plates shall be in accordance with applicable drawing, and meet performance requirements of MIL-P-514.

3.8 Vibration and noise. With a sound level meter (see 4.5.2.12) located in the vicinity of the driver's right ear, and with the vehicle traveling at 30 mph in a 1-2-3 gear range on a hard surfaced straight road, with all doors and windows closed, the sound level shall not exceed the following values:

(a) When using the "C" weighting position of the sound level meter, the noise level shall not be more than 128 db.
(b) When using the "B" weighting position of the sound level meter, the noise level shall not be more than 124 db.
(c) When using the "A" weighting position of the sound level meter, the noise level shall not be more than 119 db.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.9 Fire extinguisher. The fixed fire extinguisher system, when installed in accordance with applicable drawings shall be readily accessible for servicing and operation internally and externally. In ambient air temperature of plus 72°F, the maximum effort required to discharge the system, shall not exceed 55 pounds externally.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Parts and components. Parts, components and assemblies shall be inspected in accordance with the drawings listed on EPL 8736744 and Master List of Supplementary Quality Assurance Provisions 8736744.

4.1.2 Contractor's quality control system. Unless otherwise specified by the procuring activity, the contractor shall provide and maintain an effective inspection and Quality Control System acceptable to the Government covering the supplies under the contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that an equivalent control is included in the approved quality control procedure. The contractor shall notify the Government of and obtain approval for any change to the written procedure that might affect the degree of control required by this specification or other applicable documents referenced therein.

4.1.3 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of (a) surveillance of the operations to determine that practices, methods, and procedures of the written inspection plan are being properly applied, and (b) Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an effect upon the quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered shall be cause for suspension of acceptance until corrective action has been made or until conformance of product to prescribed criteria has been demonstrated.

4.1.4 Qualified products. The contractor shall provide the Government with evidence that materials used are as specified in the applicable specifi-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

cations and drawings. The contractor's inspection records shall be checked to determine contractors conformance to 3.3.1. Items procured as specified in QPL will be inspected and tested for conformance to the acceptance tests specified in the detail specification.

4.2 Preproduction and first production inspection.

4.2.1 Preproduction inspection. A preproduction vehicle (see 3.1) when furnished shall be inspected to ascertain vehicle conformance with the requirements of this specification. Inspection shall be performed at a location approved by the Government. Failure of the preproduction model to comply with any of the requirements specified shall be cause for refusal by the Government to conduct a retest until corrective measures satisfactory to the Government have been taken.

4.2.2 First production inspection.

4.2.2.1 Special process inspection. A special process inspection will be conducted by the Government representatives during fabrication of the first production vehicle (see 3.2) to evaluate conformance of materials and workmansnip with drawing and specification requirements.

4.2.2.1.1 Review and evaluation. Review and evaluation of records for processing procedure, inspection systems and plan of quality control, will be conducted on the following: material, welding, surface hardening, heat treating, protective finishes, etc.

4.2.2.1.2 Hull inspection The hull shall be inspected prior to covering the weldments with paint or other pertinent components or assemblies.

4.2.2.2 Complete vehicle inspection. The first vehicle when complete, shall be inspected by the Government subsequent to contractor's inspection at the contractor's plant to determine conformance to contract and specification requirements.

4.2.2.2.1 Corrections. Corrections found necessary as a result of above inspection shall be made by the contractor on the vehicle.

4.2.2.3 Production vehicle test. After completion of the first vehicle inspection, a second vehicle shall be selected from the first months production or one of the first 10 shall be subjected to examination (see 4.4.2) and all tests specified in 4.5. Subsequent to examination and tests, the selected vehicle shall be subjected to the 4,000 mile test specified in Table II at a site approved by the Government, which will require 90 days. These tests are to be performed by the Government. Delay in test completion caused by vehicle breakdown or failure of the contractor to adequately support the vehicle with parts during the tests shall not be the basis for adjustment of the contract, delivery schedule or contract price.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Table II. 4000 Mile test combat loaded

Course	Mileage & speeds
*Hard surface roads	800 miles at varying speeds up to maximum
Gravel and dirt roads	1600 miles at varying speeds up to maximum
Level cross country	800 miles at varying speeds up to maximum
*Hilly cross country	800 miles at varying speeds up to maximum
Amphibious operation	1 hour minimum at varying speeds up to maximum

*NOTE: Hard surface road and hilly cross country mileage includes 20 miles with towed load.

4.2.3 Test failure. Any failures or deficiencies of a workmanship or materials nature found during or as a result of the 4,000 mile test, will be cause for rejection of the vehicle. Further, the Government will refuse to continue acceptance of production vehicles until evidence has been provided by the manufacturer that corrective action has been taken to eliminate the deficiency. Any deficiency found during or as a result of 4,000 mile test shall be prima facie evidence that all vehicles already accepted prior to completion of the 4,000 mile test are similarly deficient unless evidence satisfactory to the contracting officer is furnished by the contractor that they are not similarly deficient. Such deficiencies on all vehicles shall be corrected by the contractor at no cost to the Government.

4.3 Break-in run, (track). To determine conformance to 3.5.1, 3.5.2, and 3.5.3 each vehicle shall be lubricated and serviced prior to the break-in run. The run shall be on smooth, level, hard-surface roads, and for the distance specified in table 1. The vehicle shall be operated in reverse after each division as specified in 3.5.4. The undulating portion of the test shall be accomplished twice in each direction at speed between 5 and 10 mph during division "a" and between 11 and 14.5 mph during division "b".

4.3.1 Condition after run. After the break-in run the vehicle shall be inspected to determine conformance to 3.5.5.

4.4 Inspection provisions.

4.4.1 Lot size. An inspection lot shall consist of all vehicles of one type, from one day's production, submitted at one time for acceptance inspection.

4.4.1.1 Sampling for inspection. For the purpose of visual, dimensional, and primary functional inspection, a representative sample shall be selected, from each inspection lot in accordance with inspection level II of MIL-STD-105. Before sampling may be accomplished by the contractor, the contractor shall 100 per cent inspect the first 20 vehicles to establish a process average (see 6.4) to allow normal sampling in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.4.2 Examinations. Visual, dimensional, and primary functional examination shall consist of examination of the vehicle for conformance to the applicable drawings and this specification. Examination shall be performed against the classification of defects and with the acceptable quality levels shown in Table III. The following constitutes a part of the classification of defects (see 6.5):

(a) Any drip constitutes a major defect when the vehicle has been standing idle and the components are at ambient temperature.
(b) Any droplet that occurs at a static fit, metal to metal or gasket combination shall constitute a major defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Table III. Classification of Defects

Characteristic	Major - AQL 25 Def./100 Units	Minor - AQL 150 Def./100 Units	Method of Inspection
Engine	101. Malfunction, leaks (see 6.5-b & c), mounting	201. Improper component assy.	Visual & Functional
Transmission	102. Malfunction, leaks (see 6.5-b & c)	202. Improper component assembly or installation	Visual & Functional
Transfer gear units	103. Malfunction, leaks (see 6.5-b & c)	203. Improper component assembly or installation	Visual & Functional
*Fuel system components	104. Malfunction, leaks (see 6.5-a)	204. Improper line clearance, assy. or installation	Visual & Functional
Cooling system components	105. Malfunction, damage, leaks (see 6.5-b)	205. Improper assy. or installation	Visual & Functional
Instrumentation, switches, warning, indicating and safety devices	106. Malfunction, damage, calibration	206. Improper assy. or installation	Visual & Functional
Electrical system components & circuits, communication system	107. Malfunction, **lighting sequence improper	207. Improper assy, or installation	Visual & Functional
Suspension system components adjustments	108. Damage, leaks (see 6.5-b & c), clearance improper, misalignment	208. Improper installation or assy, bolt or nut torque	Visual & Functional & SIE
Tracks	109. Damage, pad separation	209. Tension, installation or assy. Improper, including bolt torque, damage	Visual & SIE
Doors	110. Door fit improper, malfunction, leaks (see 6.5-b & c) damage, nonconformance.	210. Improper assy or installation	Visual & Functional
Bilge pump	111. Malfunction, damage	211. Improper assy, installation	Functional
Covers, grilles, ducts, vents, panels, stowage boxes, seats, fenders, hardware	112. Malfunction, locking devices, damage	212. Improper fits, adjustment, installation or defective welds, seals, adhesion, hardware or sheet metal	Visual & Functional
Controls	113. Malfunction, clearance improper	213. Improper assy, or installation	Visual & Functional

*Fuel leaks constitute a special defect and will result in total inspection of the lot for this deficiency.
**Filament failures are not to be classified as major or minor defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Table III. Classification of Defects (Cont'd)

Characteristic	Major - AQL 25 Def./100 Units	Minor - AQL 150 Def./100 Units	Method of Inspection
Track drive sprockets & drive shafts	114. Damage, clearance improper	214. Improper assy installation or bolts torque	Visual & SIE
Adjustment mechanisms	115. Malfunction, clearance improper	215. Improper assy or installation	Visual & Functional
Hull	116. Structural & welding defects		Visual
Towing pintle lifting eyes, hooks & brackets	117. Malfunction or welding defects	216. Improper assy or installation	Visual & Functional
Seats crash pads and straps	118. Damaged, seat control malfunction	217. Improper fit, installation, assy or adhesion, welding defects, damaged	Visual & Functional
Fire extinguisher system control operation	119. Seals, defective or missing, components damage	218. Data card incomplete, improper assy or installation	Visual
Wiring, tubing or hoses	120. Defective, damage	219. Improper assy installation, coding or protection	Visual
Paint		220. Application & color improper	Visual
Tube fittings		221. Defective, missing, improperly installed	Visual
Decals, marking data and instruction plates		222. Missing, improper location or size, defective	Visual
Lubrication and lubricants		223. Improper application, types and levels	Visual
Protective and anti-skid coatings		224. Application, materials and coverage improper	Visual
Record forms and publications		225. Missing, improperly process or secured	Visual

4.4.2.3 Unclassified defects. All defects that have no effect on function, safety, interchangeability, or life, but that are considered departures from good workmanship will be noted in writing. Workmanship deficiencies falling within this category and recurring in five consecutive lots, or ten lots or more within a thirty-day period will be added to the minor classification with no increase in AQL's.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.4.2.4 Recurring major deficiencies. A major deficiency (see 6.6) is recurring when the same defect occurs more than once in the same sample, or when the defect occurs in two successive samples. A major defect may be considered recurring when the historical inspection records ("P" Chart or approved equivalent) reflect such a condition. Recurring major deficiencies shall be cause for the entire lot or lots to be inspected for the recurring deficiencies. The deficiencies shall be corrected when found.

4.4.2.5 Recurring minor deficiencies. A minor deficiency (see 6.6) is recurring if it occurs more than twice in the same sample, or when the defect occurs in four successive samples. Recurring minor deficiencies shall be cause for the entire lot or lots to be inspected for the recurring deficiencies,sl corrected prior to acceptance.

4.5 Classification of tests.

(a) Acceptance tests 4.5.1 through 4.5.1.20
(b) Control tests 4.5.2 through 4.5.2.12
(c) Comparison tests (ICT) 4.5.3 through 4.5.3.15

4.5.1 Acceptance tests. To determine conformance to 3.6, each vehicle shall be operated a distance of 8 miles or more by the contractor and subjected to acceptance tests as specified in Table IV. Except for equipment and component installation and servicing performed by the contractor as a final processing of vehicles for acceptance, vehicles shall be completely assembled and serviced with fuel, lubricants, and fluid as specified, but need not be loaded with rated payload, except for holding test and amphibious floatation as specified in 4.5.1.17 and 4.5.3.3. After the tests, the vehicle shall be examined for evidence of fuel or lubricant leakage, or other deficiencies. The equipment and component installation and servicing performed by the contractor as a final processing will allow the omission of items such as floor plates, personnel seat cushions, OVE, decals, etc., from the vehicle during the testing operation.

4.5.1.1.1 Test failure. If a vehicle fails to pass any acceptance tests, specified herein, the Government inspector shall stop acceptance until evidence has been provided by the contractor that corrective action has been taken.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Table IV. Location for Tests

Title	Paragraph Numbers	Place of Manufacture	Government Proving Ground
Acceptance tests	4.5.1	X	X
Sealing and seals check	4.5.1.2	X	X
Special kit check	4.5.1.3	X	X
Doors covers and windov check	4.5.1.4	X	X
Engine check	4.5.1.5	X	X
Engine air induction systems check	4.5.1.5.1	X	X
Exhaust system check	4.5.1.6	X	X
Fuel and hydraulic systems leakage check	4.5.1.7	X	X
Rack linkage check	4.5.1.8	X	X
Generating system voltage (alternator) check	4.5.1.9.1	X	X
Light check	4.5.1.9.2	X	X
Heater electrical check	4.5.1.9.3	X	X
Electrical circuit tests	4.5.1.9.4	X	X
Controls check	4.5.1.10	X	X
Adjustment mechanism check	4.5.1.11	X	X
Bilge pump functional check	4.5.1.12	X	X
Speed test	4.5.1.13	X	X
Acceleration test	4.5.1.14	X	X
Engine starting test	4.5.1.15	X	X
Stopping test	4.5.1.16	X	X
Holding test	4.5.1.17	X	X
Turning test	4.5.1.18	X	X
Shallow water fording test	4.5.1.19	X	X
Winch check	4.5.1.20	X	X
Control tests	4.5.2	X	X
Carbon monoxide concentration test	4.5.2.3	X	X
Fuel cell check	4.5.2.4	X	X
Communication equiment check	4.5.2.5	X	X
Stowed equipment check	4.5.2.6	X	X
Folding blast cover check	4.5.2.7	X	X
Tailgate test	4.5.2.8	X	X
Water removal bilge pump check	4.5.2.9	X	X
Amphibious floatation test	4.5.2.10	X	X
Vibration and noise test	4.5.2.11	X	X
Fire extinguisher test	4.5.2.12	X	X
Comparison tests	4.5.3		X
Winterization equipment test	4.5.3.2		X
Floatation equipment test	4.5.3.3		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Table IV. Location for Tests (cont'd)

Title	Paragraph Numbers	Place of Manufacture	Government Proving Ground
Carbon monoxide concentration test	4.5.3.4		X
Fuel system slope test	4.5.3.5		X
Air transportable check	4.5.3.6		X
Environmental test	4.5.3.7		X
Cooling systems test	4.5.3.8		X
Water removal bilge pump check	4.5.3.9		X
Amphibious operational test	4.5.3.10		X
Trench crossing test	4.5.3.11		X
Vertical obstacle test	4.5.3.12		X
Climbing test	4.5.3.13		X
Winch operational test	4.5.3.14		X
Radio interference suppression test	4.5.3.15	X	

4.5.1.2 Sealing and seals check. To determine conformance to 3.4.1.1, prior to and after fording and amphibious operations, the vehicle shall be checked for the amount of water in vehicle and the leaking of lubricants.

4.5.1.3 Special equipment check. To determine conformance to 3.4.2 through 3.4.2.1.3 equipment when furnished and installed, shall be checked for proper installation and completeness.

4.5.1.4 Doors, covers and window check. To determine conformance to 3.4.3, all doors, covers, and windows shall be operated and checked for leaks and proper installation and functional requirements.

4.5.1.5 Engine check. To determine conformance to 3.4.4, the engine shall be checked for proper installation and any leaking of lubricants, fuel, and coolants.

4.5.1.5.1 Engine air induction systems check. To determine conformance to 3.4.4.1, the engine air induction system shall be checked for proper installation and leaks.

4.5.1.6 Exhaust system check. To determine conformance to 3.4.5, the exhaust system shall be checked for proper installation and leaks.

4.5.1.7 Fuel and hydraulic systems leakage check. To determine conformance to 3.4.6 through 3.4.6.2, the fuel and hydraulic systems shall be checked for leaks at all connections and sealed items.

4.5.1.8 Rack linkage check. To determine conformance to 3.4.6.3, the accelerator pedal shall be operated to full throttle, and the rack checked to assure that full open position has been reached when pedal is in contact with stop.

4.5.1.9 Electrical systems tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.1.9.1 Generating system voltage (alternator) check. To determine conformance to 3.4.7.1, with the alternator operating as specified, a final voltage check shall be made with a voltmeter, during or immediately after the road test.

4.5.1.9.2 Light check. To determine conformance to 3.4.7.2, all lights shall be operated during and after break-in run throughout all stages of operation, and checked for functional requirements.

4.5.1.9.3 Heater electrical check. To determine conformance to 3.4.7.3, the heater electrical control shall be turned on and the heater checked for functonal requirements.

4.5.1.9.4 Electrical circuit tests. To determine conformance to 3.4.7.4, the electrical circuits supplying current to the vehicle equipment shall be checked at all points to assure continuity throughout the circuits.

4.5.1.10 Controls check. To determine conformance to 3.4.8, all controls shall be operated and checked for functional requirements.

4.5.1.11 Adjustment mechanism check. To determine conformance to 3.4.9, all adjustment mechanisms shall be checked for proper adjustment and adjusted if required.

4.5.1.12 Bilge pump functional check. To determine conformance to 3.6.3, the bilge pump shall be operated and checked for functional requirements.

4.5.1.13 Speed test. To determine conformance to 3.6.4, vehicles shall be driven at speeds from 2 to 3 mph for not less than 5 minutes, and at speeds not to exceed 35 mph and checked for performance requirements.

4.5.1.14 Acceleration test. To determine conformance to 3.6.5, the vehicle shall be operated as specified and acceleration determined.

4.5.1.15 Engine starting test. To determine conformance to 3.6.6, the vehicle shall be driven up a 60 percent grade, engine stopped for not less than specified time and restarted. Vehicle shall be operated on side slopes as specified and engine stopped for not less than specified time then restarted.

4.5.1.16 Stopping test. To determine conformance to 3.6.7.1, the vehicle shall be driven at specified speed. Three stops shall be made and the results shall be averaged to determine acceptance.

4.5.1.17 Holding test. To determine conformance to 3.6.7.2, the vehicle shall be driven up specified grade, brakes applied and vehicle observed for movement, then with brakes locked for parking the vehicle shall be observed for movement. During this test vehicle shall be combat loaded or a simulated load of equal weight shall be placed on the vehicle, in a position that will not restrict the flow of engine air (intake or exhaust).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.1.18 Turning test. To determine conformance to 3.6.8, the vehicle shall be operated and turned to right and left in a full 360 degrees and checked for functional requirements.

4.5.1.19 Shallow water fording test. To determine conformance to 3.6.9.1, and 3.6.9.2, the vehicle shall be driven into water of specified depth without special equipment. water accumulation shall not exceed specified amount after 15 minutes of test.

4.5.1.20 Winch check. To determine conformance to 3.6.13 and 3.6.13.1, winch and controls shall be operated and checked for functional requirements.

4.5.2 Control test. Control tests for maintaining control of these requirements whose inspection would be of too long duration to be included under acceptance tests shall be conducted by the manufacturer as specified herein.

4.5.2.1 Frequency. The first vehicle off the production line, or one of the first ten vehicles produced, and thereafter one per month, shall be checked in accordance with the following control test.

4.5.2.2 Test failure. If a vehicle fails to pass any control test specified herein, the Government inspector shall stop acceptance of subsequent lots until evidence has been provided by the contractor that corrective action has been taken.

4.5.2.3 Carbon monoxide concentration test. To determine conformance to 3.4.5, the crew compartment shall be checked for carbon monoxide concentration.

4.5.2.4 Fuel cell check. To determine conformance to 3.4.6.1, the fuel cell and lines shall be checked for leaks before and after a road test on smooth, level, hard-surfaced roads.

4.5.2.5 Communication equipment check. To determine conformance to 3.4.7.4, the communication equipment leads and cable assemblies shall be checked for installation and functional requirements.

4.5.2.6 Stowed equipment check. To determine conformance to 3.4.10 all manufacturer and depot installed OVE shall be stowed (combat loaded) on the selected vehicle. All interior and exterior items shall fit in the spaces provided. The equipment shall be removed after the test. The OVE shall be of the latest configuration available to the contractor. The contractor shall be permitted to unpackage and repackage equipment used for test.

4.5.2.7 Folding blast covers check. To determine conformance to 3.4.13 the selected vehicle shall be checked for the mounting and operations of the blast covers.

4.5.2.8 Tailgate test. To determine conformance to 3.4.14, the tailgate of the selected vehicle shall be operated and checked for functional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.2.9 Water removal bilge pump check. To determine conformance to 3.6.3, the vehicle shall have sufficient water in hull to operate bilge pump and check the rate of water removal with the specified discharge head.

4.5.2.10 Amphibious floatation test. To determine conformance to 3.4.2.1.4 and 3.6.9.3, with floatation equipment installed the vehicle shall be placed in water of a depth to float vehicle and observed for floatation requirements.

4.5.2.11 Vibration and noise test. To determine conformance to 3.8, the vehicle noise level measured at the location indicated shall not be more than the specified db, when measured with a sound level meter which meets the requirements within a plus or minus 1 db as stated in the American Standards Association, Inc., Z24.3 - 1944, "American Standard for Sound-Level meters for the Measurement of Noise and Other Sounds" (or the latest revision thereof).

4.5.2.12 Fire extinguisher test. To determine conformance to 3.9, the fire extinguisher system shall be functionally tested and observed for operational requirements.

4.5.3 Comparison test. The Government may select vehicles at any time during the contract production period and subject vehicles to all tests specified in Table IV and Table V (Government Proving Ground tests). Tests shall be conducted by the Government at a site selected or approved by the Government. Vehicles selected for proving ground tests shall not include any vehicles previously tested for conformance to 4.5.2 by the manufacturer.

4.5.3.1 Test failure. Failure of any vehicle tested to comply with any of the requirements specified in the contract, or any major deficiency of a workmanship or materials nature occurring during or a result of the test cycle, may be considered cause for refusal to continue acceptance of vehicles by the Government until objective evidence has been taken to eliminate the condition which caused the failure.

Table V. 2000 Mile Test Combat Loaded
(Government Proving Grounds)

Course	Mileage & Speed
*Hard surface or gravel	200 miles at varying speeds up to maximum
Gravel and dirt road	500 miles at varying speeds up to maximum
Level cross country	650 miles at varying speeds up to maximum
*Hilly cross country	650 miles at varying speeds up to maximum
Amphibious	One (1) hour minimum at varying speeds up to maximum

*Hard surface road and hilly cross country mileage includes 10 miles with towed load.

4.5.3.2 Winterization equipment test. To determine conformance to 3.4.2.1 through 3.4.2.1.3, the winterization equipment shall be installed and the vehicle operated in the specified temperatures and equipment checked for functional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.3.3 Floatation equipment test. To determine conformance to 3.4.2.1.4, with the floatation kit installed the vehicle shall be operated into water of a depth to float vehicle and checked for performance and time requirements. This test may be accomplished during the amphibious test (see 4.5.3.11). Water contamination shall be not more than specified in 3.4.1.1.

4.5.3.4 Carbon monoxide concentration test. To determine conformance to 3.4.5, the crew compartment shall be checked for carbon monoxide concentration.

4.5.3.5 Fuel system slope test. To determine conformance to 3.4.6, with the vehicle operating on specified slopes the vehicle fuel system shall be observed for functional requirements.

4.5.3.6 Air transportability check. To determine conformance to 3.4.12, when required a vehicle shall be loaded into aircraft and checked for loading requirements.

4.5.3.7 Environmental tests. To determine conformance to 3.6 and 3.6.1, vehicle and equipment shall be operated in specified temperatures and observed for performance requirements.

4.5.3.8 Cooling systems test. To determine conformance to 3.6.2.1 through 3.6.2.3, the vehicle shall be operated in specified temperature and cooling system checked for functional requirements.

4.5.3.9 Water removal bilge pump check. To determine conformance to 3.6.3, the vehicle shall have sufficient water in hull to operate bilge pump and check the rate of water removal with the specified discharge head.

4.5.3.10 Amphibious operational test. To determine conformance to 3.6.9.3, the vehicle shall be operated amphibiously and observed for performance requirements.

4.5.3.11 Trench crossing test. To determine conformance to 3.6.10, the vehicle shall be operated over trenches of specified depth and width.

4.5.3.12 Vertical obstacle test. To determine conformance to 3.6.11, the vehicle shall be operated over vertical obstacles of specified height.

4.5.3.13 Climbing test. To determine conformance to 3.6.12, the vehicle shall be given a climbing test on specified grade.

4.5.3.14 Winch operationl test. To determine conformance to 3.6.13 through 3.6.13.2, the winch shall be operated as specified and checked for performance requirements.

4.5.3.15 Radio interference suppression test. To determine conformance to 3.6.14, the vehicle shall be subjected to a radio interference suppression test. as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery and storage shall be in accordance with MIL-C-62053.

6. NOTES

6.1 Intended use. Vehicles covered by this specification are intended for use by the Armed Forces as a Missile launcher and carrier. The vehicle must be air transportable and capable of cross-country operations.

6.2 Procurement document should specify the following:

(a) Title, number, and date of this specification.
(b) Preproduction model if required (see 3.1).
(c) Special equipment if required (see 3.4.2).
(d) Radio Interference suppression required (see 3.6.14).

6.3 Safety precautions. Caution should be used in handling carbon dioxide fire-extinguisher cylinders. Extreme care should be exercised during reinstallation to avoid tripping fire-extinguisher control system since physical injury is highly probable.

6.4 Process average. Sampling may be initiated if the process average value for the first twenty vehicles inspected is less than the AQL specified in the classification of defects for major and minor defects.

$$\text{Process Average} = \frac{\text{Number of defects}}{\text{Number of vehicles inspected}} \times 100$$

If the computed process average exceeds the specified AQL, 100% inspection shall be performed and continues until such time that the process average for twenty consecutive vehicles is less than the specified AQL.

6.5 The following shall be used with the classification of defects:

(a) Weep: Any evidence of fluid beyond the seal.
(b) Seep: Any evidence of fluid beyond the seal that does not result in function of a droplet.
(c) Droplet: Any evidence of fluid beyond the seal that results in the formation of a droplet.
(d) Drip: Any evidence of fluid beyond the seal where droplet forms and falls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

6.6 Definitions of recurring major and minor defects. The Government Inspector will verify that a thorough inspection of each vehicle is performed by the contractor not only for the listed characteristics, but also for any other departures from good workmanship. The Government Inspector will assure that all deficiencies encountered during the inspection are enumerated on the deficiency sheet for the vehicle. The defects noted on Deficiency Sheet shall contain sufficient description to enable the Government Inspector and the contractor's representative to classify the deficiency in accordance with the classification of defects of the vehicle specification and definitions contained in MIL-STD-105. Corrective action shall be taken for recurring deficiencies.

Custodian:
Army - AT

Preparing activity:
Army - AT
Project No. 2320-A596

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

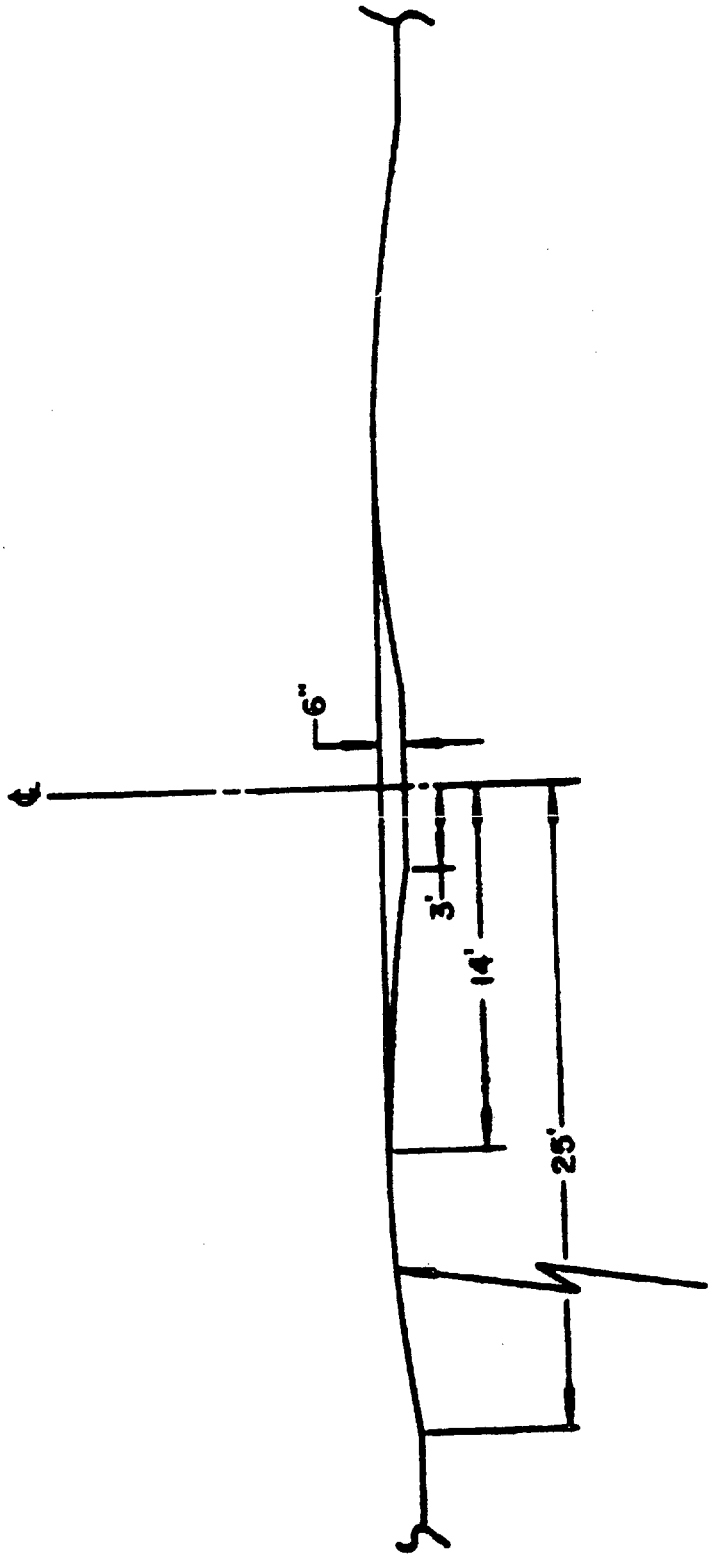


FIGURE 1 - PROFILE OF TEST TRACK (ARTIFICIAL BUMP)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U.S. Army Tank-Automotive Command
Warren, Michigan 48090
AMSTA-R

OFFICIAL BUSINESS

Commanding General
U.S. Army Tank-Automotive Command
Warren, Michigan 48090
AMSTA-R

FOLD

303-227 (Z-1192)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

MIL-C-62092 (AT)

ORGANIZATION	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 65 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.