MILITARY SPECIFICATION
DELAY CELL: 7615435

This specification is approved for use by the U.S. Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type ultrasonic delay lir operated at 60 megahertz (MHz). It is used to generate a series pulses for range calibration (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government Documents

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, ar handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

WW-T-791	Tube, Brass, Seamless

Beneficial comments (recommendations, additions, deletions) ar any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Missile Command, ATTN: AMSMI-EDS, Redstone Arsenal, AL 35898-5270, by using the self-addressed Standardization Document Improveme Proposal (DD Form 1426) appearing at the end of this document by letter.

FSC 1285

DISTRIBUTION STATEMENT A: Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-F-13926	Fire Control Material: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment & Tools for Army Materiel, Packaging of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-171	Finishing of Metal and Wood Surfaces

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein.

DRAWINGS

ARMY

7615435	Delay Cell: 7615435
IEL 7615435	List of Inspection Documents

PACKAGE DATA SHEET

Army Missile Command	7615435 Packaging Data Sheet

(Copies of specifications, standards, handbooks, drawings and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subjected to first article inspection (see 4. and 6.).

3.2 Fabrication. The delay cell shall be manufactured in accordance with drawing 7615435 and drawings pertaining thereto.

3.3 General specifications. The delay cell shall meet the requirements of MIL-F-13926, as specified below.

a. Dimensions and tolerances.
b. Inorganic protective surface finishes.
c. Part identification and marking.
d. Workmanship.

3.4 Environmental service conditions.

3.4.1 Vibration. The delay cell shall withstand a vibration of a simple harmonic motion having and amplitude of 0.015 inch (0.03 inch total excursion). The frequency shall be varied uniformly between the limits of 10 to 55 hertz (Hz) and return to the 10 hertz. This cycle shall be traversed in 1 minute ± 15 seconds. The motion shall be applied for a period of 10 minutes in each direction of the three mutually perpendicular axes (total of 30 minutes). Subsequent to vibration, the delay cell shall not be damaged nor adversely affected and shall meet all the requirements of this specification.

3.4.2 Operating temperatures. The delay cell shall meet the requirements of 3.5 with the exception of 3.5.1.1 and 3.5.1.2 when exposed to a temperature of -20° Fahrenheit (F) and +150°F for a minimum of 2 hours at each temperature.

3.4.3 Storage temperatures. The delay cell shall meet the requirements of 3.5 at a temperature between 60°F and 90°F after having been exposed to temperatures of -80°F and +160°F for a minimum of 2 hours at each temperature.

3.5 Performance. With suitable termination consisting of an antiresonant circuit and an applied 5-volt peak amplitude, 2-microsecond (u sec) pulse at approximately a 1500-pulse per second repetition rate to the crystal, the following performance requirements shall be met.

3.5.1 Attenuation. The loss to the first reflection, at a frequency of 60 ±2 MHz shall be between 46 and 55 decibels (db).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the currentversion before use.

3.5.1.1 Loss to eleventh reflection. At a temperature between 60°F and 90°F, and at a frequency of 60 ±2 MHz, the loss to the eleventh reflection shall be not more than 20 db below that of the first reflection.

3.5.1.2 Less that 80db. At a temperature between 60°F and 90°F, and at a frequency of 60 ±2 MHz, the number of pulses having attenuation of 80 db or less, relative to the applied pulse, shall be not greater than 45.

3.5.1.3 Spurious pulses. In the interval between the first and the eleventh reflected pulse, Spurious pulses shall be down at least 90 db from the applied pulse. Spurious pulses are defined as energy pulses other than the applied and reflection pulses occurring at 12.2 us intervals after the applied pulse.

3.5.1.4 Reflection size. Each reflection shall be less than or equal to the previous reflection.

3.5.2 Bandwidth. The loss to the first reflection, at 2 MHz intervals from 50 to 70 MHz, shall meet the following conditions:

a. $F_2 - F_1$ shall be equal to or greater than 10 MHz.

b. $(F_2 + F_1)/2$ shall be between 58 and 62 MHz.

Where F_1 and F_2 represent frequencies corresponding to points at which the loss is 6 db greater than the loss measured at 60 MHz.

3.5.3 Delay time. The time lapse between pulse reflections shall be 12.2 u sec. The time delay from the edge of the initial pulse to the corresponding edge of the second reflection shall be 24.4 ± 0.15 u sec.

3.5.4 Insulation resistance. The insulation resistance across the unit shall be at least 100,000 ohms with a voltage of 75 to 100 volts, direct-current (Vdc) applied.

3.5.5 Capacitance. The delay cell shall have a capacitance value between 26 and 30 picofarads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unles otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality Conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-F-13926. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.4 First article inspection. When the contract specifies inspection of First Article samples, the following paragraphs shall apply as applicable.

4.4.1 First article inspection. First article test samples shall be submitted in accordance with contract requirements. Unless otherwise specified in the contract, two samples shall be submitted to the procuring agency for approval of design and construction features. First article samples shall meet all inspection provisions of 4.5, 4.6, and 4.8 as well as any additional tests that may be specified in the contract. The Government reserves the right to conduct any or all examinations or tests as may be deemed necessary.

4.4.2 First article disapproval. Failure of any one of a first article sample submitted shall be cause for disapproval by the government and subsequent action as required by the contract clauses applicable to first article testing.

4.5 Quality conformance inspection.

4.5.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and perservation of lots shall be in accordance with MIL-STD-105.

4.5.2 Examination and tests. Components and subassemblies shall be inspected in accordance with MIL-F-13926, and the Supplementary Quality Assurance Provisions (SQAP) listed in the List of Inspection Documents (LID), IEL-7615435. Examinations and tests related to section 3 herein shall be performed on a single defect (individual characteristics) basis in accordance with

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the currentversion before use.

MIL-STD-105, and the sampling plans specified in tables I, II and III herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE I. Classification of defects.

Classification	Test	Requirement paragraph	Test paragraph
Critical: None			
Major: AQL 1.0 percent defective			
101	Vibration	3.4.1	4.8.2.1
102	Attenuation	3.5.1	4.8.3.1
		3.5.1.1	4.8.3.2
		3.5.1.2	4.8.3.2
103	Spurious pulses	3.5.1.3	4.8.3.2
104	Bandwidth	3.5.2	4.8.3.3
105	Delay time	3.5.3	4.8.3.4
106	Insulation resistance	3.5.4	4.8.3.5
107	Capacitance	3.5.5	4.8.3.6
108	Thread 5/8 -32NS-2A	3.2	4.8.4
Minor: None			

4.5.3 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with MIL-STD-105.

4.5.4 Certification. Certification shall include test data and results for all characteristics specified below. Certification will be required prior to performing final acceptance inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

and shall suffice for the remainder of the production quantities, provided the manufacturing processes and techniques used to produce the items for which certification was issued have not been changed or revised. Any and all changes will require a new certification from the contractor.

4.6 Special sampling.

4.6.1 General. One delay cell shall be selected at random as a special sampling from each 100 produced. The sample shall meet the requirements and tests in table II.

TABLE II. Special sampling.

Classification	Characteristic	Requirement paragraph	Test Method
301	Fabrication	3.2	Applicable drawing, visual
302	General specification	3.3	Visual, MIL-F-13926
303	Finish	7615435 & MIL-STD-171	
304	Materials	7615435 & WW-T-791	Certification

4.6.2 Environmental. Three delay cells shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall have met the requirements and tests in table I and shall then meet the requirements and tests in table III.

TABLE III. Environmental tests.

Classification	Test	Requirement paragraph	Test paragraph
305	Operating temperature	3.4.2	4.8.2.2
306	Storage temperature	3.4.3	4.8.2.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

4.6.2.1 Disposition of samples. Parts subjected to the environmental test shall not be supplied to the Government as part of the contract quantity.

4.6.3 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.5.3).

4.7 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.7.1 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.7.2 Contractor furnished inspection equipment.

4.7.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifictions or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the LID, IEL-7615435.

4.7.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the test methods and procedures of this specification (see 4.8) and with the component inspection requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.7.3 Test equipment. In conjunction with 4.7.2.2 the following standard test equipment shall be utilized in the performance of the applicable tests as specified in 4.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

	NOMENCLATURE	DESCRIPTION
1.	Signal source, pulsed IF or equivalent	50-70 megahertz ± 0.5%, pulse width 2 to 4 microseconds, repetition rate 1000 to 100,000 pulses per second, pulse amplitude 10 volts peak-to-peak or greater into a 50 ohm resistive termination, IF pulse rise and fall times 100 nanoseconds maximum, sync and count pulse outputs, IF pulse on-off isolation 80 db or greater.
2.	Universal counter (electronic) or equivalent	Pulse rate counter 1000 to 100,000 pulses per second and equivalent time interval. Time interval accuracy of 5 nanoseconds minimum.
3.	Attenuator, variable coaxial or equivalent	100 db range in 1 db steps, nominal impedance 50 ohms, maximum VSWR 1.3, frequency DC to 100 MHz, minimum power 0.5 watts average, minimum accuracy ± 0.25 db.
4.	Oscilloscope	Frequency response DC to 100 MHz minimum, sensitivity 5 millivolts per division minimum, input impedance 1 megohm nominal paralleled by less than 25 picofarads.
5.	Log amplifier (IF) or equivalent	Center frequency 60 MHz, IF bandwidth 20 MHz minimum, rise time 50 nanoseconds minimum, dynamic range 90 db minimum, input impedance 50 ohms nominal.
6.	Power supply	As required to power log amplifier.
7.	Test fixture	As required to mount test components and item under test.
8.	Switching diodes CR1 and CR2	1N5711 Schottky Barrier diodes.
9.	Terminating resistor R1 or equivalent	50 ohms ± 5%, 1/2 watt composition (non-inductive)
10.	Isolation resistor R2	100 ohms ± 5%, 1/4 watt composition (non-inductive)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

11.	Variable inductor L1 or equivalent	As required to tune input of unit under test at 60 MHz. Typically 0.2 to 0.3 microhenries with a minimum Q of 60 at 60 MHz.
12.	Coaxial termination or equivalent	Impendance as necessary to match log amp output, VSWR 1.15 maximum, frequency range DC to 100 MHz minimum, minimum power 0.5 watts average.
13.	Power supply	100 volts, 0.0005 amperes
14.	Resistor	0.1 megohm ± 5% 1 watt
15.	Megohmmeter	Range 0 to 100 megohms, accuracy ± 5% at 0.1 megohms.
16.	Capacitance test bridge	Range 5 picofarads to 100 picofarads, accuracy 1.5%.

4.8 Test methods and procedures.

4.8.1 Fabrication. The delay cell shall be subjected to visual, tactile and dimensional inspection for conformance to the applicable drawing and specifications referenced on drawing 7615435 to determine conformance to 3.2. Dimensional inspection shall be performed using standard measuring equipment.

4.8.2 Environmental test.

4.8.2.1 Vibration. This test shall be conducted in accordance with procedure I of MIL-F-13926 except that the frequency, amplitude and cycle time specified in 3.4.1 shall be applied for a period of 10 minutes in each of the 3 mutually perpendicular directions (total of 30 minutes). Performance measurements of the delay cell are not required during vibration testing. Subsequent to vibration the delay cell shall be subjected to visual and tactile examination for evidence of physical damage or failure. The delay cell shall then be subjected to the examinations and tests specified in 4.8.3 and 4.8.4 to determine compliance with the requirements referenced therein.

4.8.2.2 Storage and operating temperature. This test shall be conducted in accordance with procedure I of MIL-F-13926 at the temperatures and duration specified in 3.4.2 and 3.4.3. While stabilized at each temperature extreme specified in 3.4.2 the delay cell shall be energized and be continuously operated for 15 minutes. At the completion of this operating period the delay cell shall be subjected to the tests specified in 4.8.3 to 4.8.3.6 inclusive with the exception of 4.8.3.2, to determine compliance

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:21Z
Check the source to verify that this is the current version before use.

with the requirements referenced therein. Upon completion of the specified exposures and return to standard ambient temperature (60°F to 90°F) the delay cell shall be visually examined for damage and then subjected to the tests specified in 4.8.3 and 4.8.4 to determine conformance to the requirements referenced therein.

4.8.3 Performance. The delay cell shall be subjected to the following tests utilizing the test equipment and components specified in 4.7.3. The applicable test equipment shall be connected to the unit under test as shown in figures 1 and 2. Tests shall be conducted using the applied input pulse of the amplitude, time duration and repetition rate specified in 3.5.

4.8.3.1 Attenuation. Test equipment shall be connected as shown in figure 1. The delay cell and load capacities of the unit under test shall be antiresonated at a frequency of 60 megahertz. The termination resistance shall be a total of 150 ± 5 ohms which shall be made up of item 3 plus necessary series resistance. The voltage applied to the delay cell shall be 2 microsecond pulses repeated at a repetition rate of approximately 1500 pulses per second, modulating a radio frequency carrier which may be varied from 50 to 70 megahertz at a 5 volt peak amplitude. Output pulses shall appear at equal intervals of 12.2 microseconds. The loss of the first reflection as measured in decibels shall be measured in 1 megahertz steps from 50 MHz to 70 MHz with the maximum db loss point within this range between 46 and 55 decibels in compliance with 3.5.1.

4.8.3.2 Decibel loss. The tests for the db loss of the eleventh reflection specified in 3.5.1.1 and the number of pulses having an attenuation not greater than 80 db as specified in 3.5.1.2 shall be performed concurrently with the test specified in 4.8.3.1. Conduct test within the temperature range specified in 3.5.1.1 and 3.5.1.2. With an input pulse at a frequency of 60 ± 2 MHz, the loss to the eleventh reflection shall not be more than 20 db below that of the first reflection in compliance with 3.5.1.1. The number of pulses visible at a level 80 db or less shall not exceed 45 pulses in compliance with 3.5.1.2. Determine the level of any spurious responses, these responses shall be at least 90 db below the applied pulse in compliance with 3.5.1.3. The decrease in amplitude of the successive pulses shall be in accordance with 3.5.1.4.

4.8.3.3 Bandwidth. Utilize the same set-up specified in 4.6.3.1. The bandwidth is obtained by measuring and recording the loss to the first reflection in decibels at 2 megahertz intervals from 50 MHz to 70 MHz in order to form a smooth curve. The bandwidth is the difference between the highest and lowest frequencies and as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

determined within F_1 and F_2, specified in 3.5.2, represent frequencies corresponding to points at which the loss is 6 db greater than the loss at 60 MHz. The difference between the two frequencies shall be greater than 10 megahertz and one-half the summation of the frequencies $((F_1 + F_2)/2)$ shall fall between 58 MHz and 62 MHz to determine compliance with 3.5.2.

4.8.3.4 Delay time. This test shall be conducted with the same set-up specified in 4.6.3.1. The delay time between pulse reflections shall be measured at a frequency of 60 ± 2 MHz and shall be 12.2 microseconds. The time lapse from the edge of the applied pulse to the corresponding edge of the second reflection shall be 24.4 ± 0.15 microseconds in compliance with the requirements of 3.5.3.

4.8.3.5 Insulation resistance. This test shall be conducted by measuring the insulation resistance between mutually insulted parts by means of the test equipment connected as shown in figure 3. With the DC voltage specified in 3.5.4 applied across the delay cell, the insulation resistance shall be read on the megohmmeter (item 15 of 4.7.3) to determine compliance with the requirements specified in 3.5.4.

4.8.3.6 Capacitance. This test shall be conducted by measuring the capacitance value to the delay cell between the case and the delay line terminal by means of a capacitance test bridge (item 16 of 4.7.2.4). This capacitance measurement shall be within the limits specified in 3.5.5.

4.8.4 The 5/8-32NS-2A thread. This threaded diameter shall be inspected using the special thread ring gages specified in IEL-7615435 in conjunction with the test of 4.8.1 for determining conformance to 3.2.

4.9 Inspection of packaging. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and section 5 herein.

5. PACKAGING.

5.1 Preservation, packing unitization, and marking. Level A or B (see 6.3).

5.1.1 Level A or B. Preservation, packing, unitization, and marking shall be in accordance with packaging data sheet APN 7615435 and specifications referenced therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The delay cell is intended to generate a pulse train of eleven electrical pulses (minimum) having a pulse repetition period of 12.2 u sec. These pulses are the 2000 yard calibration marks, used to zero and calibrate the tracking range computer.

6.2 Application. The delay cell is located in the tracking r-f coupler or target AFC which are parts of the tracking antenna. The tracking antenna is an assembly of the following systems:

a. Guided Missile Fire Control System AN/MSG-3.
b. Antiaircraft Fire Control Systems M33C and M33D.
c. NIKE AJAX
d. NIKE HERCULES
e. Improved NIKE HERCULES
f. NIKE HERCULES SAMCAP
g. NIKE HERCULES Solid State Receiver

6.3 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of preservation, packing and packaging (see 5.1).
c. Applicable stock number.
d. Order of document procedure.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-MI

Preparing activity:
Army-MI

Project No. 1285-A590

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

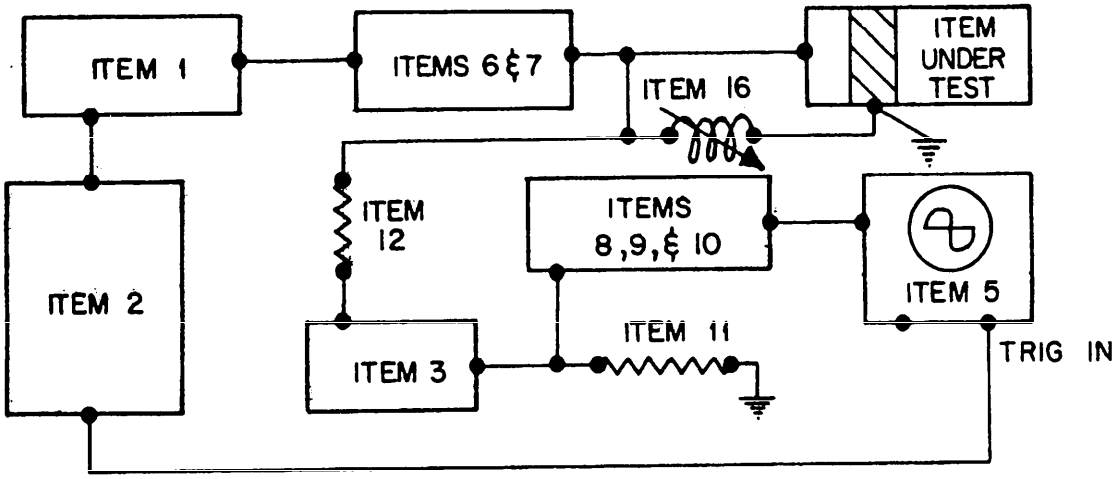


FIGURE 1 - ATTENUATION & BANDWIDTH TESTS

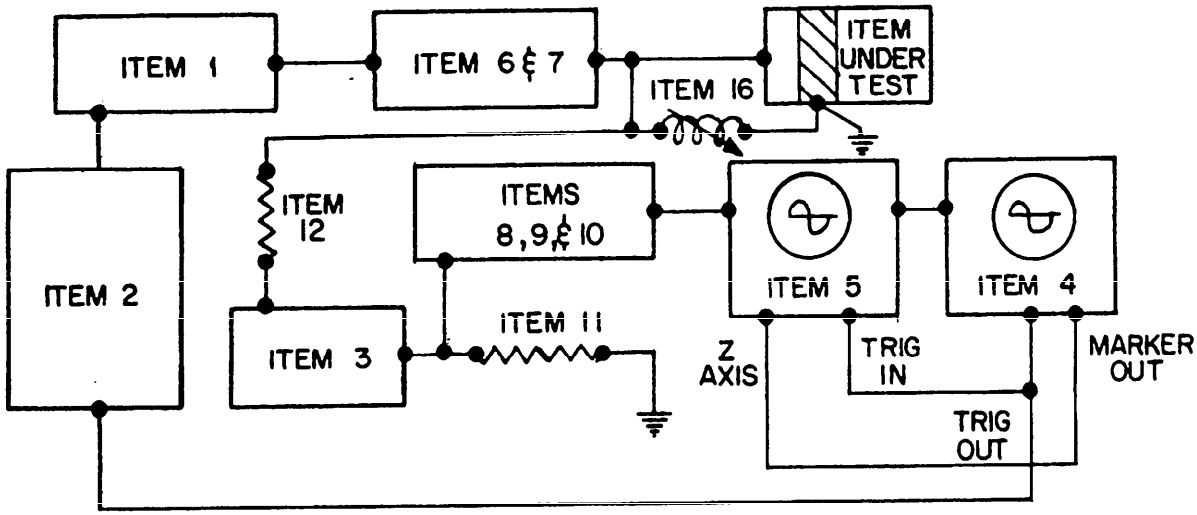


FIGURE 2 - DELAY TIME TESTS

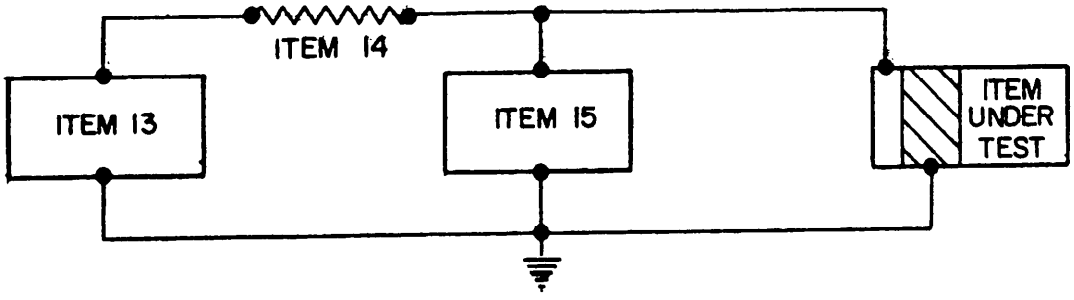


FIGURE 3 - INSULATION RESISTANCE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:21Z
Check the source to verify that this is the current version before use.

NSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use ubmitting comments and suggestions for improvements. All users of military standardization documents are invited to provi uggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, an ailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w oo rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the roblems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an cknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being onsidered.

IOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of pecification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization o waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander, U.S. Army Missile Command,
ATTN: AMSMI-EDS, Redstone Arsenal, Al
35898-5270

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:21Z
Check the source to verify that this is the currenversion before use.