MIL-HDBK-1010
16 OCTOBER 1989
SUPERSEDING
MIL-HDBK-1010/1
MIL-HDBK-1010/2
30 SEPTEMBER 1988

# MILITARY HANDBOOK

## COST ENGINEERING: POLICY AND PROCEDURES




AMSC N/A

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

AREA FACR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## ABSTRACT

Current criteria and procedures are presented for use in the preparation and review of the Activities' Project Data Sheet, Facility Study Cost Estimates, and the EFD's Cost Certification Estimates for MILCON construction and operational/maintenance projects at all naval shore facilities. General guidance for other types of cost estimates is also provided.

Projects have four parts of equal importance: requirement, justification, scope, and cost. The preparation of documents and the reviews are usually satisfactory with full attention given to these four parts.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# FOREWORD

This publication presents the Naval Facilities Engineering Command (NAVFACENGCOM) criteria and procedures related to the preparation and review of the Activity's Facility Study and the Engineering Field Division's (EFD) Cost Certification estimates for the Military Construction Program, including Operations and Maintenance (O&M) projects. This publication is intended to be a cost estimate preparation and review guide, and should not be used without full consideration of scope, additional functional features, and supporting facilities.

MIL-HDBK-1010 provides guidance, procedure, and examples. The guidance costs given are for two consecutive fiscal years based on an area cost factor of 1.00. The source of information is the EFD award data. The adjusted unit costs have been escalated to a common date for one fiscal year, and have been adjusted for size and area cost factors.

Design cannot remain static any more than can the functions it serves or the technologies it uses. Accordingly, recommendations for improvement are encouraged and should be furnished to the appropriate EFD point of contact as noted in paragraph 1.4.

THIS HANDBOOK SHALL NOT BE USED AS A REFERENCE DOCUMENT FOR PROCUREMENT OF FACILITIES CONSTRUCTION. IT IS TO BE USED IN THE PURCHASE OF FACILITIES ENGINEERING STUDIES AND DESIGN (FINAL PLANS, SPECIFICATIONS, AND COST ESTIMATES). DO NOT REFERENCE IT IN MILITARY OR FEDERAL SPECIFICATIONS OR OTHER PROCUREMENT DOCUMENTS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# COST ENGINEERING: POLICY AND PROCEDURES

## CONTENTS


Page

PART 1 PROJECT DATA SHEET (PDS) AND FACILITY STUDY COST GUIDANCE

Section 1 INTRODUCTION
1.1 Purpose....1
1.2 Background....1
1.3 Importance....1
1.4 Comments or Suggestions....1

Section 2 SCOPE CONSIDERATIONS
2.1 Introductory Paragraph....2
2.2 Operation and Maintenance Support Information (OMSI)....2
2.2.1 Types of OMSI....2
2.2.2 OMSI Estimate....3
2.3 Intrusion Detection Systems (IDS)....6
2.3.1 Non-MCON Fundable IDS....6
2.3.2 Technical Support....6
2.4 Land Acquisition....6
2.5 Hyperbaric Requirements....6
2.6 Shielding Requirements....6
2.6.1 Radio Frequency Interference (RFI/TEMPEST/ HEMP (High Altitude Electromagnetic Pulse)/ EMP (Electromagnetic Pulse) Shielding....7
2.6.2 Coordination Required to Meet Objectives....7
2.7 Uninterruptible Power System (UPS)....7
2.8 Communication Requirements....7
2.8.1 Telephone and Communications Installations....7
2.8.2 Funding Responsibilities....7
2.8.3 Funding Exceptions....8
2.9 Built-in Retrieval Equipment Racks (Warehouses)....8
2.9.1 MCON Funded....8
2.9.2 OPN Funded....8
2.9.3 Warehouse Design....8
2.10 Asbestos Related Work....8
2.11 Computation of Gross Area....8
2.11.1 BEQ Area Requirements....9
2.11.2 BOQ Area Requirements....9
2.12 International Balance of Payments (IBOP)....9
2.12.1 IBOP Implications....9
2.12.2 Normal Procedures....9
2.12.3 Planned Procedures....12
2.12.4 Basis for Choice of Construction Procedure....12
2.12.5 Presentation of IBOP Data on DD Form 1391....12




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

2.12.6 Requirements Regarding Returns to the United States....12
2.13 Project Data Sheet....12
2.14 Project Data Sheet Flow Chart....12

Section 3 FACILITIES STUDY COST DEVELOPMENT
3.1 Instructions for DD Form 1391....17
3.2 Instructions for Building SF Cost Development..18
3.3 Supporting Facilities....18
3.3.1 Special Foundation Features....18
3.3.2 Electrical Utilities....19
3.3.3 Mechanical Utilities....19
3.3.4 Roads, Parking, and Sidewalks....19
3.3.5 Site Improvements....19
3.3.6 Demolition....19
3.3.7 Contaminated Soil....19
3.3.8 Asbestos Removal....19
3.3.9 Supporting Facilities - Cost....19
3.3.10 Cost Model....19
3.4 Proposed Site Plan....19
3.5 Pricing Sources....20

Section 4 AREA COST FACTORS
4.1 Stateside Area Cost Factors....26
4.2 Overseas Area Cost Information....31

Section 5 GUIDANCE COSTS
5.1 Primary Facility Guidance Costs....32
5.2 Supporting Facilities Guidance Cost....32

Section 6 FACILITY STUDY SAMPLE ESTIMATE
6.1 DD Form 1391....50
6.2 Building Square Foot Cost Development....50
6.3 Supporting Facilities Cost Development....50

Section 7 CES STANDARD SYSTEMS LIST
7.1 Interior....55
7.2 Exterior....57

Section 8 SUPPLEMENTAL INFORMATION
8.1 Blank Forms and References....60
8.2 SI Conversion Factors....60
8.3 Units of Measure and Their Symbols....60
8.4 Acronyms and Abbreviations....60

PART 2 COST CERTIFICATION GUIDANCE

Section 9 INTRODUCTION
9.1 Purpose and Background....84
9.2 Importance....84
9.3 Contents....84
9.4 Comments or Suggestions....84



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 10 SCOPE CONSIDERATIONS
10.1 Introductory Paragraph....85
10.2 Operation and Maintenance Support Information (OMSI)....85
10.2.1 Types of OMSI....85
10.2.2 OMSI Estimate....86
10.3 Intrusion Detection Systems (IDS)....89
10.3.1 Non-MCON Fundable IDS....89
10.3.2 Technical Support....89
10.4 Land Acquisition....89
10.5 Hyperbaric Requirements....89
10.6 Shielding Requirements....89
10.6.1 Radio Frequency Interference (RFI)/TEMPEST/ HEMP (High Altitude Electromagnetic Pulse)/ EMP (Electromagnetic Pulse) Shielding....90
10.6.2 Coordination Required to Meet Objectives....90
10.7 Uninterruptible Power System (UPS)....90
10.8 Communication Requirements....90
10.8.1 Telephone and Communications Installations....90
10.8.2 Funding Requirements....90
10.8.3 Funding Exceptions....91
10.9 Built-in Retrieval Equipment Racks (Warehouses)....91
10.9.1 MCON Funded....91
10.9.2 OPN Funded....91
10.9.3 Warehouse Design....91
10.10 Asbestos Related Work....91
10.11 Computation of Gross Area....91
10.11.1 BEQ Requirements....92
10.11.2 BOQ Area Requirements....92
10.12 International Balance of Payments (IBOP)....92
10.12.1 IBOP Implications....92
10.12.2 Normal Procedures....95
10.12.3 Planned Procedures....95
10.12.4 Basis for Choice of Construction Procedure....95
10.12.5 Presentation of IBOP Data on DD Form 1391....95
10.12.6 Requirements Regarding Returns to the United States....95
10.13 Instructions for DD Form 1391....95
10.14 Instructions for Budget Estimate Summary Sheet.98
10.15 Instructions for the Building SF Cost Development Sheet....100

Section 11 PRIMARY AND SUPPORTING FACILITIES DEFINITIONS
11.1 Primary Facility....104
11.2 Supporting Facilities....104
11.2.1 Special Foundation Features....104
11.2.2 Electrical Utilities....104
11.2.3 Mechanical Utilities....104
11.2.4 Roads, Parking, and Sidewalks....104
11.2.5 Site Improvements....104
11.2.6 Demolition....104
11.2.7 Contaminated Soil....104



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

11.2.8 Asbestos Removal.....104
11.3 Supporting Facilities - Cost.....105
11.4 Proposed Site Plan.....105
11.5 Pricing Sources.....105

Section 12 AREA COST FACTORS
12.1 Stateside Area Cost Factors.....106
12.2 Overseas Area Cost Information.....111

Section 13 GUIDANCE COSTS
13.1 Primary Facility Guidance Costs.....112
13.2 Supporting Facilities Guidance Cost.....112

Section 14 COST CERTIFICATION SAMPLE ESTIMATE
14.1 DD Form 1391.....130
14.2 Building Budget Estimate Summary Sheet.....130
14.3 Building Square Foot Cost Development.....130
14.4 Cost Estimate Backup Sheet (LANTDIV).....130
14.5 Worksheet.....130
14.6 Cost Model Questionnaire.....142

Section 15 CES STANDARD SYSTEMS LIST
15.1 Interior.....163
15.2 Exterior.....165

Section 16 SUPPLEMENTAL INFORMATION
16.1 Conversion Factors.....168
16.2 Blank Forms and References.....168
16.3 Acronyms and Abbreviations.....168

PART 3 CONSTRUCTION COST ESTIMATES

Section 17 CONSTRUCTION COST ESTIMATES
17.1 General.....204
17.1.1 Detailed Cost Estimate Required With Each Submittal.....204
17.1.2 Uses of the Cost Estimate.....204
17.2 Preliminary (35%) Estimate.....204
17.2.1 Preliminary Estimate Based on Materials Take-Off.....204
17.2.2 Preliminary Estimate Should Monitor the Estimated Construction Cost.....204
17.3 Prefinal Estimate.....204
17.3.1 Prefinal Requirements.....204
17.3.2 Structure of Estimates and Work Requiring Multiple Estimates.....204
17.3.3 CES Estimates.....205
17.4 Final Estimate.....206

Section 18 SAMPLE CONSTRUCTION COST ESTIMATE
18.1 Summary Report - System.....207
18.2 Input Report.....210




Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

18.3 Backup Report - System Specification.....213
18.4 Summary Report - Specification Section.....220
18.5 Detailed Backup Report - Specification Section.....227
18.6 Input Listing (Sorted).....234

PART 4 OTHER TYPES OF ESTIMATES

Section 19 ESTIMATES FOR CHANGE ORDERS
19.1 Estimates for Change Orders.....238
19.2 Sample Change Order Estimate.....239
19.2.1 Change Order Cost Estimate Backup Sheet (LANTDIV).....242

Section 20 ESTIMATES FOR NEGOTIATED CONSTRUCTION CONTRACTS
20.1 Negotiated Construction Contracts.....247

Section 21 ESTIMATES FOR SPECIAL PROJECTS
21.1 Two-Step Procedures.....248

Section 22 SUPPLEMENTAL INFORMATION
22.1 Blank Forms.....249

PART 5 COST DATA REFERENCES

Section 23 CES STANDARD SYSTEMS NARRATIVES
23.1 CES Standard Systems Narratives.....254
23.2 Award Cost Data.....283

## APPENDICES

APPENDIX A Blank Forms and References.....61
APPENDIX B SI Conversion Factors.....76
APPENDIX C Units of Measure and Their Symbols.....77
APPENDIX D Acronyms and Abbreviations.....78
APPENDIX E Air Conditioning Tonnage Guide.....82
APPENDIX F Conversion Factors.....169
APPENDIX G Blank Forms and References.....170
APPENDIX H Acronyms and Abbreviations.....199
APPENDIX I Blank Forms.....250
APPENDIX J Award Cost Data.....284

## FIGURES

1 Sample IBOP Summary.....11
2 Project Data Sheet.....13
3 Project Submission Routes.....15
4 Components of Project Documentation.....16
5 DD Form 1391.....21



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

6 Building SF Cost Development.....22
7 Supporting Facilities Cost Development.....23
8 Size Adjustment Chart.....24
9 Protected NAVFAC Cost Index.....25
10 DD Form 1391.....51
11 Building Square Foot Cost Development.....52
12 Supporting Facilities Cost Development.....54
13 Sample IBOP Summary.....94
14 Sample 1391 for Cost Certification Estimate....97
15 Building Budget Estimate Summary Sheet.....99
16 Building SF Cost Development.....101
17 Size Adjustment Chart.....102
18 Projected NAVFAC Cost Index.....103
19 DD Form 1391.....131
20 Budget Estimate Summary Sheet.....133
21 Building SF Cost Development.....134
22 Cost Estimate Backup Sheet (LANTDIV).....135
23 Summary Report - System.....208
24 Input Report.....211
25 Backup Report - System Specification.....214
26 Summary Report - Specification Section.....221
27 Detailed Backup Report - Specification Section.....228
28 Input Listing (Sorted).....235
29 Change Order Estimate.....240
30 Change Order Cost Estimate Backup Sheet (LANTDIV).....243

TABLES

1 Examples of Facilities Usually Requiring Type A OMSI....4
2 Examples of Facilities Usually Requiring Type B OMSI....4
3 Examples of Facilities Usually Requiring Type C OMSI....5
4 Examples of OMSI Cost for Preliminary Estimates.....5
5 Bachelor Enlisted Quarters Area Table.....10
6 Primary Facility Guidance Costs.....33
7 Supporting Facilities Guidance Costs.....37
8 Examples of Facilities Usually Requiring Type A OMSI...87
9 Examples of Facilities Usually Requiring Type B OMSI...87
10 Examples of Facilities Usually Requiring Type C OMSI...88
11 Examples of OMSI Cost for Preliminary Estimates.....88
12 Bachelor Enlisted Quarters Area Table.....93
13 Primary Facility Guidance Costs.....113
14 Supporting Facilities Guidance Costs.....117

REFERENCES.....341



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# PART 1: PROJECT DATA SHEET (PDS) AND FACILITY STUDY COST GUIDANCE

## Section 1: INTRODUCTION

1.1 Purpose. This guide is for the preparation of planning cost estimates in support of the Shore Facilities Planning System. It supplements instructions and direction provided in the instructions listed in paragraph 1.2.

1.2 Background. OPNAVINST 11010.16, Command Responsibility for Shore Activity Land and Facilities establishes the Shore Facilities Planning System. NAVFACINST 11010.44, Shore Facilities Planning Manual carries out the system and requires activity submission of a planning estimate with cost backup and other data, to propose a project for the Military Construction Requirements List.

1.3 Importance. The importance of an accurate planning cost estimate cannot be over emphasized, as it could be the determining factor as to whether or not the project is included in the budget year program. Although requirements and justifications are important parts of project submittals, this publication deals only with scope and cost. Scope is included because an estimate is no better than the definition of scope that has been determined. An incomplete scope will result in an incomplete proposed project cost.

1.4 Cancellation. This handbook, MIL-HDBK-1010, dated August 1989, cancels and supersedes MIL-HDBK-1010/1 and MIL-HDBK-1010/2, dated 30 September 1988.

1.5 Comments or Suggestions. You are encouraged to advise the Engineering Field Division (EFD) Planning Division (Code 20) or the Cost Engineering Branch (Code 407) of errors, conflicts, or omissions detected while using this guide, as well as to suggest improvements which will help you produce higher quality planning cost estimates. Advice or comments should be forwarded to the EFD Code 407 to be considered for the MIL-HDBK-1010 update.

Points of contact are:

| DIVISION | 407 | 20 |
|---|---|---|
| Atlantic Division | (804) 444-9907 | (804) 445-2300 |
| Chesapeake Division | (202) 433-3315 | (202) 433-3387 |
| Northern Division | (215) 897-6156 | (215) 897-6257 |
| Pacific Division | (808) 471-8436 | (808) 471-3931 |
| Southern Division | (803) 743-0463 | (803) 743-0781 |
| Western Division | (415) 742-7760 | (415) 877-7544 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the currentversion before use.

## Section 2: SCOPE CONSIDERATIONS

2.1 Introductory Paragraph. The Building Square Foot Cost Development Sheet must include separate entries for specific features of additional cost. Certain features and their cost derivation are discussed below. Other specific features may not be discussed in this section, but should be a separate item to emphasize significant cost.

2.2 Operation and Maintenance Support Information (OMSI). OMSI is a product developed during design and construction of a facility to give the activity clear comprehensive data for use in operating and maintaining new facilities as well as to ensure economical, safe life cycle operation and maintenance. The principal OMSI elements requiring consideration are as follows:

a) Operation and Maintenance Technical Documentation

b) Supply Support (repair parts, fuels, lubricants, etc.)

c) Maintenance Planning

d) Maintenance and Test Equipment

e) Operating and Maintenance Indoctrination

f) Staffing and Budgeting

g) Inspection Plan

h) Training

i) Extended Special Warranties

j) Basic Data for Facilities Support Contracts\ Performance Work Statements (FSC/PWS)

2.2.1 Types of OMSI. OMSI is valuable on most projects for which product data is to be submitted by the construction contractor. OMSI is usually needed on projects having complex built-in systems for which submittal of operating and operating and maintenance information is called for in the construction specifications. The degree of OMSI will vary with the kind of facility. For identification, projects requiring OMSI can be classified as Type A, Type B, or Type C.

a) Type A: Operation and Maintenance Manual plus User Manual

b) Type B: Operating Manual plus User Manual

c) Type C: User Manual only



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Examples of facilities that usually require a Type A are listed in Table 1, and those requiring a Type B, in Table 2. Rather simple facilities requiring only a User Manual are classified as Type C, samples of which are shown in Table 3. The User Manual compiles and indexes product and operation and maintenance data into a consolidated manual and also provides useful information such as small scale floor plans with utility shutoff locations, special warranty information, and parts lists. Facilities having systems which require operating information above and beyond that in the User Manual should be classified as Type B and be provided an Operating Manual in addition to the User Manual. Complex facilities having systems which require operating and maintenance information above and beyond that in the User Manual should be classified as Type A and be provided an Operation and Maintenance Manual in addition to the User Manual.

2.2.2 OMSI Estimate. In estimating the cost of OMSI for a specific project, use the best available information. If a good basis to make the estimate does not exist, Table 4 should be used for a preliminary estimate based upon a percentage of the total primary facility cost. The percentage selected (within the ranges shown) should be based on the relative complexity of the facility and its built-in systems. If OMSI is greater than $50,000, it shall be a separate line item on the DD Form 1391 and Building SF Cost Development Sheet. If OMSI is less than $50,000, it shall be part of the building cost and be shown on the Building SF Cost Development Sheet. In either case, OMSI should be included in Block 10 of the DD Form 1391 under Description of Proposed Construction.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 1
Examples of Facilities Usually Requiring Type A OMSI

| FACILITY TYPE | CATEGORY CODE |
|---|---|
| PETROLEUM, OIL & LUBRICANT (POL) FACILITIES | 120 |
| COMPUTER OPERATIONS CENTER (LARGE/COMPLEX) | 143 |
| TRAINING FACILITIES WITH COMPLEX SYSTEMS | 171 |
| AIRCRAFT & SHIP MAINTENANCE SHOPS | 211 & 213 |
| MISSILE ASSEMBLY & MAINTENANCE SHOPS | 212 |
| CENTRAL REFRIGERATION PLANTS | 431 & 826 |
| MEDICAL FACILITIES & LABORATORIES | 500 & 310 |
| POWER PLANTS & HEATING PLANTS | 811 & 821 |
| INDUSTRIAL WASTE & SEWAGE TREATMENT PLANTS | 831 |

Table 2
Examples of Facilities Usually Requiring Type B OMSI

| FACILITY TYPE | CATEGORY CODE |
|---|---|
| OPERATIONAL & TRAINING FACILITIES * | 100 |
| AMMUNITION, EXPLOSIVES, & TOXICS* | 316 |
| LIQUID FUEL STORAGE - BULK* | 411 |
| COLD STORAGE WAREHOUSE | 431 |
| WATER - SUPPLY, TREATMENT, & STORAGE - POTABLE* | 841 |
| * May require Type A OMSI | |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Table 3
Examples of Facilities Usually Requiring Type C OMSI

| FACILITY TYPE | CATEGORY CODE |
|---|---|
| WAREHOUSE - GENERAL | 441 |
| ADMINISTRATIVE FACILITIES | 600 |
| BEQ/BOQ | 721 & 724 |
| COMMUNITY, MORALE, RECREATION | 740 |
| NOTE: If complex system, use Type B | 890 |

Table 4
Examples of OMSI Cost for Preliminary Estimates

| PRIMARY FACILITY COST | ESTIMATED OMSI COST BY TYPE (1) | | |
|---|---|---|---|
| | A (2) | B (3) | C (4) |
| BELOW $5,000,000 | 1.10-2.25% | 0.60-1.25% | 0.35-0.75% |
| $5,000,000 to 20,000,000 | 0.85-1.75% | 0.50-1.00% | 0.30-0.65% |
| $20,000,000 to $50,000,000 | 0.60-1.25% | 0.35-0.75% | 0.25-0.50% |
| ABOVE $50,000,000 | 0.50-1.00% | 0.30-0.65% | 0.20-0.45% |

NOTES:
(1) Table 4 shows cost of OMSI as a percentage range of the primary facility cost. Use higher range for more complex projects, for example: Industrial Waste Treatment Plant with $18 million primary facility cost: $18,000,000 x 0.0175 = $315,000 estimated cost for Type A OMSI (Operation and Maintenance Manual plus User Manual).
(2) The minimum amount for a Type A should be approximately $20,000.
(3) The minimum amount for a Type B should be approximately $16,000.
(4) The minimum amount for a Type C should be approximately $6,000.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

2.3 Intrusion Detection Systems (IDS). Interior "non-built-in" portions of IDS are no longer MCON funded per NAVCOMPT September 1987 decision. Effective with FY 90 Program, NAVCOMPT requires OPN funding for interior "non-built-in" IDS. NAVFACENGCOM message 061449Z September 1988 provides guidance on the IDS issue.

Facility support, such as utilities, conduit runs, equipment space, building, and conventional fencing required to support IDS associated with a MCON project are properly chargeable to MCON funds and should be included in the MCON project scope. Refer to NAVFAC DM-13.02, Commercial Intrusion Detection Systems (IDS) for help in determining facility IDS requirements.

2.3.1 Non-MCON Fundable IDS. Per NAVCOMPT all of the following are non-MCON funded:

a) New building within United States;

b) Building at nuclear ordnance, arms, ammo, and explosives sites;

c) Other IDS including closed circuit television (CCTV) and taut wire sensor;

d) New buildings outside United States; and

e) Base perimeter security system.

CCTV and taut wire sensor systems, including installation of posts, footings, and integral ductwork/conduit, have been determined to be equipment and are the responsibility of Space and Naval Warfare Systems Command (SPAWARSYSCOM). Claimant, user, and SPAWARSYSCOM, depending on current policy, will budget for and fund non-MCON IDS requirements. These commands must be notified of a project's non-MCON IDS requirements and your need for data on facility support requirements. This should generally result in a Base Electronic System Engineering Plan (BESEP).

2.3.2 Technical Support. Technical support for IDS design is available on a reimbursable basis from Naval Electronic Systems Engineering Center (NAVELEXCEN) Charleston. This support includes guidance on scope and technical review of compiled IDS designs at appropriate steps in project development and design. NAVFACENGCOM will attempt to identify MCON projects requiring major IDS and request NAVELEXCEN Charleston prepare a BESEP for each.

2.4 Land Acquisition. Obtain instructions from major claimant and EFD Code 024 (Real Estate).

2.5 Hyperbaric Requirements. CHESNAVFACENGCOM (FPO-1) is responsible for executing the design and procurement phases of shore based hyperbaric facilities. When the project scope includes provisions for hyperbaric facilities, you must contact CHESNAVFACENGCOM (FPO-1) to make appropriate arrangements for the design, procurement, and installation of the required hyperbaric facilities and the associated cost estimate.

2.6 Shielding Requirements.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

2.6.1 Radio Frequency Interference (RFI)/TEMPEST/HEMP (High Altitude Electromagnetic Pulse)/EMP (Electromagnetic Pulse) Shielding. NAVELEXSECCEN Washington, D.C. has been very effective in limiting requirements for shielding in MCON facilities. NAVFACENGCOM message 151455Z Jun 84 provides the guidance on determining the extent of RF shielding required on projects involving installation of electronic equipment. For affected projects, ensure NAVELEXSECCEN Washington, D.C., has formally reviewed and commented on TEMPEST shielding requirements. If HEMP/EMP shielding is identified as a user requirement, consult with NAVFAC Code 04T prior to A&E scoping.

2.6.2 Coordination Required to Meet Objectives. Satisfying shielding objectives is often very difficult; it requires close coordination between the customer, the designer, and the construction contractor to establish this scope requirement. Good information transfer from designers to ROICC personnel is essential. The use of expert consultants during design and construction, and the development of both interim and final testing plans and criteria, should be evaluated and incorporated when appropriate. Design Policy Letter DPL-00-0002 dated 3 January 1989 established CHESNAVFACENGCOM (FPO-2) as the center of expertise and criteria source for TEMPEST, HEMP, and RFI shielding. Consult CHESNAVFACENGCOM (FPO-2) and MIL-HDBK-1195, Radio Frequency Shielded Enclosures for information on these subjects.

2.7 Uninterruptible Power System (UPS). If the UPS is required only to support personal property (electronic equipment) installations, it may not be procured and installed with MCON funds. Instead, its procurement and installation cost must be separately budgeted by the major claimant or user as an integral part of the associated electronic equipment package. Please ensure that the major claimant or user is aware of this requirement. Government furnished UPS are procured through CHESNAVFACENGCOM (FPO-2), and UPS requirements should be coordinated through them. However, facility items required to support the UPS such as power panels, flooring, and battery rooms are properly chargeable to MCON and should be included in the project scope.

2.8 Communication Requirements.

2.8.1 Telephone and Communications Installations. It is the responsibility of the designer to determine the design requirements, and design the facility's telephone system. Based on NAVCOMPT guidance, the general policy is to include only the cost of the following as required to support future installation of telephone and other communication systems wiring internal to a MCON facility:

a) Exterior: All supporting structures (e.g., telephone poles, underground conduits, underground ductbanks, manholes, and handholes).

b) Interior: Empty conduit with pull wire, outlet boxes, conduit bushings, backboards, and cable trays to support future installation of telephone wiring.

2.8.2 Funding Responsibilities. Normally, the wiring, instruments, and equipment are to be funded by other than MCON regardless of whether the system is leased or Government owned. The responsibility of Telephone Management Division East (TMD East) is to assist the user in identifying non-project funds to pay for the following items to be installed as a separate contract (not part of the MCON project):



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

a) Exterior: All cabling and telephone switching equipment.

b) Interior: All wiring, instruments, and equipment.

2.8.3 Funding Exceptions. In certain situations, such as medical facilities and Navy owned systems in overseas areas, entire systems may be MCON funded where practical and justifiable. These exceptions to the general policy should be clearly identified and justified.

2.9 Built-in Retrieval Equipment Racks (Warehouses). Policy on funding specialized equipment in automated warehouses is as follows:

2.9.1 MCON Funded. If the project includes a guide wire or guide rail built into the facility, include the cost of the guide wire or rail system, vehicles which ride on the system (system captive), and the storage racks serviced by the system in the MCON project.

2.9.2 OPN Funded. If the retrieval system does not include a built-in guide wire or rail system, the retrieval vehicles and racks are to be identified as collateral equipment.

2.9.3 Warehouse Design. The design of all warehouses must be coordinated with Naval Supply Systems Command (NAVSUPSYSCOM) as the Navy's expert in warehouses. NAVSUPSYSCOM must formally approve the design concept prior to your achieving a 35 percent design. To help with the design concept, NAVSUPSYSCOM has developed a computer program to determine the least cost alternative for various stacking heights and retrieval systems. As the foot print and stacking height affect the project cost, and some retrieval systems are MCON funded, these decisions must be made prior to starting design. Coordinate design with NAVSUPSYSCOM. The NAVFACENGCOM point of contact is Code 04B2, Autovon 221-0044, Commercial (202) 325-0044.

2.10 Asbestos Related Work. A&E firms are finding it difficult, if not impossible, to obtain professional liability insurance for work involving asbestos, hazardous waste, and pollution abatement. The Federal Acquisition Regulation (FAR) does not require A&E firms to carry professional liability insurance. NAVFACENGCOM does not have the authority to provide blanket indemnification for work involving hazardous waste. NAVFACENGCOM policy is that when asbestos or other hazardous waste will be encountered, or when there is a good probability of asbestos or other hazardous waste, note this fact in the Commerce Business Daily (CBD) synopsis for any affected contract. We should NOT include this warning in every CBD synopsis as a matter of routine; it should only be used where the hazards cited are known or probable. During interviews the willingness of each firm to undertake any required asbestos, hazardous waste, or pollution abatement work is to be clearly established and made a matter of record. Please continue to keep NAVFACENGCOM informed of problems in this area. The NAVFACENGCOM point of contact is Code 04BD, Autovon 221-0043, Commercial (202) 325-0043.

2.11 Computation of Gross Area. For all gross and net area calculations use Chapter 4 of MIL-HDBK-1190, Facility Planning and Design Guide. Gross area includes the total area of all floors, including mezzanines, basements, and penthouses as determined by the effective outside dimensions of the building. One-half the area shall be included in the gross area for balconies and porches, covered raised loading platforms, covered loading facilities (either depressed,



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

ground level, or raised), covered but not enclosed passageways or walks, covered and uncovered but open stairs, and covered ramps. Excluded from the gross area are crawl spaces, exterior uncovered loading facilities (either depressed, ground level, or raised), open courtyards, roof overhangs and soffits, uncovered ramps and stoops, utility tunnels, and raceways. Separate central energy plants or utility buildings serving large complexes are not included in the gross module area shown in Table 5. Separate support buildings should be programmed as a line item on DD Form 1391.

2.11.1 BEQ Area Requirements. For Bachelor Enlisted Quarters, use the criteria shown in Table 5.

2.11.2 BOQ Area Requirements. For Bachelor Officer Quarters, use MIL-HDBK-1190. The following requirements shall be used to program BOQ projects:

a) Grades 02 and below: Quarters shall provide a private suite of approximately 330 square feet net area, consisting of combination of living room and bedroom, bathroom, and pullman-type kitchen. The gross floor area shall approximate 475 square feet per officer.

b) Grades 03 and above: Quarters shall provide a private suite of approximately 460 square feet consisting of living room, bedroom, bathroom, and kitchen. The gross floor area shall approximate 650 square feet per officer.

2.12 International Balance of Payments (IBOP). The IBOP Summary is only included when preparing the cost estimate for projects in specific foreign areas. Information on the exempt areas is available from the EFD Project Management Office. The IBOP Summary shall be developed on 8-1/2 by 11-inch plain bond paper as illustrated in Figure 1.

2.12.1 IBOP Implications. Current directives require action by cognizant addressees to maintain Foreign Exchange Costs (FEC) at a minimum. IBOP implications will be prepared to show the effect of construction under both normal and planned IBOP procedures. This effort is to permit analysis and response by NAVFACENGCOM to inquiries regarding items contributing to FEC.

2.12.2 Normal Procedures. Those construction procedures which would normally be used at a particular location if no effort were made to suppress FEC.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 5
Bachelor Enlisted Quarters Area Table

| MODULES (2 Rooms and Bath) | FLOORS (1) | AREA SF (2) | ELEVATORS (3) | SPRINKLER SYSTEM |
|---|---|---|---|---|
| | | | | |
| 60 | 3 | 800 | --- | --- |
| 72 | 3 | 785 | --- | --- |
| 96 | 4 | 800 | F | (4) |
| 180 | 6 | 800 | F & P | YES |

(1) Modules per floor must be divisible by 2, with no exceptions.
(2) Total gross module area including its share of the non-module areas.
(3) F (Freight) & P (Passenger)
(4) Provide a fire stand pipe system if sprinkler system is not required.
(5) The data in this table satisfies the net area requirements of MIL-HDBK-1190. Gross area for combinations not shown must be determined or verified by the EFD, Code 401.

| GRADE | ACCOMMODATIONS |
|---|---|
| E-1 thru E-4 | 4 Men per Module |
| E-5 thru E-6 | 2 Men per Module |
| E-7 thru E-9 | 1 Man per Module |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

INTERNATIONAL BALANCE OF PAYMENTS (IBOP) IMPLICATIONS

| 1. Activity (Name and Location) (CAPITAL LETTERS) | Date |
|---|---|
| 2. Project Title (CAPITAL LETTERS) | 3. P-No. |

| | NORMAL PROCEDURES | | PLANNED PROCEDURE | |
|---|---|---|---|---|
| | Construction | *Construction Total Material | Construction | *Construction Total Material |
| BUDGET COST | 1,030,000 | - | 1,100,000 | - |
| LESS RETURNS TO THE US | | | | |
| a) US End Products | - | - | 100,000 | - |
| b) US Services | 5,000 | - | 5,000 | - |
| c) US Transportation | - | - | 20,000 | - |
| TOTAL RETURNS | 5,000 | 0 | 125,000 | 0 |
| FOREIGN EXCHANGE COST (FEC) | 1,075,000 | | 975,000 | |

This example makes the following assumptions:

1. Normal procedure; all foreign materials and contractors, only return to US is .5% SIOH.
2. Planned procedure; purchase of a pre-engineered metal building in the US at the same price as in the foreign country, shipping by a US line, .5% SIOH is returned to the US.

Returns to US include escalation and contingencies. Overhead and profit depends upon location of contractor.

SUMMARY OF IBOP DATA

*CWE is the same as total request rounded for selected procedures.

| | NORMAL PROCEDURE | PLANNED PROCEDURE | PLANNED PROCEDURE EFFECT |
|---|---|---|---|
| CURRENT WORKING ESTIMATE | 1,080 | 1,100 | + 20 |
| FOREIGN EXCHANGE COST (FEC) | 1,075 | 975 | - 100 |

* Materials, supplies and equipment (including government furnished material procured abroad) acquired by the Navy from construction funds and provided to contractors for incorporation into foreign construction projects.

**Figure 1**
Sample IBOP Summary



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

2.12.3 Planned Procedures. Those procedures utilized at a particular location to minimize FEC with specific support and emphasis on:

a) Adhering to pertinent executive orders, U.S. laws, status of forces agreements, and treaties which affect our contractual freedom abroad.

b) Maximum feasible use of U.S. contractors as allowed by paragraph 2.12.3a.

c) Maximum feasible use of U.S. materials, end products, and equipment as allowed by paragraph 2.12.3a.

d) Maximum use of U.S. flag, ocean, and air carriers.

e) Utilization of competent military labor where available.

f) Designs incorporating portable van-type installations and structures prefabricated in the United States.

2.12.4 Basis for Choice of Construction Procedure. Generally, planned procedures will be recommended where for every dollar increase in Current Working Estimate (CWE) from NORMAL to PLANNED there is a resulting decrease in FEC of at least $2, and normal procedures will be recommended otherwise. An explanation for the deviation will be provided if the EFD recommends construction at the normal level and cost estimates justify programming at the planned level.

Exceptions to the above criteria are allowed where country-to-country agreements specifically establish construction procedures, or project urgency is an overwhelming factor.

2.12.5 Presentation of IBOP Data on DD Form 1391. The DD Form 1391 will be prepared to show costs at the recommended level. IBOP data will be shown on the DD Form 1391 with entries asterisked to show the corresponding CWE and FEC amounts for the recommended procedure. Such IBOP entries will be shown as:

| IBOP DATA: | NORMAL | PLANNED | NORMAL | PLANNED |
|---|---|---|---|---|
| CWE | $550,000 | $590,000* | FEC $330,000 | $220,000* |

*Recommended construction method

2.12.6 Requirements Regarding Returns to the United States. Other information requirements regarding returns to the United States are to be shown at the end of the cost estimates. This additional data is required in order that NAVFACENGCOM may provide estimates of IBOP expenditures as required by higher authority.

2.13 Project Data Sheet. The contents of the Project Data Sheet are described in Figure 2.

2.14 Project Data Sheet Flow Chart. Figures 3 and 4 show the procedures and documentation required for entering a project in the RL, for reviewing projects selected for the FYDP, and for submitting Facility Study and DD Form 1391 documentation.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

| COMPONENT | ESTIMATE YEAR | DATE |
|---|---|---|
| NAVY* | 1993 | 15 August 1989 |
| INSTALLATION AND LOCATION | PROJECT TITLE | |
| U.S. NAVAL STATION, NORFOLK, VA* | ADMINISTRATIVE OFFICE** | |
| PROGRAM ELEMENT | CATEGORY CODE | PROJECT NUMBER | CURRENT COST ($000) |
| * | 610.10 | P-000 | 3,600 |

ACF: .90 ESCALATED TO:
FER: N.A. ITEM 1 APRIL 1993

| ITEM | U/M | QUANTITY | UNIT COST | COST ($000) | |
|---|---|---|---|---|---|
| PRIMARY FACILITY | SF | 30,000 | 93.16 | 2,795 | |
| SUPPORTING FACILITIES | LS | | | 468 | *** |
| SUBTOTALS | | | | 3,263 | |
| CONTINGENCY (5%) | | | | 163 | |
| TOTAL CONTRACT COST | | | | 3,426 | |
| SUPERVISION, INSPECTION, & OVERHEAD (5.5%) | | | | 188 | |
| TOTAL REQUEST | | | | 3,614 | |
| TOTAL REQUEST ROUNDED | | | | 3,600 | |
| EQUIPMENT FROM OTHER APPROPRIATIONS (LIST NOT AVAILABLE) | | | | (-) | |

DESCRIPTION OF PROPOSED CONSTRUCTION: Permanent two-story masonry and structural frame building. A passenger elevator and an exterior uncovered steel stairway are included. Fire protection, grounding, utilities, and air conditioning are included. Buildings B15 and B25 are to be demolished.

REQUIREMENT:
The mission of the Naval Station, Norfolk, Virginia is to maintain and operate facilities and provide services and material to support operations of the Atlantic Fleet.

PROGRAMMING DATA: ACTIVITY UIC: NXXXXX ALTERNATE HOST: NYYYYY SUP UNIT: NZZZZZ
SPEC AREA: __ INVESTMENT PROGRAM: 99 SIR: II RESOURCE SPONSOR: 04
MAJ/SUBCLAIMANT CODE: FA1/ INVESTMENT CATEGORY: 14* MOBILIZATION INDICATOR: N
ACTIVITY PRIORITY: 01 CLAIMANT PRIORITY: 12 FLEP PRIORITY: H READINESS RATING: C4

PROJECT DETAIL DATA:

| CATEGORY CODE | DESCRIPTION | SCOPE | U/M | CC/MC | VALIDATION INDICATOR |
|---|---|---|---|---|---|
| 610-10 | ADMINISTRATIVE | 30,000 | SF | 3B | |
| 610-10 | ADMINISTRATIVE | 22,000 | SF | 3B | |
| 610-20 | DATA PROCESSING | 8,000 | SF | 3B | |

REQUIREMENT CERTIFICATION:
ACTIVITY _____ (name) _____ DATE: _____
MAJOR CLAIMANT _____ (name) _____ DATE: _____
NAVFACENGCOMHQ _____ (name) _____ DATE: _____

* COMPUTER GENERATED INFORMATION
** DEFAULTS TO CATEGORY CODE DIRECTORY TITLE IF NO ENTRY IS MADE
*** NO COST FOR SPECIAL FOUNDATION FEATURES IS INCLUDED SINCE FUNDING FOR TEST BORINGS IS NOT AVAILABLE AT THIS TIME, AND THEREFORE, THE REQUIREMENTS FOR FOUNDATION PILING WERE NOT KNOWN. COST FOR DEMOLITION OF BUILDINGS B15 AND B25 HAS BEEN INCLUDED.

Figure 2
Project Data Sheet



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

**LOCATION AND SITE PLAN**

**********

* PREPARATION NOTES:
* PROJECT DATA SHEET (PDS):
* The PDS is the initial activity Submittal for a MCON project.[1]
*
* PREPARATION OF COST:
* PRIMARY FACILITY: Cost shall be prepared following the same instructions as for the preparation of the Facility Study primary estimate described in this instruction. Include the Building SF Cost Development Sheets (see Figure 11).
* SUPPORTING FACILITIES: Costs are to be a percentage of the primary facility Cost. Use 15% when the project is to be constructed within a developed area. Use 20% for all other locations. Provide backup for other percentages. Foundation features and demolition are to be separately priced and added to above cost.

**********

SITING RATIONALE: Building sited outside the ammunition pier Explosive Safety Quantity Distance Arc and adjacent to another administrative building, Building 400, implementing the plan for consolidation of station administrative and data processing. All required utilities are immediately available at the site and are adequate to accommodate the additional connected load. Demolition will be required by the project.

EFD REVIEW/ANALYSIS:

| REQUIRES FURTHER ACTION? | NO | YES | COMMENTS |
|---|---|---|---|
| Explosives Safety | X | | |
| Airfield Safety | X | | |
| Electromagnetic Radiation | X | | |
| AICUZ Violation | X | | |
| Change to Approved Master Plan, CIP | X | | Shown in latest approved MP |
| Coastal Zone Management | X | | |
| Natural Resources Plan | X | | |
| Dredging/Filling Permits | X | | |
| Wetland/Floodplain | X | | |
| Hazardous Wastes on Site | X | | |
| Cultural Resources Impact | X | | |
| Other Site Problems (List) | X | | |
| Utilities Support | X | | |
| Roads, Parking | | X | Minor Changes to existing |
| Preliminary Environmental Assessment | | X | Submit when project enters FYDP |
| Preliminary Hazards Analysis | | X | If RAC is a 1 or 2 |
| Other (List) | | | |

EFD Validation:
Site Approved: Yes _____ No _____ Deferred _____
Project Supported by SFPS: Yes _____ No _____

(Name) Date:

1 A detailed discussion of the Project Data Sheet and the Capital Improvement Plan (CIP) is contained in NAVFACINST 11010.44E.

Figure 2 (Continued)
Project Data Sheet



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

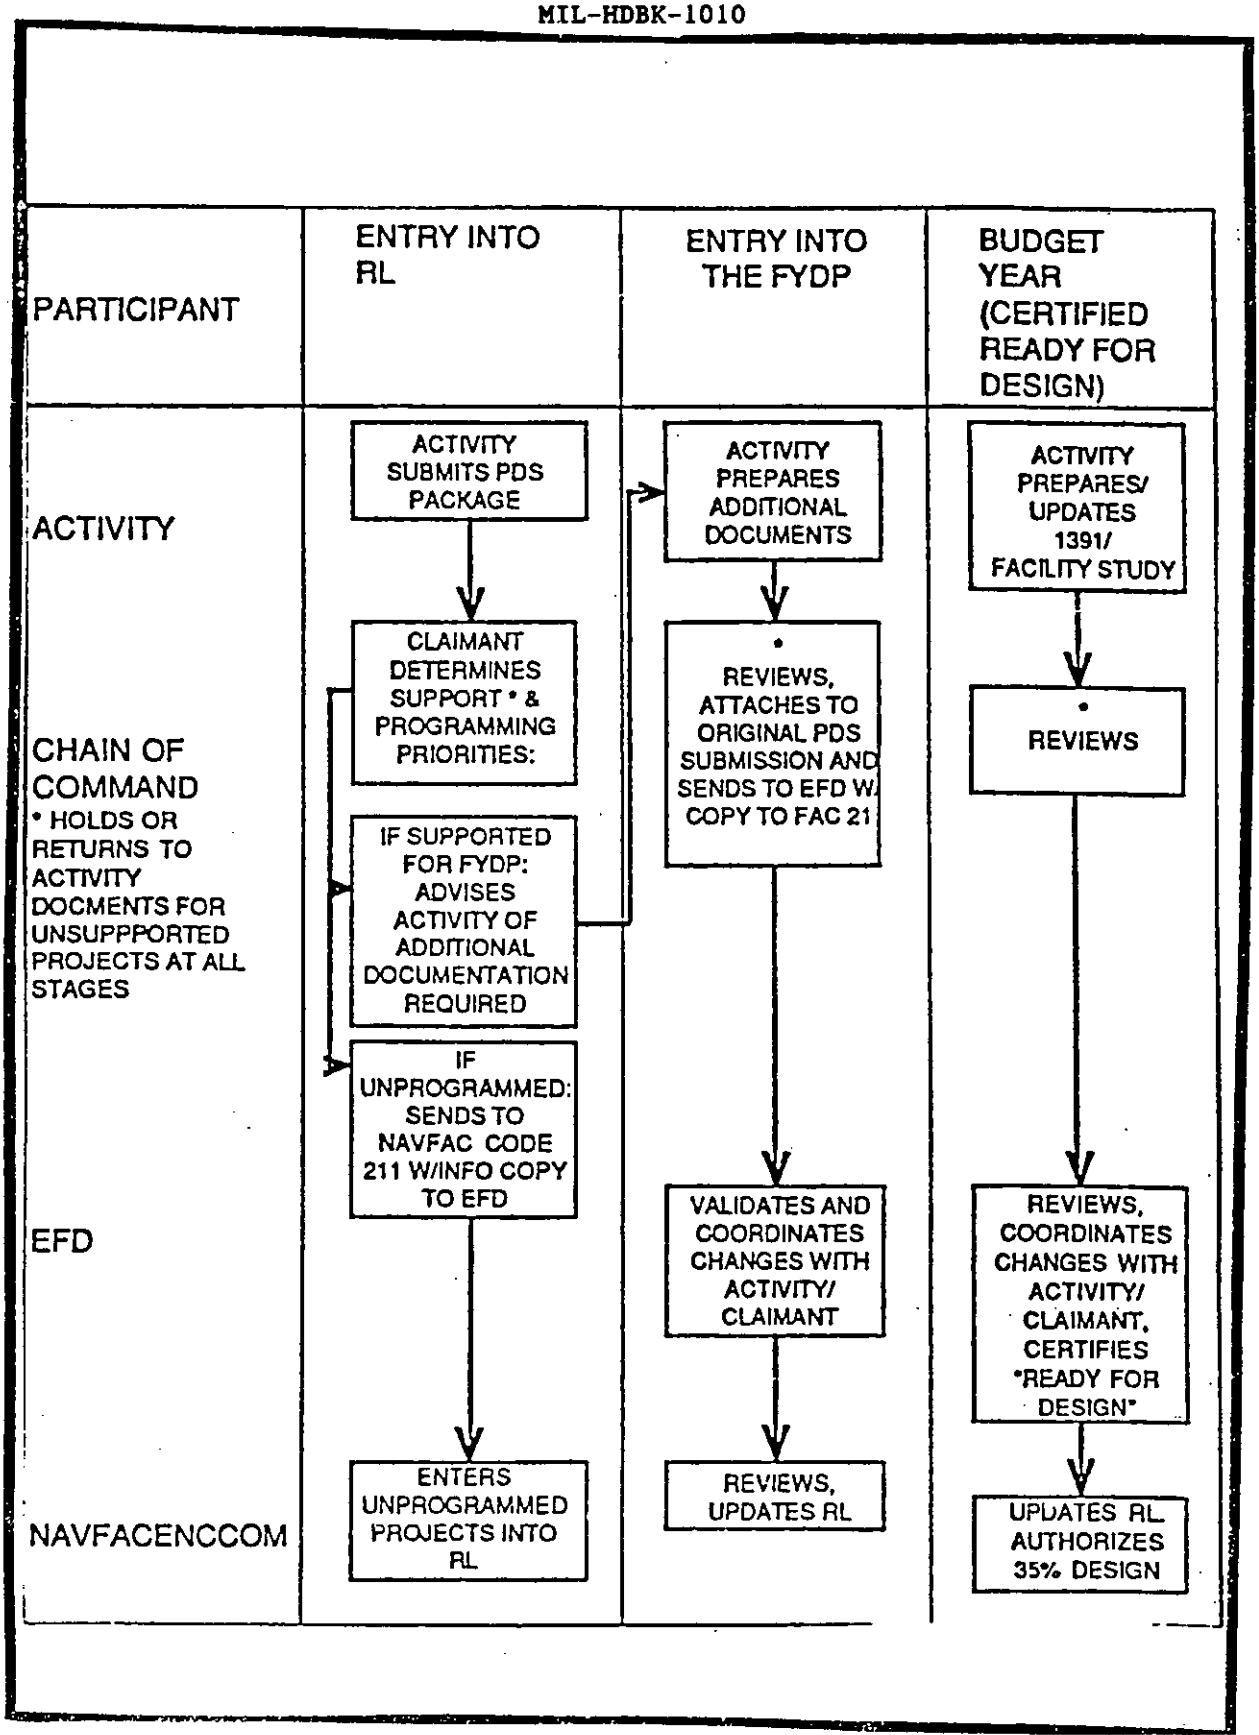



**Figure 3**
**Project Submission Routes**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

**LEGEND**

C: ALREADY COMPLETE: RESUBMIT ONLY IF DATA HAS CHANGED
CSMC: ALREADY COMPLETE: SUBMIT COPY TO MAJOR CLAIMANT W/PDS
E: EFD ACTION
S: SUBMIT TO EFD, COPY TO NAVFAC CODE 211
SMC: SUBMIT TO MAJOR CLAIMANT, COPY TO NAVFAC CODE 211
X: COMPLETED AT PREVIOUS STAGE: NO RESUBMISSION REQUIRED
*: MAY NOT BE REQUIRED FOR ALL PROJECTS
**: SUBMISSION REQUIRED AT THIS TIME FOR PROJECTS REQUIRING WASHINGTON-LEVEL SITE APPROVAL

| DOCUMENTATION REQUIRED | ENTRY INTO RL | PDS REVIEW BY EFD FOR PROJECTS IN THE FYDP | BUDGET YEARS (CERTIFIED READY FOR DESIGN) |
|---|---|---|---|
| BFR IN SFPS | C | C | C |
| CURRENT EB | C | C | C |
| FPD | CSMC | C | C |
| PDS | SMC | C | C |
| PEA | | S | C |
| PRELIMINARY COST ESTIMATE | | S | X |
| RISK ASSESSMENT CODE | | S | X |
| QUICK SIR/PVA | | S* | X* |
| SITE APPROVAL REQUEST | | S** | S |
| LIFE CYCLE COST ANALYSIS SUMMARY | | S* | C* |
| ECIP COST/ENGINEERING DATA | | S* | C* |
| POLLUTION CONTROL REPORT | | S* | C* |
| OSH CONTROL REPORT | | S* | C* |
| EQUIVALENCY STATEMENT | | S* | C* |
| MEDICAL ECONOMIC ANALYSIS | | S* | C* |
| MEDICAL SPACE PROGRAM | | S* | C* |
| NAF SUPPLEMENTAL INFORMATION | SMC* | X* | X* |
| FACILITY STUDY | | | S |
| FACILITY STUDY COST ESTIMATE | | | S |
| COLLATERAL EQUIPMENT LIST | | | S |
| BESEP/EQUIPMENT STUDY | | | S* |
| FACILITY STUDY 1391 | | | S |
| 1390s (RESERVES) | | | S |
| ENVIRONMENTAL ANALYSIS | | | S* |
| PRELIMINARY HAZARDS ANALYSIS | | | S* |
| TYPE I/II ECONOMIC ANALYSIS | | | S* |
| COST CERTIFICATION/ARCHITECTURAL PROGRAMMING/2 STEP PLANNING/DESIGN | | | E |

**Figure 4**
*Components of Project Documentation*



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 3: FACILITIES STUDY COST DEVELOPMENT

3.1 Instructions for DD Form 1391. The following instructions correspond to the circled numbers shown in Figure 5.

1. Date shall be the day submitted. Dates must be revised if a resubmittal is made.

2. Enter the five-digit category code number from NAVFAC P-72, Department of the Navy Facility Category Codes to identify the primary facility. In cases of multi-use facilities, enter the category code which represents the largest cost of the project.

3. Block 8 - "Project Cost" shall be the same as the "TOTAL REQUEST ROUNDED" in block 9. This cost shall be escalated to 1 April of the appropriation year, except assigned foreign areas, paragraph 4.2.

4. The Area Cost Factors and the corresponding Foreign Exchange Rates for various overseas locations are given in paragraph 4.2.

5. The line items shown are generally suitable for most projects. They should be tailored to suit the individual project - discuss this with the EFD Cost Engineering Branch. The Cost figures in parentheses should add to equal "PRIMARY FACILITY" cost or "SUPPORTING FACILITIES" cost.

6. Include a list of the major use areas for multi-use facilities under the primary facility. Also, include a line item entitled, "Additional Functional Features." Show the unit cost as applicable to the total size of the primary facility as shown in Figure 6.

7. Contingency will be 5 percent for all projects.

8. Use 5.5 percent SIOH for all projects unless directed otherwise.

9. Rounded cost estimate:

| | | |
|---|---|---|
| less than | $1,000,000 | - nearest 10,000 |
| 1,000,000 | - 5,000,000 | - nearest 50,000 |
| Over 5,000,000 | | - nearest 100,000 |

10. Must agree with total for all other categories of equipment on collateral equipment list other than built-in equipment as defined in paragraph 7.1. If not available, type "(LIST NOT AVAILABLE)" in place of "(NON-ADD)." Built-in equipment is MCON funded and normal built-in equipment cost is included in guidance SF cost. Enclose cost figures in parentheses.

11. If the project includes more than one structure or location, address each in a separate paragraph in block 10 and separately in block 9.

12. Draw a line between blocks 10 and 11.

13. IBOP entry is required for assigned foreign areas.

NOTE: Complete the Supporting Facilities Cost Development, as shown in Figure



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

7 and Figure 12.

3.2 Instructions for Building SF Cost Development. See Figure 6.

a) Guidance Cost Priorities:

(1) NAVFAC Guidance Cost, Table 6.

(2) SF cost obtained from historical data of comparable projects (cost must be obtained from or verified by Code 407).

b) The guidance cost must be adjusted to allow for differences in size (see Figure 8), area cost factors, and escalation (see Figure 9). The area cost factors are listed in paragraphs 4.1 and 4.2.

c) The guidance cost represents a typical project, including all normal built-in equipment. Identification of built-in equipment may be obtained from the CES Standard Systems List shown in paragraph 7.1. The guidance cost must be adjusted for additional functional features which are considered to be additional cost. This adjustment is absolutely required to justify cost above guidance. Backup for the additional functional features must be attached. Examples of additional functional features are hyperbaric requirements, TEMPEST/HEMP/EMP shielding, UPS support facilities, communications support facilities, retrieval equipment racks for warehouses, OMSI, very high walls, emergency power, raised floor, and asbestos removal.

d) Gross area calculations (paragraph 2.11) require certain areas to be taken at zero or one-half the actual area. These excluded areas must be included in the project cost. This can be done by showing the actual cost as a functional feature on the Building SF Cost Development Sheet.

e) The adjusted unit cost (u/c) for each functional feature is obtained by dividing the total cost of each feature by the total size of the proposed facility. (Include all multi-use areas.)

f) The percent change is obtained by dividing the total cost of each feature by the total adjusted historical cost of the facility. (Include all multi-use areas.)

g) The size adjustment factor is related to Figure 8.

h) The area cost factors are given in Section 4.

i) The escalation factors are given in Figure 9.

3.3 Supporting Facilities. (Refer to Figure 7.) Supporting facilities include all construction items outside the building 5-foot line and all special foundation features of significant cost unique to the building. All supporting facility items should be included under one of the following major categories. Each sub-item included under these major categories shall have a separate line item entry on the Supporting Facility Cost Development Sheet. Refer to paragraph 7.2 for identification by system number of supporting facilities.

3.3.1 Special Foundation Features. Include special foundation requirements



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(e.g., piling, drilled piers, vibroflotation, dewatering, etc.). (Systems 91X)

3.3.2 Electrical Utilities. Include electrical distribution, substations, emergency power generators, fire alarms, exterior lighting, telephone distribution, etc., beyond the 5-foot line. (Systems 51X, 52X)

3.3.3 Mechanical Utilities. Include those utilities outside the 5-foot line covered in Divisions 2 and 15 of the specifications (e.g., gas, steam, water, sanitary, etc.). (Systems 54X through 59X).

3.3.4 Roads, Parking, and Sidewalks. Include subgrade preparation, subbase and surface courses, curb and gutters, and valley gutters (Systems 7XX).

3.3.5 Site Improvements. Include seeding, sodding, riprap, landscaping, irrigation, fencing, storm drainage, and other site enhancements. Do not include normal excavation which is within the 5-foot line. (Systems 8XX)

3.3.6 Demolition. Include real property inventory (building or structure), major utility, or paving demolition only. Utility, pavement, or other miscellaneous demolition associated with installation of new construction should be included with the applicable trade category (e.g., electrical demolition with Electrical Utilities, steam line demolition with Mechanical Utilities, paving demolition with Roads, Parking, and Sidewalks, etc.). Provide the total number of buildings to be demolished in paragraph 10 of DD Form 1391. (Systems 84X)

3.3.7 Contaminated Soil. Cost to remove or treat contaminated soil in areas such as old industrial sites.

3.3.8 Asbestos Removal. Discussions with a contractor specialist or Code 407 is encouraged.

3.3.9 Supporting Facilities - Cost. Each supporting facility system must be priced separately.

3.3.10 Cost Model. A completed cost model (Systems 5XX through 9XX) must be included. Refer to Section 8.

3.4 Proposed Site Plan. In order to reasonably estimate the supporting facility requirements, the proposed site should be investigated and station utility maps reviewed. It is suggested that a scaled, single line site plan be developed for the project. For most projects, this site plan can be made on an 8-1/2 by 11-inch sheet and should be attached to the estimate. The site plan should show most, if not all, of the following:

a) Existing elevations

b) Proposed building(s) and structure(s)

c) Finish floor elevation

d) Existing mechanical and electrical utility runs

e) New mechanical and electrical services to the facility

f) Paving



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

g) Demolition

3.5 Pricing Sources. Supporting facility costs should be estimated using the following pricing sources:


a) Supporting facility guidance cost reference provides composite in-place cost for typical systems. Refer to Table 7.

b) Systems cost obtained from recently bid local projects. This is considered a reliable source. Coordinate with the EFD Code 407 for these costs.

c) NAVFACENGCOM CES unit price file including assembly, and the composite prices.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

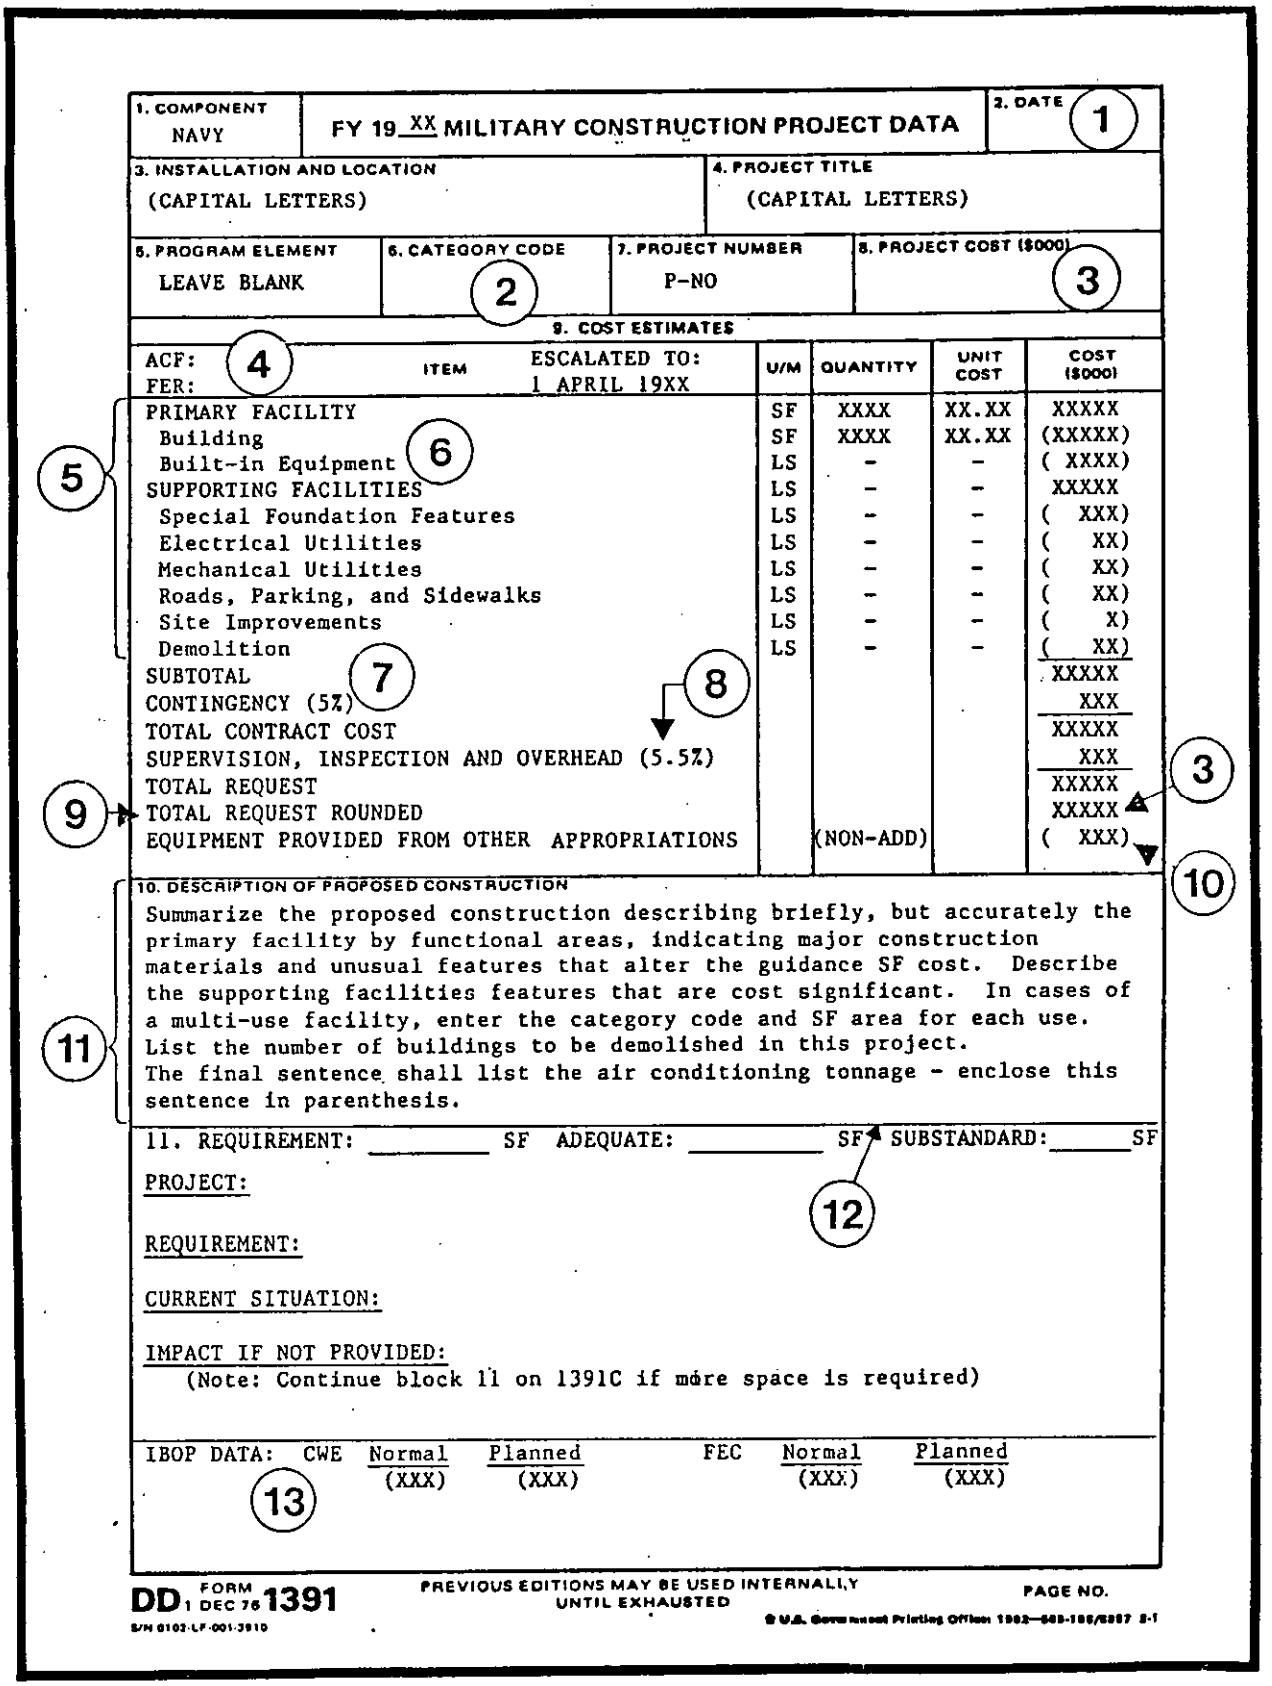

| 1. COMPONENT | FY 19XX MILITARY CONSTRUCTION PROJECT DATA | 2. DATE (1) |
|---|---|---|
| NAVY | | |

| 3. INSTALLATION AND LOCATION | 4. PROJECT TITLE |
|---|---|
| (CAPITAL LETTERS) | (CAPITAL LETTERS) |

| 5. PROGRAM ELEMENT | 6. CATEGORY CODE (2) | 7. PROJECT NUMBER | 8. PROJECT COST ($000) (3) |
|---|---|---|---|
| LEAVE BLANK | | P-NO | |

9. COST ESTIMATES

| ACF: / FER: (4) | ITEM | ESCALATED TO: 1 APRIL 19XX | U/M | QUANTITY | UNIT COST | COST ($000) |
|---|---|---|---|---|---|---|
| (5) | PRIMARY FACILITY | | SF | XXXX | XX.XX | XXXXX |
| | Building | | SF | XXXX | XX.XX | (XXXXX) |
| | Built-in Equipment (6) | | LS | - | - | ( XXXX) |
| | SUPPORTING FACILITIES | | LS | - | - | XXXXX |
| | Special Foundation Features | | LS | - | - | ( XXX) |
| | Electrical Utilities | | LS | - | - | ( XX) |
| | Mechanical Utilities | | LS | - | - | ( XX) |
| | Roads, Parking, and Sidewalks | | LS | - | - | ( XX) |
| | Site Improvements | | LS | - | - | ( X) |
| | Demolition | | LS | - | - | ( XX) |
| | SUBTOTAL (7) | | | | | XXXXX |
| | CONTINGENCY (5%) (8) | | | | | XXX |
| | TOTAL CONTRACT COST | | | | | XXXXX |
| | SUPERVISION, INSPECTION AND OVERHEAD (5.5%) | | | | | XXX |
| | TOTAL REQUEST | | | | | XXXXX |
| (9) | TOTAL REQUEST ROUNDED | | | | | XXXXX (3) |
| | EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS | | | (NON-ADD) | | ( XXX) |

10. DESCRIPTION OF PROPOSED CONSTRUCTION (10)

(11) Summarize the proposed construction describing briefly, but accurately the primary facility by functional areas, indicating major construction materials and unusual features that alter the guidance SF cost. Describe the supporting facilities features that are cost significant. In cases of a multi-use facility, enter the category code and SF area for each use. List the number of buildings to be demolished in this project. The final sentence shall list the air conditioning tonnage - enclose this sentence in parenthesis.

11. REQUIREMENT: _____ SF ADEQUATE: _____ SF (12) SUBSTANDARD: _____ SF

PROJECT:

REQUIREMENT:

CURRENT SITUATION:

IMPACT IF NOT PROVIDED:

(Note: Continue block 11 on 1391C if more space is required)

| IBOP DATA: (13) | CWE | Normal (XXX) | Planned (XXX) | FEC | Normal (XXX) | Planned (XXX) |
|---|---|---|---|---|---|---|

DD FORM 1 DEC 76 1391 — PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED — PAGE NO.

S/N 0102-LF-001-3910

Figure 5
DD Form 1391



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## BUILDING SF COST DEVELOPMENT

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | | | | |
| GUIDANCE FACILITY | | | | |

HISTORICAL GUIDANCE SOURCE: _____ *

HISTORICAL GUIDANCE UNIT COST: _____/SF

| HISTORICAL UNIT COST | SIZE FACTOR | AREA COST FACTOR | ESCALATION FACTOR | ADJUSTED UNIT COST |
|---|---|---|---|---|
| | | | | |

_____ X _____ X _____ X _____ = _____

* Show date of source as shown in Figure 11.

## ADDITIONAL FUNCTIONAL FEATURES

| FUNCTIONAL FEATURES | QTY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

FUNCTIONAL FEATURES TOTAL: _____ _____

TOTAL BUILDING SF COST: _____ includes built-in equipment

Figure 6
Building SF Cost Development



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## FACILITIES STUDY
## SUPPORTING FACILITIES COST DEVELOPMENT

TITLE: _____ p#: _____ FY: _____

LOCATION: _____ DATE: _____

| CES SYSTEM | PRICE SOURCE | COMPOSITE QUANTITY | COMPOSITE UNIT COST | COMPOSITE ADJUSTMENT FACTOR (1) | TOTAL COST | FORM 1391 ($000) |
|---|---|---|---|---|---|---|
| SPECIAL FOUNDATION FEATURES (91X) | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| ELECTRICAL UTILITIES (51X - 52X) | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| MECHANICAL UTILITIES (54X - 59X) | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| ROADS, PARKING, SIDEWALKS (7XX) | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| SITE IMPROVEMENTS (8XX) | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| DEMOLITION (84X) | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


NOTE: PLACE ADDITIONAL INFORMATION AND EXCESS COMPOSITE ITEMS ON BACK.
(1) COMPOSITE ADJUSTMENT FACTOR = AREA COST FACTOR X ESCALATION FACTOR

**Figure 7**
Supporting Facilities Cost Development



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

SIZE ADJUSTMENT CHART

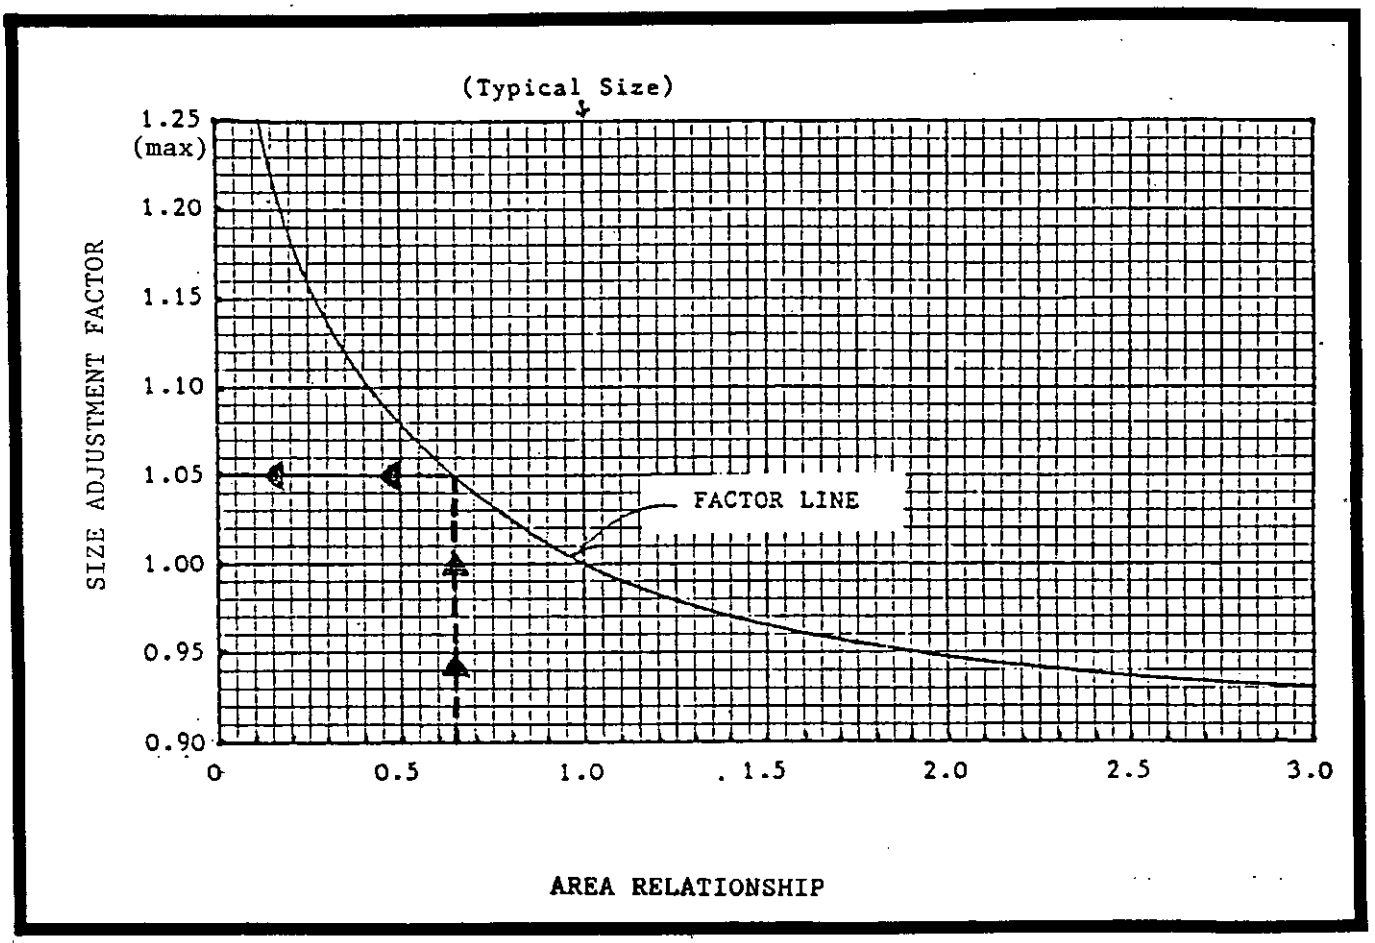


Example: The Size Adjustment factor is desired for a 16,000 SF Academic Facility.

$$\text{AREA RELATIONSHIP} = \frac{\text{PROPOSED FACILITY SIZE}}{\text{TYPICAL FACILITY SIZE}} = \frac{16{,}000}{25{,}000} = 0.64$$

Find 0.64 on the horizontal axis. Trace a vertical line to the factor curve and then trace a horizontal line to the vertical axis' Size Adjustment Factor which is 1.05.

Figure 8
Size Adjustment Chart



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

PROJECTED NAVFAC COST INDEX
MONTHLY
JULY 1989

| YEAR | JAN. | FEB. | MAR. | APR. | MAY. | JUNE | JULY | AUG. | SEPT. | OCT. | NOV. | DEC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1974 | 1156 | 1154 | 1155 | 1177 | 1177 | 1199 | 1233 | 1240 | 1238 | 1246 | 1239 | 1240 |
| 1975 | 1242 | 1265 | 1265 | 1269 | 1287 | 1307 | 1317 | 1330 | 1333 | 1351 | 1349 | 1354 |
| 1976 | 1362 | 1370 | 1378 | 1391 | 1398 | 1416 | 1425 | 1455 | 1467 | 1476 | 1479 | 1484 |
| 1977 | 1489 | 1499 | 1504 | 1506 | 1507 | 1521 | 1539 | 1554 | 1587 | 1617 | 1603 | 1606 |
| 1978 | 1609 | 1617 | 1620 | 1621 | 1652 | 1663 | 1696 | 1705 | 1720 | 1721 | 1732 | 1734 |
| 1979 | 1740 | 1740 | 1750 | 1749 | 1753 | 1809 | 1829 | 1849 | 1900 | 1899 | 1902 | 1909 |
| 1980 | 1895 | 1894 | 1915 | 1899 | 1888 | 1916 | 1950 | 1971 | 1976 | 1981 | 2000 | 2017 |
| 1981 | 2015 | 2016 | 2014 | 2064 | 2076 | 2083 | 2109 | 2118 | 2139 | 2156 | 2186 | 2184 |
| 1982 | 2184 | 2200 | 2195 | 2195 | 2220 | 2219 | 2233 | 2253 | 2249 | 2248 | 2260 | 2295 |
| 1983 | 2311 | 2348 | 2352 | 2347 | 2351 | 2388 | 2414 | 2428 | 2430 | 2416 | 2419 | 2406 |
| 1984 | 2402 | 2407 | 2412 | 2422 | 2419 | 2417 | 2418 | 2428 | 2430 | 2424 | 2421 | 2408 |
| 1985 | 2410 | 2414 | 2406 | 2405 | 2411 | 2429 | 2448 | 2442 | 2440 | 2441 | 2446 | 2439 |
| 1986 | 2440 | 2446 | 2447 | 2458 | 2479 | 2493 | 2499 | 2498 | 2504 | 2511 | 2511 | 2511 |
| 1987 | 2515 | 2510 | 2518 | 2523 | 2524 | 2525 | 2538 | 2557 | 2565 | 2569 | 2564 | 2589 |
| 1988 | 2574 | 2576 | 2586 | 2591 | 2592 | 2595 | 2598 | 2611 | 2612 | 2612 | 2616 | 2617 |
| 1989 | 2619 | 2613 | 2616 | 2620 | 2621 | 2626 | 2633 | 2640 | 2648 | 2655 | 2663 | 2670 |
| 1990 | 2677 | 2683 | 2690 | 2697 | 2704 | 2710 | 2717 | 2724 | 2731 | 2738 | 2744 | 2751 |
| 1991 | 2757 | 2763 | 2769 | 2776 | 2782 | 2788 | 2794 | 2800 | 2806 | 2812 | 2819 | 2825 |
| 1992 | 2830 | 2835 | 2840 | 2845 | 2850 | 2855 | 2861 | 2866 | 2871 | 2876 | 2881 | 2886 |
| 1993 | 2891 | 2896 | 2900 | 2905 | 2910 | 2914 | 2919 | 2924 | 2928 | 2933 | 2938 | 2942 |

ANNUAL MARK-UP FACTORS FOR ESCALATION
(BEYOND FY 93, USE 1.80% ESCALATION COMPOUNDED EACH YEAR)

| FISCAL-YEAR | 4-87 | 4-88 | 4-89 | 4-90 | 4-91 | 4-92 | 4-93 | 4-94 | 4-95 |
|---|---|---|---|---|---|---|---|---|---|
| 4-83 | 1.07 | 1.10 | 1.12 | 1.15 | 1.18 | 1.21 | 1.24 | 1.26 | 1.28 |
| 4-84 | 1.04 | 1.07 | 1.08 | 1.11 | 1.15 | 1.17 | 1.20 | 1.22 | 1.24 |
| 4-85 | 1.05 | 1.08 | 1.09 | 1.12 | 1.15 | 1.18 | 1.21 | 1.23 | 1.25 |
| 4-86 | 1.03 | 1.05 | 1.07 | 1.10 | 1.13 | 1.16 | 1.18 | 1.20 | 1.22 |
| 4-87 | 1.00 | 1.03 | 1.04 | 1.07 | 1.10 | 1.13 | 1.15 | 1.17 | 1.19 |
| 4-88 | 0.97 | 1.00 | 1.01 | 1.04 | 1.07 | 1.10 | 1.12 | 1.14 | 1.16 |
| 4-89 | 0.96 | 0.99 | 1.00 | 1.03 | 1.06 | 1.09 | 1.11 | 1.13 | 1.15 |
| 4-90 | 0.94 | 0.96 | 0.97 | 1.00 | 1.03 | 1.05 | 1.08 | 1.10 | 1.12 |
| 4-91 | 0.91 | 0.93 | 0.94 | 0.97 | 1.00 | 1.02 | 1.05 | 1.07 | 1.08 |
| 4-92 | 0.89 | 0.91 | 0.92 | 0.95 | 0.98 | 1.00 | 1.02 | 1.04 | 1.06 |
| 4-93 | 0.87 | 0.89 | 0.90 | 0.93 | 0.96 | 0.98 | 1.00 | 1.02 | 1.04 |

NOTE: Escalation rate change to be 1.80% after 1993.

Figure 9
Projected NAVFAC Cost Index



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Section 4: AREA COST FACTORS (8/89)

4.1 Stateside Area Cost Factors. The following list outlines area cost factors for various areas within the United States.

| | |
|---|---|
| ALABAMA | .90 |
| ALABAMA AAP | .83 |
| ANNISTON AD | .88 |
| BIRMINGHAM | .92 |
| FORT MCCLELLAN | .87 |
| FORT RUCKER | .85 |
| MAXWELL AFB | .79 |
| MOBILE | .91 |
| MONTGOMERY | .79 |
| PHOSPHATE DEV WKS | .85 |
| REDSTONE ARS | .82 |
| ALASKA | 2.46 |
| ADAK | 3.53 |
| ADAK (NAVY) | 3.53 |
| ALEUTIAN | 3.48 |
| ANCHORAGE | 1.79 |
| CLEAR AFB | 2.78 |
| EIELSON AFB | 2.06 |
| ELMENDORF AFB | 1.79 |
| FAIRBANKS | 2.06 |
| FORT GREELY | 2.66 |
| FT RICHARDSON | 1.79 |
| FORT WAINWRIGHT | 2.06 |
| GALENA | 3.35 |
| KODIAK | 2.85 |
| ARIZONA | 1.00 |
| FLAGSTAFF | 1.03 |
| FORT HUACHUCA | 1.13 |
| NAVAJO AD | 1.03 |
| PHOENIX | .98 |
| TUCSON | 1.00 |
| YUMA | 1.19 |
| YUMA PG | 1.19 |
| ARKANSAS | .91 |
| FORT CHAFFEE | .96 |
| FORT SMITH | .96 |
| LITTLE ROCK | .87 |
| PINEBLUFF | .90 |
| PINEBLUFF ARS | .90 |
| CALIFORNIA | 1.20 |
| BEALE AFB | 1.19 |
| BRIDGEPORT NWTC | 1.24 |
| CAMP PENDLETON | 1.12 |
| CASTLE AFB | 1.08 |
| CENTERVILLE BCH | 1.18 |
| DESERT AREA | 1.25 |
| EDWARDS AFB | 1.23 |
| E1 CENTRO | 1.19 |
| FT HUNT LIGGETT | 1.34 |
| FORT IRWIN | 1.36 |
| FORT ORD | 1.25 |
| GEORGE AFB | 1.20 |
| LEMOORE NAS | 1.14 |
| LOS ANGELES | 1.19 |
| LOS ANGELES AREA | 1.19 |
| MARCH AFB | 1.22 |
| MATHER AFB | 1.15 |
| MCCLELLAN AFB | 1.15 |
| MONTEREY AREA | 1.25 |
| NORTON AFB | 1.16 |
| OAKLAND AB | 1.29 |
| PORT HUENEME AREA | 1.18 |
| PRESIDIO MONTEREY | 1.45 |
| PRESIDIO SAN FRAN | 1.46 |
| RIVER BANK AAF | 1.07 |
| SACRAMENTO AD | 1.13 |
| SAN CLEMENTE IS | 1.46 |
| SAN DIEGO | 1.22 |
| SAN DIEGO AREA | 1.21 |
| SAN FRANCISCO | 1.19 |
| SAN FRAN AREA | 1.21 |
| SAN NICOLAS ISL | 2.20 |
| SHARPE AD | 1.05 |
| SIERRA AD | 1.34 |
| STOCKTON | 1.07 |
| TRAVIS AFB | 1.22 |
| TWENTY-NINE PALMS | 1.32 |
| VANDENBURG AFB | 1.27 |
| COLORADO | .97 |
| AIR FORCE ACADEMY | 1.01 |
| CHEYENNE MOUNTAIN | 1.07 |
| COLORADO SPRINGS | .95 |
| DENVER | .97 |
| FALCON AFB | 1.01 |
| FITZSIMMONS AMC | .99 |
| FORT CARSON | 1.01 |
| PETERSON AFB | 1.01 |
| PUEBLO | 1.00 |
| PUEBLO AD | .98 |
| ROCK MOUNTAIN ARS | .97 |
| CONNECTICUT | 1.13 |
| BRIDGEPORT | 1.12 |
| HARTFORD | 1.10 |
| NEW LONDON | 1.17 |
| NEW LONDON AREA | 1.17 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| STRATFORD ENGR P | 1.12 |
| DELAWARE | .99 |
| DOVER | .97 |
| DOVER AFB | .97 |
| LEWES | .97 |
| LEWES NF | .97 |
| MILFORD | 1.02 |
| FLORIDA | .93 |
| CAPE CANAVERAL | .91 |
| CAPE KENNEDY | .91 |
| EGLIN AFB | .82 |
| HOMESTEAD | .96 |
| HOMESTEAD AFB | .96 |
| JACKSONVILLE AREA | .87 |
| KEY WEST AFB | 1.05 |
| MCDILL AFB | .96 |
| MIAMI | .96 |
| ORLANDO | .84 |
| PANAMA CITY | .87 |
| PENSACOLA AREA | .82 |
| TAMPA | .97 |
| TYNDALL AREA | .87 |
| GEORGIA | .84 |
| ALBANY | .85 |
| ATHENS | .89 |
| ATLANTA | .86 |
| ATLANTA, MARIETTA | .87 |
| DOVER AFB | .82 |
| FORT BENNING | .80 |
| FORT GILLEM | .86 |
| FORT GORDON | .92 |
| FORT MCPHERSON | .81 |
| FORT STEWART | .82 |
| KINGS BAY | .98 |
| MACON | .81 |
| WARNER ROBBIN | .85 |
| HAWAII | 1.32 |
| ALIAMANU | 1.39 |
| BARB PT. NAS | 1.44 |
| BARKING SAND | 1.80 |
| EWA BEACH | 1.44 |
| FORD ISLAND | 1.53 |
| FORT DERUSSY | 1.39 |
| FORT SHAFTER | 1.39 |
| HELEMANO | 1.49 |
| HICKAM AFB | 1.39 |
| HONOLULU | 1.39 |
| KANEOHE MCAS | 1.44 |
| LUALUALEI | 1.39 |
| MAUI | 1.25 |
| MOANALOA | 1.39 |
| PEARL CITY | 1.39 |
| PEARL HARBOR | 1.39 |
| PHAKULOA | 1.35 |
| SCHOFIELD BRKS | 1.39 |
| TRIPLER AMC | 1.39 |
| WHEELER | 1.44 |
| IDAHO | 1.06 |
| BOISE | 1.03 |
| IDAHO FALLS | 1.04 |
| MTN HOME | 1.11 |
| MTN HOME AFB | 1.11 |
| ILLINOIS | 1.01 |
| BELLVILLE | 1.00 |
| CHANUTE AFB | 1.14 |
| CHICAGO | 1.06 |
| CHICAGO AREA | 1.06 |
| FORT SHERIDAN | 1.07 |
| ROCK ISLAND | .97 |
| ROCK ISLAND ARS | 1.00 |
| SAVANNAH AD | 1.04 |
| SCOTT AFB | 1.06 |
| INDIANA | 1.02 |
| CRANE | 1.12 |
| CRANE AAP | 1.12 |
| FT BEN HARRISON | 1.09 |
| GRISSOM AFB | 1.12 |
| INDIANA AAP | 1.00 |
| INDIANAPOLIS | 1.02 |
| JEFFERSON PG | .98 |
| LOGANSPORT | 1.05 |
| MADISON | .98 |
| NEWPORT AAP | 1.03 |
| IOWA | 1.01 |
| BURLINGTON | 1.04 |
| CEDAR RAPIDS | .99 |
| DES MOINES | .99 |
| IOWA AAP | 1.06 |
| KANSAS | .92 |
| FORT LEAVENWORTH | .99 |
| FORT RILEY | .89 |
| KANSAS AAP | .95 |
| MANHATTAN | .94 |
| MCCONNELL AFB | .91 |
| SUNFLOWER AAP | .96 |
| TOPEKA | .90 |
| WICHITA | .91 |
| KENTUCKY | .94 |
| BOWLING GREEN | .93 |
| FORT CAMPBELL | .98 |
| FORT KNOX | 1.03 |
| LEXINGTON | .95 |
| LEX/BLUEGRASS AD | 1.02 |
| LOUISVILLE | .95 |
| LOUISVILLE NOS | .95 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| LOUISIANA | .89 |
| ALEXANDRIA | .84 |
| BARKSDALE AFB | .88 |
| ENGLAND AFB | .84 |
| FORT POLK | .96 |
| GULF OUTPT NEW ORL | .94 |
| LAKE CHARLES | .96 |
| LOUISIANA AAP | .88 |
| NEW ORLEANS | .94 |
| NEW ORLEANS AB | .94 |
| NEW ORLEANS AREA | .94 |
| SHREVEPORT | .88 |
| MAINE | .98 |
| BANGOR | .88 |
| BRUNSWICK | 1.12 |
| CARIBOU | 1.12 |
| CUTLER | .96 |
| LORING AFB | 1.11 |
| PORTLAND | .93 |
| PROSPECT HARBOR | .95 |
| WINTER HARBOR | .95 |
| MARYLAND | .94 |
| ABERDEEN PG | .91 |
| ANDREWS AFB | 1.03 |
| ANNAPOLIS | 1.03 |
| BALTIMORE | .92 |
| FORT DETRICK | .95 |
| FORT HOLABIRD | .92 |
| FORT MEADE | .92 |
| FORT RITCHIE | .95 |
| FREDERICK | .95 |
| HARRY DIAMOND LAB | .97 |
| LEXINGTON PARK | .96 |
| PATUXENT RIV AR | 1.03 |
| MASSACHUSETTS | 1.10 |
| ARMY MATL & MECH | 1.15 |
| BOSTON | 1.08 |
| BOSTON (NAVY) | 1.19 |
| FITCHBURG | 1.11 |
| FORT DEVENS | 1.18 |
| HANSCOMB AFB | 1.15 |
| NATICK | 1.18 |
| SOUTH WEYMOUTH | 1.24 |
| SPRINGFIELD | 1.11 |
| MICHIGAN | 1.05 |
| BAY CITY | 1.02 |
| DETROIT | 1.07 |
| DETROIT AREA | 1.07 |
| DETROIT ARS | 1.07 |
| MARQUETTE | 1.06 |
| REPUBLIC ELFCOM | 1.12 |
| SAWYER AFB | 1.06 |
| WURTSMITH AFB | 1.03 |
| MINNESOTA | 1.13 |
| DULUTH | 1.12 |
| MINNEAPOLIS | 1.15 |
| ROSEMONT | 1.19 |
| ST. CLOUD | 1.12 |
| TWIN CITY AAP | 1.11 |
| MISSISSIPPI | .82 |
| BILOXI | .85 |
| COLUMBUS | .82 |
| COLUMBUS AFB | .82 |
| GULF PORT AREA | .85 |
| JACKSON | .80 |
| KEESLER | .86 |
| MERIDIAN | .85 |
| MISSISSIPPI AAP | .85 |
| PASCAGOULA | .84 |
| MISSOURI | .93 |
| FT LEONARD WOOD | .92 |
| KANSAS CITY | .94 |
| LAKE CITY AAP | .94 |
| ROLLA | .87 |
| ST. LOUIS | .98 |
| ST. LOUIS AAP | .93 |
| WHITEMAN AFB | 1.11 |
| MONTANA | 1.15 |
| BILLINGS | 1.18 |
| BUTTE | 1.21 |
| GREAT FALLS | 1.19 |
| MALMSTROM AFB | 1.19 |
| NEBRASKA | 1.03 |
| CORNHUSKER AAP | .82 |
| GRAND ISLAND | 1.01 |
| LINCOLN | 1.03 |
| OFFUTT AFB | 1.05 |
| OMAHA | 1.05 |
| NEVADA | 1.17 |
| FALLON | 1.34 |
| HAWTHORNE | 1.27 |
| HAWTHORNE AAP | 1.20 |
| LAS VEGAS | 1.09 |
| NELLIS AFB | 1.09 |
| RENO | 1.15 |
| NEW HAMPSHIRE | 1.06 |
| CONCORD | 1.07 |
| NASHUA | 1.04 |
| PORTSMOUTH | 1.08 |
| PORTSMOUTH AREA | 1.10 |
| NEW JERSEY | 1.10 |
| BAYONNE MOT | 1.12 |
| EARLE | 1.11 |
| FORT DIX | 1.00 |
| FORT MONMOUTH | 1.07 |
| LAKEHURST | 1.07 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MCGUIRE AFS | 1.10 |
| NEWARK | 1.10 |
| PICATINNY ARS | 1.18 |
| RED BANK | 1.11 |
| TRENTON | 1.08 |
| TRENTON AREA | 1.08 |
| NEW MEXICO | 1.01 |
| ALAMAGORDO | 1.00 |
| ALBUQUERQUE | 1.00 |
| CANNON AFB | .97 |
| FORT WINGATE | 1.02 |
| GALLUP | 1.02 |
| HOLLOMAN AFB | 1.08 |
| KIRTLAND AFB | 1.00 |
| WHIT SAND MIL RAN | 1.09 |
| NEW YORK | 1.14 |
| ALBANY | 1.07 |
| BROOKLYN | 1.27 |
| FORT DRUM | 1.16 |
| GARDEN CITY | 1.29 |
| GRIFFISS AFB | 1.06 |
| NEW YORK CITY | 1.27 |
| PLATTSBURG AFB | 1.12 |
| SENECA | 1.11 |
| STATEN ISLAND | 1.40 |
| SYRACUSE | 1.08 |
| USMA | 1.14 |
| WATERVLIET ARS | 1.07 |
| NORTH CAROLINA | .85 |
| CAMP LEJEUNE AREA | .92 |
| CHERRY POINT | .92 |
| FAYETTEVILLE | .84 |
| FORT BRAGG | .87 |
| GREENSBORO | .88 |
| POPE AFB | .87 |
| SEYMOUR AFB | .78 |
| SUNNY POINT MT | .89 |
| WILMINGTON | .83 |
| NORTH DAKOTA | .98 |
| BISMARCK | .96 |
| GRAND FORKS | .95 |
| MINOT AFB | 1.04 |
| OHIO | 1.01 |
| CLEVELAND | 1.10 |
| COLUMBUS | .97 |
| DAYTON | 1.03 |
| RAVENNA AAP | 1.05 |
| WRGT PATTERSON AFB | 1.03 |
| YOUNGSTOWN | 1.02 |
| OKLAHOMA | .89 |
| ALTUS AFB | .99 |
| FORT SILL | .92 |
| LAWTON | .92 |
| MCALESTER | .87 |
| OKLAHOMA CITY | .88 |
| TINKER AFB | .87 |
| OREGON | 1.02 |
| ASTORIA | 1.13 |
| CHARLESTON | 1.09 |
| COOS HEAD | 1.06 |
| PENDLETON | 1.09 |
| PORTLAND | .99 |
| SALEM | .97 |
| UMATILLA AD | 1.15 |
| PENNSYLVANIA | .99 |
| CARLISLE BRKS | .88 |
| HARRISBURG | .88 |
| INDIANTOWN GAP MIS | .94 |
| LETTERKENNY AD | 1.01 |
| MECHANICSBURG AREA | .88 |
| NEW CUMBERLAND | .88 |
| PHILADELPHIA | 1.08 |
| PHILADELPHIA AR | 1.08 |
| PITTSBURG | 1.01 |
| SCRANTON AAP | 1.02 |
| TOBYHANNA AD | 1.09 |
| WARMINSTER AREA | 1.02 |
| RHODE ISLAND | 1.11 |
| BRISTOL | 1.11 |
| DAVISVILLE | 1.13 |
| NEWPORT | 1.16 |
| NEWPORT AREA | 1.19 |
| PROVIDENCE | 1.07 |
| SOUTH CAROLINA | .85 |
| BEAUFORT | .93 |
| CHARLESTON | .89 |
| CHARLESTON AFB | .89 |
| CHARLESTON AREA | .91 |
| COLUMBIA | .80 |
| FORT JACKSON | .80 |
| MYRTLE BEACH | .87 |
| SHAW AFB | .78 |
| SOUTH DAKOTA | .99 |
| ABERDEEN | .86 |
| ELLSWORTH AFB | 1.03 |
| SIOUX FALLS | 1.00 |
| RAPID CITY | 1.02 |
| TENNESSEE | .87 |
| ARNOLD AFB | .92 |
| CHATTANOOGA | .85 |
| HOLSTON AAP | .81 |
| KINGSPORT | .81 |
| MEMPHIS | .94 |
| MEMPHIS AREA | .96 |
| MILAN AAP | .96 |
| VOLUNTEER AAP | .90 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| TEXAS | .86 |
| BERGSTROM AFB | .87 |
| BROOKS AFB | .88 |
| CAMP BULLIS | .73 |
| CARSWELL AFB | .91 |
| CHASE FIELD, BVLE | .93 |
| CORPUS CHRISTI | .88 |
| CORPUS CHRISTI AD | .88 |
| DALLAS | .93 |
| DYESS AFB | .96 |
| FORT BLISS | .96 |
| FORT HOOD | .84 |
| FORT SAM HOUSTON | .88 |
| FORT WORTH | .91 |
| GALVESTON | .88 |
| GOODFELLOW AFB | .79 |
| INGLESIDE | .89 |
| KELLY AFB | .88 |
| KINGSVILLE | .95 |
| LACKLAND AFB | .88 |
| LAUGHLIN AFB | .90 |
| LONESTAR AAP | .88 |
| LONGHORN AAP | .82 |
| RANDOLPH AFB | .88 |
| RED RIVER AD | .88 |
| REESE AFB | .84 |
| SAN ANGELO | .79 |
| SAN ANTONIO | .88 |
| SHEPPARD AFB | .99 |
| UTAH | 1.02 |
| DUGWAY PG | 1.15 |
| FORT DOUGLAS | 1.00 |
| HILL AFB | 1.03 |
| OGDEN | .99 |
| SALT LAKE CITY | 1.00 |
| TOOELE | 1.06 |
| TOOELE AD | 1.06 |
| VERMONT | .95 |
| BURLINGTON | .99 |
| MONTPELIER | .90 |
| RUTLAND | .96 |
| VIRGINIA | .92 |
| ARLINGTON | 1.04 |
| ARLINGTON HS | 1.04 |
| CAMERON STA | 1.05 |
| DAHLGREN | 1.02 |
| FORT BELVOIR | 1.05 |
| FORT EUSTIS | .93 |
| FORT HILL | .96 |
| FORT LEE | .90 |
| FORT MONROE | .92 |
| FORT MYER | .97 |
| FORT PICKETT | .97 |
| FORT STORY | .92 |
| NORFOLK | .90 |
| NORFOLK AREA | .92 |
| QUANTICO | .96 |
| RADFORD | .92 |
| RADFORD AAP | .96 |
| RICHMOND | .93 |
| VINT HILL FARMS | .96 |
| WASHINGTON | 1.15 |
| EVERETT | 1.19 |
| FAIRCHILD AFB | 1.19 |
| FORT LEWIS | 1.10 |
| INDIAN ISLAND | .99 |
| JIM CREEK | 1.20 |
| MCCHORD AFB | 1.26 |
| PACIFIC BEACH | 1.10 |
| SEATTLE AREA | 1.14 |
| SPOKANE | 1.14 |
| TACOMA | 1.10 |
| WHIDBEY ISLAND | 1.16 |
| YAKIMA | 1.21 |
| YAKIMA FC | 1.27 |
| WEST VIRGINIA | .95 |
| BLUEFIELD | .89 |
| CHARLESTON | .99 |
| CLARKSBURG | .99 |
| SUGAR GROVE | |
| (Buildings) | 1.29 |
| (Heavy Constr) | 1.50 |
| WISCONSIN | 1.04 |
| BADGER AAP | 1.00 |
| CLAM LAKE | 1.15 |
| FORT MCCOY | 1.17 |
| LACROSSE | 1.06 |
| MADISON | 1.00 |
| MILWAUKEE | 1.06 |
| WYOMING | 1.04 |
| CASPER | 1.00 |
| CHEYENNE | 1.04 |
| F.E. WARREN AFB | 1.04 |
| LARAMIE | 1.08 |
| WASHINGTON, DC | 1.04 |
| FORT MCNAIR | 1.05 |
| WALTER REED AMC | 1.05 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

4.2 Overseas Area Cost Information. (8/89) The following list outlines area cost information for various areas outside of the United States.

| LOCATION | ACF/FER | NOTES |
|---|---|---|
| ANTIGUA | 1.73/2.78 | |
| ARGENTIA | 1.23/1.21 | |
| AUSTRALIA | 1.46/1.43 | |
| DARWIN | 1.80 | |
| PERTH | 1.33 | |
| SYDNEY | 1.24 | |
| AZORES | 1.14/123.00 | 2 |
| BAHAMAS | 2.51/1.09 | 2 |
| ANDROS IS | 2.51 | |
| BELGIUM | 1.25/38.14 | |
| BRUSSELS | 1.25 | |
| BELIZE | 1.48/3.33 | |
| MIDDLESEX | 1.48 | |
| BERMUDA | 1.61/1.00 | 2 |
| CANADA | 1.49/1.21 | |
| ST JOHN'S | 1.77 | |
| TORONTO | 1.18 | |
| VANCOUVER | 1.52 | |
| CRETE | 1.37/133.30 | |
| CRETE | 1.37 | |
| CUBA | 1.61 | 2 |
| GUANTANAMO | 1.61 | 2 |
| DIEGO GARCIA | 3.00 | |
| EGYPT | 1.52/2.50 | |
| CAIRO | 1.52 | |
| GREECE | .91/160.00 | |
| ATHENS | .81 | |
| TRIAKALA | 1.00 | |
| GREENLAND | 2.52/7.75 | |
| GODTHAAB | 2.52 | |
| GUAM | 2.03 | |
| AGANA | 2.03 | |
| HONDURAS | 1.08/2.78 | |
| PUERTO CORTES | 1.07 | |
| TEGUCIGALPA | 1.08 | |
| ICELAND | 4.01/42.25 | 1 |
| KEFLAVIK | 4.01 | |
| REYKAVIK | 4.01 | 1 |
| ISRAEL | 1.32/1.573 | |
| TEL AVIV | 1.32 | |
| ITALY | 1.21/1350.00 | 1 |
| NAPLES | 1.21 | 1 |
| SICILY | 1.21 | 1 |

| LOCATION | ACF/FER | NOTES |
|---|---|---|
| JAPAN | 1.89/133.80 | |
| MISAWA | 1.80 | |
| OKINAWA | 1.99 | |
| TOKYO | 1.87 | |
| JOHNSTON ATOLL | 2.33 | |
| KOREA | 1.07/669.00 | |
| DMZ | 1.10 | |
| SEOUL | 1.07 | |
| KWAJALEIN | 2.43 | |
| INNER IS | 2.19 | |
| KWAJALEIN | 2.43 | |
| OUTER IS | 2.67 | |
| MIDWAY ISLAND | 2.31 | |
| MOROCCO | 1.68/10.53 | |
| CASABLANCA | 1.68 | |
| NETHERLANDS | 1.20/2.13 | |
| OSS | 1.20 | |
| NEW ZEALAND | 2.14/1.50 | |
| WELLINGTON | 2.14 | |
| OMAN | 1.89/.41 | |
| RUWI | 1.89 | |
| PANAMA | 1.15 | |
| PANAMA CITY | 1.15 | |
| PHILLIPINES | .90/21.10 | |
| MANILA | .90 | |
| PUERTO RICO | 1.16 | 2 |
| ROOSEVELT ROADS | 1.16 | 2 |
| SAN JUAN | 1.16 | 2 |
| SOMALIA | 1.20/140.00 | 1 2 |
| SPAIN | .95/118.00 | |
| MADRID | .95 | |
| TURKEY | 1.00 | |
| ERZURUM | 1.00 | |
| ISTANBUL | 1.00 | |
| UNITED KINGDOM | 1.49/.59 | 1 |
| BIRMINGHAM | 1.46 | 1 |
| LONDON | 1.50 | 1 |
| GLASGOW, SCOT | 1.52 | 1 |
| WEST GERMANY | 1.15/1.82 | |
| FRANKFURT | 1.15 | |
| GRAFENWOEHR | 1.15 | |
| KAISERSLAUTERN | 1.15 | |
| MUNICH | 1.15 | |
| WEST INDIES | 1.46/2.78 | |
| GRENADA | 1.46 | |

NOTES: 1. Escalate project costs to the one-third time point of construction.
2. Allow for Defense Base Act Insurance Costs.
3. International Balance of Payments (IBOP) Summary Sheet is required.

ACF: Area Cost Factor FER: Foreign Exchange Rate



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 5: GUIDANCE COSTS

5.1 Primary Facility Guidance Costs. Table 6 gives the current guidance costs for various facilities identified by category code. The costs have been adjusted for an ACF of 1.00, and the time has been adjusted for FY 92 and FY 93.

5.2 Supporting Facilities Guidance Cost. Table 7 gives the current total composite contract cost for various supporting facilities elements. The cost has been adjusted for an ACF of 1.00, and the time has been adjusted for FY 92 and FY 93.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6

Primary Facility Guidance Costs

NAVFACENGCOM FY 92 & FY 93 GUIDANCE COST (ACF = 1.00) AS OF JULY 1989.

ALL UNIT COSTS INCLUDE BUILT-IN EQUIPMENT TYPICAL FOR THE FACILITY.
UNIT COSTS INCLUDE CQM & PCAS EXCEPT HIGH TECH AND HIGH RISK FACILITIES.

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 113.20 | AIRCRAFT PARKING APRON | 65000 SY | 43 | 44 |
| 131.15 | COMMUNICATIONS CENTER | 6000 SF | 230 | 235 |
| 131.24 | SATELLITE COMM CENTER | 6000 SF | 260 | 266 |
| 131.25 | TELEMETRY BUILDING | 9000 SF | 191 | 195 |
| 131.40 | TELEPHONE EXCHANGE | 6000 SF | 161 | 165 |
| 131.45 | TERMINAL EQUIP BLDG | 70000 SF | 109 | 111 |
| 131.55 | ANTENNA ARRAY BLDG | 15000 SF | 125 | 128 |
| 132.10 | ANTENNA COMM (800 LF) | 1 EA | 2500 | 2555 |
| 133.72 | RADAR AIR TRAF CTL CTR | 6500 SF | 136 | 139 |
| 137.10 | OCEANOGRAPHIC BLDG | 37000 SF | 95 | 97 |
| 141.20/25 | ACFT FIRE/RESCUE/STRUC/STATION | 8000 SF | 125 | 128 |
| 141.40 | AIRCRAFT OPER BLDG W/O CONT TOWER | 20000 SF | 95 | 97 |
| 141.42 | AIR INTEL SUPPORT CTR | 20000 SF | 95 | 97 |
| 141.70 | CONTROL TOWER | 3000 SF | 160 | 164 |
| 143.15 | RANGE OP CENTER | 13000 SF | 185 | 189 |
| 143.20 | ORDNANCE OPERATION BUILDING | 13000 SF | 80 | 82 |
| 143.40 | COMPUTER PROGRAMMING OP CTR | 21000 SF | 97 | 99 |
| 143.45 | ARMORY | 10000 SF | 85 | 87 |
| 143.65 | OPCON CTR FOR FLEET OPERATIONS | 36000 SF | 137 | 140 |
| 143.77 | OPERATIONAL STORAGE | 4000 SF | 49 | 50 |
| 143.80 | NSG REGIONAL REPORTING CENTER | 26000 SF | 150 | 153 |
| 151.20 | BERTHING PIER | 10000 SY | 974 | 995 |
| 159.20 | DEGAUSSING BUILDING | 1600 SF | 175 | 179 |
| 171.10 | ACADEMIC INSTRUCTION BLDG | 30000 SF | 76 | 78 |
| 171.15 | RESERVE TRAINING BUILDING | 33834 SF | 67 | 68 |
| 171.20 | APPLIED INSTRUCTION BLDG | 25000 SF | 86 | 88 |
| 171.35 | OP TRAINER FAC (NON AIRCRAFT) | 22000 SF | 100 | 102 |
| 171.351 | OP TRAINER FAC (AIRCRAFT) | 28000 SF | 120 | 123 |
| 171.60 | RECRUIT PROCESSING BUILDING | 80000 SF | 74 | 76 |
| 179.45 | FIREFIGHTING TRAINING FACILITY | 8100 SF | 220 | 225 |
| 211.01 | AIRCRAFT ACOUSTICAL ENCL | 7950 SF | 650 | 664 |
| 211.03 | CORROSION CONTROL HANGAR | 35000 | 222 | 227 |
| 211.05-7 | MAINTENANCE HANGAR (1 MODULE) | 38000 SF | 78 | 80 |
| 211.08 | AIRFRAMES SHOP (NON NADEP) | 23000 SF | 140 | 143 |
| 211.12 | PAINT AND FINISHING HANGAR | 69708 SF | 209 | 214 |
| 211.14 | VSTOL AIRCRAFT REWORK FAC (NADEP) | 160800 SF | 88 | 90 |
| 211.21 | ENGINE MAINTENANCE SHOP (NON-NADEP) | 34000 SF | 70 | 72 |
| 211.34 | DYNAMIC COMPONENTS SHOP (NADEP) | 8000 SF | 90 | 92 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Primary Facility Guidance Costs (July 1989) ACF = 1.00

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 211.36 | ELECTRICAL COMPONENTS SHOP (NADEP) | 15550 SF | 89 | 91 |
| 211.45 | AVIONICS SHOP (NON-NADEP) | 23000 SF | 87 | 89 |
| 211.54 | AVIATION ARMAMENT SHOP (NON-NADEP) | 16000 SF | 73 | 75 |
| 211.60 | SUPPORT EQUIP REWORK SHOP (NADEP) | 57680 SF | 91 | 93 |
| 211.70 | MANUFACTURE & REPAIR SHOP (NADEP) | 81000 SF | 66 | 67 |
| 211.72 | METAL FAB/MANUFACTURING SHOP (NADEP) | 81000 SF | 111 | 113 |
| 211.73 | METAL TREATMENT SHOP (PLATING) (STRUCTURE ONLY) (NADEP) | 81000 SF | 158 | 161 |
| 211.75 | PARACHUTE/SURV EQUIP SHOP (NON-NADEP) | 8000 SF | 83 | 85 |
| 211.81 | TURBO FAN/JET ENGINE TEST CELL | 6900 SF | 668 | 683 |
| 211.811 | TURBO PROP/SHAFT ENGINE TEST CELL | 9655 SF | 249 | 254 |
| 211.83 | JET ENGINE TEST CELL (NADEP) | 14110 SF | 508 | 519 |
| 211.89 | POWER CHECK PAD (NON-VSTOL) | 1 EA | *346 | *353 |
| 211.891 | POWER CHECK PAD (VSTOL) | 1 EA | *579 | *591 |
| 211.93 | ENGINEERING LAB (NADEP) | 16000 SF | 145 | 148 |
| 211.94 | AIRCRAFT POWER CHECK FAC (NADEP) | 9000 SF | 455 | 465 |
| 212.10 | GUIDED MISSILE INTEGRATION FAC | 5000 SF | 65 | 66 |
| 213.30 | SHORE INTER-MAINT FAC (SIMA) | 77000 SF | 86 | 88 |
| 213.55 | PIPEFITTING SHOP (ASBESTOS HANDLING) | 78000 SF | 100 | 102 |
| 213.58 | BOAT SHOP | 22500 SF | 66 | 67 |
| 213.59 | ABRASIVE BLAST FACILITY | 20000 SF | 160 | 164 |
| 213.70 | SHIP SERVICES SUPPORT BLDG | 7000 SF | 100 | 102 |
| 213.75 | AMPHIBIAN VEHICLE MAINT SHOP | 55000 SF | 92 | 94 |
| 214.10 | COMBAT VEHICLE MAINT SHOP | 20000 SF | 115 | 118 |
| 214.20 | AUTOMOTIVE-VEHICLE MAINT SHOP | 30000 SF | 85 | 87 |
| 214.30 | REFUELING VEHICLE SHOP | 2600 SF | 85 | 87 |
| 214.51 | AUTO ORGANIZAT'L SHOP (MARCORPS) | 30000 SF | 70 | 72 |
| 214.53 | FIELD-MAINT SHOP-TANK/AUTO (MARCORPS) | 20000 SF | 87 | 89 |
| 215.30 | HEAVY GUN SHOP | 25000 SF | 115 | 118 |
| 216.10 | AMMO REWORK AND OVERHAUL SHOP | 14170 SF | 140 | 143 |
| 216.40 | TORPEDO SHOP | 69000 SF | 130 | 133 |
| 216.60 | QUALITY EVALUATION LAB | 27000 SF | 85 | 87 |
| 217.10 | ELEC/COMM MAINT SHOP | 27000 SF | 88 | 90 |
| 218.20 | CONST/WGHT HANDLING EQUIP SHOP | 9600 SF | 65 | 66 |
| 218.25 | MARINE AIR-BASE SQUADRON FACILITY | 48330 SF | 90 | 92 |
| 218.45 | INSTRUMENT-CALIB SHOP | 12000 SF | 70 | 72 |
| 218.50 | BATTERY SHOP | 27000 SF | 85 | 87 |
| 218.60 | AIRCRAFT GROUND SUPPORT EQUIP SHOP | 32000 SF | 80 | 82 |
| 219.10 | PUBLIC WORKS SHOP | 31000 SF | 65 | 66 |
| 219.77 | PUBLIC WORKS MAINT STORAGE | 42830 SF | 65 | 66 |

* Figures represent cost in thousands.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Primary Facility Guidance Costs (July 1989) ACF = 1.00

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 222.10 | MISSILE ASSEMBLY PLANT | 3430 SF | 110 | 112 |
| 226.65 | PROPELLANT AND RELATED CHEM PLANT | 6000 SF | 350 | 358 |
| 227.20 | SONAR EQUIPMENT PLANT | 93200 SF | 91 | 93 |
| 310.23 | COMBINED RESEARCH LAB | 60000 SF | 98 | 100 |
| 310.33 | COMPUTATION AND ANALYSIS LAB | 28000 SF | 110 | 112 |
| 310.37 | OCEAN SCIENCES LABORATORY | 56000 SF | 112 | 114 |
| 311.25 | AIRCRAFT SYS INTEGRATION LAB | 26500 SF | 90 | 92 |
| 312.25 | SPACECRAFT/SATELLITE LAB | 80000 SF | 150 | 153 |
| 313.10 | SHIP & MARINE LAB | 20000 SF | 95 | 97 |
| 313.15 | SHIPS AND MARINE NAVIG EQUIP LAB | 30200 SF | 150 | 153 |
| 315.20 | UNDERWATER WEAPON SYS LAB | 6000 SF | 185 | 189 |
| 315.30 | WEAPONS SYS INTEGRATION LAB | 51000 SF | 135 | 138 |
| 316.10 | AMMO, EXPLOSIVES AND TOXICS LAB | 6000 SF | 465 | 475 |
| 317.15 | DETECTION SYSTEMS LABORATORY | 17000 SF | 95 | 97 |
| 317.20 | ELECTRICAL/ELECTRONIC SYS LAB | 60000 SF | 116 | 119 |
| 317.25 | ELEC/COMM SYS INTEGRATION LAB | 110000 SF | 110 | 112 |
| 318.10 | PROPULSION SYSTEMS LAB | 13000 SF | 290 | 296 |
| 319.10 | MISC EQUIPMENTS & ITEMS LABORATORY | 38000 SF | 64 | 65 |
| 319.40 | RANGE OPER & INSTRUMENTATION LAB | 31000 SF | 80 | 82 |
| 321.10 | TECHNICAL SERVICES LABORATORY | 56500 SF | 66 | 67 |
| 371.17 | ELEC, COMM, & ELEC SYS RANGE FAC | 15238 SF | 50 | 51 |
| 411.20 | AVIATION GASOLINE STORAGE | 10000 BL | 70 | 72 |
| 412.25 | LUBRICANT STORAGE | 16750 SF | 47 | 48 |
| 421.22 | HIGH EXPLOSIVE MAGAZINE | 3000 SF | 150 | 153 |
| 421.32 | INERT STOREHOUSE | 16000 SF | 65 | 66 |
| 421.48 | SMALL ARMS/PYROTECHNICS LAB | 3000 SF | 150 | 153 |
| 421.72 | MISSILE MAGAZINE | 9255 SF | 165 | 169 |
| 431.10 | COLD STORAGE WAREHOUSE (24' & OVER SH) | 6000 SF | 133 | 136 |
| | COLD STORAGE WAREHOUSE (12'-24' SH) | 6000 SF | 88 | 90 |
| 441.10-12 | GENERAL WAREHOUSE (24' & OVER SH) | 60000 SF | 71 | 72 |
| | GENERAL WAREHOUSE (12'-24' SH) | 40000 SF | 57 | 58 |
| 441.13 | SECURITY WAREHOUSE | 90000 SF | 55 | 56 |
| 441.20 | CONTROLLED HUMIDITY WAREHOUSE | 150000 SF | 45 | 46 |
| 441.30 | HAZARD/FLAMMABLE STOREHOUSE | 18000 SF | 100 | 102 |
| 441.35 | GENERAL STORAGE SHED | 1000 SF | 30 | 31 |
| 441.71 | INTEGRATED LOGISTICS OVERHAUL AND OUTFITTING BUILDING | 10000 SF | 100 | 102 |
| 441.72 | SERVMART | 39600 SF | 50 | 51 |
| 610.10 | ADMIN OFFICE (INCL HQS) | 25000 SF | 90 | 92 |
| 610.101 | PASS OFFICE | 6000 SF | 95 | 97 |
| 610.20 | DATA PROCESSING CENTER | 21000 SF | 115 | 118 |
| 610.40 | COURTROOM FACILITY | 6000 SF | 95 | 97 |
| 610.70 | DIVISION/WING HEADQUARTERS (MARCORPS) | 30000 SF | 90 | 92 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Primary Facility Guidance Costs (July 1989) ACF = 1.00

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 610.71 | REGIMENTAL/GROUP HQ BLDG (MARCORPS) | 30000 SF | 90 | 92 |
| 610.72 | BATTALION/SQUADRON HEADQUARTERS | 30000 SF | 90 | 92 |
| 721.11 | BEQ | 100000 SF | 76 | 78 |
| 721.11 | BEQ-HIGH RISE | 75400 SF | 78 | 80 |
| 721.12 | BEQ E-5 AND E-6 | 100000 SF | 80 | 82 |
| 721.14 | CLASS A STUDENT BARRACKS | 108800 SF | 95 | 97 |
| 722.10 | ENLISTED DINING FACILITY | 16000 SF | 150 | 153 |
| 724.11-12 | BOQ | 44000 SF | 76 | 78 |
| 730.10 | FIRE STATION (COMMUNITY) | 3500 SF | 110 | 112 |
| 730.15 | CONFINEMENT FACILITY | 30000 SF | 98 | 100 |
| 730.20 | POLICE STATION | 6500 SF | 95 | 97 |
| 730.83 | CHAPEL | 15000 SF | 105 | 107 |
| 730.84 | RELIGIOUS EDUCATION BUILDING | 15000 SF | 95 | 97 |
| 740.25 | FAMILY SERVICES CENTER | 5000 SF | 105 | 107 |
| 740.36 | HOBBY SHOP, ARTS/CRAFTS | 16500 SF | 107 | 109 |
| 740.43 | GYMNASIUM | 20000 SF | 105 | 107 |
| 740.50 | FIELD HOUSE | 38330 SF | 100 | 102 |
| 740.74 | CHILD CARE CENTER | 8000 SF | 95 | 97 |
| 811.09 | ELECTRIC POWER PLANT BUILDING | 4800 SF | 77 | 79 |
| 811.10 | ELECTRIC POWER PLANT - DIESEL | 10000 KW | 690 | 705 |
| 831.14 | INDUSTRIAL WASTE TREATMENT BLDG | 10000 SF | 76 | 78 |
| 831.41 | HAZARDOUS WASTE FACILITY | 3600 SF | 83 | 85 |
| 872.20 | GUARD AND WATCH TOWERS | 100 SF | 219 | 224 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| 511, 512, & 516 ELECTRICAL DIST. | | | | |
| VP-A | Note: Normal duct size is 4". 35KV circuit run 5" conduit | | | |
| VP-D | Note: For quantities less than 200 LF add 20% less than 100 LF add 50% | | | |
| VP-H | 4-1/C #2 THW str al. w/1-1/C#8 CU ground secondary w/termination | LF | 7.52 | 7.66 |
| VP-J | 4-1/C #1/0 THW str al. w/1-1/C#6 CU ground secondary w/termination | LF | 9.81 | 9.99 |
| VP-K | 4-1/C #2/0 THW str al. w/1-1/C#4 CU ground secondary w/termination | LF | 12.55 | 12.79 |
| VP-M | 4-1/C #4/0 THW str al. w/1-1/C#2 CU ground secondary w/termination | LF | 17.31 | 17.64 |
| VP-N | 4-1/C 250 MCM THW str al. w/1-1/C#2 CU ground secondary w/termination | LF | 18.29 | 18.63 |
| VP-R | 4-1/C 500 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination | LF | 25.80 | 26.29 |
| VP-U | 4-1/C 750 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination | LF | 31.34 | 31.94 |
| WI-H | 4-1/C #2 CU USE wire 600V w/1-1/C#8 CU ground secondary w/termination | LF | 12.55 | 12.79 |
| WI-J | 4-1/C #1/0 CU USE wire 600V w/1-1/C#6 CU ground secondary w/termination | LF | 16.99 | 17.31 |
| WI-K | 4-1/C #2/0 CU USE wire 600V w/1-1/C#4 CU ground secondary w/termination | LF | 20.71 | 21.10 |
| WI-M | 4-1/C #4/0 CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination | LF | 30.04 | 30.61 |
| WI-N | 4-1/C 250 MCM CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination | LF | 35.92 | 36.60 |
| WI-R | 4-1/C 500 MCM CU USE wire 600V w/1-1/C#1/0 CU grd. secondary w/termination | LF | 55.51 | 56.56 |
| WJ-F | 3-1/C #4 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 9.14 | 9.31 |
| WJ-H | 3-1/C #2 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 11.00 | 11.21 |
| WJ-J | 3-1/C #1/0 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 13.72 | 13.98 |
| WJ-K | 3-1/C #2/0 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 16.98 | 17.30 |
| WJ-M | 3-1/C #4/0 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 21.87 | 22.28 |
| WJ-N | 3-1/C 250 MCM AWG CU XLP 5KV shielded cable primary w/o termination | LF | 24.49 | 24.95 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| WJ-R | 3-1/C 500 MCM AWG CU XLP 5KV shielded cable primary w/o termination | LF | 39.18 | 39.92 |
| WK-H | 3-1/C #2 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 13.72 | 13.98 |
| WK-I | 3-1/C #1 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 15.02 | 15.30 |
| WK-J | 3-1/C #1/0 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 16.98 | 17.30 |
| WK-K | 3-1/C #2/0 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 19.06 | 19.42 |
| WK-M | 3-1/C #4/0 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 24.49 | 24.95 |
| WK-N | 3-1/C 250 MCM AWG CU XLP 15KV shielded cable primary w/o termination | LF | 28.09 | 28.62 |
| WK-R | 3-1/C 500 MCM AWG CU XLP 15KV shielded cable primary w/o termination | LF | 41.05 | 41.93 |
| WK-1 | Cable termination size no. 2 thru 4/0 0-15KV porcelain | EA | 353.00 | 360.00 |
| WK-2 | Cable termination size 250 MCM thru 500 MCM 0-15KV porcelain | EA | 484.00 | 493.00 |
| WK-3 | Cable termination size 500 MCM thru 750 MCM 0-15KV porcelain | EA | 692.00 | 705.00 |
| YI-OCA | Ditto YI-OCB but w/3 ea 36KV sta typ arresters added | EA | 101,870.00 | 103,792.00 |
| YI-OCB | 35KV OCB line up compl w/3-750 MCM term-2 5WS 1 OCB 1-6" con stub PED & FWD | EA | 92,728.00 | 94,477.00 |
| YI-OCC | Ditto YI-OCB but w/2-6" conduit stub ups & 6 ea 750 MCM terminators | EA | 96,646.00 | 98,469.00 |
| YI-OCD | Ditto YI-OCB but 2/2-6" cond stub ups 6 ea 750 MCM term & 3 ea 36KV arst | EA | 107,094.00 | 109,114.00 |
| YI-OCE | Ditto YI-OCB but 2/4/0 grd mat 100'2" duct bk all control & power cable | EA | 94,034.00 | 95,808.00 |
| YI-OCF | 2000 amp 35KV bus 16' W-2-support pedestals 1 at each end | EA | 340.04 | 346.45 |
| YP-012 | Duct bank 1 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 8.49 | 8.65 |
| YP-013 | Duct bank 1 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 13.91 | 14.17 |
| YP-014 | Duct bank 1 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 19.06 | 19.42 |
| YP-015 | Duct bank 1 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 32.65 | 33.26 |
| YP-016 | Duct bank 1 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 44.40 | 45.24 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| YP-022 | Duct bank 2 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 16.30 | 16.61 |
| YP-023 | Duct bank 2 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 26.78 | 27.28 |
| YP-024 | Duct bank 2 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 36.57 | 37.26 |
| YP-025 | Duct bank 2 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 63.35 | 64.54 |
| YP-026 | Duct bank 2 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 86.98 | 88.62 |
| YP-032 | Duct bank 3 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 23.12 | 23.55 |
| YP-033 | Duct bank 3 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 39.18 | 39.92 |
| YP-034 | Duct bank 3 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 54.86 | 55.89 |
| YP-035 | Duct bank 3 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 94.03 | 95.81 |
| YP-036 | Duct bank 3 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 129.31 | 131.75 |
| YP-042 | Duct bank 4 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 30.04 | 30.61 |
| YP-043 | Duct bank 4 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 45.06 | 45.91 |
| YP-044 | Duct bank 4 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 70.52 | 71.85 |
| YP-045 | Duct bank 4 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 124.07 | 126.41 |
| YP-046 | Duct bank 4 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 169.78 | 172.98 |
| YT-012 | Duct bank 1 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 5.23 | 5.32 |
| YT-013 | Duct bank 1 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 6.20 | 6.32 |
| YT-014 | Duct bank 1 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 7.18 | 7.31 |
| YT-015 | Duct bank 1 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 8.83 | 9.00 |
| YT-016 | Duct bank 1 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 10.78 | 10.98 |
| YT-022 | Duct bank 2 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 8.49 | 8.65 |
| YT-023 | Duct bank 2 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 10.45 | 10.65 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| YT-024 | Duct bank 2 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 13.06 | 13.31 |
| YT-025 | Duct bank 2 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 15.68 | 15.97 |
| YT-026 | Duct bank 2 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 19.59 | 19.96 |
| YT-032 | Duct bank 3 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 12.41 | 12.65 |
| YT-033 | Duct bank 3 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 15.02 | 15.30 |
| YT-034 | Duct bank 3 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 18.61 | 18.96 |
| YT-035 | Duct bank 3 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 23.51 | 23.95 |
| YT-036 | Duct bank 3 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 28.74 | 29.28 |
| YT-042 | Duct bank 4 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 15.02 | 15.30 |
| YT-043 | Duct bank 4 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 18.29 | 18.63 |
| YT-044 | Duct bank 4 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 22.86 | 23.30 |
| YT-045 | Duct bank 4 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 28.74 | 29.28 |
| YT-046 | Duct bank 4 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 35.27 | 35.93 |
| YT-062 | Duct bank 6 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 21.22 | 21.62 |
| YT-063 | Duct bank 6 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 26.12 | 26.61 |
| YT-064 | Duct bank 6 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 32.65 | 33.26 |
| YT-065 | Duct bank 6 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 40.49 | 41.26 |
| YT-066 | Duct bank 6 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 52.24 | 53.22 |
| YT-082 | Duct bank 8 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 27.42 | 27.94 |
| YT-083 | Duct bank 8 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 31.34 | 31.94 |
| YT-084 | Duct bank 8 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 41.80 | 42.58 |
| YT-085 | Duct bank 8 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 52.29 | 53.28 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| YT-086 | Duct bank 8 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 66.61 | 67.87 |
| YT-122 | Duct bank 12 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 39.18 | 39.92 |
| YT-123 | Duct bank 12 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 48.33 | 49.24 |
| YT-124 | Duct bank 12 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 61.38 | 62.54 |
| YT-125 | Duct bank 12 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 77.05 | 78.51 |
| YT-126 | Duct bank 12 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 97.95 | 99.80 |
| YT-162 | Duct bank 16 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 52.24 | 53.22 |
| YT-163 | Duct bank 16 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 63.99 | 65.20 |
| YT-164 | Duct bank 16 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 82.28 | 83.83 |
| YT-165 | Duct bank 16 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 100.56 | 102.46 |
| YT-166 | Duct bank 16 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 130.60 | 133.07 |
| YT-15 | 15KV feeder w/4 way 4" DB, 4/0 CP grd, 3-6'x8'x6'D MHS & 3-250 MCM cab w/spl | LF | 60.08 | 61.21 |
| YT-35 | 35KV feeder w/4 way 6" DB, 4/0 CP grd, 3-9'x12'x6'D MHS & 3-500 MCM cab w/spl | LF | 101.87 | 103.79 |
| ZM-15 | Pole line complete 15KV 4/0 alum w/1 tap pole & 1 term pole 1000' run | LF | 16.98 | 17.30 |
| ZM-35 | Pole line complete 35KV 4/0 alum w/1 tap pole & 1 term pole 1000' run | LF | 17.64 | 17.97 |
| 513 | ELECTRICAL SUBSTATION | | | |
| YJ-C1 | 15KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 6,354.00 | 6,474.00 |
| YJ-C10 | 25KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 7,413.00 | 7,552.00 |
| YJ-C11 | 37.5KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 7,648.00 | 7,792.00 |
| YJ-C12 | 50KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 7,883.00 | 8,032.00 |
| YJ-C13 | 75KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 9,177.00 | 9,351.00 |
| YJ-C14 | 100KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 9,766.00 | 9,950.00 |
| YJ-C15 | 167KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 10,119.00 | 10,310.00 |
| YJ-C16 | 75KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 16,472.00 | 16,783.00 |
| YJ-C17 | 112KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 16,905.00 | 17,224.00 |
| YJ-C18 | 150KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 18,237.00 | 18,581.00 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| YJ-C19 | 225KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 20,591.00 | 20,979.00 |
| YJ-C20 | 300KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 21,296.00 | 21,698.00 |
| YJ-C21 | 500KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 25,768.00 | 26,254.00 |
| YJ-C22 | 750KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 29,650.00 | 30,210.00 |
| YJ-C23 | 1000KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 34,121.00 | 34,765.00 |
| YJ-C24 | 1500KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 42,828.00 | 43,636.00 |
| YX-PF | 1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 5,648.00 | 5,754.00 |
| YX-PG | 1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 5,883.00 | 5,994.00 |
| YX-PH | 1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 6,236.00 | 6,354.00 |
| YX-PI | 3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 12,237.00 | 12,468.00 |
| YX-PJ | 3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 12,354.00 | 12,587.00 |
| YX-PK | 3, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 12,707.00 | 12,947.00 |
| YX-PLF | 1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 6,118.00 | 6,354.00 |
| YX-PLG | 1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 6,354.00 | 6,593.00 |
| YX-PLH | 1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 6,707.00 | 6,953.00 |
| YX-PLI | 3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 12,707.00 | 13,307.00 |
| YX-PLJ | 3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 12,707.00 | 13,307.00 |
| YX-PLK | 3, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 13,060.00 | 13,666.00 |
| 541 & 542 | HEAT DISTRIBUTION | | | |
| DK-1AA | 10" steam & 6" condensate heat distribution piping aboveground | LF | 330.00 | 336.00 |
| DK-2AA | 8" steam & 6" condensate heat distribution piping aboveground | LF | 322.00 | 328.00 |
| DK-3AA | 8" steam & 4" condensate heat distribution piping aboveground | LF | 260.00 | 265.00 |
| DK-4AA | 6" steam & 4" condensate heat distribution piping aboveground | LF | 218.00 | 222.00 |
| DK-5AA | 4" steam & 2.5" condensate heat distribution piping aboveground | LF | 192.00 | 195.00 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| DK-6AA | 3" steam & 2.5" condensate heat distribution piping aboveground | LF | 172.00 | 175.00 |
| DK-7AA | 3" steam & 2" condensate heat distribution piping aboveground | LF | 162.00 | 165.00 |
| DK-8AA | 2.5" steam & 2.5" condensate heat distribution piping aboveground | LF | 162.00 | 165.00 |
| DK-9AA | 2.5" steam & 2" condensate heat distribution piping aboveground | LF | 159.00 | 162.00 |
| DK-91A | 2.5" steam & 1.5" condensate heat distribution piping aboveground | LF | 157.00 | 160.00 |
| DK-92A | 2" steam & 2" condensate heat distribution piping aboveground | LF | 154.00 | 157.00 |
| DK-93A | 2" steam & 1.5" condensate heat distribution piping aboveground | LF | 148.00 | 151.00 |
| DK-94A | 2" steam & 1" condensate heat distribution piping aboveground | LF | 146.00 | 149.00 |
| DK-95A | 1.5" steam & 1.5" condensate heat distribution piping aboveground | LF | 142.00 | 145.00 |
| DK-96A | 1.5" steam & 1" condensate heat distribution piping aboveground | LF | 140.00 | 143.00 |
| DK-97A | 1" steam & 1" condensate heat distribution piping aboveground | LF | 138.00 | 140.00 |

For areas with unstable soil conditions increase unit prices by 20%.

551, 552, & 553 WATER DISTRIBUTION

| | | | | |
|---|---|---|---|---|
| DF-DM | Paving patch for trench. Flexible 2" surface w/12" base (incl removal) | SY | 37.87 | 38.59 |
| DC-EZ | Concrete patch for trench 6" conc over 6" base (incl removal) | SY | 61.38 | 62.54 |
| DJ-LA | Fire hydrant standard 3 way post type w/6" valve and thrust block | EA | 3,657.00 | 3,726.00 |
| DJ-AE | 4" 90 deg bend CI MJ | EA | 261.00 | 266.00 |
| DJ-AI | 6" 90 deg bend CI MJ | EA | 340.00 | 347.00 |
| DJ-AM | 8" 90 deg bend CI MJ | EA | 392.00 | 400.00 |
| DJ-AQ | 10" 90 deg bend CI MJ | EA | 515.00 | 525.00 |
| DJ-AU | 12" 90 deg bend CI MJ | EA | 653.00 | 665.00 |
| DJ-BA | 4" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 13.72 | 13.98 |
| DJ-BB | 6" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 17.64 | 17.97 |
| DJ-BC | 8" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 23.51 | 23.95 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| FY 92 | FY 93 | | | |
| DJ-BD | 10" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 30.70 | 31.28 |
| DJ-BE | 12" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 37.87 | 38.59 |
| QL-JE | 1" Type K copper pipe w/3' deep trenching, backfill & compaction | LF | 4.58 | 4.67 |
| QL-JM | 1-1/2" Type K copper pipe w/3' deep trenching, backfill & compaction | LF | 6.20 | 6.32 |
| QL-KA | 2" Type K copper pipe w/3' deep trenching, backfill & compaction | LF | 7.83 | 7.98 |
| DJ-LN | 4" tapping saddle tap size to 2" | EA | 169.00 | 173.00 |
| DJ-LO | 6" tapping saddle tap size to 2" | EA | 209.00 | 213.00 |
| DJ-LP | 8" tapping saddle tap size to 2" | EA | 222.00 | 227.00 |
| DJ-LQ | 10" tapping saddle tap size to 2" | EA | 248.00 | 253.00 |
| DJ-LR | 12" tapping saddle tap size to 2" | EA | 287.00 | 293.00 |
| DJ-LT | 4" x 4" tapping sleeve, 4" tapping valve & 4" tapped hole in pipe | EA | 2,057.00 | 2,096.00 |
| DJ-LV | 6" x 6" tapping sleeve, 6" tapping valve & 6" tapped hole in pipe | EA | 3,004.00 | 3,061.00 |
| DJ-LY | 8" x 8" tapping sleeve, 8" tapping valve & 8" tapped hole in pipe | EA | 3,462.00 | 3,527.00 |
| DJ-LYD | 10" x 10" tapping sleeve, 10" tapping valve & 10" tapped hole in pipe | EA | 5,485.00 | 5,589.00 |
| DJ-LYI | 12" x 12" tapping sleeve, 12" tapping valve & 12" tapped hole in pipe | EA | 7,184.00 | 7,319.00 |
| | Underground tanks for hazardous waste oil storage tanks increase cost by 120% | | | |
| 554 | SANITARY SEWERS | | | |
| DP-KA | Precast 48" dia manhole 5' deep w/frame & cover (incl poured invert) | EA | 2,187.00 | 2,228.00 |
| DP-KB | Precast 48" dia manhole 8' deep w/frame & cover (incl poured invert) | EA | 3,134.00 | 3,194.00 |
| DF-DM | Paving patch for trench. Flexible 2" surface w/12" base (incl removal) | SY | 37.87 | 38.59 |
| DC-EZ | Concrete patch for trench 6" conc over 6" base (incl removal) | SY | 61.38 | 62.54 |
| DP-EC | 4" exterior sewer cleanout | EA | 817.00 | 832.00 |
| DP-ED | 6" exterior sewer cleanout | EA | 953.00 | 971.00 |
| DP-EE | 8" exterior sewer cleanout | EA | 1,227.00 | 1,250.00 |
| DP-DA | 4" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 7.48 | 7.62 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| DP-DB | 6" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 8.16 | 8.32 |
| DP-DC | 8" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 10.12 | 10.31 |
| DP-DD | 10" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 13.72 | 13.98 |
| DP-DE | 12" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 16.33 | 16.64 |
| 561 & 562 | FUEL STORAGE | | | |
| QV-BF | Underground oil storage tank 550 gal fiberglass double wall (incl excav) | GAL | 20.89 | 21.29 |
| QV-BG | Underground oil storage tank 1000 gal fiberglass double wall (incl excav) | GAL | 19.59 | 19.96 |
| QV-BJ | 2000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 11.77 | 11.99 |
| QV-BI | 4000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 7.83 | 7.98 |
| QV-BK | 6000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 6.53 | 6.65 |
| QV-BL | 8000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 5.88 | 5.99 |
| QV-BLA | 10000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 5.23 | 5.32 |
| QV-BM | 12000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 4.90 | 4.99 |
| QV-BN | 15000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 4.90 | 4.99 |
| QV-BO | 20000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 4.58 | 4.67 |
| 71X | ROADS | | | |
| BW-AH | Stone aggregate base 6" thick | SY | 7.31 | 7.45 |
| BW-AJ | Stone aggregate base 8" thick | SY | 9.81 | 9.99 |
| DF-DD | Asphalt paving 1-1/2" overlay | SY | 7.19 | 7.32 |
| DF-DE | Asphalt paving 2" overlay | SY | 9.66 | 9.84 |
| DB-BD | Single bituminous surface treatment | SY | 2.61 | 2.66 |
| DB-BE | Double bituminous surface treatment | SY | 3.28 | 3.34 |
| DF-FF | Slurry seal | SY | 5.55 | 5.66 |
| DC-EC | Conc paving non-reinf 5000 psi 6 inch thick | SY | 32.65 | 33.26 |
| DC-EE | Conc paving non-reinf 5000 psi 8 inch thick | SY | 40.49 | 41.26 |
| DF-EG | Conc paving non-reinf 5000 psi 10 inch thick | SY | 50.93 | 51.89 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| DC-EI | Conc paving non-reinf 5000 psi 12 inch thick | SY | 58.80 | 59.98 |
| DF-GA | Painting 4" lines on pavement | LF | 0.42 | 0.43 |
| DF-GE | Inlaid pavement lane line markings 4" wide | LF | 1.70 | 1.73 |
| EA-CA | Concrete curb 6x18 cast-in-place | LF | 15.68 | 15.97 |
| EA-EA | Concrete curb & gutter cast-in-place | LF | 20.24 | 20.62 |
| EA-FA | Concrete valley gutter cast-in-place | SY | 58.77 | 59.88 |
| 72X | PARKING | | | |
| BW-AH | Stone aggregate base 6" thick | SY | 7.31 | 7.45 |
| BW-AJ | Stone aggregate base 8" thick | SY | 9.81 | 9.99 |
| DF-DD | Asphalt paving 1-1/2" overlay | SY | 7.19 | 7.32 |
| DF-DE | Asphalt paving 2" overlay | SY | 9.66 | 9.84 |
| DB-BD | Single bituminous surface treatment | SY | 2.61 | 2.66 |
| DB-BE | Double bituminous surface treatment | SY | 3.28 | 3.34 |
| DF-FF | Slurry seal | SY | 5.55 | 5.66 |
| DF-GA | Painting 4" lines on pavement | LF | 0.42 | 0.43 |
| DF-GE | Inlaid pavement lane line markings 4" wide | LF | 1.70 | 1.73 |
| EA-CA | Concrete curb 6x18 cast-in-place | LF | 15.68 | 15.97 |
| EA-EA | Concrete curb & gutter cast-in-place | LF | 20.24 | 20.62 |
| EA-FA | Conc valley gutter cast-in-place | SY | 58.77 | 59.88 |
| EA-GA | Precast concrete parking bumpers 6"x10"x6' incl dowels | EA | 47.68 | 48.58 |
| 74X | SIDEWALKS | | | |
| EA-DA | Conc sidewalks 4 inch cast-in-place no base | SY | 33.95 | 34.59 |
| 75X & 76X | AIRCRAFT PAVING | | | |
| BW-AH | Stone aggregate base 6" thick | SY | 7.31 | 7.45 |
| BW-AJ | Stone aggregate base 8" thick | SY | 9.81 | 9.99 |
| DF-DD | Asphalt paving 1-1/2" overlay | SY | 7.19 | 7.32 |
| DF-DE | Asphalt paving 2" overlay | SY | 9.66 | 9.84 |
| DB-BD | Single bituminous surface treatment | SY | 2.61 | 2.66 |
| DF-FF | Double bituminous surface treatment | SY | 3.28 | 3.34 |
| DC-EC | Slurry seal | SY | 5.55 | 5.66 |
| DC-EC | Conc paving non-reinf 5000 psi 6 inch thick | SY | 32.65 | 33.26 |
| DC-EE | Conc paving non-reinf 5000 psi 8 inch thick | SY | 40.49 | 41.26 |
| DC-EG | Conc paving non-reinf 5000 psi 10 inch thick | SY | 50.93 | 51.89 |
| DC-EI | Conc paving non-reinf 5000 psi 12 inch thick | SY | 58.80 | 59.98 |
| DF-GA | Painting 4" lines on pavement | LF | 0.42 | 0.43 |
| DF-GE | Inlaid pavement lane line markings 4" wide | LF | 1.70 | 1.73 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| **812 BORROW** | | | | |
| BG-BC | Borrow fill in place at Sewells Point Area from Willoughby borrow pit | CY | 11.31 | 11.52 |
| BG-BL | Borrow fill in place at Cherry Pt/Camp Lejeune from station borrow pit | CY | 12.27 | 12.51 |
| BG-BJ | Borrow fill in place from commercial Tidewater pit 30 mile round trip | CY | 18.29 | 18.63 |
| BG-BK | Borrow fill in place from commercial Tidewater pit 20 miles round trip | CY | 16.98 | 17.30 |
| **813 TOPSOIL SEED** | | | | |
| DV-AA | 4" topsoil from piles on site w/seed, fertilize lime, & fine grade | SY | 1.96 | 2.00 |
| **84X DEMOLITION** | | | | |
| BE-BB | Clear & grub medium dense areas w/disposal | AC | 3,004.00 | 3,061.00 |
| BB-EA | Demolition of masonry building complete w/disposal | CF | 0.25 | 0.26 |
| BB-EB | Demolition of wood frame building complete w/disposal | CF | 0.25 | 0.26 |
| BB-EE | Demolition of steel frame building complete w/disposal | CF | 0.59 | 0.60 |
| BC-AB | Removal of bituminous paving up to 3" thick w/disposal | SY | 4.71 | 4.80 |
| BC-AD | Removal of 6" thick non-reinforced concrete pavement w/disposal | SY | 15.68 | 15.97 |
| BC-AJ | Removal of 8" thick non-reinforced concrete pavement w/disposal | SY | 25.42 | 25.93 |
| BC-AK | Removal of 11" thick non-reinforced concrete pavement w/disposal | SY | 38.18 | 38.94 |
| BC-AL | Removal of conc sidewalk 4" thick w/disposal | SY | 3.78 | 3.86 |
| BC-BF | Removal of concrete curb & gutter | LF | 2.75 | 2.80 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| **85X STORM DRAINAGE** | | | | |
| CG-BA | 12" RCP Class III storm drainage 4 ft deep w/excav, backfill & compact | LF | 19.07 | 19.43 |
| CG-BB | 15" RCP Class III storm drainage 4 ft deep w/excav, backfill & compaction | LF | 26.12 | 26.61 |
| CG-BC | 18" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 35.27 | 35.93 |
| CG-BE | 24" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 48.98 | 52.90 |
| CG-BG | 30" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 67.91 | 73.34 |
| CG-BH | 36" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 88.81 | 95.91 |
| CG-MW | Precast 48" dia manhole 5' deep w/frame & cover | EA | 2,189.00 | 2,230.00 |
| CG-MX | Precast 48" dia manhole 8' deep w/frame & cover | EA | 3,057.00 | 3,115.00 |
| CG-MN | Standard catch basin 5 ft deep | EA | 2,056.00 | 2,095.00 |
| CG-MO | Curb inlet max depth 8' 4' throat width, 12" to 36 " pipe w/excav & backfill | EA | 3,657.00 | 3,726.00 |
| DF-DM | Paving patch for trench. Flexible 2" surface w/12" base (incl removal) | SY | 37.87 | 38.59 |
| DC-EZ | Concrete patch for trench 6" conc over 6" base (incl removal) | SY | 58.77 | 59.88 |
| **86X FENCING** | | | | |
| CI-AC | Chain link fence 9 ga galv steel 4' high w/3 strand barbwire | LF | 13.06 | 13.31 |
| CI-AE | Chain link fence 9 ga galv steel 6' high w/3 strand barbwire | LF | 16.65 | 16.97 |
| CI-AF | Chain link fence 9 ga galv steel 7' high w/3 strand barbwire | LF | 18.29 | 18.63 |
| CI-AG | Chain link fence 9 ga galv steel 8' high w/3 strand barbwire | LF | 20.24 | 20.62 |
| CI-CA | Gate chain link 9 ga galv steel 4' high w/gate posts & barbwire | LF | 57.79 | 58.88 |
| CI-CE | Gate chain link 9 ga galv steel 6' high w/gate posts & barbwire | LF | 81.63 | 83.17 |
| CI-CF | Gate chain link 9 ga galv steel 7' high w/gate posts & barbwire | LF | 94.03 | 95.81 |
| CI-CG | Gate chain link 9 ga galv steel 8' high w/gate posts & barbwire | LF | 108.40 | 110.44 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

Table 7 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| 911, 912, & 913 LAND PILING | | | | |
| CB-BC | Treated wood piling 40' to 50' long 12" butt 7" tip 12 lb creosote | LF | 11.77 | 11.99 |
| CD-AB | Piling prestressed conc 10" sq, more than 60 LF long, truck delivery | LF | 14.36 | 14.63 |
| CD-CB | Piling prestressed conc 12" sq, more than 60 LF long, truck delivery | LF | 16.01 | 16.31 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 6: FACILITY STUDY SAMPLE ESTIMATE

6.1 DD Form 1391. Figure 10 is a sample of a facility study estimate.

6.2 Building Square Foot Cost Development. Figure 11 is a sample of building square foot cost development.

6.3 Supporting Facilities Cost Development. Figure 12 is a facilities study for supporting facilities cost development.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| 1. COMPONENT | FY 19 93 MILITARY CONSTRUCTION PROJECT DATA | 2. DATE |
|---|---|---|
| NAVY | | 15 AUG 1989 |

| 3. INSTALLATION AND LOCATION | 4. PROJECT TITLE |
|---|---|
| U.S. NAVAL STATION<br>NORFOLK, VIRGINIA | ADMINISTRATIVE OFFICE |

| 5. PROGRAM ELEMENT | 6. CATEGORY CODE | 7. PROJECT NUMBER | 8. PROJECT COST ($000) |
|---|---|---|---|
| | 610 - 10 | P-000 | 3,600 |

9. COST ESTIMATES

| ACF: 0.90<br>FER: NA | ITEM | ESCALATED TO:<br>1 APRIL 1993 | U/M | QUANTITY | UNIT COST | COST ($000) |
|---|---|---|---|---|---|---|
| PRIMARY FACILITY | | | SF | 30,000 | 93.16 | 2,795 |
| Administrative Office | | | SF | 22,000 | 83.63 | (1,840) |
| Data Processing Center | | | SF | 8,000 | 116.82 | (935) |
| Additional Functional Features | | | SF | 30,000 | .66 | (20) |
| SUPPORTING FACILITIES | | | LS | - | - | 460 |
| Special Foundation Features | | | LS | - | - | (54) |
| Electrical Utilities | | | LS | - | - | (14) |
| Mechanical Utilities | | | LS | - | - | (130) |
| Roads, Parking, and Sidewalks | | | LS | - | - | (145) |
| Site Improvements | | | LS | - | - | (67) |
| Demolition | | | LS | - | - | (49) |
| SUB-TOTAL | | | | | | 3,254 |
| CONTINGENCY (5%) | | | | | | 163 |
| TOTAL CONTRACT COST | | | | | | 3,417 |
| SUPERVISION, INSPECTION & OVERHEAD (5.5%) | | | | | | 188 |
| TOTAL REQUEST | | | | | | 3,605 |
| TOTAL REQUEST (ROUNDED) | | | | | | 3,600 |
| EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS | | | (LIST NOT AVAILABLE) | | | |

10. DESCRIPTION OF PROPOSED CONSTRUCTION

Construct a permanent three-story masonry and structural frame building on a pile foundation. A passenger elevator and an exterior uncovered steel stairway are included. The facility will provide 22,000 SF of administration space (610-10) and 8,000 SF data processing space (610-20). Supporting facilities consist of the foundation wood piling, utility conections, parking and road construction, and site improvements including storm drainage. Two buildings are to be demolished.
(Air Conditioning: 140 tons)

11.

**********
* NOTE: The sample estimate (Figures 10 and 11) was based on the escalation rate, area cost factor, and the historical unit costs which were in effect as of August 1989. Current estimates must be based on current criteria. *
**********

DD FORM 1 DSC 76 1391 PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED PAGE NO.

S/ 0102-LF-001-3910 ☆ U.S. Government Printing Office: 1982—600-100/6007 3-1

Figure 10
DD Form 1391



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## BUILDING SF COST DEVELOPMENT

TITLE: ADMINISTRATIVE OFFICE P#: P-000

LOCATION: NAVAL STATION, NORFOLK, VA DATE: 8/15/89

PREPARED BY: U. R. ABLE PH#: 100-0000

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | 610-10 | 22,000 SF | 0.90 | 4/93 |
| GUIDANCE FACILITY | 610-10 | 25,000 SF | 1.00 | 4/93 |

HISTORICAL GUIDANCE SOURCE: NAVFAC (7/89)

HISTORICAL GUIDANCE UNIT COST: 92.00 /SF

| HISTORICAL UNIT COST | | SIZE FACTOR | | AREA COST FACTOR | | ESCALATION FACTOR | | ADJUSTED UNIT COST |
|---|---|---|---|---|---|---|---|---|
| 92.00 | X | 1.01 | X | 0.90 | X | 1.00 | = | $83.63/SF |

### ADDITIONAL FUNCTIONAL FEATURES

| FUNCTIONAL FEATURES | QTY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| OMSI (C - .5%) | $2,774,420* | 0.005 | 13,872 | 0.46 | 0.5% |
| UNCOVERED EXTERIOR STAIRS | 1 EA | 6,000 | 6,000 | 0.20 | 0.2% |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

ADDITIONAL FUNCTIONAL FEATURES TOTAL: 0.66 0.7%

* NOTE: This figure is the total primary cost of both elements of the multi-use building (i.e., $83.63/SF X 22,000 SF plus $116.82/SF X 8,000 SF).

Figure 11
Building Square Foot Cost Development



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## BUILDING SF COST DEVELOPMENT

TITLE: ADMINISTRATIVE OFFICE P#: P-000

LOCATION: NAVAL STATION, NORFOLK, VA DATE: 8/15/89

PREPARED BY: U. R. ABLE PH#: 100-0000

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | 610-20 | 8,000 SF | 0.90 | 4/93 |
| GUIDANCE FACILITY | 610-20 | 21,000 SF | 1.00 | 4/93 |

HISTORICAL GUIDANCE SOURCE: NAVFAC (7/89)

HISTORICAL GUIDANCE UNIT COST: 118.00 /SF

| HISTORICAL UNIT COST | SIZE FACTOR | AREA COST FACTOR | ESCALATION FACTOR | ADJUSTED UNIT COST |
|---|---|---|---|---|
| | | | | |

118.00 X 1.10 X 0.90 X 1.00 = $116.82/SF

### ADDITIONAL FUNCTIONAL FEATURES

| FUNCTIONAL FEATURES | QTY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

ADDITIONAL FUNCTIONAL FEATURES TOTAL: _____ _____

Figure 11 (Continued)
Building Square Foot Cost Development



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

FACILITIES STUDY
SUPPORTING FACILITIES COST DEVELOPMENT

TITLE : ADMINISTRATIVE OFFICE P# : 000 FY : 93

LOCATION : NAVAL STATION, NORFOLK, VA DATE : 8/15/89

| CES SYSTEM | PRICE SOURCE | COMPOSITE QUANITY | UNIT COST | COMPOSITE ADJUSTMENT FACTOR (1) | TOTAL COST | FORM 1391 ($000) |
|---|---|---|---|---|---|---|
| SPECIAL FOUNDATION FEATURES (91X) | | | | | | |
| 911 | CB-BC | 5000 LF | 11.99 | 0.90 | 53,955 | 54 |
| ELECTRICAL UTILITIES (51X - 52X) | | | | | | |
| 511 | WJ-K | 300 LF | 17.30 | 0.90 | 4,671 | |
| 512 | VP-K | 100 LF | 12.79 | 0.90 | 1,151 | |
| 513 | YJ-C11 | 1 EA | 7792.00 | 0.90 | 7,012 | |
| 523 | CODE 407 | 300 LF | 5.00 | 0.98 | 1,470 | |
| | | | | | 14,304 | 14 |
| MECHANICAL UTILITIES (54X - 59X) | | | | | | |
| 541 | DK-2AA | 400 LF | 328.00 | 0.90 | 118,080 | |
| 551 | DJ-BC | 400 LF | 23.95 | 0.90 | 8,622 | |
| 554 | DP-DB | 400 LF | 8.32 | 0.90 | 2,995 | |
| | | | | | 129,697 | 130 |
| ROADS, PARKING, SIDEWALKS (7XX) | | | | | | |
| 711 | BW-AH | 3000 SY | 7.45 | 0.90 | 20,115 | |
| 711 | DC-EC | 3000 SY | 33.26 | 0.90 | 89,802 | |
| 721 | BW-AH | 3000 SY | 7.45 | 0.90 | 20,115 | |
| 721 | DB-BE | 3000 SY | 3.34 | 0.90 | 9,018 | |
| 741 | EA-DA | 200 SY | 34.59 | 0.90 | 6,226 | |
| | | | | | 145,276 | 145 |
| SITE IMPROVEMENTS (8XX) | | | | | | |
| 813 | DV-AA | 10,000 SY | 2.00 | 0.90 | 18,000 | |
| 814 | ALLOWANCE | ---- | ------ | ----- | 25,000 | |
| 851 | CG-BB | 500 SY | 26.61 | 0.90 | 11,975 | |
| 851 | CG-MW | 2 EA | 2230.00 | 0.90 | 4,014 | |
| 851 | CG-MN | 4 EA | 2095.00 | 0.90 | 7,542 | |
| | | | | | 66,531 | 67 |
| DEMOLITION (84X) | | | | | | |
| 843 | BB-EE | 90,000 CF | 0.60 | 0.90 | 48,600 | 49 |

NOTE: PLACE ADDITIONAL INFORMATION AND COMPOSITE ITEMS ON BACK.
(1) COMPOSITE ADJUSTMENT FACTOR = AREA COST FACTOR X ESCALATION FACTOR

Figure 12
Supporting Facilities Cost Development

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 7: CES STANDARD SYSTEMS LIST (10/29/87)

7.1 Interior. The interior systems are shown in the following list.

0XX General
000 Building Construction
00X Overhead
001 Field Overhead
002 Home Office OH
01X Additive Bid Items
02X Deductive Bid Items
03X Base Bids
04X Government Cost
041 OMSI
042 PCAS
043 Contingencies
044 SIOH

1XX General Construction
11X Structural
111 Foundation (SF)
112 Slab on Grade (SF)
113 Structural (SF)
114 Supported Floor (SF)
115 Stairs (EA)
116 Roof Structure (SF)
117 Pre-Engd Building (SF)
118 Vault (SF)
119 Write-in
13X Structural Write-in
14X Architectural
141 Roofing (SF)
142 Exterior Walls (SF)
143 Interior Walls (SF)
144 Interior Finishes (SF)
145 Doors (SF)
146 Windows (SF)
147 Specialties (SF)
148 BEQ Wardrobes (EA)
149 Write-in
16X Architectural Write-in
17X Demolition Interior
171 Demo Interior (SF)
172 Asbestos Removal Interior (LS)
173 - 175 Write-in

2XX Interior Mechanical
21X Plumbing Domestic
211 Plumbing, domestic (EA)
212 Domestic Hot Water Solar (MBTU)
213 Roof Drainage (EA)
214 - 216 Write-in
22X Space Conditioning
221 HVAC (MBTU/TNS)
222 Air Conditioning (TNS)
223 Heating, Ventilation (MBTU/CFM)
224 Mechanical Ventilation (CFM)
225 Dehumidification (PPH)
226 Heating Solar (SF)
227 Write-in
23X Weight Handling Equipment
231 Bridge Cranes (TNS)(1)
232 Monorails (TNS)(1)
233 Fixed Hoist (TNS)(1)
234 Vehicle Lifts (TNS)(1)
235 Elevators (TNS)(1)
236 Escalators (TNS)(1)
237 Conveyors (TNS)(1)
238 Write-in
24X Special Mechanical Piping System
241 Vacuum (CFM)(1)
242 Oxygen (EA)(1)
243 Nitrogen (EA)(1)
244 Compressed Air (CFM)(1)
245 Interior Steam (PPH)(1)
246 - 247 Write-in
25X Special Mechanical, Other
251 Dust Collection (CFM)(1)
252 Engine Exhaust (CFM)(1)
253 - 255 Write-in
27X Interior Fire Protection
271 Sprinklers (SF)
272 AFFF (SF)
273 Carbon Dioxide (LBS)
274 Halon (LBS)
275 Fire Alarm (SF)
276 - 277 Write-in

---

(1) Built-in Equipment

---



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

3XX Interior Electrical
- 31X Power & Lighting
  - 311 Power (KW)
  - 312 Lighting (SF)
  - 313 400HZ (KW)(1)
  - 314 Direct Current (KW)(1)
  - 315 UPS (KVA)(1)
  - 316 Electrical Generators (KW)(1)
  - 317 - 318 Write-in
- 32X Special Equipment Protection
  - 321 Grounding (SF)(1)
  - 322 Lightning Protection (SF)(1)
  - 323 - 326 Write-in
- 33X Special Electrical Electronics
  - 331 Security Detection
  - 332 EMCS (EA)(1)
  - 333 Computer Communication
  - 334 - 336 Write-in
- 34X Communication
  - 341 Telephone (SF)
  - 342 Intercom (SF)
  - 343 Television (SF)
  - 344 Public Announcement (SF)
  - 345 Master Clock (EA)
  - 346 - 347 Write-in
- 35X Write-in

4XX Special Equipment
- 41X Medical Equipment
  - 411 Hospital Equip (SF) (1)
  - 412 Dental Equip (EA)(1)
  - 413 - 414 Write-in
  - 415 Install Gov't Furnished Medical Equip
  - 416 Gov't Furn Med Equip
- 42X Food Service Equipment
  - 421 Food Service Equip (SF)
  - 422 - 424 Write-in
  - 425 Install Gov't Furnished Food Service Equip
  - 426 Gov't Furnished Food Service Equip
- 43X Miscellaneous Equipment
  - 431 Chapel Equip (SF)(1)
  - 432 Movie Theater Equip (SF)(1)
  - 433 Rifle Range Equip (EA)(1)
  - 434 Lab Equip (EA)(1)
  - 435 Install Gov't Furnished Lab Equip
  - 436 Gov't Furnished Lab Equip
  - 437 Waste Disposal (PPH)(1)
  - 438 Write-in
- 44X Special Warehouse Equipment
  - 441 Special Warehouse Equip (SF)(1)
  - 442 - 444 Write-in
  - 445 Install Gov't Furnished Warehouse Equip
  - 446 Gov't Furnished Warehouse Equip
- 45X Special Construction
  - 451 Hangar Doors (SF)
  - 452 Vault Doors (EA)
  - 453 Blast Doors (SF)
  - 454 Raised Floor (SF)*
  - 455 Radio Frequency Shielding (SF)(1)
  - 456 Bowling Lanes (EA)
  - 457 Paint Spray Booth (SF)(1)
  - 458 Write-in
- 49X Other Equipment
  - 491 Other Miscellaneous Equip
  - 492 Snow Melting (SF)
  - 495 Install Other Gov't Furnished Equip
  - 496 Other Gov't Furnished Equip (SF)(1)
  - 499 Building Work Not Included Elsewhere (LS)

---

(1) Built-in Equipment

---

* Considered built-in equipment for category code 610-20 (Data Processing Center) only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

7.2 Exterior. The exterior systems are shown in the following lists.

5XX Exterior Utilities
- 51X Exterior Electrical
  - 511 Electrical Distribution Primary (LF)
  - 512 Electrical Distribution Secondary (LF)
  - 513 Substation/ Transformer (KVA)
  - 514 Area Lighting (EA)
  - 515 Airfield Lighting (LF)
  - 516 Lightning Protection (EA)
  - 517 - 518 Write-in
- 52X Exterior Communication
  - 521 Fire Alarm (LF)
  - 522 Security Alarm (LF)
  - 523 Communication, Phone (LF)
  - 524 Exterior EMCS (LF)
  - 525 - 526 Write-in
- 54X Exterior Mechanical
  - 541 Heat Distribution Overhead (LF)
  - 542 Heat Distribution Underground (LF)
  - 543 Chilled Water Dist (LF)
  - 544 Condensate Collect (LF)
  - 545 Gas Distribution (LF)
  - 546 Compressed Air Dist (LF)
  - 547 Fuel Distribution (LF)
  - 548 Exterior Foam (LF)
  - 549 Write-in
- 55X Exterior Mechanical
  - 551 Water Distribution (LF)
  - 552 Fire Protection Water Distribution (LF)
  - 553 Salt Water Distribution (LF)
  - 554 Sanitary Sewers (LF)
  - 555 - 556 Write-in
- 56X Bulk Storage
  - 561 Fuel Storage Bulk (BBL)
  - 562 Fuel Storage Ready Issue (GAL)
  - 563 Water Storage (GAL)
  - 564 - 566 Write-in
- 57X Fueling
  - 571 Vehicle Fueling (EA)
  - 572 Aircraft Fueling (EA)
  - 573 Marine Fueling (EA)
  - 574 - 576 Write-in
- 58X Pumping
  - 581 Fuel Pumping Station (GPM)
  - 582 Water Pumping Station (GPM)
  - 583 Fire Booster Pump (GPM)
  - 584 Sewage Pump Station (GPM)
  - 585 Sewage Lift Station (GPM)
  - 586 Write-in
- 59X Treatment Facility
  - 591 Water Treatment (MGD)
  - 592 Domestic Sewage (MGD)
  - 593 Industrial Waste ((MGD)
  - 594 - 596 Write-in

6XX Exterior Structures
- 61X Equipment Building
  - 611 Mechanical Equip Building (SF)
  - 612 Electrical Equip Building (SF)
  - 613 - 615 Write-in
- 62X Supporting Structures Miscellaneous
  - 621 Security Gate (LF)
  - 622 Guard House (SF)
  - 623 - 625 Write-in
- 64X Pollution Abatement Structures
  - 641 Oil Water Separators (GAL)
  - 642 Electrostatic Precipitator (SCFM)
  - 643 - 645 Write-in
- 65X Shop Support Structures
  - 651 Vehicle Grease Racks (EA)
  - 652 Vehicle Wash Platforms (EA)
  - 653 - 656 Write-in
- 66X AC Cleaning Facility
  - 661 AC Washing Facility (SY)
  - 662 AC Rinsing Facility (SY)
  - 663 - 666 Write-in

7XX Paving
- 71X Roads
  - 711 Concrete Roads (SY)
  - 712 Flexible Roads (SY)
  - 713 Overlay Roads (SY)
  - 714 Surface Treatment (SY)
  - 715 Slurry Seal (SY)
  - 716 - 717 Write-in



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

72X Parking
- 721 Concrete (SY)
- 722 Flexible (SY)
- 723 Overlay (SY)
- 724 Surface Treatment (SF)
- 725 Slurry Seal (SY)
- 726 - 727 Write-in

73X Write-in

74X Walks
- 741 Concrete Walks (SY)
- 742 Bituminous Walks (SY)
- 743 Special Walks (SY)
- 744 - 746 Write-in

75X Aircraft Paving Concrete
- 751 Runways (SY)
- 752 Taxiways (SY)
- 753 Aprons (SY)
- 754 Repairs Paving (SY)
- 755 Crack and Joint Repairs (LF)
- 756 - 757 Write-in

76X Aircraft Paving Flexible
- 761 Flexible Runways (SY)
- 762 Flexible Taxiways (SY)
- 763 Flexible Aprons (SY)
- 764 Repair A/C Flexible Paving (SY)
- 765 AC Paving Overlay (SY)
- 766 AC Paving Slurry Seal (SY)
- 767 - 768 Write-in

77X Incidental Paving Work
- 771 Pavement Milling (SY)
- 772 - 776 Write-in

## 8XX Site Preparation

81X Earthwork
- 811 Earthwork (CY)
- 812 Borrow (CY)
- 813 Topsoil/Seed/Sod (SY)
- 814 Landscaping (SY)
- 815 Site Irrigation (EA)
- 816 Surcharge (CY)
- 817 Earth Replacement (CY)
- 818 Environmental Protection (AC)

82X Site Improvements
- 821 Site Improvements (SY)
- 822 - 825 Write-in

83X Site Preparation Miscellaneous
- 831 Site Dewatering (Major) (LF)
- 832 - 835 Write-in

84X Demolition
- 841 Remove Utilities (LF)
- 842 Remove Paving and Slabs (SY)
- 843 Remove Structures (CF)
- 844 Remove/Dispose of Asbestos (Exterior) (LS)
- 845 Remove/Dispose of P.C.B. (LS)
- 846 Remove/Dispose of Contaminated Earth (CY)
- 847 Write-in

85X Storm Drainage
- 851 Storm Drainage Piping (LF)
- 852 Box Arch Culvert (LF)
- 853 Drainage Facing Materials (SY)
- 854 - 856 Write-in

86X Fencing
- 861 Fencing (Perimeter) (LF)
- 862 Fencing Alarm (LF)
- 863 - 865 Write-in

87X Recreation Equipment/Fields
- 871 Playground Equip (EA)
- 872 Playing Field Equip (EA)
- 873 Tennis Courts (EA)
- 874 Softball/Baseball (EA)
- 875 Football/Soccer (EA)
- 876 - 877 Write-in

## 9XX Heavy Construction

91X Special Building Foundations
- 911 Piling - Land (LF)
- 912 Caissons (EA)
- 913 Pressure Injected Footings (EA)
- 914 Vibrofloatation (EA)
- 915 Chemical Soil Stabilization (EA)
- 916 Dynamic Consolidation (EA)
- 917 Piling Cast-in-place (LF)

92X Railroad
- 921 Track Work Railroad (LF)
- 819 Write-in
- 922 - 925 Write-in

93X Marine Structures Piers
- 931 Piling-Marine (LF)
- 932 Dolphins (EA)
- 933 Med Mooring (LS)
- 934 Pier Deck (SF)
- 935 Fenders (LF)
- 936 Pile Clusters (EA)
- 937 Marine Specialties (LS)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

938 Write-in

94X Marine Structures Special

941 Bulkhead/Seawall (SF)
942 Erosion Protection-Marine (SY)
943 Riprap (Marine) (SY)
944 - 946 Write-in

95X Marine Repairs

951 Underdeck Repairs (LS)
952 Pile Repairs Marine (LF)
953 - 957 Write-in

96X Dredging

961 Mob/Demob Dredging (LS)
962 Hydraulic Dredging (CY)
963 Bucket Dredging (CY)
964 - 966 Write-in

97X Towers/Antennas

971 Towers (LF)
972 Antennas (LS)
973 - 976 Write-in

98X Tunnel/Pipe Jacking

981 Tunneling (LS)
982 Pipe Jacking (LF)
983 - 986 Write-in

99X Heavy Construction Miscellaneous

991 Bridges (SF)
992 Overpasses (SF)
993 - 996 Write-in
999 Supporting Facilities



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 8: SUPPLEMENTAL INFORMATION

8.1 Blank Forms and References. See Appendix A.

8.2 SI Conversion Factors. See Appendix B.

8.3 Units of Measure and Their Symbols. See Appendix C.

8.4 Acronyms and Abbreviations. See Appendix D.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX A

BLANK FORMS AND REFERENCES

Project Data Sheet

| PROJECT DATA SHEET | | | |
|---|---|---|---|
| COMPONENT<br>NAVY | ESTIMATE YEAR | DATE | |
| INSTALLATION AND LOCATION | | PROJECT TITLE | |
| PROGRAM ELEMENT | CATEGORY CODE | PROJECT NUMBER<br>P- | CURRENT COST ($000) |

| ACF:<br>FER: ESCALATED TO:<br>Item | U/M | Quantity | Unit Cost | Cost ($000) |
|---|---|---|---|---|
| PRIMARY FACILITY | | | | |
| SUPPORTING FACILITIES | | | | |
| SUBTOTAL | | | | |
| CONTINGENCY (5%) | | | | |
| TOTAL CONTRACT COST | | | | |
| SUPERVISION, INSPECTION, & OVERHEAD (5.5%) | | | | |
| TOTAL REQUEST | | | | |
| TOTAL REQUEST ROUNDED | | | | |
| EQUIPMENT FROM OTHER APPROPRIATIONS | | | | |

DESCRIPTION OF PROPOSED CONSTRUCTION:

REQUIREMENT:

PROGRAMMING DATA ACTIVITY UIC:N_____ ALTERNATE HOST:_____ SUP UNIT:_____
SPEC AREA:___ INVESTMENT PROGRAM: __ SIR: __ RESOURCE SPONSOR .__
MAJ/SUBCLAIMANT CODE: __ INVESTMENT CATEGORY: __ MOBILIZATION INDICATOR: __
ACTIVITY PRIORITY: __ CLAIMANT PRIORITY:__ FLEP PRIORITY: __ READINESS RATING: __

PROJECT DETAIL DATA:

| CATEGORY CODE | DESCRIPTION | SCOPE | U/M | CC/MC | VALIDATION INDICATOR |
|---|---|---|---|---|---|

REQUIREMENT CERTIFICATION:

ACTIVITY DATE:
MAJOR CLAIMANT DATE:
NAVFACENGCOMHQ DATE:



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Project Data Sheet (Continued)

LOCATION AND SITE PLAN

SITING RATIONALE:

EFD REVIEW/ANALYSIS:

| REQUIRES FURTHER ACTION? | NO | YES | COMMENTS |
|---|---|---|---|
| Explosives Safety | | | |
| Airfield Safety | | | |
| Electromagnetic Radiation | | | |
| AICUZ Violation | | | |
| Change to Approved Master Plan/CIP | | | |
| Coastal Zone Management | | | |
| Natural Resources Plan | | | |
| Dredging/Filling Permits | | | |
| Wetland/Floodplain | | | |
| Hazardous Wastes on Site | | | |
| Cultural Resources Impact | | | |
| Other Site Problems (List) | | | |
| Utilities Support | | | |
| Roads, Parking | | | |
| Preliminary Environmental Assessment | | | |
| Preliminary Hazards Analysis | | | |
| Other (List) | | | |

EFD Validation:
Site Approved: Yes____ No____ Deferred
Project Supported By SFPS: Yes____ No_____

Name:_____ Date:_____



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

DD Form 1391

| 1. COMPONENT | FY 19___ MILITARY CONSTRUCTION PROJECT DATA | 2. DATE |
|---|---|---|
| 3. INSTALLATION AND LOCATION | 4. PROJECT TITLE | |
| 5. PROGRAM ELEMENT | 6. CATEGORY CODE | 7. PROJECT NUMBER | 8. PROJECT COST ($000) |

9. COST ESTIMATES

| ACF: FER: ITEM | ESCALATED TO: U/M | QUANTITY | UNIT COST | COST ($000) |
|---|---|---|---|---|
| | | | | |

10. DESCRIPTION OF PROPOSED CONSTRUCTION

DD FORM 1 DEC 76 1391 — PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED — PAGE NO.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## BUILDING SF COST DEVELOPMENT

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | | | | |
| GUIDANCE FACILITY | | | | |

HISTORICAL GUIDANCE SOURCE: _____

HISTORICAL GUIDANCE UNIT COST: _____/SF

| HISTORICAL UNIT COST | SIZE FACTOR | AREA COST FACTOR | ESCALATION FACTOR | ADJUSTED UNIT COST |
|---|---|---|---|---|
| | | | | |

_____ X _____ X _____ X _____ = _____

## ADDITIONAL FUNCTIONAL FEATURES

| FUNCTIONAL FEATURES | QTY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

FUNCTIONAL FEATURES TOTAL: _____ _____

TOTAL BUILDING SF COST: _____ includes built-in equipment



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities Cost Development

## FACILITIES STUDY
## SUPPORTING FACILITIES COST DEVELOPMENT

TITLE: _____ P#: _____ FY: _____

LOCATION: _____ DATE: _____

| | CES SYSTEM | PRICE SOURCE | COMPOSITE QUANTITY | COMPOSITE UNIT COST | COMPOSITE ADJUSTMENT FACTOR (1) | TOTAL COST | FORM 1391 ($000) |
|---|---|---|---|---|---|---|---|
| SPECIAL FOUNDATION FEATURES (91X) | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| ELECTRICAL UTILITIES (51X - 52X) | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| MECHANICAL UTILITIES (54X - 59X) | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| ROADS, PARKING, SIDEWALKS (7XX) | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| SITE IMPROVEMENTS (8XX) | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| DEMOLITION (84X) | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

NOTE: PLACE ADDITIONAL INFORMATION AND EXCESS COMPOSITE ITEMS ON BACK.
(1) COMPOSITE ADJUSTMENT FACTOR = AREA COST FACTOR X ESCALATION FACTOR



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

## Cost Model Explanation

GENERAL:

The cost model questionnaire will establish a measure of the project scope early in the planning stage in a manner which will allow empirical prices to be applied. It is recognized that many design decisions cannot be made at this time; however, if a realistic price is to be developed, the needs of the activity relating to a particular project must be defined. The NAVFACENGCOM method of conceptual estimating requires cost development from guidance cost of comparable construction. Any variation from guidance cost must be supported by a definition and cost of functional features. This support is often necessary to provide adequate project funding.

BUILDING:

Under normal conditions, the building cost model will be completed at the design cost certification stage. Therefore, this portion of the cost model is not required for the facilities study.

System 000 Building Construction:

This system describes the total function of the building. As such, it is the most important information shown on the cost model.

SUPPORTING FACILITIES:

The completed cost model (systems 500 through 999) should state what is planned with emphasis upon scope features that generate significant cost. Refer to additional guidance in the cost model questionnaire.

NOTES:

1. This Cost Model Questionnaire serves two purposes: At the budget stage it serves as a means of describing and quantifying project requirements in such a manner that empirical prices can be used to generate a project cost.

   At the final estimate stage it serves as a means of collecting subsystem numbers, for storage in NAVFACENGCOM historical files.

2. The cost model questionnaire systems list includes numbered systems that are "write-in." These numbers may be used to identify systems in the project that are not identified in the questionnaire.

3. Systems followed by (1) are considered built-in equipment.

4. Exterior Systems and Special Equipment need more scope definition for accurate pricing. Show narrative description as you best understand the scope when detailed lists are not available.

5. Building system quantities should be the area in which the system occurs.

6. A completed supporting facilities cost model questionnaire must be included in the facility study cost submittal.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities (Systems 500 through 999)

Note:

1. Show the following criteria suitable for the application of historical cost under each applicable system heading:

   a. Size (assume if unknown) and length of utility runs. Include storm drainage requirement. Indicate valves, fire hydrants, manholes, catch basins, and other significant extras. Depth of cut (when over 6 feet) and dewatering requirements must be shown.

   b. Area and assumed section for paved areas. Identify each type and section variation.

   c. Description of work required for grading, cut, and borrow. Describe assumed nature of materials to be moved. If rock excavation is required, state assumptions on removal requirements (e.g., rip, blast, etc.).

   d. Indicate approximate quantities of clearing and grubbing in acres, and whether heavy, medium, or light.

   e. Describe any functional features required outside the building 5-foot line such as sewage lift stations, wash racks and water tanks, and unsuitable soil conditions.

   f. If hazardous materials are present, state type, extent and method of disposal.

   g. See System 911 for Land Piling - Driven.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR ELECTRICAL

| | |
|---|---|
| 511 Electrical Distribution, Primary | Length of Run (LF) _____ |
| 512 Electrical Distribution, Secondary | Length of Run (LF) _____ |
| 513 Substation/Transformer | Capacity (KVA) _____ |
| 514 Area Lighting | Number of Fixtures (EA) _____ |
| 515 Airfield Lighting | Length of Run (LF) _____ |
| 516 Lightning Protection | Points of Protection (EA) _____ |
| 517, 518 Write-in Systems | |

EXTERIOR COMMUNICATION

| | |
|---|---|
| 521 Fire Alarm | Length of Run (LF) _____ |
| 522 Security Alarm | Length of Run (LF) _____ |
| 523 Communication, Telephone | Length of Run (LF) _____ |
| 524 Exterior EMCS (Energy Monitoring Control System) | Length of Run (LF) _____ |
| 525, 526 Write-in Systems | |

EXTERIOR MECHANICAL

| | |
|---|---|
| 541 Heat Distribution, Overhead | Length of Run (LF) _____ |
| 542 Heat Distribution, Underground | Length of Run (LF) _____ |
| 543 Chilled Water Distribution | Length of Run (LF) _____ |
| 544 Condensate Collection (only) | Length of Run (LF) _____ |
| 545 Gas Distribution | Length of Run (LF) _____ |
| 546 Compressed Air Distribution | Length of Run (LF) _____ |
| 547 Fuel Distribution | Length of Run (LF) _____ |
| 548 Exterior Foam | Length of Run (LF) _____ |
| 549 Write-in System | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR WATER DISTRIBUTION

| | |
|---|---|
| 551 Water Distribution | Length of Run (LF) _____ |
| 552 Fire Protection Water Distribution | Length of Run (LF) _____ |
| 553 Salt Water Distribution | Length of Run (LF) _____ |
| 554 Sanitary Sewers | Length of Run (LF) _____ |
| 555, 556 Write-in Systems | |

BULK STORAGE

| | |
|---|---|
| 561 Fuel Storage, Bulk | Capacity (BBL) _____ |
| 562 Fuel Storage, Ready Issue | Capacity (GAL) _____ |
| 563 Water Storage | Capacity (GAL) _____ |
| 564 - 566 Write-in Systems | |

FUELING

| | |
|---|---|
| 571 Vehicle Fueling | Number of Outlets (EA) _____ |
| 572 Aircraft Fueling | Number of Hydrants (EA) _____ |
| 573 Marine Fueling | Number of Outlets (EA) _____ |
| 574 - 576 Write-in Systems | |

PUMPING

| | |
|---|---|
| 581 Fuel Pumping Station | Pump Capacity (GPM) _____ |
| 582 Water Pumping Station | Pump Capacity (GPM) _____ |
| 583 Fire Booster Pump | Pump Capacity (GPM) _____ |
| 584 Sewage Pump Station | Pump Capacity (GPM) _____ |
| 585 Sewage Lift Station | Pump Capacity (GPM) _____ |
| 586 Write-in System | |

TREATMENT FACILITY

| | |
|---|---|
| 591 Water Treatment | Capacity (MGD) _____ |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

592 Domestic Sewage Treatment — Capacity (MGD) _____

593 Industrial Waste Treatment — Capacity (MGD) _____

594 - 596 Write-in Systems

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross M.E. Bldg Area (SF)_____

Building required to house mechanical equipment when not connected to the main building and not included in gross area shown under the primary facility.

612 Electrical Equipment Building — Gross E.E. Bldg Area (SF)_____

613 - 615 Write-in Systems

SUPPORTING STRUCTURES MISCELLANEOUS

621 Security Gate — Opening Width (LF) _____

622 Guard House — Gross Building Area (SF) _____

623 - 625 Write-in Systems

POLLUTION ABATEMENT STRUCTURES

641 Oil Water Separators — Capacity (GAL) _____

642 Electro-Static Precipitator — Airflow (SCFM) _____

643 - 645 Write-in Systems

SHOP SUPPORT STRUCTURES

651 Vehicle Grease Racks — Number of Vehicle Racks (EA) ___

652 Vehicle Wash Platforms — Number of Vehicle Bays (EA) ___

653 - 656 Write-in Systems

AIRCRAFT CLEANING FACILITY

661 Aircraft Washing Facility — Paved Area (SY) _____

662 Aircraft Rinsing Facility — Paved Area (SY) _____

663 - 666 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PAVING

| | |
|---|---|
| 711 Concrete Roads | Paved Area (SY) _____ |
| 712 Flexible Roads | Paved Area (SY) _____ |
| 713 Overlay Roads | Paved Area (SY) _____ |
| 714 Surface Treatment Roads | Paved Area (SY) _____ |
| 715 Slurry Seal Road | Paved Area (SY) _____ |
| 716, 717 Write-in Systems | |

PARKING

| | |
|---|---|
| 721 Concrete Parking | Paved Area (SY) _____ |
| 722 Flexible Parking | Paved Area (SY) _____ |
| 723 Overlay - Parking | Paved Area (SY) _____ |
| 724 Surface Treatment - Parking | Paved Area (SY) _____ |
| 725 Slurry Seal Parking | Paved Area (SY) _____ |
| 726, 727 Write-in Systems | |

WALKS

| | |
|---|---|
| 741 Concrete Walks | Paved Area (SY) _____ |
| 742 Bituminous Walks | Paved Area (SY) _____ |
| 743 Special Walks | Paved Area (SY) _____ |
| 744 - 746 Write-in Systems | |

AIRCRAFT PARKING CONCRETE

| | |
|---|---|
| 751 Concrete Runways | Paved Area (SY) _____ |
| 752 Concrete Taxiways | Paved Area (SY) _____ |
| 753 Concrete Aprons | Paved Area (SY) _____ |
| 754 Repairs Concrete Paving | Paved Area (SF) _____ |
| 755 Crack and Joint Repair | Length of Repair (LF) _____ |
| 757, 758 Write-in Systems | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

AIRCRAFT PAVING FLEXIBLE

761 Flexible Runways — Paved Area (SY) _____

762 Flexible Taxiways — Paved Area (SY) _____

763 Flexible Aprons — Paved Area (SY) _____

764 Repair Aircraft Flexible Paving — Paved Area Patched (SY) _____

765 Aircraft Paving Overlays — Paved Area (SY) _____

766 Aircraft Paving Slurry Seal — Paved Area (SY) _____

767, 768 Write-in Systems

INCIDENTAL PAVING WORK

771 Pavement Milling — Milled Area (SY) _____

772 - 776 Write-in Systems

EARTHWORK

811 Earthwork — Volume (CY) _____

812 Borrow — Volume in Place (CY) _____

813 Topsoil, Seed, Sod — Area Graded (SY) _____

814 Landscaping — Area Planted (SY) _____

815 Site Irrigation — Number of Sprinkler Heads (EA) _____

816 Surcharge — Fill in Surcharge (CY) _____

817 Earth Replacement — In-Place Measurement (CY) _____

818 Environmental Protection — Area Protected (ACRES) _____

819 Write-in System

SITE IMPROVEMENTS

821 Site Improvements — Area Developed (SY) _____

822 - 825 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SITE PREPARATION MISCELLANEOUS

831 Site Dewatering (Major) Header Pipe (LF) _____

832 - 835 Write-in Systems

DEMOLITION

841 Remove Utilities Length of Run (LF) _____

842 Remove Paving and Slabs Area Removed (SY) _____

843 Remove Structures Structure Volume (CF) _____
*** See attached for bldgs to be demolished ***

844 Remove/Dispose of Asbestos (Exterior) Total Cost (LS) _____

845 Remove/Dispose of P.C.B. Total Cost (LS) _____

846 Remove/Dispose of Contaminated Earth Volume of Earth Removed (CY) ___

847 Write-in System

STORM DRAINAGE

851 Storm Drainage Piping Length of Run (LF) _____

852 Box and Arch Culvert Length of Culvert (LF) _____

853 Drainage Facing Materials Surface Area (SY) _____

854 - 856 Write-in Systems

FENCING

861 Fencing (Perimeter) Length of Fence (LF) _____

862 Fencing (Alarm) Length of Fence (LF) _____

863 - 865 Write-in Systems

RECREATION EQUIPMENT/FIELDS

871 Playground Equipment Pieces of Equipment (EA) _____

872 Playing Field Equipment Pieces of Equipment (EA) _____

873 Tennis Courts Number of Courts (EA) _____

874 Softball/Baseball Fields Number of Fields (EA) _____



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

875 Football/Soccer Fields  Number of Fields (EA) _____

876, 877 Write-in Systems

SPECIAL BUILDING FOUNDATIONS

911 Piling - Land  Total Length (LF) _____

912 Caissons  Number of Caissons (EA) _____

913 Pressure Injected Footing  Number of Footings (EA) _____

914 Vibrofloatation  Number of Locations (EA) _____

915 Chemical Soil Stabilization  Number of Locations (EA) _____

916 Dynamic Consolidation  Number of Locations (EA) _____

917 Piling Cast-In-Place Concrete  Length of Piling (LF) _____

RAILROAD

921 Track Work - Railroad  Length of Track (LF) _____

922 - 925 Write-in Systems

MARINE STRUCTURES PIERS

931 Piling - Marine  Total Length (LF) _____

932 Dolphins  Number of Dolphins (EA) _____

933 Med Mooring  Total Cost (LS) _____

934 Pier Deck  Area of Deck (SF) _____

935 Fenders  Length of Fender (LF) _____

936 Pile Clusters  Number of Clusters (EA) _____

937 Marine Specialties  Total Cost (LS) _____

938 Write-in Systems

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls  Total Face Area (SF) _____

942 Erosion Protection - Marine  Area Covered (SY) _____



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

943 Riprap (Marine) — Area Covered (SY) _____

944 - 946 Write-in Systems

MARINE REPAIRS

951 Underdeck Repairs — Total Cost (LS) _____

952 Pile Repairs - Marine — Length Repaired (LF) _____

953 - 957 Write-in Systems

DREDGING

961 Mobilization/Demobilization - Dredging — Total Cost (LS) _____

963 Hydraulic Dredging — Volume (CY) _____

964 Bucket Dredging — Volume (CY) _____

965 - 966 Write-in Systems

TOWERS/ANTENNAS

971 Towers — Length (LF) _____

972 Antennas — Total Cost (LS) _____

973 - 976 Write-in Systems

TUNNEL/PIPE JACKING

981 Tunneling — Volume Removed (CY) _____

982 Pipe Jacking — Length Jacked (LF) _____

983 - 986 Write-in Systems

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges — Deck Area (SF) _____

992 Overpasses — Deck Area (SF) _____

993 - 996 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX B

## SI CONVERSION FACTORS

| Quantity | Multiply | By | to Obtain | |
|---|---|---|---|---|
| Length | inch | 25.400 | millimeter | mm |
| | foot | 0.304800 | meter | m |
| | yard | 0.914400 | meter | m |
| | mile (U.S. Statute) | 1.609347 | kilometer | km |
| | millimeter | $39.370079 \times 10^{-3}$ | inch | in |
| | meter | 3.280840 | foot | ft |
| | meter | 1.093613 | yard | yd |
| | kilometer | 0.621370 | mile | mi |
| Area | square inch | $0.645160 \times 10^{3}$ | square millimeter | $mm^2$ |
| | square foot | 0.092903 | square meter | $m^2$ |
| | square yard | 0.836127 | square meter | $m_2$ |
| | square mile (U.S. Statute) | 2.589998 | square kilometer | $km^2$ |
| | acre | $4.046873 \times 10^{3}$ | square meter | $m^2$ |
| | acre | 0.404687 | hectare | |
| | square millimeter | $1.550003 \times 10^{-3}$ | square inch | $in^2$ |
| | square meter | 10.763910 | square foot | $ft^2$ |
| | square meter | 1.195990 | square yard | $yd^2$ |
| | square kilometer | 0.386101 | square mile | $mi^2$ |
| | square meter | $0.247104 \times 10^{-3}$ | acre | |
| | hectare | 2.471044 | acre | |
| Volume | cubic inch | $16.38706 \times 10^{3}$ | cubic millimeter | $mm^3$ |
| | cubic foot | $28.31685 \times 10^{-3}$ | cubic meter | $m^3$ |
| | cubic yard | 0.764555 | cubic meter | $m^3$ |
| | gallon (U.S.liquid) | 3.785412 | liter | l |
| | quart (U.S.liquid) | 0.946353 | liter | l |
| | cubic millimeter | $61.023759 \times 10^{-6}$ | cubic inch | $in^3$ |
| | cubic meter | 35.314662 | cubic foot | $ft^3$ |
| | cubic meter | 1.307951 | cubic yard | $yd^3$ |
| | liter | 0.264172 | gallon (U.S.liquid) | gal |
| | liter | 1.056688 | quart (U.S.liquid) | qt |
| Mass | ounce (avoirdupois) | 28.34952 | gram | g |
| | pound (avoirdupois) | 0.453592 | kilogram | kg |
| | short ton | $0.907185 \times 10^{3}$ | kilogram | kg |
| | gram | $35.273966 \times 10^{-3}$ | ounce (avoirdupois) | oz av |
| | kilogram | 2.204622 | pound (avoirdupois) | lb av |
| | kilogram | $1.102311 \times 10^{-3}$ | short ton | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX C

## UNITS OF MEASURE AND THEIR SYMBOLS

| | |
|---|---|
| AC | Acres |
| BD | Hospital Beds, Normal Capacity |
| BL | Barrels (42 gals each) |
| BX | Boxes (fire alarm etc.) |
| CF | Cubic Feet |
| CM | CF/Minute[1] |
| CP | Candlepower[1] |
| CY | Cubic Yards |
| DS | Depth of Water Over Sill @ High Tide[1] |
| DW | Depth of Water @ Low Tide |
| EA | Each |
| FA | Family Units (housing) |
| FB | Feet of Berthing (ships/boats/ small craft) |
| FP | Firing Point (firing ranges)[1] |
| GA | Gallons |
| GM | Gallons Per Minute |
| HO | Holes (golf course)[1] |
| KG | Thousands of Gallons Per Day, Capacity |
| KV | Kilovolt-Amperes, Capacity (KVA) |
| KW | Kilowatts[1] |
| LA | Lanes (bowling)[1] |
| LC | Light Care (hospital spaces)[1] |
| LF | Linear Feet |
| MB | Millions of BTU Per Hr (capacity) |
| ME | Meters (length)[1] |
| MG | Millions of Gallons[1] |
| MI | Statute Miles |
| NF | Net Square Feet (housing)[1,2] |
| NS | Net square Feet (storage)[1,3] |
| OL | Outlets (number of) |
| OU | Operating Units |
| PH | Pounds Per Hour[1] |
| PH | Persons, Designed Capacity |
| SE | Seats (number of) |
| SF | Square Feet |
| SH | Stacking Height[1,3] |
| SI | Sites[1] |
| SP | Service Points[1] |
| SY | Square Yards |
| TC | Total Cubic Feet[1,3] |
| TH | Tons Per Hour (capacity)[1] |
| TN | Tons (capacity) |
| VE | Vehicles (number of) |

[1] Not listed in DODINST 4165.3 of 24 Oct 1978, as amended
[2] As defined by NAVFACENGCOM for housing purposes
[3] As defined by NAVSUPSYSCOM for supply facilities



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX D

## ACRONYMS AND ABBREVIATIONS

| | |
|---|---|
| ABSLA | Approved Basic Stock Level of Ammunition |
| ACF | Area Cost Factor |
| ADCA | Anticipated Date of Contract Award |
| A&E | Architect and Engineer |
| AGI | Activity General Information |
| AH | Alternate Host |
| AICUZ | Air Installations Compatible Use Zones |
| AIS | Annual Inspection Summary |
| ASD | Assistant Secretary of Defense |
| BAM | Baseline Assessment Memorandum |
| BASE REP | Shore Base Readiness Report |
| BEAP | Base Exterior Architecture Plan |
| BEQ | Bachelor Enlisted Quarters |
| BESEP | Base Electronics Systems Engineering Plan |
| BFR | Basic Facility Requirements |
| BLS | Base Loading System |
| BOQ | Bachelor Officer Quarters |
| CAUSE | Computer Assisted Utility Systems Evaluation |
| CCD | Category Code Directory (data base) |
| CCN | Category Code Number |
| CES | Computerized Estimating System |
| CES-H | Computerized Estimating System - Historical |
| CIP | Capital Improvements Plan |
| CL3-D | Class 3 (Relocatable); planned for disposition (planning action) |
| CL3-I | Class 3 (Relocatable); used on interim basis (planning action) |
| CL3-U | Class 3 (Relocatable); temporary use (planning action) |
| CMC | Commandant, Marine Corps |
| CNET | Chief of Naval Education and Training |
| CNO | Chief of Naval Operations |
| CO | Commanding Officer |
| COMNAVFACENGCOM | Commander, Naval Facilities Engineering Command |
| CONSTR | New Construction (planning action) |
| CONVFR | Convert From (planning action) |
| CONVTO | Convert To (planning action) |
| CPS | (Final) Consolidated Personnel Summary |
| CPV | Current Plant Value |
| CQM | Contractor Quality Management |
| CY | Cubic Yards (unit of measure) |
| D | Planning Action Designator |
| DASN | Deputy Assistant Secretary of the Navy |
| DCNO | Deputy Chief of Naval Operations |
| DDESB | Department of Defense Explosives Safety Board |
| DEMOL | Demolition (planning action) |
| DF | Discount Factor |
| DISPOS | Disposable Asset (planning action) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| DPS | Decision Package Sets |
| DRA | Defense Relocation Account (funds) |
| DoD | Department of Defense |
| EA | Economic Analysis |
| EA | Each (unit of measure) |
| EAF | Environmental Adjustment Factor |
| ECIP | Energy Conservation Investment Program |
| EE | Engineering Evaluation |
| EFD | Engineering Field Division |
| EMCS | Energy Monitoring and Control Systems |
| EOD | Explosives Ordnance Disposal |
| FACSO | Facilities Systems Office (Port Hueneme, CA) |
| FEC | Foreign Exchange Cost |
| FEP | Facility Energy Plans |
| FER | Foreign Exchange Rate |
| FHS | Family Housing Plans |
| FPD | Facility Planning Document |
| FRP | Facilities Requirements Plan |
| FUR | Facilities Utilization Report |
| FYDP | Five Year Defense Program |
| GEMS | Graphics Engineering and Mapping System |
| H/T | Host/Tenant |
| HCA | Hazard Control Assessment |
| HVAC | Heating, Ventilation, and Air Conditioning |
| IBOP | International Balance of Payments |
| ID | Planning Action Identifiers |
| IP | Investment Program |
| JFAI | Joint Formal Acceptance Inspection |
| LS | Lump Sum (unit of measure) |
| MAGIC | Master Activity General Information and Control |
| MARCORPS | Marine Corps |
| MBTU | Million British Thermal Units |
| MCNR | Military Construction Naval Reserve |
| MCON | Military Construction, Navy |
| MCP/MIS | Military Construction Programming Management Information System |
| MILCON | Military Construction |
| MILPERS | Naval Military Personnel Command |
| MODIFY | Modification (planning action) |
| NACIP | Navy Assessments and Control of Installation Pollutants |
| NADEP | Naval Aviation Depot (formerly NARF) |
| NAF | Nonappropriated Funded; Nonappropriated Fund |
| NAVAIRSYSCOM | Naval Air Systems Command |
| NAVCOMPT | Comptroller of the Navy |
| NAVELEXSECCEN | Naval Electronic Systems Security Engineering Center |
| NAVFAC | Naval Facilities Engineering Command (for directives and publications) |
| NAVFACENGCOM | Naval Facilities Engineering Command |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| NAVFACENGCOMHQ | Naval Facilities Engineering Command, Headquarters |
| NAVMEDCOM | Naval Medical Command |
| NAVOSH | Navy Occupational Safety and Health |
| NAVRESSO | Navy Resale and Services Support Office |
| NAVSEASYSCOM | Naval Sea Systems Command |
| NAVSUPSYSCOM | Naval Supply Systems Command |
| NCR | National Capital Region |
| NFADB | Navy Facility Assets Data Base |
| NFH | Navy Family Housing |
| NMCRC | Navy Marine Corps Reserve Centers |
| NPV | Net Present Value |
| NS | Net Square Feet (unit of measure) |
| O&M,N | Operations & Maintenance, Navy (funds) |
| OCR | Occupational Safety and Health Control Report |
| OMB | Office of Management and Budget |
| OPNAV | Office of the Chief of Naval Operations |
| OSD | Office of the Secretary of Defense |
| OUTG-C | Outgrant, continue (planning action) |
| OUTG R | Outgrant, retrieve (planning action |
| PART FRP | Partial Facilities Requirements Plan |
| PCAS | Post Construction Award Services |
| PCR | Pollution Control Report |
| PCS | Permanent Change of Station |
| PEA | Preliminary Environmental Assessment |
| PED | Project Engineering Documentation |
| PHA | Preliminary Hazard Analysis |
| PID | Project Identification Document |
| POM | Program Objectives Memorandum |
| PVA | Present Value Analysis (economic analysis) |
| PWC | Public Works Center |
| RAC | Risk Assessment Code |
| RCRA | Resource Conservation and Recovery Act |
| RDT&E | Research, Development, Test & Evaluation |
| REASFR | Reassignment From (planning action) |
| REASTO | Reassignment To (planning action) |
| RENOV | Renovation (planning action) |
| REPLCE | Replace (planning action) |
| RETAIN | Retain For Contingency (planning action) |
| RETR | Retrieve (planning action identifier) |
| RJE | Remote Job Entry |
| RL | Requirements List |
| SA | Special Area |
| SCF | Supplemental Category Flag |
| SECDEF | Secretary of Defense |
| SECNAV | Secretary of the Navy |
| SF | Square Feet, Gross (unit of measure) |
| SFMR | Supply Facility Management Report |
| SFPB | Shore Facilities Programming Board |
| SFPS | Shore Facilities Planning System |
| SH | Stacking Height (unit of measure) |
| SIMA | Shore Intermediate Maintenance Activity |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| SIOH | Supervision, Inspection, and Overhead |
| SIR | Savings to Investment Ratio (economic analysis) |
| SNDL | Standard Navy Distribution List |
| SPP | Sponsor Program Proposal |
| SY | Square Yards (unit of measure) |
| TCF | Total Cubic Feet (unit of measure) |
| TDY | Temporary Duty |
| TOA | Total Obligation Authority |
| TPAA | Total Proposed Adequate Assets |
| UIC | Unit Identification Code |
| UM | Unit of Measure |
| UPH | Unaccompanied Personnel Housing (now called bachelor housing) |
| USA | Utility System Assessments |
| USE | Continued Use (planning action) |
| UTS | Utility Technical Studies |
| VAC | Vacant (planning action identifier) |
| VI | Validation Indicator |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX E

## AIR CONDITIONING TONNAGE GUIDE

| CATEGORY CODE | TITLE | SQUARE FEET OF FLOOR AREA / TON OF A/C |
|---|---|---|
| 171-15 | Reserve Centers | 450 - 600 |
| 171-20 | Applied Instruction Building | NO STANDARD |
| 171-25 | Auditorium | 0.04 - 0.06 tons/seat |
| 171-35 | Flight Simulator | 100 - 300 |
| 610-10 | Administration Building | 350 - 400 |
| 721-11 | UEPH | 1000 - 1200 |
| 722-10 | Dining Facility | 175 - 450 |
| 724-11 | UOPH | 1000 - 1200 |
| 730-83 | Chapel | 300 - 500; or 0.02 - 0.03 tons/seat |
| 740-02 | Location Exchange | NO STANDARD |
| 740-20 | Temporary Lodging | 550 - 750 |
| 740-23 | Commissary | 800 - 900 |
| 740-25 | Family Service Center | 375 - 400 |
| 740-40 | Bowling Alley | 0.8 - 1.4 tons/alley |
| 740-63 | Enlisted Men's & Officers Clubs | 600 - 650 |
| 740-74 | Child Care Center | 350 - 450 |
| | Classrooms | 400 - 500 |
| | Computer Room | 50 - 150 |
| | Dispensaries | 450 - 550 |
| | Hospital Patient Rooms | 450 - 550 |
| | Married Personnel Quarters | 900 - 1275 |
| | Recreation Rooms | 375 - 450 |
| | Shops (Precision Equipment) | 450 - 500 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# PART 2: COST CERTIFICATION GUIDANCE



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 9: INTRODUCTION

9.1 Purpose and Background. This guide is to assist in the preparation of Cost Certification Estimates for the appropriate fiscal year Military Construction, Navy (MCON) projects; NAVFACENGCOM. NAVFACINST 11010.44 requires a Facility Study to be prepared by the activity. The PDS and the Facility Study provide the initial conceptual cost. Many items described herein and required as part of the Cost Certification were also required as part of the Facility Study. It should be recognized that this does not represent inadvertent duplication. Rather, it is an effort to evaluate and refine the Facility Study as the project scope is defined.

9.2 Importance. The importance of an accurate planning cost estimate cannot be over emphasized, as it could be the determining factor as to whether or not the project is included in the budget year program. Although requirements and justifications are important parts of project submittals, this publication deals only with scope and cost. Scope is included because an estimate is no better than the definition of scope that has been determined. An incomplete scope will result in an incomplete proposed project cost.

9.3 Contents. The cost certification components which are described in this guide are:

a) DD Form 1391 (Figure 14)

b) Budget Estimate Summary Sheet and backup estimate (Figure 15)

c) Building Square Foot Cost Development Sheet (Figure 16)

d) Cost Model Questionnaire (paragraph 14.7)

9.4 Comments or Suggestions. You are encouraged to advise the Engineering Field Division (EFD) Cost Engineering Branch (Code 407) of errors, conflicts, or omissions detected while using this guide, as well as to suggest improvements which will help you produce higher quality Cost Certification Estimates. Advice or comments should be forwarded to the EFD Code 407 for the MIL-HDBK-1010 update.

Points of contact are:

| DIVISION | 407 |
|---|---|
| Atlantic Division | (804) 444-9907 |
| Chesapeake Division | (202) 433-3315 |
| Northern Division | (215) 897-6156 |
| Pacific Division | (808) 471-8436 |
| Southern Division | (803) 743-0463 |
| Western Division | (415) 742-7760 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 10: SCOPE CONSIDERATIONS

10.1 Introductory Paragraph. The Building Square Foot Cost Sheet Development sheet must include separate entries for specific functional features of additional cost. Certain features and their cost derivation are discussed below. Other specific features may not be discussed in this section, but should be a separate item to emphasize significant cost.

10.2 Operation and Maintenance Support Information (OMSI). OMSI is a product developed during design and construction of a facility to give the activity clear comprehensive data for use in operating and maintaining new facilities as well as to assure economical, safe life cycle operation and maintenance. The principal OMSI elements requiring consideration are as follows:

a) Operation and Maintenance Technical Documentation

b) Supply Support (repair parts, fuels, lubricants, etc.)

c) Maintenance Planning

d) Maintenance and Test Equipment

e) Operating and Maintenance Indoctrination

f) Staffing and Budgeting

g) Inspection Plan

h) Training

i) Extended Special Warranties

j) Basic Data for Facilities Support Contracts/ Performance Work Statements (FSC/PWS)

10.2.1 Types of OMSI. OMSI is valuable on most projects for which product data is to be submitted by the construction contractor. OMSI is usually needed on projects having complex built-in systems for which submittal of operating and operating and maintenance information is called for in the construction specifications. The degree of OMSI will vary with the kind of facility. For identification, projects requiring OMSI can be classified as Type A, Type B, or Type C.

a) Type A: Operation and Maintenance Manual plus User Manual

b) Type B: Operating Manual plus User Manual

c) Type C: User Manual only



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Examples of facilities that usually require a Type A are listed in Table 8, and those requiring a Type B, in Table 9. Rather simple facilities requiring only a User Manual are classified as Type C, samples of which are shown in Table 10. The User Manual compiles and indexes product and operation and maintenance data into a consolidated manual and also provides useful information such as small scale floor plans with utility shutoff locations, special warranty information, and parts lists. Facilities having systems which require operating information above and beyond that in the User Manual should be classified as Type B and be provided an Operating Manual in addition to the User Manual. Complex facilities having systems which require operating and maintenance information above and beyond that in the User Manual should be classified as Type A and be provided an Operation and Maintenance Manual in addition to the User Manual.

10.2.2 OMSI Estimate. In estimating the cost of OMSI for a specific project, use the best available information. If a good basis to make the estimate does not exist, Table 11 should be used for a preliminary estimate based upon a percentage of the total primary facility cost. The percentage selected (within the ranges shown) should be based on the relative complexity of the facility and its built-in systems. If OMSI is greater than $50,000, it shall be a separate line item on the DD Form 1391 and Budget Estimate Summary Sheet. If OMSI is less than $50,000, it shall be part of the building cost and be shown on the Budget Estimate Summary Sheet. In either case, OMSI should be included in Block 10 of the DD Form 1391 under Description of Proposed Construction.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

Table 8
Examples of Facilities Usually Requiring Type A OMSI

| FACILITY TYPE | CATEGORY CODE |
|---|---|
| PETROLEUM, OIL & LUBRICANT (POL) FACILITIES | 120 |
| COMPUTER OPERATIONS CENTER (LARGE/COMPLEX) | 143 |
| TRAINING FACILITIES WITH COMPLEX SYSTEMS | 171 |
| AIRCRAFT & SHIP MAINTENANCE SHOPS | 211 & 213 |
| MISSILE ASSEMBLY & MAINTENANCE SHOPS | 212 |
| CENTRAL REFRIGERATION PLANTS | 431 & 826 |
| MEDICAL FACILITIES & LABORATORIES | 500 & 310 |
| POWER PLANTS & HEATING PLANTS | 811 & 821 |
| INDUSTRIAL WASTE & SEWAGE TREATMENT PLANTS | 831 |

Table 9
Examples of Facilities Usually Requiring Type B OMSI

| FACILITY TYPE | CATEGORY CODE |
|---|---|
| OPERATIONAL & TRAINING FACILITIES * | 100 |
| AMMUNITION, EXPLOSIVES, & TOXICS* | 316 |
| LIQUID FUEL STORAGE - BULK* | 411 |
| COLD STORAGE WAREHOUSE | 431 |
| WATER - SUPPLY, TREATMENT, & STORAGE - POTABLE* | 841 |
| * May require Type A OMSI | 890 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 10
Examples of Facilities Usually Requiring Type C OMSI

| FACILITY TYPE | CATEGORY CODE |
|---|---|
| WAREHOUSE - GENERAL | 441 |
| ADMINISTRATIVE FACILITIES | 600 |
| BEQ/BOQ | 721 & 724 |
| COMMUNITY, MORALE, RECREATION | 740 |
| NOTE: If complex system, use Type B | 890 |

Table 11
Examples of OMSI Cost for Preliminary Estimates

| PRIMARY FACILITY COST | ESTIMATED OMSI COST BY TYPE (1) | | |
|---|---|---|---|
| | A (2) | B (3) | C (4) |
| BELOW $5,000,000 | 1.10-2.25% | 0.60-1.25% | 0.35-0.75% |
| $5,000,000 to 20,000,000 | 0.85-1.75% | 0.50-1.00% | 0.30-0.65% |
| $20,000,000 to $50,000,000 | 0.60-1.25% | 0.35-0.75% | 0.25-0.50% |
| ABOVE $50,000,000 | 0.50-1.00% | 0.30-0.65% | 0.20-0.45% |

NOTES:
(1) Table 11 shows cost of OMSI as a percentage range of the primary facility cost. Use higher range for more complex projects, for example: Industrial Waste Treatment Plant with $18 million primary facility cost: $18,000,000 x 0.0175 = $315,000 estimated cost for Type A OMSI (Operation and Maintenance Manual plus User Manual).
(2) The minimum amount for a Type A should be approximately $20,000.
(3) The minimum amount for a Type B should be approximately $16,000.
(4) The minimum amount for a Type C should be approximately $6,000.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

10.3 Intrusion Detection Systems (IDS). Interior "non-built-in" portions of IDS are no longer MCON funded per NAVCOMPT September 1987 decision. Effective with FY 90 Program, NAVCOMPT requires OPN funding for interior "non-built-in" IDS. NAVFACENGCOM message 061449Z September 1988 provides guidance on the IDS issue.

Facility support, such as utilities, conduit runs, equipment space, building, and conventional fencing required to support IDS associated with a MCON project are properly chargeable to MCON funds and should be included in the MCON project scope. Refer to NAVFAC DM-13.02, Commercial Intrusion Detection Systems (IDS) for help in determining facility IDS requirements.

10.3.2 Non-MCON Fundable IDS. Per NAVCOMPT all of the following are non-MCON funded:

a) New building within United States;

b) Building at nuclear ordnance, arms, ammo, and explosives sites;

c) Other IDS including closed circuit television (CCTV) and taut wire sensor;

d) New buildings outside United States; and

e) Base perimeter security system.

CCTV and taut wire sensor systems, including installation of posts, footings, and integral ductwork/conduit, have been determined to be equipment and are the responsibility of Space and Naval Warfare Systems Command (SPAWARSYSCOM). Claimant, user, and SPAWARSYSCOM, depending on current policy, will budget for and fund non-MCON IDS requirements. These commands must be notified of a project's non-MCON IDS requirements and your need for data on facility support requirements. This should generally result in a Base Electronic System Engineering Plan (BESEP).

10.3.3 Technical Support. Technical support for MCON-funded IDS is available on a reimbursable basis from NAVELEXENGCEN Charleston. This support includes guidance on scope and technical review of compiled IDS designs at appropriate steps in project development and design. NAVFACENGCOM will attempt to identify MCON projects with major IDS and request NAVELEXENGCEN Charleston prepare a Base Electronic System Engineering Plan (BESEP) for each.

10.4 Land Acquisition. Obtain instructions from major claimant and EFD Code 024 (Real Estate).

10.5 Hyperbaric Requirements. CHESNAVFACENGCOM (FPO-1) is responsible for executing the design and procurement phases of shore based hyperbaric facilities. When the project scope includes provisions for hyperbaric facilities, you must contact CHESNAVFACENGCOM (FPO-1) to make appropriate arrangements for the design, procurement, and installation of the required hyperbaric facilities and the associated cost estimate.

10.6 Shielding Requirements.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

10.6.1 Radio Frequency Interference (RFI)/TEMPEST/HEMP (High Altitude Electromagnetic Pulse)/EMP (Electromagnetic Pulse) Shielding. NAVELEXSECCEN Washington, D.C. has been very effective in limiting requirements for shielding in MCON facilities. NAVFACENGCOM message 151455Z Jun 84 provides the guidance on determining the extent of RF shielding required on projects involving installation of electronic equipment. For affected projects, ensure NAVELEXSECCEN Washington, D.C., has formally reviewed and commented on TEMPEST shielding requirements. If HEMP/EMP shielding is identified as a user requirement, consult with NAVFAC Code 04T prior to A&E scoping.

10.6.2 Coordination Required to Meet Objectives. Satisfying shielding objectives is often very difficult; it requires close coordination between the customer, the designer, and the construction contractor to establish this scope requirement. Good information transfer from designers to ROICC personnel is essential. The use of expert consultants during design and construction, and the development of both interim and final testing plans and criteria, should be evaluated and incorporated when appropriate. Design Policy Letter DPL-00-0002 dated 3 January 1989 established CHESNAVFACENGCOM (FPO-2) as the center of expertise and criteria source for TEMPEST, HEMP, and RFI shielding. Consult CHESNAVFACENGCOM (FPO-2) and MIL-HDBK-1195, Radio Frequency Shielded Enclosures for information on these subjects.

10.7 Uninterruptible Power System (UPS). If the UPS is required only to support personal property (electronic equipment) installations, it may not be procured and installed with MCON funds. Instead, its procurement and installation cost must be separately budgeted by the major claimant or user as an integral part of the associated electronic equipment package. Please ensure that the major claimant or user is aware of this requirement. Government furnished UPS are procured through CHESNAVFACENGCOM (FPO-2), and UPS requirements should be coordinated through them. However, facility items required to support the UPS such as power panels, flooring, and battery rooms are properly chargeable to MCON and should be included in the project scope.

10.8 Communication Requirements.

10.8.1 Telephone and Communications Installations. It is the responsibility of the designer to determine the design requirements, and design the facility's telephone system. Based on NAVCOMPT guidance, the general policy is to include only the cost of the following as required to support future installation of telephone and other communication systems wiring internal to a MCON facility:

a) Exterior - All supporting structures (e.g., telephone poles, underground conduits, underground ductbanks, manholes, handholes, etc.).

b) Interior - Empty conduit with pull wire, outlet boxes, conduit bushings, backboards, and cable trays to support future installation of telephone wiring.

10.8.2 Funding Requirements. Normally, the wiring, instruments, and equipment are to be funded by other than MCON regardless of whether the system is leased or Government owned. The responsibility of Telephone Management Division East (TMD East) is to assist the user in identifying non-project funds to pay for the following items to be installed as a separate contract (not part of the MCON project):



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

a) Exterior - All cabling and telephone switching equipment.

b) Interior - All wiring, instruments, and equipment.

10.8.3 Funding Exceptions. In certain situations, such as medical facilities and Navy owned systems in overseas areas, entire systems may be MCON funded where practical and justifiable. These exceptions to the general policy should be clearly identified and justified.

10.9 Built-in Retrieval Equipment Racks (Warehouses). Policy on funding specialized equipment in automated warehouses is as follows:

10.9.1 MCON Funded. If the project includes a guide wire or guide rail built into the facility, include the cost of the guide wire or rail system, vehicles which ride on the system (system captive), and the storage racks serviced by the system in the MCON project.

10.9.2 OPN Funded. If the retrieval system does not include a built-in guide wire or rail system, the retrieval vehicles and racks are to be identified as collateral equipment.

10.9.3 Warehouse Design. The design of all warehouses must be coordinated with NAVSUPSYSCOM as the Navy's expert in warehouses. NAVSUPSYSCOM must formally approve the design concept prior to your achieving a 35 percent design. To help with the design concept NAVSUPSYSCOM has developed a computer program to determine the least cost alternative for various stacking heights and retrieval systems. As the foot print and stacking height affect the project cost, and some retrieval systems are MCON funded, these decisions must be made prior to starting design. Coordinate design with NAVSUPSYSCOM; the NAVFACENGCOM point of contact is Code 04B2, Autovon, 221-0044, Commercial (202) 325-0044.

10.10 Asbestos Related Work. A&E firms are finding it difficult, if not impossible, to obtain professional liability insurance for work involving asbestos, hazardous waste, and pollution abatement. The Federal Acquisition Regulation (FAR) does not require A&E firms to carry professional liability insurance. NAVFACENGCOM does not have the authority to provide blanket indemnification for work involving hazardous waste. NAVFACENGCOM policy is that when asbestos or other hazardous waste will be encountered, or when there is a good probability of asbestos or other hazardous waste, note this fact in the Commerce Business Daily (CBD) synopsis for any affected contract. We should NOT include this warning in every CBD synopsis as a matter of routine; it should only be used where the hazards cited are known or probable. During interviews the willingness of each firm to undertake any required asbestos, hazardous waste, or pollution abatement work is to be clearly established and made a matter of record. Please continue to keep NAVFACENGCOM informed of problems in this area. The NAVFACENGCOM point of contact is, Code 04BD, Autovon 221-0044, Commercial (202) 325-0043.

10.11 Computation of Gross Area. For all gross and net area calculations use Chapter 4 of MIL-HDBK-1190, Facility Planning and Design Guide. Gross area includes the total area of all floors, including mezzanines, basements, and penthouses as determined by the effective outside dimensions of the building. One-half the area shall be included in the gross area for balconies and porches, covered raised loading platforms, covered ground level or depressed loading facilities, covered but not enclosed passageways or walks, covered and uncovered



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

but open stairs, and covered ramps. Excluded from the gross area: crawl spaces, exterior uncovered loading facilities, open courtyards, roof overhangs and soffits, uncovered ramps and stoops, utility tunnels and raceways. Separate central energy plants or utility buildings serving large complexes are not included in the gross modular area shown in Table 12. Separate support buildings should be programmed as a line item on DD Form 1391.

10.11.1 BEQ Area Requirements. For Bachelor Enlisted Quarters, use the criteria shown in Table 12.

10.11.2 BOQ Area Requirements. For Bachelor Officer Quarters, use MIL-HDBK-1190. The following requirements shall be used to program BOQ projects:

a) Grades 02 and below: Quarters shall provide a private suite of approximately 330 square feet net area, consisting of combination of living room and bedroom, bathroom, and pullman-type kitchen. The gross floor area shall approximate 475 square feet per officer.

b) Grades 03 and above: Quarters shall provide a private suite of approximately 460 square feet consisting of living room, bedroom, bathroom, and kitchen. The gross floor area shall approximate 650 square feet per officer.

10.12 International Balance of Payments (IBOP). The IBOP Summary is only included when preparing the cost estimate for projects in specific foreign areas. Information on the exempt areas is available from the EFD Project Management Office. The IBOP Summary shall be developed on 8-1/2 by 11-inch plain bond paper as illustrated in Figure 13.

10.12.1 IBOP Implications. Current directives require action by cognizant addressees to maintain Foreign Exchange Costs (FEC) at a minimum. IBOP implications will be prepared to show the effect of construction under both normal and planned (IBOP) procedures. This effort is to permit analysis and response by NAVFACENGCOM to inquiries regarding items contributing to FEC.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

Table 12
Bachelor Enlisted Quarters Area Table

| MODULES (2 Rooms and Bath) | FLOORS (1) | AREA SF (2) | ELEVATORS (3) | SPRINKLER SYSTEM |
|---|---|---|---|---|
| 60 | 3 | 800 | --- | --- |
| 72 | 3 | 785 | --- | --- |
| 96 | 4 | 800 | F | (4) |
| 180 | 6 | 800 | F & P | YES |

(1) Modules per floor must be divisible by 2, with no exceptions.
(2) Total gross module area including its share of the non-module areas.
(3) F (Freight) & P (Passenger)
(4) Provide a fire stand pipe system if sprinkler system is not required.
(5) The data in this table satisfies the net area requirements of MIL-HDBK-1190. Gross area for combinations not shown must be determined or verified by the EFD, Code 401.

| GRADE | ACCOMMODATIONS |
|---|---|
| E-1 thru E-4 | 4 Men per Module |
| E-5 thru E-6 | 2 Men per Module |
| E-7 thru E-9 | 1 Man per Module |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INTERNATIONAL BALANCE OF PAYMENTS (IBOP) IMPLICATIONS

| 1. Activity (Name and Location) (CAPITAL LETTERS) | Date |
|---|---|
| 2. Project Title (CAPITAL LETTERS) | 3. P-No. |

| | NORMAL PROCEDURES | | PLANNED PROCEDURE | |
|---|---|---|---|---|
| | Construction | *Construction Total Material | Construction | *Construction Total Material |
| BUDGET COST | 1,030,000 | - | 1,100,000 | - |
| LESS RETURNS TO THE US | | | | |
| a) US End Products | - | - | 100,000 | - |
| b) US Services | 5,000 | - | 5,000 | - |
| c) US Transportation | - | - | 20,000 | - |
| TOTAL RETURNS | 5,000 | 0 | 125,000 | 0 |
| FOREIGN EXCHANGE COST (FEC) | 1,075,000 | | 975,000 | |

This example makes the following assumptions:

1. Normal procedure; all foreign materials and contractors, only return to US is .5% SIOH.
2. Planned procedure; purchase of a pre-engineered metal building in the US at the same price as in the foreign country, shipping by a US line, .5% SIOH is returned to the US.

Returns to US include escalation and contingencies. Overhead and profit depends upon location of contractor.

SUMMARY OF IBOP DATA

*CWE is the same as total request rounded for selected procedures.

| | NORMAL PROCEDURE | PLANNED PROCEDURE | PLANNED PROCEDURE EFFECT |
|---|---|---|---|
| CURRENT WORKING ESTIMATE | 1,080 | 1,100 | + 20 |
| FOREIGN EXCHANGE COST (FEC) | 1,075 | 975 | - 100 |

* Materials, supplies and equipment (including government furnished material procured abroad) acquired by the Navy from construction funds and provided to contractors for incorporation into foreign construction projects.

Figure 13
Sample IBOP Summary

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

10.12.2 Normal Procedures. Those construction procedures which would normally be used at a particular location if no effort were made to suppress FEC.

10.12.3 Planned Procedures. Those procedures utilized at a particular location to minimize FEC with specific support and emphasis on:

a) Adhering to pertinent executive orders, U.S. laws, status of forces agreements, and treaties which affect our contractual freedom abroad;

b) Maximum feasible use of U.S. contractors as allowed by paragraph 10.12.3a;

c) Maximum feasible use of U.S. materials, end products, and equipment as allowed by paragraph 10.12.3a;

d) Maximum use of U.S. flag, ocean, and air carriers;

e) Utilization of competent military labor where available;

f) Designs incorporating portable van-type installations and structures prefabricated in the United States.

10.12.4 Basis for Choice of Construction Procedure. Generally, planned procedures will be recommended where for every dollar increase in Current Working Estimate (CWE) from NORMAL to PLANNED there is a resulting decrease in FEC of at least $2, and normal procedures will be recommended otherwise. An explanation for the deviation will be provided if the EFD recommends construction at the NORMAL level and cost estimates justify programming at the planned level.

Exceptions to the above criteria are allowed where country-to-country agreements specifically establish construction procedures, or project urgency is an overwhelming factor.

10.12.5 Presentation of IBOP Data on DD Form 1391. The DD Form 1391 will be prepared to show costs at the recommended level. IBOP data will be shown on the DD Form 1391 with entries asterisked to show the corresponding CWE and FEC amounts for the recommended procedure. Such IBOP entries will be shown as:

| IBOP DATA: | NORMAL | PLANNED | | NORMAL | PLANNED |
|---|---|---|---|---|---|
| CWE | $550,000 | $590,000* | FEC | $330,000 | $220,000* |

*Recommended construction method

10.12.6 Requirements Regarding Returns to the United States. Other information requirements regarding returns to the United States are to be shown at the end of the cost estimates. This additional data is required in order that NAVFACENGCOM may provide estimates of IBOP expenditures as required by higher authority.

10.13 Instructions for DD Form 1391. The following instructions correspond to the circled numbers shown in Figure 14.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. Date shall be the day submitted. Dates must be revised if a resubmittal is made.

2. Enter the five-digit category code number from NAVFAC P-72 to identify the primary facility. In cases of multi-use facilities, enter the category code which represents the largest cost of the project. The corresponding title from NAVFAC P-72 should be entered in block 4.

3. Block 8 - "Project Cost" shall be the same as the "TOTAL REQUEST ROUNDED" in block 9. This cost shall be escalated to 1 April of the appropriation year, except for assigned foreign areas (paragraph 12.2).

4. The Area Cost Factors and the corresponding Foreign Exchange Rates for various overseas locations are given in paragraph 12.2.

5. The line items shown are generally suitable for most projects. They should be tailored to suit the individual project - discuss this with the EFD Cost Engineering Branch. The cost figures in parentheses should add to equal "PRIMARY FACILITY" cost or "SUPPORTING FACILITIES" cost. The building SF cost is carried over from the budget estimate sheet (Figure 15).

6. Built-in Equipment are those equipment that are installed as an integral part of the facility and are funded as part of the MILCON project cost. Those systems are designated by a (1) on the CES Standard Systems List (paragraphs 15.1 and 15.2). Built-in equipment is MCON funded and normal built-in equipment is included in guidance SF cost. Enclose cost figures in parentheses.

7. Contingency will be 5 percent for all projects.

8. Use 5.5 percent SIOH for all projects unless directed otherwise.

9. Rounded cost estimate:

| | |
|---|---|
| less than $1,000,000 - nearest | 10,000 |
| 1,000,000 - 5,000,000 - nearest | 50,000 |
| Over 5,000,000 - nearest | 100,000 |

10. Must agree with total for all other categories of equipment on collateral equipment list other than built-in equipment. If not available, type "(LIST NOT AVAILABLE)" in place of "(NON-ADD)."

11. If the project includes more than one structure or location, address each in a separate paragraph in block 10 and separately in block 9.


12. Draw a line between blocks 10 and 11.

13. IBOP entry is required for assigned foreign areas (Paragraph 12.2).

NOTE: If the A&E has access to an IBM compatible personal computer and Lotus 1,2,3 Version 2.0, then the government will provide an automated template to assist in the development of the 1391's and Budget Estimate Summary Sheets. To obtain a copy of the template the A&E must supply a 1,360K, double sided, double density, 5 1/4-inch floppy diskette. Contact the EFD, Code 407, for further information.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

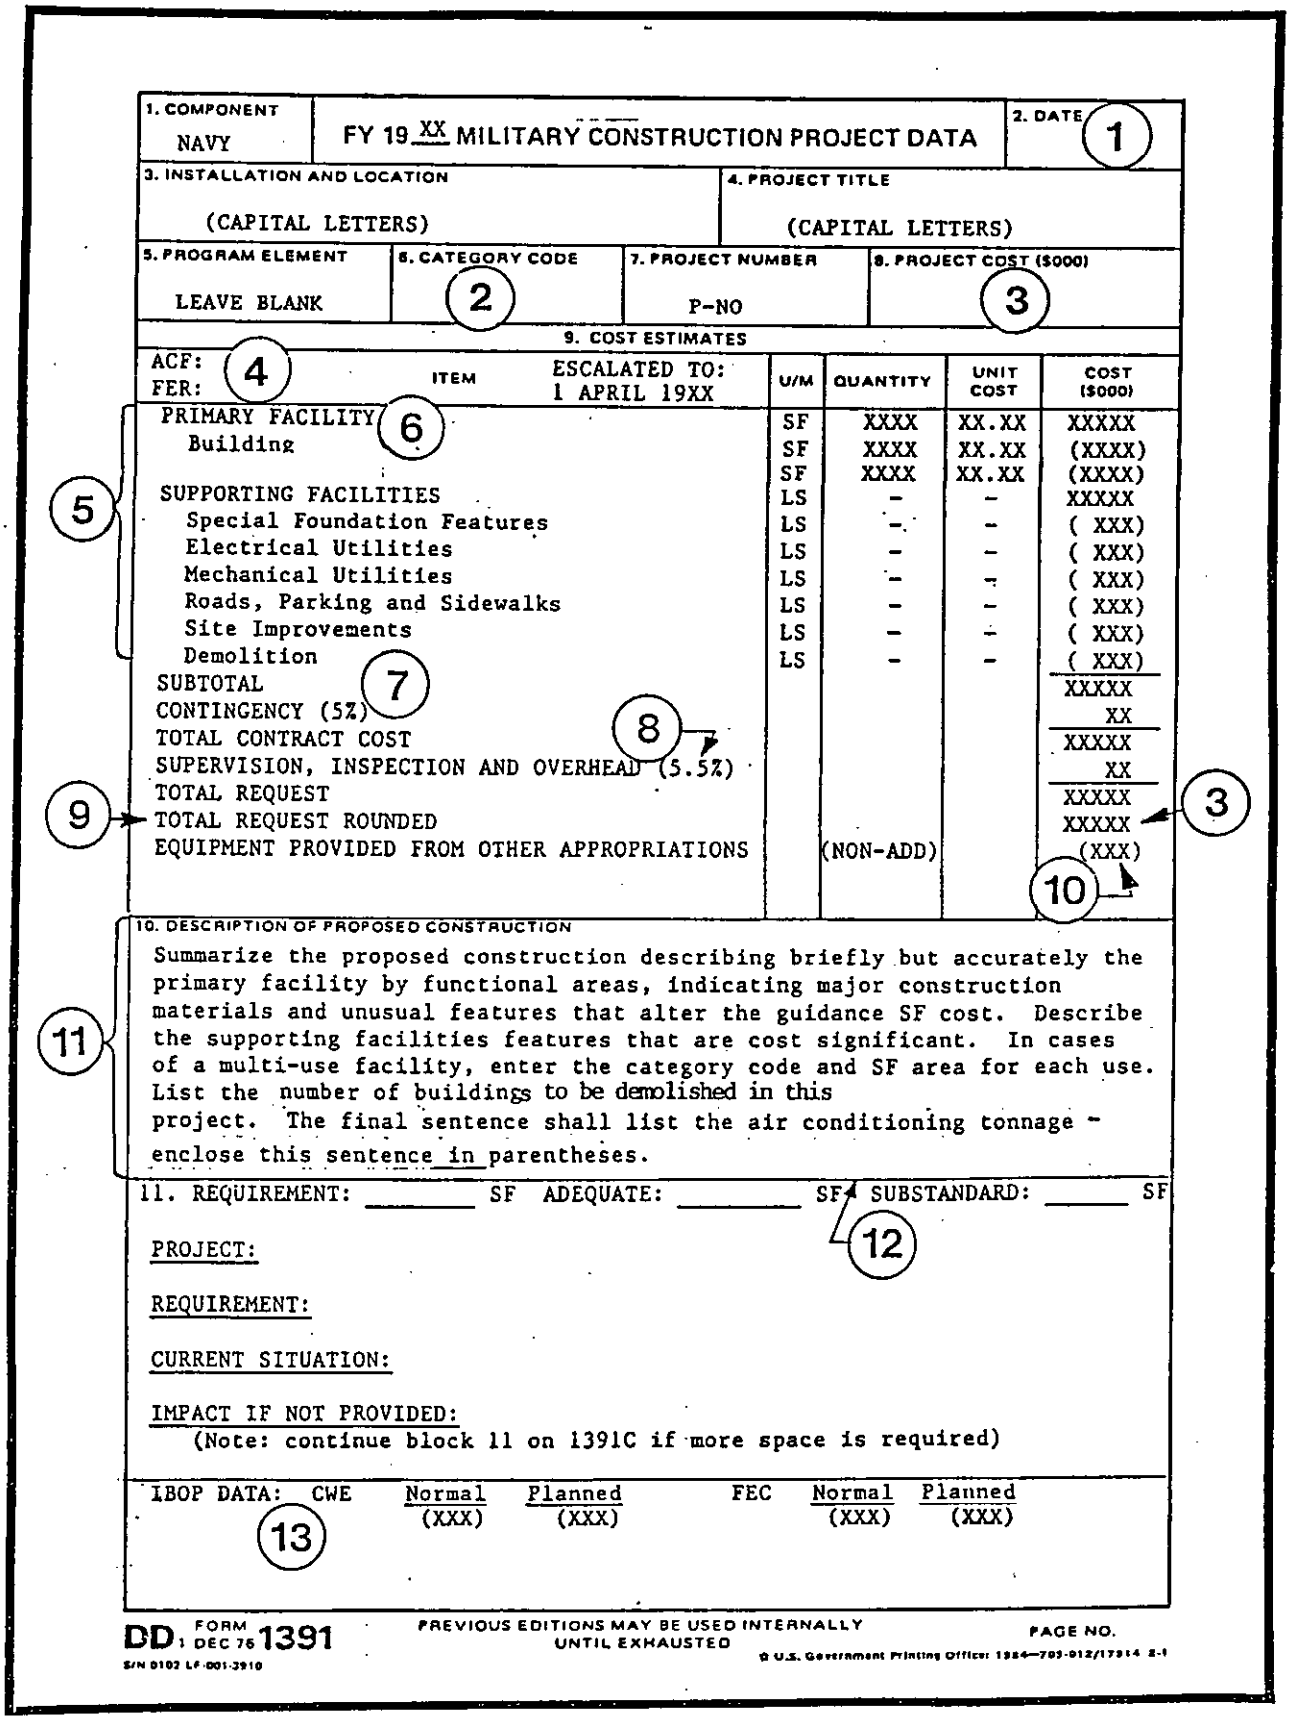

| 1. COMPONENT | FY 19XX MILITARY CONSTRUCTION PROJECT DATA | 2. DATE (1) |
|---|---|---|
| NAVY | | |

| 3. INSTALLATION AND LOCATION | 4. PROJECT TITLE |
|---|---|
| (CAPITAL LETTERS) | (CAPITAL LETTERS) |

| 5. PROGRAM ELEMENT | 6. CATEGORY CODE (2) | 7. PROJECT NUMBER | 8. PROJECT COST ($000) (3) |
|---|---|---|---|
| LEAVE BLANK | | P-NO | |

9. COST ESTIMATES

ACF: (4)
FER:

| ITEM (ESCALATED TO: 1 APRIL 19XX) | U/M | QUANTITY | UNIT COST | COST ($000) |
|---|---|---|---|---|
| PRIMARY FACILITY (6) | SF | XXXX | XX.XX | XXXXX |
| Building | SF | XXXX | XX.XX | (XXXX) |
| | SF | XXXX | XX.XX | (XXXX) |
| SUPPORTING FACILITIES (5) | LS | - | - | XXXXX |
| Special Foundation Features | LS | - | - | ( XXX) |
| Electrical Utilities | LS | - | - | ( XXX) |
| Mechanical Utilities | LS | - | - | ( XXX) |
| Roads, Parking and Sidewalks | LS | - | - | ( XXX) |
| Site Improvements | LS | - | - | ( XXX) |
| Demolition | LS | - | - | ( XXX) |
| SUBTOTAL (7) | | | | XXXXX |
| CONTINGENCY (5%) | | | | XX |
| TOTAL CONTRACT COST (8) | | | | XXXXX |
| SUPERVISION, INSPECTION AND OVERHEAD (5.5%) | | | | XX |
| TOTAL REQUEST (9) | | | | XXXXX |
| TOTAL REQUEST ROUNDED | | | | XXXXX (3) |
| EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS | | (NON-ADD) | | (XXX) (10) |

10. DESCRIPTION OF PROPOSED CONSTRUCTION (11)

Summarize the proposed construction describing briefly but accurately the primary facility by functional areas, indicating major construction materials and unusual features that alter the guidance SF cost. Describe the supporting facilities features that are cost significant. In cases of a multi-use facility, enter the category code and SF area for each use. List the number of buildings to be demolished in this project. The final sentence shall list the air conditioning tonnage - enclose this sentence in parentheses.

11. REQUIREMENT: _____ SF ADEQUATE: _____ SF SUBSTANDARD: _____ SF (12)

PROJECT:

REQUIREMENT:

CURRENT SITUATION:

IMPACT IF NOT PROVIDED:

(Note: continue block 11 on 1391C if more space is required)

| IBOP DATA: (13) | CWE | Normal | Planned | FEC | Normal | Planned |
|---|---|---|---|---|---|---|
| | | (XXX) | (XXX) | | (XXX) | (XXX) |

DD FORM 1 DEC 76 1391 — PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED — PAGE NO.

S/N 0102 LF-001-3910

☆ U.S. Government Printing Office: 1984—793-012/17914 8-1

Figure 14
Sample 1391 for Cost Certification Estimate



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

10.14 Instructions for Budget Estimate Summary Sheet. The following instructions correspond to the circled numbers shown in Figure 15.

1. Show project title in conformance with NAVFAC P-72. If summary sheet is for one building (or any portion of a project) so indicate. In that case, provide one summary sheet for totals transferred from sub-summary sheets.

2. Enter area cost factor.

3. Escalate to 1 April of the fiscal year of planned appropriation. See overseas area cost factors for requirement of escalation to one-third point of construction. NAVFAC escalation chart will be used for all projects.

4. Enter unit of measure.

5. Quantity - Quantities applicable to the building systems. Use the CES Standard System List. For primary facilities, use gross building area.

6. Unit cost for all systems shown based upon the building gross area and systems quantity.

7. Round cost to nearest thousand.

8. Contingency will be 5 percent for all projects.

9. Enter 5.5 percent Supervision, Inspection and Overhead (SIOH).

10. Rounding - See DD Form 1391 Instruction. This figure must agree with block 8 on DD Form 1391.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

BUDGET ESTIMATE SUMMARY SHEET

P.NO.: P-____ FY 19__

TITLE: (1) _____ DATE OF ESTIMATE: _____

LOCATION: _____ DESIGN STATUS (%): _____

PREPARED BY: _____ DATE ESCALATED TO: (3) _____

A.C.F.: (2) _____ ESCALATION FACTOR (%): _____

| DESCRIPTION | UM | QUANTITY | UNIT COST | ESCALATED COST ROUNDED | COST TRANSFRD TO 1391 |
|---|---|---|---|---|---|
| PRIMARY FACILITIES | (4) | (5) | (6) | (7) | |
| SUPPORTING FACILITIES | | | | | |
| Special Foundation Features | | | | | |
| Electrical Utilities | | | | | |
| Mechanical Utilities | | | | | |
| Roads, Parking, Sidewalks | | | | | |
| Site Improvements | | | | | |
| Demolition | | | | | |

Total Contract Cost W/O Contingency _____ (8)
Contingency (5%) _____
TOTAL CONTRACT COST _____ (9)
SIOH (5.5%) _____
TOTAL BUDGET COST _____ (10)
ROUNDED _____

Figure 15
Building Budget Estimate Summary Sheet



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

10.15 Instructions for the Building SF Cost Development Sheet. (See Figure 16).

a) Guidance Cost Priorities:

(1) NAVFAC Guidance Cost

(2) SF cost obtained from historical data of comparable projects (cost must be obtained from or verified by Code 407)

b) The guidance cost must be adjusted to allow for differences in size (see Figure 17), area cost factors, and escalation (see Figure 18). The area cost factors are listed in paragraphs 12.1 and 12.2.

c) The guidance cost represents a typical project, including all normal built-in equipment. Identification of built-in equipment may be obtained from the CES Standard Systems List shown in paragraphs 15.1 and 15.2. The guidance cost must be adjusted for functional features which are considered to be additional cost. This adjustment is absolutely required to justify cost above guidance. Backup for the added functional features must be attached. Examples of added functional features are hyperbaric requirements, TEMPEST/HEMP/EMP shielding, UPS support facilities, communications support facilities, retrieval equipment racks for warehouses, OMSI, very high walls, emergency power, and asbestos removal. These features may be or may not be built-in equipment.

d) If the primary facility includes a major use area of a different category code, the differential cost may be entered as a functional feature.

e) Gross area calculations (paragraph 10.11) require certain areas to be taken at zero or one-half the actual area. These excluded areas must be included in the project cost. This can be done by showing the actual cost as an "additional functional feature" on the Building SF Cost Development Sheet.

f) The addition/deletion adjusted unit cost (U/C) is obtained by dividing the total cost of each additional functional feature by the total area of the primary facility. (Include all multi-use areas.)

g) The size adjustment factor is related to Figure 17.

h) The area cost factors are given in Section 12.

i) The escalation factors are given in Figure 18.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## BUILDING SF COST DEVELOPMENT

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | | | | |
| GUIDANCE FACILITY | | | | |

HISTORICAL GUIDANCE SOURCE: _____ *

HISTORICAL GUIDANCE UNIT COST: _____/SF

| HISTORICAL UNIT COST | SIZE FACTOR | AREA COST FACTOR | ESCALATION FACTOR | ADJUSTED UNIT COST |
|---|---|---|---|---|
| | | | | |

_____ X _____ X _____ X _____ = _____

* Show date of source as shown in Figure 21.

## ADDITIONAL FUNCTIONAL FEATURES

| FUNCTIONAL FEATURES | QTY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

FUNCTIONAL FEATURES TOTAL: _____ _____


TOTAL BUILDING SF COST: _____ includes built-in equipment

Figure 16
Building SF Cost Development



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

SIZE ADJUSTMENT CHART

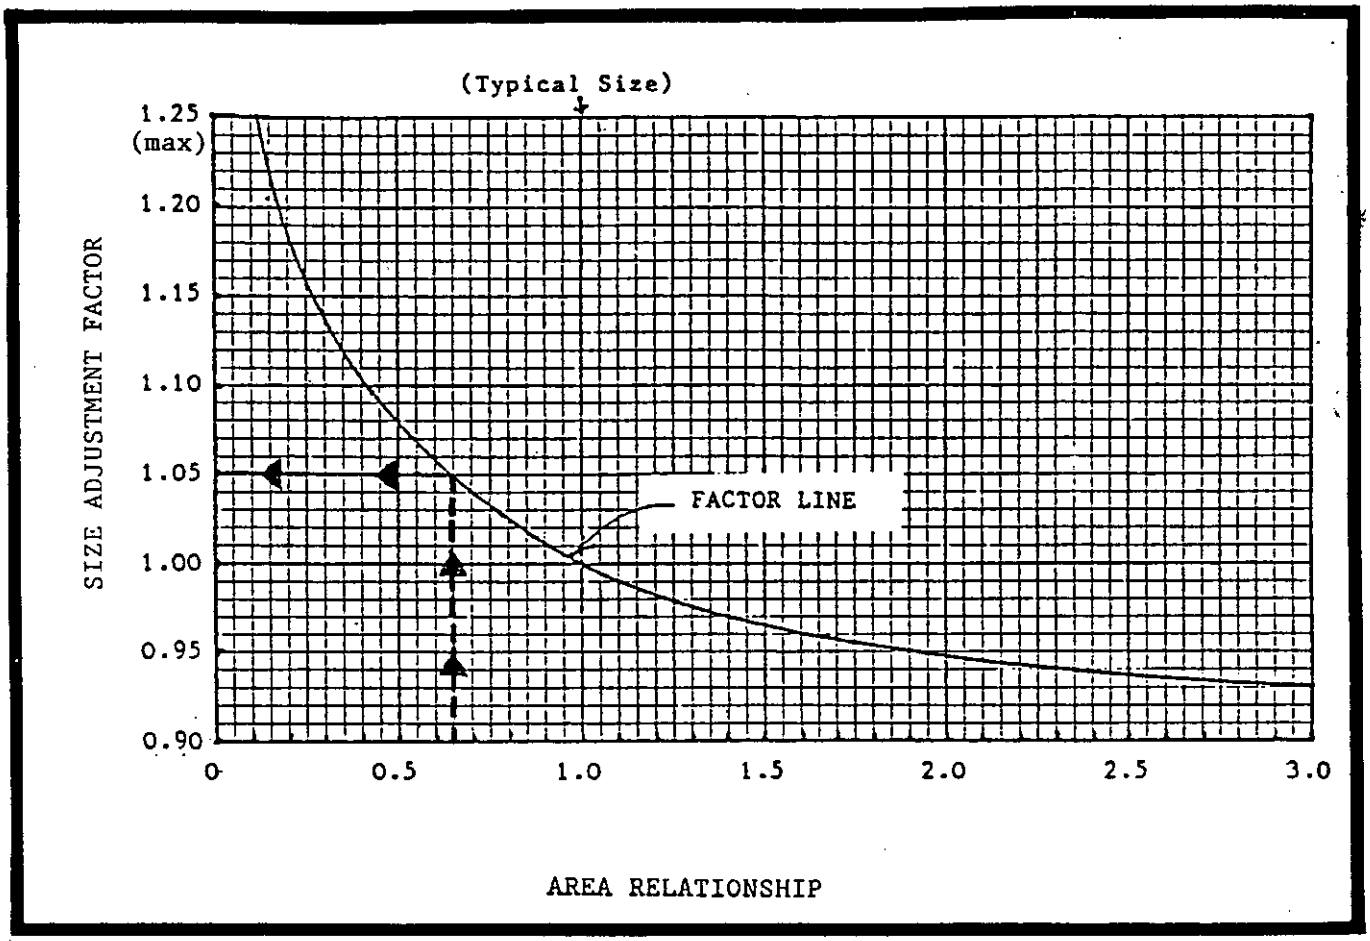


Example: The Size Adjustment factor is desired for a 16,000 SF Academic Facility.

$$\text{AREA RELATIONSHIP} = \frac{\text{PROPOSED FACILITY SIZE}}{\text{TYPICAL FACILITY SIZE}} = \frac{16{,}000}{25{,}000} = 0.64$$

Find 0.64 on the horizontal axis. Trace a vertical line to the factor curve and then trace a horizontal line to the vertical axis' Size Adjustment Factor which is 1.05.

Figure 17
Size Adjustment Chart



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

PROJECTED NAVFAC COST INDEX
MONTHLY
JULY 1989

| YEAR | JAN. | FEB. | MAR. | APR. | MAY. | JUNE | JULY | AUG. | SEPT. | OCT. | NOV. | DEC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1974 | 1156 | 1154 | 1155 | 1177 | 1177 | 1199 | 1233 | 1240 | 1238 | 1246 | 1239 | 1240 |
| 1975 | 1242 | 1265 | 1265 | 1269 | 1287 | 1307 | 1317 | 1330 | 1333 | 1351 | 1349 | 1354 |
| 1976 | 1362 | 1370 | 1378 | 1391 | 1398 | 1416 | 1425 | 1455 | 1467 | 1476 | 1479 | 1484 |
| 1977 | 1489 | 1499 | 1504 | 1506 | 1507 | 1521 | 1539 | 1554 | 1587 | 1617 | 1603 | 1606 |
| 1978 | 1609 | 1617 | 1620 | 1621 | 1652 | 1663 | 1696 | 1705 | 1720 | 1721 | 1732 | 1734 |
| 1979 | 1740 | 1740 | 1750 | 1749 | 1753 | 1809 | 1829 | 1849 | 1900 | 1899 | 1902 | 1909 |
| 1980 | 1895 | 1894 | 1915 | 1899 | 1888 | 1916 | 1950 | 1971 | 1976 | 1981 | 2000 | 2017 |
| 1981 | 2015 | 2016 | 2014 | 2064 | 2076 | 2083 | 2109 | 2118 | 2139 | 2156 | 2186 | 2184 |
| 1982 | 2184 | 2200 | 2195 | 2195 | 2220 | 2219 | 2233 | 2253 | 2249 | 2248 | 2260 | 2295 |
| 1983 | 2311 | 2348 | 2352 | 2347 | 2351 | 2388 | 2414 | 2428 | 2430 | 2416 | 2419 | 2406 |
| 1984 | 2402 | 2407 | 2412 | 2422 | 2419 | 2417 | 2418 | 2428 | 2430 | 2424 | 2421 | 2408 |
| 1985 | 2410 | 2414 | 2406 | 2405 | 2411 | 2429 | 2448 | 2442 | 2440 | 2441 | 2446 | 2439 |
| 1986 | 2440 | 2446 | 2447 | 2458 | 2479 | 2493 | 2499 | 2498 | 2504 | 2511 | 2511 | 2511 |
| 1987 | 2515 | 2510 | 2518 | 2523 | 2524 | 2525 | 2538 | 2557 | 2565 | 2569 | 2564 | 2589 |
| 1988 | 2574 | 2576 | 2586 | 2591 | 2592 | 2595 | 2598 | 2611 | 2612 | 2612 | 2616 | 2617 |
| 1989 | 2619 | 2613 | 2616 | 2620 | 2621 | 2626 | 2633 | 2640 | 2648 | 2655 | 2663 | 2670 |
| 1990 | 2677 | 2683 | 2690 | 2697 | 2704 | 2710 | 2717 | 2724 | 2731 | 2738 | 2744 | 2751 |
| 1991 | 2757 | 2763 | 2769 | 2776 | 2782 | 2788 | 2794 | 2800 | 2806 | 2812 | 2819 | 2825 |
| 1992 | 2830 | 2835 | 2840 | 2845 | 2850 | 2855 | 2861 | 2866 | 2871 | 2876 | 2881 | 2886 |
| 1993 | 2891 | 2896 | 2900 | 2905 | 2910 | 2914 | 2919 | 2924 | 2928 | 2933 | 2938 | 2942 |

ANNUAL MARK-UP FACTORS FOR ESCALATION
(BEYOND FY 93, USE 1.80% ESCALATION COMPOUNDED EACH YEAR)

| FISCAL-YEAR | 4-87 | 4-88 | 4-89 | 4-90 | 4-91 | 4-92 | 4-93 | 4-94 | 4-95 |
|---|---|---|---|---|---|---|---|---|---|
| 4-83 | 1.07 | 1.10 | 1.12 | 1.15 | 1.18 | 1.21 | 1.24 | 1.26 | 1.28 |
| 4-84 | 1.04 | 1.07 | 1.08 | 1.11 | 1.15 | 1.17 | 1.20 | 1.22 | 1.24 |
| 4-85 | 1.05 | 1.08 | 1.09 | 1.12 | 1.15 | 1.18 | 1.21 | 1.23 | 1.25 |
| 4-86 | 1.03 | 1.05 | 1.07 | 1.10 | 1.13 | 1.16 | 1.18 | 1.20 | 1.22 |
| 4-87 | 1.00 | 1.03 | 1.04 | 1.07 | 1.10 | 1.13 | 1.15 | 1.17 | 1.19 |
| 4-88 | 0.97 | 1.00 | 1.01 | 1.04 | 1.07 | 1.10 | 1.12 | 1.14 | 1.16 |
| 4-89 | 0.96 | 0.99 | 1.00 | 1.03 | 1.06 | 1.09 | 1.11 | 1.13 | 1.15 |
| 4-90 | 0.94 | 0.96 | 0.97 | 1.00 | 1.03 | 1.05 | 1.08 | 1.10 | 1.12 |
| 4-91 | 0.91 | 0.93 | 0.94 | 0.97 | 1.00 | 1.02 | 1.05 | 1.07 | 1.08 |
| 4-92 | 0.89 | 0.91 | 0.92 | 0.95 | 0.98 | 1.00 | 1.02 | 1.04 | 1.06 |
| 4-93 | 0.87 | 0.89 | 0.90 | 0.93 | 0.96 | 0.98 | 1.00 | 1.02 | 1.04 |

NOTE: Escalation rate change to be 1.80% after 1993.

Figure 18
Projected NAVFAC Cost Index



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 11: PRIMARY AND SUPPORTING FACILITIES DEFINITIONS

11.1 Primary Facility. The SF cost of the building shall be derived using a guidance cost that is adjusted for size, location (area cost factor) escalation, and additional functional features, see Figure 21 (Building SF Cost Development). Built-in equipment is included in the guidance building SF cost. All non-identical buildings shall be listed separately. However, completion of the cost model is required.

11.2 Supporting Facilities. Supporting Facilities include all construction items outside the building 5-foot line and all special foundation features of significant cost unique to the building. All Supporting Facility items should be included under one of the following major categories. Each sub-item included under these major categories shall have a separate line item entry on the Budget Estimate Summary Sheet. Refer to the CES Standard Systems List and the systems narratives for identification by system number of supporting facilities. Completion of the cost model is required.

11.2.1 Special Foundation Features. Include special foundation requirements (e.g., engineered fill, piling, drilled piers, vibrofloatation, dewatering, etc.). (Systems 91X)

11.2.2 Electrical Utilities. Include electrical distribution, substations, emergency power generators, fire alarms, exterior lighting, telephone distribution, etc., beyond the 5-foot line. (Systems 51X, 52X)

11.2.3 Mechanical Utilities. Include those utilities outside the 5-foot line covered in Divisions 2 and 15 of the specifications (e.g., gas, steam, water, sanitary, etc.). (Systems 54X through 59X)

11.2.4 Roads, Parking, and Sidewalks. Include subgrade preparation, subbase and surface courses, curb and gutters, and valley gutters. (Systems 7XX)

11.2.5 Site Improvements. Include seeding, sodding, riprap, landscaping, irrigation, fencing, storm drainage, and other site enhancements. Do not include normal excavation which is within the 5-foot line. (Systems 8XX)

11.2.6 Demolition. Include real property inventory (building or structure), major utility or paving demolition only. Utility, pavement, or other miscellaneous demolition associated with installation of new construction should be included with the applicable trade category (e.g., electrical demolition with Electrical Utilities, steam line demolition with Mechanical Utilities, paving demolition with Roads, Parking, and Sidewalks, etc.). Provide the total number of buildings to be demolished in paragraph 10 of DD Form 1391.

11.2.7 Contaminated Soil. Cost to remove or treat contaminated soil in areas such as old industrial sites.

11.2.8 Asbestos Removal. Discussions with a contractor specialist or Code 407 is encouraged.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

11.3 Supporting Facilities - Cost. Each supporting facility system must be priced separately and backup work sheets included.

11.4 Proposed Site Plan. In order to reasonably estimate the Supporting Facility requirements, the proposed site should be investigated and station utility maps reviewed. It is suggested that a scaled, single line site plan be developed for the project. For most projects, this site plan can be made on an 8-1/2 x 11-inch sheet and should be attached to the estimate. The site plan should show most, if not all, of the following:

a) Existing elevations

b) Proposed building(s) and structure(s)

c) Finish floor elevation

d) Existing mechanical and electrical utility runs

e) New mechanical and electrical services to the facility

f) Paving

g) Demolition

11.5 Pricing Sources. Supporting facility costs should be estimated using the following pricing sources:

a) Supporting facility guidance cost reference provides composite in-place cost for typical systems. Refer to Table 14.

b) Systems cost obtained from recently bid local projects. This is considered the most reliable source. Coordinate with EFD Code 407 for these costs.

c) NAVFACENGCOM CES unit price file including assembly and composite prices.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 12: AREA COST FACTORS (8/89)

12.1 Stateside Area Cost Factors. The following list outlines area cost factors for various areas within the United States.

| | |
|---|---|
| ALABAMA | .90 |
| ALABAMA AAP | .83 |
| ANNISTON AD | .88 |
| BIRMINGHAM | .92 |
| FORT MCCLELLAN | .87 |
| FORT RUCKER | .85 |
| MAXWELL AFB | .79 |
| MOBILE | .91 |
| MONTGOMERY | .79 |
| PHOSPHATE DEV WKS | .85 |
| REDSTONE ARS | .82 |
| ALASKA | 2.46 |
| ADAK | 3.53 |
| ADAK (NAVY) | 3.53 |
| ALEUTIAN | 3.48 |
| ANCHORAGE | 1.79 |
| CLEAR AFB | 2.78 |
| EIELSON AFB | 2.06 |
| ELMENDORF AFB | 1.79 |
| FAIRBANKS | 2.06 |
| FORT GREELY | 2.66 |
| FT RICHARDSON | 1.79 |
| FORT WAINWRIGHT | 2.06 |
| GALENA | 3.35 |
| KODIAK | 2.85 |
| ARIZONA | 1.00 |
| FLAGSTAFF | 1.03 |
| FORT HUACHUCA | 1.13 |
| NAVAJO AD | 1.03 |
| PHOENIX | .98 |
| TUCSON | 1.00 |
| YUMA | 1.19 |
| YUMA PG | 1.19 |
| ARKANSAS | .91 |
| FORT CHAFFEE | .96 |
| FORT SMITH | .96 |
| LITTLE ROCK | .87 |
| PINEBLUFF | .90 |
| PINEBLUFF ARS | .90 |
| CALIFORNIA | 1.20 |
| BEALE AFB | 1.19 |
| BRIDGEPORT NWTC | 1.24 |
| CAMP PENDLETON | 1.12 |
| CASTLE AFB | 1.08 |
| CENTERVILLE BCH | 1.18 |
| DESERT AREA | 1.25 |
| EDWARDS AFB | 1.23 |
| El CENTRO | 1.19 |
| FT HUNT LIGGETT | 1.34 |
| FORT IRWIN | 1.36 |
| FORT ORD | 1.25 |
| GEORGE AFB | 1.20 |
| LEMOORE NAS | 1.14 |
| LOS ANGELES | 1.19 |
| LOS ANGELES AREA | 1.19 |
| MARCH AFB | 1.22 |
| MATHER AFB | 1.15 |
| MCCLELLAN AFB | 1.15 |
| MONTEREY AREA | 1.25 |
| NORTON AFB | 1.16 |
| OAKLAND AB | 1.29 |
| PORT HUENEME AREA | 1.18 |
| PRESIDIO MONTEREY | 1.45 |
| PRESIDIO SAN FRAN | 1.46 |
| RIVER BANK AAF | 1.07 |
| SACRAMENTO AD | 1.13 |
| SAN CLEMENTE IS | 1.46 |
| SAN DIEGO | 1.22 |
| SAN DIEGO AREA | 1.21 |
| SAN FRANCISCO | 1.19 |
| SAN FRAN AREA | 1.21 |
| SAN NICOLAS ISL | 2.20 |
| SHARPE AD | 1.05 |
| SIERRA AD | 1.34 |
| STOCKTON | 1.07 |
| TRAVIS AFB | 1.22 |
| TWENTY-NINE PALMS | 1.32 |
| VANDENBURG AFB | 1.27 |
| COLORADO | .97 |
| AIR FORCE ACADEMY | 1.01 |
| CHEYENNE MOUNTAIN | 1.07 |
| COLORADO SPRINGS | .95 |
| DENVER | .97 |
| FALCON AFB | 1.01 |
| FITZSIMMONS AMC | .99 |
| FORT CARSON | 1.01 |
| PETERSON AFB | 1.01 |
| PUEBLO | 1.00 |
| PUEBLO AD | .98 |
| ROCK MOUNTAIN ARS | .97 |
| CONNECTICUT | 1.13 |
| BRIDGEPORT | 1.12 |
| HARTFORD | 1.10 |
| NEW LONDON | 1.17 |
| NEW LONDON AREA | 1.17 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| STRATFORD ENGR P | 1.12 |
| DELAWARE | .99 |
| DOVER | .97 |
| DOVER AFB | .97 |
| LEWES | .97 |
| LEWES NF | .97 |
| MILFORD | 1.02 |
| FLORIDA | .93 |
| CAPE CANAVERAL | .91 |
| CAPE KENNEDY | .91 |
| EGLIN AFB | .82 |
| HOMESTEAD | .96 |
| HOMESTEAD AFB | .96 |
| JACKSONVILLE AREA | .87 |
| KEY WEST AFB | 1.05 |
| MCDILL AFB | .96 |
| MIAMI | .96 |
| ORLANDO | .84 |
| PANAMA CITY | .87 |
| PENSACOLA AREA | .82 |
| TAMPA | .97 |
| TYNDALL AREA | .87 |
| GEORGIA | .84 |
| ALBANY | .85 |
| ATHENS | .89 |
| ATLANTA | .86 |
| ATLANTA, MARIETTA | .87 |
| DOVER AFB | .82 |
| FORT BENNING | .80 |
| FORT GILLEM | .86 |
| FORT GORDON | .92 |
| FORT MCPHERSON | .81 |
| FORT STEWART | .82 |
| KINGS BAY | .98 |
| MACON | .81 |
| WARNER ROBBIN | .85 |
| HAWAII | 1.32 |
| ALIAMANU | 1.39 |
| BARB PT. NAS | 1.44 |
| BARKING SAND | 1.80 |
| EWA BEACH | 1.44 |
| FORD ISLAND | 1.53 |
| FORT DERUSSY | 1.39 |
| FORT SHAFTER | 1.39 |
| HELEMANO | 1.49 |
| HICKAM AFB | 1.39 |
| HONOLULU | 1.39 |
| KANEOHE MCAS | 1.44 |
| LUALUALEI | 1.39 |
| MAUI | 1.25 |
| MOANALOA | 1.39 |
| PEARL CITY | 1.39 |
| PEARL HARBOR | 1.39 |
| PHAKULOA | 1.35 |
| SCHOFIELD BRKS | 1.39 |
| TRIPLER AMC | 1.39 |
| WHEELER | 1.44 |
| IDAHO | 1.06 |
| BOISE | 1.03 |
| IDAHO FALLS | 1.04 |
| MTN HOME | 1.11 |
| MTN HOME AFB | 1.11 |
| ILLINOIS | 1.01 |
| BELLVILLE | 1.00 |
| CHANUTE AFB | 1.14 |
| CHICAGO | 1.06 |
| CHICAGO AREA | 1.06 |
| FORT SHERIDAN | 1.07 |
| ROCK ISLAND | .97 |
| ROCK ISLAND ARS | 1.00 |
| SAVANNAH AD | 1.04 |
| SCOTT AFB | 1.06 |
| INDIANA | 1.02 |
| CRANE | 1.12 |
| CRANE AAP | 1.12 |
| FT BEN HARRISON | 1.09 |
| GRISSOM AFB | 1.12 |
| INDIANA AAP | 1.00 |
| INDIANAPOLIS | 1.02 |
| JEFFERSON PG | .98 |
| LOGANSPORT | 1.05 |
| MADISON | .98 |
| NEWPORT AAP | 1.03 |
| IOWA | 1.01 |
| BURLINGTON | 1.04 |
| CEDAR RAPIDS | .99 |
| DES MOINES | .99 |
| IOWA AAP | 1.06 |
| KANSAS | .92 |
| FORT LEAVENWORTH | .99 |
| FORT RILEY | .89 |
| KANSAS AAP | .95 |
| MANHATTAN | .94 |
| MCCONNELL AFB | .91 |
| SUNFLOWER AAP | .96 |
| TOPEKA | .90 |
| WICHITA | .91 |
| KENTUCKY | .94 |
| BOWLING GREEN | .93 |
| FORT CAMPBELL | .98 |
| FORT KNOX | 1.03 |
| LEXINGTON | .95 |
| LEX/BLUEGRASS AD | 1.02 |
| LOUISVILLE | .95 |
| LOUISVILLE NOS | .95 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| LOUISIANA | .89 |
| ALEXANDRIA | .84 |
| BARKSDALE AFB | .88 |
| ENGLAND AFB | .84 |
| FORT POLK | .96 |
| GULF OUTPT NEW ORL | .94 |
| LAKE CHARLES | .96 |
| LOUISIANA AAP | .88 |
| NEW ORLEANS | .94 |
| NEW ORLEANS AB | .94 |
| NEW ORLEANS AREA | .94 |
| SHREVEPORT | .88 |
| MAINE | .98 |
| BANGOR | .88 |
| BRUNSWICK | 1.12 |
| CARIBOU | 1.12 |
| CUTLER | .96 |
| LORING AFB | 1.11 |
| PORTLAND | .93 |
| PROSPECT HARBOR | .95 |
| WINTER HARBOR | .95 |
| MARYLAND | .94 |
| ABERDEEN PG | .91 |
| ANDREWS AFB | 1.03 |
| ANNAPOLIS | 1.03 |
| BALTIMORE | .92 |
| FORT DETRICK | .95 |
| FORT HOLABIRD | .92 |
| FORT MEADE | .92 |
| FORT RITCHIE | .95 |
| FREDERICK | .95 |
| HARRY DIAMOND LAB | .97 |
| LEXINGTON PARK | .96 |
| PATUXENT RIV AR | 1.03 |
| MASSACHUSETTS | 1.10 |
| ARMY MATL & MECH | 1.15 |
| BOSTON | 1.08 |
| BOSTON (NAVY) | 1.19 |
| FITCHBURG | 1.11 |
| FORT DEVENS | 1.18 |
| HANSCOMB AFB | 1.15 |
| NATICK | 1.18 |
| SOUTH WEYMOUTH | 1.24 |
| SPRINGFIELD | 1.11 |
| MICHIGAN | 1.05 |
| BAY CITY | 1.02 |
| DETROIT | 1.07 |
| DETROIT AREA | 1.07 |
| DETROIT ARS | 1.07 |
| MARQUETTE | 1.06 |
| REPUBLIC ELFCOM | 1.12 |
| SAWYER AFB | 1.06 |
| WURTSMITH AFB | 1.03 |
| MINNESOTA | 1.13 |
| DULUTH | 1.12 |
| MINNEAPOLIS | 1.15 |
| ROSEMONT | 1.19 |
| ST. CLOUD | 1.12 |
| TWIN CITY AAP | 1.11 |
| MISSISSIPPI | .82 |
| BILOXI | .85 |
| COLUMBUS | .82 |
| COLUMBUS AFB | .82 |
| GULF PORT AREA | .85 |
| JACKSON | .80 |
| KEESLER | .86 |
| MERIDIAN | .85 |
| MISSISSIPPI AAP | .85 |
| PASCAGOULA | .84 |
| MISSOURI | .93 |
| FT LEONARD WOOD | .92 |
| KANSAS CITY | .94 |
| LAKE CITY AAP | .94 |
| ROLLA | .87 |
| ST. LOUIS | .98 |
| ST. LOUIS AAP | .93 |
| WHITEMAN AFB | 1.11 |
| MONTANA | 1.15 |
| BILLINGS | 1.18 |
| BUTTE | 1.21 |
| GREAT FALLS | 1.19 |
| MALMSTROM AFB | 1.19 |
| NEBRASKA | 1.03 |
| CORNHUSKER AAP | .82 |
| GRAND ISLAND | 1.01 |
| LINCOLN | 1.03 |
| OFFUTT AFB | 1.05 |
| OMAHA | 1.05 |
| NEVADA | 1.17 |
| FALLON | 1.34 |
| HAWTHORNE | 1.27 |
| HAWTHORNE AAP | 1.20 |
| LAS VEGAS | 1.09 |
| NELLIS AFB | 1.09 |
| RENO | 1.15 |
| NEW HAMPSHIRE | 1.06 |
| CONCORD | 1.07 |
| NASHUA | 1.04 |
| PORTSMOUTH | 1.08 |
| PORTSMOUTH AREA | 1.10 |
| NEW JERSEY | 1.10 |
| BAYONNE MOT | 1.12 |
| EARLE | 1.11 |
| FORT DIX | 1.00 |
| FORT MONMOUTH | 1.07 |
| LAKEHURST | 1.07 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MCGUIRE AFS | 1.10 |
| NEWARK | 1.10 |
| PICATINNY ARS | 1.18 |
| RED BANK | 1.11 |
| TRENTON | 1.08 |
| TRENTON AREA | 1.08 |
| NEW MEXICO | 1.01 |
| ALAMAGORDO | 1.00 |
| ALBUQUERQUE | 1.00 |
| CANNON AFB | .97 |
| FORT WINGATE | 1.02 |
| GALLUP | 1.02 |
| HOLLOMAN AFB | 1.08 |
| KIRTLAND AFB | 1.00 |
| WHIT SAND MIL RAN | 1.09 |
| NEW YORK | 1.14 |
| ALBANY | 1.07 |
| BROOKLYN | 1.27 |
| FORT DRUM | 1.16 |
| GARDEN CITY | 1.29 |
| GRIFFISS AFB | 1.06 |
| NEW YORK CITY | 1.27 |
| PLATTSBURG AFB | 1.12 |
| SENECA | 1.11 |
| STATEN ISLAND | 1.40 |
| SYRACUSE | 1.08 |
| USMA | 1.14 |
| WATERVLIET ARS | 1.07 |
| NORTH CAROLINA | .85 |
| CAMP LEJEUNE AREA | .92 |
| CHERRY POINT | .92 |
| FAYETTEVILLE | .84 |
| FORT BRAGG | .87 |
| GREENSBORO | .88 |
| POPE AFB | .87 |
| SEYMOUR AFB | .78 |
| SUNNY POINT MT | .89 |
| WILMINGTON | .83 |
| NORTH DAKOTA | .98 |
| BISMARCK | .96 |
| GRAND FORKS | .95 |
| MINOT AFB | 1.04 |
| OHIO | 1.01 |
| CLEVELAND | 1.10 |
| COLUMBUS | .97 |
| DAYTON | 1.03 |
| RAVENNA AAP | 1.05 |
| WRGT PATTERSON AFB | 1.03 |
| YOUNGSTOWN | 1.02 |
| OKLAHOMA | .89 |
| ALTUS AFB | .99 |
| FORT SILL | .92 |
| LAWTON | .92 |
| MCALESTER | .87 |
| OKLAHOMA CITY | .88 |
| TINKER AFB | .87 |
| OREGON | 1.02 |
| ASTORIA | 1.13 |
| CHARLESTON | 1.09 |
| COOS HEAD | 1.06 |
| PENDLETON | 1.09 |
| PORTLAND | .99 |
| SALEM | .97 |
| UMATILLA AD | 1.15 |
| PENNSYLVANIA | .99 |
| CARLISLE BRKS | .88 |
| HARRISBURG | .88 |
| INDIANTOWN GAP MIS | .94 |
| LETTERKENNY AD | 1.01 |
| MECHANICSBURG AREA | .88 |
| NEW CUMBERLAND | .88 |
| PHILADELPHIA | 1.08 |
| PHILADELPHIA AR | 1.08 |
| PITTSBURG | 1.01 |
| SCRANTON AAP | 1.02 |
| TOBYHANNA AD | 1.09 |
| WARMINSTER AREA | 1.02 |
| RHODE ISLAND | 1.11 |
| BRISTOL | 1.11 |
| DAVISVILLE | 1.13 |
| NEWPORT | 1.16 |
| NEWPORT AREA | 1.19 |
| PROVIDENCE | 1.07 |
| SOUTH CAROLINA | .85 |
| BEAUFORT | .93 |
| CHARLESTON | .89 |
| CHARLESTON AFB | .89 |
| CHARLESTON AREA | .91 |
| COLUMBIA | .80 |
| FORT JACKSON | .80 |
| MYRTLE BEACH | .87 |
| SHAW AFB | .78 |
| SOUTH DAKOTA | .99 |
| ABERDEEN | .86 |
| ELLSWORTH AFB | 1.03 |
| SIOUX FALLS | 1.00 |
| RAPID CITY | 1.02 |
| TENNESSEE | .87 |
| ARNOLD AFB | .92 |
| CHATTANOOGA | .85 |
| HOLSTON AAP | .81 |
| KINGSPORT | .81 |
| MEMPHIS | .94 |
| MEMPHIS AREA | .96 |
| MILAN AAP | .96 |
| VOLUNTEER AAP | .90 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| TEXAS | .86 |
| BERGSTROM AFB | .87 |
| BROOKS AFB | .88 |
| CAMP BULLIS | .73 |
| CARSWELL AFB | .91 |
| CHASE FIELD, BVLE | .93 |
| CORPUS CHRISTI | .88 |
| CORPUS CHRISTI AD | .88 |
| DALLAS | .93 |
| DYESS AFB | .96 |
| FORT BLISS | .96 |
| FORT HOOD | .84 |
| FORT SAM HOUSTON | .88 |
| FORT WORTH | .91 |
| GALVESTON | .88 |
| GOODFELLOW AFB | .79 |
| INGLESIDE | .89 |
| KELLY AFB | .88 |
| KINGSVILLE | .95 |
| LACKLAND AFB | .88 |
| LAUGHLIN AFB | .90 |
| LONESTAR AAP | .88 |
| LONGHORN AAP | .82 |
| RANDOLPH AFB | .88 |
| RED RIVER AD | .88 |
| REESE AFB | .84 |
| SAN ANGELO | .79 |
| SAN ANTONIO | .88 |
| SHEPPARD AFB | .99 |
| UTAH | 1.02 |
| DUGWAY PG | 1.15 |
| FORT DOUGLAS | 1.00 |
| HILL AFB | 1.03 |
| OGDEN | .99 |
| SALT LAKE CITY | 1.00 |
| TOOELE | 1.06 |
| TOOELE AD | 1.06 |
| VERMONT | .95 |
| BURLINGTON | .99 |
| MONTPELIER | .90 |
| RUTLAND | .96 |
| VIRGINIA | .92 |
| ARLINGTON | 1.04 |
| ARLINGTON HS | 1.04 |
| CAMERON STA | 1.05 |
| DAHLGREN | 1.02 |
| FORT BELVOIR | 1.05 |
| FORT EUSTIS | .93 |
| FORT HILL | .96 |
| FORT LEE | .90 |
| FORT MONROE | .92 |
| FORT MYER | .97 |
| FORT PICKETT | .97 |
| FORT STORY | .92 |
| NORFOLK | .90 |
| NORFOLK AREA | .92 |
| QUANTICO | .96 |
| RADFORD | .92 |
| RADFORD AAP | .96 |
| RICHMOND | .93 |
| VINT HILL FARMS | .96 |
| WASHINGTON | 1.15 |
| EVERETT | 1.19 |
| FAIRCHILD AFB | 1.19 |
| FORT LEWIS | 1.10 |
| INDIAN ISLAND | .99 |
| JIM CREEK | 1.20 |
| MCCHORD AFB | 1.26 |
| PACIFIC BEACH | 1.10 |
| SEATTLE AREA | 1.14 |
| SPOKANE | 1.14 |
| TACOMA | 1.10 |
| WHIDBEY ISLAND | 1.16 |
| YAKIMA | 1.21 |
| YAKIMA FC | 1.27 |
| WEST VIRGINIA | .95 |
| BLUEFIELD | .89 |
| CHARLESTON | .99 |
| CLARKSBURG | .99 |
| SUGAR GROVE | |
| (Buildings) | 1.29 |
| (Heavy Constr) | 1.50 |
| WISCONSIN | 1.04 |
| BADGER AAP | 1.00 |
| CLAM LAKE | 1.15 |
| FORT MCCOY | 1.17 |
| LACROSSE | 1.06 |
| MADISON | 1.00 |
| MILWAUKEE | 1.06 |
| WYOMING | 1.04 |
| CASPER | 1.00 |
| CHEYENNE | 1.04 |
| F.E. WARREN AFB | 1.04 |
| LARAMIE | 1.08 |
| WASHINGTON, DC | 1.04 |
| FORT MCNAIR | 1.05 |
| WALTER REED AMC | 1.05 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

12.2 *Overseas Area Cost Information.* (8/89) The following list outlines area cost information for various areas outside of the United States.

| LOCATION | ACF/FER | NOTES |
|---|---|---|
| ANTIGUA | 1.73/2.78 | |
| ARGENTIA | 1.23/1.21 | |
| AUSTRALIA | 1.46/1.43 | |
| DARWIN | 1.80 | |
| PERTH | 1.33 | |
| SYDNEY | 1.24 | |
| AZORES | 1.14/123.00 | 2 |
| BAHAMAS | 2.51/1.09 | 2 |
| ANDROS IS | 2.51 | |
| BELGIUM | 1.25/38.14 | |
| BRUSSELS | 1.25 | |
| BELIZE | 1.48/3.33 | |
| MIDDLESEX | 1.48 | |
| BERMUDA | 1.61/1.00 | 2 |
| CANADA | 1.49/1.21 | |
| ST JOHN'S | 1.77 | |
| TORONTO | 1.18 | |
| VANCOUVER | 1.52 | |
| CRETE | 1.37/133.30 | |
| CRETE | 1.37 | |
| CUBA | 1.61 | 2 |
| GUANTANAMO | 1.61 | 2 |
| DIEGO GARCIA | 3.00 | |
| EGYPT | 1.52/2.50 | |
| CAIRO | 1.52 | |
| GREECE | .91/160.00 | |
| ATHENS | .81 | |
| TRIAKALA | 1.00 | |
| GREENLAND | 2.52/7.75 | |
| GODTHAAB | 2.52 | |
| GUAM | 2.03 | |
| AGANA | 2.03 | |
| HONDURAS | 1.08/2.78 | |
| PUERTO CORTES | 1.07 | |
| TEGUCIGALPA | 1.08 | |
| ICELAND | 4.01/42.25 | 1 |
| KEFLAVIK | 4.01 | |
| REYKAVIK | 4.01 | 1 |
| ISRAEL | 1.32/1.573 | |
| TEL AVIV | 1.32 | |
| ITALY | 1.21/1350.00 | 1 |
| NAPLES | 1.21 | 1 |
| SICILY | 1.21 | 1 |

| LOCATION | ACF/FER | NOTES |
|---|---|---|
| JAPAN | 1.89/133.80 | |
| MISAWA | 1.80 | |
| OKINAWA | 1.99 | |
| TOKYO | 1.87 | |
| JOHNSTON ATOLL | 2.33 | |
| KOREA | 1.07/669.00 | |
| DMZ | 1.10 | |
| SEOUL | 1.07 | |
| KWAJALEIN | 2.43 | |
| INNER IS | 2.19 | |
| KWAJALEIN | 2.43 | |
| OUTER IS | 2.67 | |
| MIDWAY ISLAND | 2.31 | |
| MOROCCO | 1.68/10.53 | |
| CASABLANCA | 1.68 | |
| NETHERLANDS | 1.20/2.13 | |
| OSS | 1.20 | |
| NEW ZEALAND | 2.14/1.50 | |
| WELLINGTON | 2.14 | |
| OMAN | 1.89/.41 | |
| RUWI | 1.89 | |
| PANAMA | 1.15 | |
| PANAMA CITY | 1.15 | |
| PHILLIPINES | .90/21.10 | |
| MANILA | .90 | |
| PUERTO RICO | 1.16 | 2 |
| ROOSEVELT ROADS | 1.16 | 2 |
| SAN JUAN | 1.16 | 2 |
| SOMALIA | 1.20/140.00 | 1 2 |
| SPAIN | .95/118.00 | |
| MADRID | .95 | |
| TURKEY | 1.00 | |
| ERZURUM | 1.00 | |
| ISTANBUL | 1.00 | |
| UNITED KINGDOM | 1.49/.59 | 1 |
| BIRMINGHAM | 1.46 | 1 |
| LONDON | 1.50 | 1 |
| GLASGOW, SCOT | 1.52 | 1 |
| WEST GERMANY | 1.15/1.82 | |
| FRANKFURT | 1.15 | |
| GRAFENWOEHR | 1.15 | |
| KAISERSLAUTERN | 1.15 | |
| MUNICH | 1.15 | |
| WEST INDIES | 1.46/2.78 | |
| GRENADA | 1.46 | |

NOTES: 1. Escalate project costs to the one-third time point of construction.
2. Allow for Defense Base Act Insurance Costs.
3. International Balance of Payments (IBOP) Summary Sheet is required.

ACF: Area Cost Factor FER: Foreign Exchange Rate



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 13: GUIDANCE COSTS

13.1 Primary Facility Guidance Costs. Table 13 gives the current guidance costs for various facilities identified by category code. The costs have been adjusted for an ACF of 1.00, and the time has been adjusted for FY 92 and FY 93.

13.2 Supporting Facilities Guidance Cost. Table 14 gives the current total composite contract cost for various supporting facilities elements. The cost has been adjusted for an ACF of 1.00, and the time has been adjusted for FY 92 and FY 93.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 13

Primary Facility Guidance Costs

NAVFACENGCOM FY 92 & FY 93 GUIDANCE COST (ACF = 1.00) AS OF JULY 1989.

ALL UNIT COSTS INCLUDE BUILT-IN EQUIPMENT TYPICAL FOR THE FACILITY.
UNIT COSTS INCLUDE CQM & PCAS EXCEPT HIGH TECH AND HIGH RISK FACILITIES.

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 113.20 | AIRCRAFT PARKING APRON | 65000 SY | 43 | 44 |
| 131.15 | COMMUNICATIONS CENTER | 6000 SF | 230 | 235 |
| 131.24 | SATELLITE COMM CENTER | 6000 SF | 260 | 266 |
| 131.25 | TELEMETRY BUILDING | 9000 SF | 191 | 195 |
| 131.40 | TELEPHONE EXCHANGE | 6000 SF | 161 | 165 |
| 131.45 | TERMINAL EQUIP BLDG | 70000 SF | 109 | 111 |
| 131.55 | ANTENNA ARRAY BLDG | 15000 SF | 125 | 128 |
| 132.10 | ANTENNA COMM (800 LF) | 1 EA | 2500 | 2555 |
| 133.72 | RADAR AIR TRAF CTL CTR | 6500 SF | 136 | 139 |
| 137.10 | OCEANOGRAPHIC BLDG | 37000 SF | 95 | 97 |
| 141.20/25 | ACFT FIRE/RESCUE/STRUC/STATION | 8000 SF | 125 | 128 |
| 141.40 | AIRCRAFT OPER BLDG W/O CONT TOWER | 20000 SF | 95 | 97 |
| 141.42 | AIR INTEL SUPPORT CTR | 20000 SF | 95 | 97 |
| 141.70 | CONTROL TOWER | 3000 SF | 160 | 164 |
| 143.15 | RANGE OP CENTER | 13000 SF | 185 | 189 |
| 143.20 | ORDNANCE OPERATION BUILDING | 13000 SF | 80 | 82 |
| 143.40 | COMPUTER PROGRAMMING OP CTR | 21000 SF | 97 | 99 |
| 143.45 | ARMORY | 10000 SF | 85 | 87 |
| 143.65 | OPCON CTR FOR FLEET OPERATIONS | 36000 SF | 137 | 140 |
| 143.77 | OPERATIONAL STORAGE | 4000 SF | 49 | 50 |
| 143.80 | NSG REGIONAL REPORTING CENTER | 26000 SF | 150 | 153 |
| 151.20 | BERTHING PIER | 10000 SY | 974 | 995 |
| 159.20 | DEGAUSSING BUILDING | 1600 SF | 175 | 179 |
| 171.10 | ACADEMIC INSTRUCTION BLDG | 30000 SF | 76 | 78 |
| 171.15 | RESERVE TRAINING BUILDING | 33834 SF | 67 | 68 |
| 171.20 | APPLIED INSTRUCTION BLDG | 25000 SF | 86 | 88 |
| 171.35 | OP TRAINER FAC (NON AIRCRAFT) | 22000 SF | 100 | 102 |
| 171.351 | OP TRAINER FAC (AIRCRAFT) | 28000 SF | 120 | 123 |
| 171.60 | RECRUIT PROCESSING BUILDING | 80000 SF | 74 | 76 |
| 179.45 | FIREFIGHTING TRAINING FACILITY | 8100 SF | 220 | 225 |
| 211.01 | AIRCRAFT ACOUSTICAL ENCL | 7950 SF | 650 | 664 |
| 211.03 | CORROSION CONTROL HANGAR | 35000 | 222 | 227 |
| 211.05-7 | MAINTENANCE HANGAR (1 MODULE) | 38000 SF | 78 | 80 |
| 211.08 | AIRFRAMES SHOP (NON NADEP) | 23000 SF | 140 | 143 |
| 211.12 | PAINT AND FINISHING HANGAR | 69708 SF | 209 | 214 |
| 211.14 | VSTOL AIRCRAFT REWORK FAC (NADEP) | 160800 SF | 88 | 90 |
| 211.21 | ENGINE MAINTENANCE SHOP (NON-NADEP) | 34000 SF | 70 | 72 |
| 211.34 | DYNAMIC COMPONENTS SHOP (NADEP) | 8000 SF | 90 | 92 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 13 (Continued)

Primary Facility Guidance Costs (July 1989) ACF = 1.00

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 211.36 | ELECTRICAL COMPONENTS SHOP (NADEP) | 15550 SF | 89 | 91 |
| 211.45 | AVIONICS SHOP (NON-NADEP) | 23000 SF | 87 | 89 |
| 211.54 | AVIATION ARMAMENT SHOP (NON-NADEP) | 16000 SF | 73 | 75 |
| 211.60 | SUPPORT EQUIP REWORK SHOP (NADEP) | 57680 SF | 91 | 93 |
| 211.70 | MANUFACTURE & REPAIR SHOP (NADEP) | 81000 SF | 66 | 67 |
| 211.72 | METAL FAB/MANUFACTURING SHOP (NADEP) | 81000 SF | 111 | 113 |
| 211.73 | METAL TREATMENT SHOP (PLATING) (STRUCTURE ONLY) (NADEP) | 81000 SF | 158 | 161 |
| 211.75 | PARACHUTE/SURV EQUIP SHOP (NON-NADEP) | 8000 SF | 83 | 85 |
| 211.81 | TURBO FAN/JET ENGINE TEST CELL | 6900 SF | 668 | 683 |
| 211.811 | TURBO PROP/SHAFT ENGINE TEST CELL | 9655 SF | 249 | 254 |
| 211.83 | JET ENGINE TEST CELL (NADEP) | 14110 SF | 508 | 519 |
| 211.89 | POWER CHECK PAD (NON-VSTOL) | 1 EA | *346 | *353 |
| 211.891 | POWER CHECK PAD (VSTOL) | 1 EA | *579 | *591 |
| 211.93 | ENGINEERING LAB (NADEP) | 16000 SF | 145 | 148 |
| 211.94 | AIRCRAFT POWER CHECK FAC (NADEP) | 9000 SF | 455 | 465 |
| 212.10 | GUIDED MISSILE INTEGRATION FAC | 5000 SF | 65 | 66 |
| 213.30 | SHORE INTER-MAINT FAC (SIMA) | 77000 SF | 86 | 88 |
| 213.55 | PIPEFITTING SHOP (ASBESTOS HANDLING) | 78000 SF | 100 | 102 |
| 213.58 | BOAT SHOP | 22500 SF | 66 | 67 |
| 213.59 | ABRASIVE BLAST FACILITY | 20000 SF | 160 | 164 |
| 213.70 | SHIP SERVICES SUPPORT BLDG | 7000 SF | 100 | 102 |
| 213.75 | AMPHIBIAN VEHICLE MAINT SHOP | 55000 SF | 92 | 94 |
| 214.10 | COMBAT VEHICLE MAINT SHOP | 20000 SF | 115 | 118 |
| 214.20 | AUTOMOTIVE-VEHICLE MAINT SHOP | 30000 SF | 85 | 87 |
| 214.30 | REFUELING VEHICLE SHOP | 2600 SF | 85 | 87 |
| 214.51 | AUTO ORGANIZAT'L SHOP (MARCORPS) | 30000 SF | 70 | 72 |
| 214.53 | FIELD-MAINT SHOP-TANK/AUTO (MARCORPS) | 20000 SF | 87 | 89 |
| 215.30 | HEAVY GUN SHOP | 25000 SF | 115 | 118 |
| 216.10 | AMMO REWORK AND OVERHAUL SHOP | 14170 SF | 140 | 143 |
| 216.40 | TORPEDO SHOP | 69000 SF | 130 | 133 |
| 216.60 | QUALITY EVALUATION LAB | 27000 SF | 85 | 87 |
| 217.10 | ELEC/COMM MAINT SHOP | 27000 SF | 88 | 90 |
| 218.20 | CONST/WGHT HANDLING EQUIP SHOP | 9600 SF | 65 | 66 |
| 218.25 | MARINE AIR-BASE SQUADRON FACILITY | 48330 SF | 90 | 92 |
| 218.45 | INSTRUMENT-CALIB SHOP | 12000 SF | 70 | 72 |
| 218.50 | BATTERY SHOP | 27000 SF | 85 | 87 |
| 218.60 | AIRCRAFT GROUND SUPPORT EQUIP SHOP | 32000 SF | 80 | 82 |
| 219.10 | PUBLIC WORKS SHOP | 31000 SF | 65 | 66 |
| 219.77 | PUBLIC WORKS MAINT STORAGE | 42830 SF | 65 | 66 |

* Figures represent cost in thousands.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 13 (Continued)

Primary Facility Guidance Costs (July 1989) ACF = 1.00

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 222.10 | MISSILE ASSEMBLY PLANT | 3430 SF | 110 | 112 |
| 226.65 | PROPELLANT AND RELATED CHEM PLANT | 6000 SF | 350 | 358 |
| 227.20 | SONAR EQUIPMENT PLANT | 93200 SF | 91 | 93 |
| 310.23 | COMBINED RESEARCH LAB | 60000 SF | 98 | 100 |
| 310.33 | COMPUTATION AND ANALYSIS LAB | 28000 SF | 110 | 112 |
| 310.37 | OCEAN SCIENCES LABORATORY | 56000 SF | 112 | 114 |
| 311.25 | AIRCRAFT SYS INTEGRATION LAB | 26500 SF | 90 | 92 |
| 312.25 | SPACECRAFT/SATELLITE LAB | 80000 SF | 150 | 153 |
| 313.10 | SHIP & MARINE LAB | 20000 SF | 95 | 97 |
| 313.15 | SHIPS AND MARINE NAVIG EQUIP LAB | 30200 SF | 150 | 153 |
| 315.20 | UNDERWATER WEAPON SYS LAB | 6000 SF | 185 | 189 |
| 315.30 | WEAPONS SYS INTEGRATION LAB | 51000 SF | 135 | 138 |
| 316.10 | AMMO, EXPLOSIVES AND TOXICS LAB | 6000 SF | 465 | 475 |
| 317.15 | DETECTION SYSTEMS LABORATORY | 17000 SF | 95 | 97 |
| 317.20 | ELECTRICAL/ELECTRONIC SYS LAB | 60000 SF | 116 | 119 |
| 317.25 | ELEC/COMM SYS INTEGRATION LAB | 110000 SF | 110 | 112 |
| 318.10 | PROPULSION SYSTEMS LAB | 13000 SF | 290 | 296 |
| 319.10 | MISC EQUIPMENTS & ITEMS LABORATORY | 38000 SF | 64 | 65 |
| 319.40 | RANGE OPER & INSTRUMENTATION LAB | 31000 SF | 80 | 82 |
| 321.10 | TECHNICAL SERVICES LABORATORY | 56500 SF | 66 | 67 |
| 371.17 | ELEC, COMM, & ELEC SYS RANGE FAC | 15238 SF | 50 | 51 |
| 411.20 | AVIATION GASOLINE STORAGE | 10000 BL | 70 | 72 |
| 412.25 | LUBRICANT STORAGE | 16750 SF | 47 | 48 |
| 421.22 | HIGH EXPLOSIVE MAGAZINE | 3000 SF | 150 | 153 |
| 421.32 | INERT STOREHOUSE | 16000 SF | 65 | 66 |
| 421.48 | SMALL ARMS/PYROTECHNICS LAB | 3000 SF | 150 | 153 |
| 421.72 | MISSILE MAGAZINE | 9255 SF | 165 | 169 |
| 431.10 | COLD STORAGE WAREHOUSE (24' & OVER SH) | 6000 SF | 133 | 136 |
| | COLD STORAGE WAREHOUSE (12'-24' SH) | 6000 SF | 88 | 90 |
| 441.10-12 | GENERAL WAREHOUSE (24' & OVER SH) | 60000 SF | 71 | 72 |
| | GENERAL WAREHOUSE (12'-24' SH) | 40000 SF | 57 | 58 |
| 441.13 | SECURITY WAREHOUSE | 90000 SF | 55 | 56 |
| 441.20 | CONTROLLED HUMIDITY WAREHOUSE | 150000 SF | 45 | 46 |
| 441.30 | HAZARD/FLAMMABLE STOREHOUSE | 18000 SF | 100 | 102 |
| 441.35 | GENERAL STORAGE SHED | 1000 SF | 30 | 31 |
| 441.71 | INTEGRATED LOGISTICS OVERHAUL AND OUTFITTING BUILDING | 10000 SF | 100 | 102 |
| 441.72 | SERVMART | 39600 SF | 50 | 51 |
| 610.10 | ADMIN OFFICE (INCL HQS) | 25000 SF | 90 | 92 |
| 610.101 | PASS OFFICE | 6000 SF | 95 | 97 |
| 610.20 | DATA PROCESSING CENTER | 21000 SF | 115 | 118 |
| 610.40 | COURTROOM FACILITY | 6000 SF | 95 | 97 |
| 610.70 | DIVISION/WING HEADQUARTERS (MARCORPS) | 30000 SF | 90 | 92 |
| 610.71 | REGIMENTAL/GROUP HQ BLDG (MARCORPS) | 30000 SF | 90 | 92 |
| 610.72 | BATTALION/SQUADRON HEADQUARTERS | 30000 SF | 90 | 92 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

Table 13 (Continued)

Primary Facility Guidance Costs (July 1989) ACF = 1.00

| CAT CODE | FACILITY DESCRIPTION | GUIDANCE FAC SIZE | FY 92 GUID U/C | FY 93 GUID U/C |
|---|---|---|---|---|
| 721.11 | BEQ | 100000 SF | 76 | 78 |
| 721.11 | BEQ-HIGH RISE | 75400 SF | 78 | 80 |
| 721.12 | BEQ E-5 AND E-6 | 100000 SF | 80 | 82 |
| 721.14 | CLASS A STUDENT BARRACKS | 108800 SF | 95 | 97 |
| 722.10 | ENLISTED DINING FACILITY | 16000 SF | 150 | 153 |
| 724.11-12 | BOQ | 44000 SF | 76 | 78 |
| 730.10 | FIRE STATION (COMMUNITY) | 3500 SF | 110 | 112 |
| 730.15 | CONFINEMENT FACILITY | 30000 SF | 98 | 100 |
| 730.20 | POLICE STATION | 6500 SF | 95 | 97 |
| 730.83 | CHAPEL | 15000 SF | 105 | 107 |
| 730.84 | RELIGIOUS EDUCATION BUILDING | 15000 SF | 95 | 97 |
| 740.25 | FAMILY SERVICES CENTER | 5000 SF | 105 | 107 |
| 740.36 | HOBBY SHOP, ARTS/CRAFTS | 16500 SF | 107 | 109 |
| 740.43 | GYMNASIUM | 20000 SF | 105 | 107 |
| 740.50 | FIELD HOUSE | 38330 SF | 100 | 102 |
| 740.74 | CHILD CARE CENTER | 8000 SF | 95 | 97 |
| 811.09 | ELECTRIC POWER PLANT BUILDING | 4800 SF | 77 | 79 |
| 811.10 | ELECTRIC POWER PLANT - DIESEL | 10000 KW | 690 | 705 |
| 831.14 | INDUSTRIAL WASTE TREATMENT BLDG | 10000 SF | 76 | 78 |
| 831.41 | HAZARDOUS WASTE FACILITY | 3600 SF | 83 | 85 |
| 872.20 | GUARD AND WATCH TOWERS | 100 SF | 219 | 224 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the currentversion before use.

Table 14

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| 511, 512, & 516 ELECTRICAL DIST. | | | | |
| VP-A | Note: Normal duct size is 4". 35KV circuit run 5" conduit | | | |
| VP-D | Note: For quantities less than 200 LF add 20% less than 100 LF add 50% | | | |
| VP-H | 4-1/C #2 THW str al. w/1-1/C#8 CU ground secondary w/termination | LF | 7.52 | 7.66 |
| VP-J | 4-1/C #1/0 THW str al. w/1-1/C#6 CU ground secondary w/termination | LF | 9.81 | 9.99 |
| VP-K | 4-1/C #2/0 THW str al. w/1-1/C#4 CU ground secondary w/termination | LF | 12.55 | 12.79 |
| VP-M | 4-1/C #4/0 THW str al. w/1-1/C#2 CU ground secondary w/termination | LF | 17.31 | 17.64 |
| VP-N | 4-1/C 250 MCM THW str al. w/1-1/C#2 CU ground secondary w/termination | LF | 18.29 | 18.63 |
| VP-R | 4-1/C 500 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination | LF | 25.80 | 26.29 |
| VP-U | 4-1/C 750 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination | LF | 31.34 | 31.94 |
| WI-H | 4-1/C #2 CU USE wire 600V w/1-1/C#8 CU ground secondary w/termination | LF | 12.55 | 12.79 |
| WI-J | 4-1/C #1/0 CU USE wire 600V w/1-1/C#6 CU ground secondary w/termination | LF | 16.99 | 17.31 |
| WI-K | 4-1/C #2/0 CU USE wire 600V w/1-1/C#4 CU ground secondary w/termination | LF | 20.71 | 21.10 |
| WI-M | 4-1/C #4/0 CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination | LF | 30.04 | 30.61 |
| WI-N | 4-1/C 250 MCM CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination | LF | 35.92 | 36.60 |
| WI-R | 4-1/C 500 MCM CU USE wire 600V w/1-1/C#1/0 CU grd. secondary w/termination | LF | 55.51 | 56.56 |
| WJ-F | 3-1/C #4 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 9.14 | 9.31 |
| WJ-H | 3-1/C #2 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 11.00 | 11.21 |
| WJ-J | 3-1/C #1/0 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 13.72 | 13.98 |
| WJ-K | 3-1/C #2/0 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 16.98 | 17.30 |
| WJ-M | 3-1/C #4/0 AWG CU XLP 5KV shielded cable primary w/o termination | LF | 21.87 | 22.28 |
| WJ-N | 3-1/C 250 MCM AWG CU XLP 5KV shielded cable primary w/o termination | LF | 24.49 | 24.95 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| WJ-R | 3-1/C 500 MCM AWG CU XLP 5KV shielded cable primary w/o termination | LF | 39.18 | 39.92 |
| WK-H | 3-1/C #2 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 13.72 | 13.98 |
| WK-I | 3-1/C #1 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 15.02 | 15.30 |
| WK-J | 3-1/C #1/0 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 16.98 | 17.30 |
| WK-K | 3-1/C #2/0 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 19.06 | 19.42 |
| WK-M | 3-1/C #4/0 AWG CU XLP 15KV shielded cable primary w/o termination | LF | 24.49 | 24.95 |
| WK-N | 3-1/C 250 MCM AWG CU XLP 15KV shielded cable primary w/o termination | LF | 28.09 | 28.62 |
| WK-R | 3-1/C 500 MCM AWG CU XLP 15KV shielded cable primary w/o termination | LF | 41.05 | 41.93 |
| WK-1 | Cable termination size no. 2 thru 4/0 0-15KV porcelain | EA | 353.00 | 360.00 |
| WK-2 | Cable termination size 250 MCM thru 500 MCM 0-15KV porcelain | EA | 484.00 | 493.00 |
| WK-3 | Cable termination size 500 MCM thru 750 MCM 0-15KV porcelain | EA | 692.00 | 705.00 |
| YI-OCA | Ditto YI-OCB but w/3 ea 36KV sta typ arresters added | EA | 101,870.00 | 103,792.00 |
| YI-OCB | 35KV OCB line up compl w/3-750 MCM term-2 5WS 1 OCB 1-6" con stub PED & FWD | EA | 92,728.00 | 94,477.00 |
| YI-OCC | Ditto YI-OCB but w/2-6" conduit stub ups & 6 ea 750 MCM terminators | EA | 96,646.00 | 98,469.00 |
| YI-OCD | Ditto YI-OCB but 2/2-6" cond stub ups 6 ea 750 MCM term & 3 ea 36KV arst | EA | 107,094.00 | 109,114.00 |
| YI-OCE | Ditto YI-OCB but 2/4/0 grd mat 100'2" duct bk all control & power cable | EA | 94,034.00 | 95,808.00 |
| YI-OCF | 2000 amp 35KV bus 16' W-2-support pedestals 1 at each end | EA | 340.04 | 346.45 |
| YP-012 | Duct bank 1 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 8.49 | 8.65 |
| YP-013 | Duct bank 1 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 13.91 | 14.17 |
| YP-014 | Duct bank 1 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 19.06 | 19.42 |
| YP-015 | Duct bank 1 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 32.65 | 33.26 |
| YP-016 | Duct bank 1 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 44.40 | 45.24 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| YP-022 | Duct bank 2 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 16.30 | 16.61 |
| YP-023 | Duct bank 2 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 26.78 | 27.28 |
| YP-024 | Duct bank 2 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 36.57 | 37.26 |
| YP-025 | Duct bank 2 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 63.35 | 64.54 |
| YP-026 | Duct bank 2 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 86.98 | 88.62 |
| YP-032 | Duct bank 3 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 23.12 | 23.55 |
| YP-033 | Duct bank 3 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 39.18 | 39.92 |
| YP-034 | Duct bank 3 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 54.86 | 55.89 |
| YP-035 | Duct bank 3 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 94.03 | 95.81 |
| YP-036 | Duct bank 3 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 129.31 | 131.75 |
| YP-042 | Duct bank 4 way 2" grs duct w/exca & backfill does not incl pave remvl | LF | 30.04 | 30.61 |
| YP-043 | Duct bank 4 way 3" grs duct w/exca & backfill does not incl pave remvl | LF | 45.06 | 45.91 |
| YP-044 | Duct bank 4 way 4" grs duct w/exca & backfill does not incl pave remvl | LF | 70.52 | 71.85 |
| YP-045 | Duct bank 4 way 5" grs duct w/exca & backfill does not incl pave remvl | LF | 124.07 | 126.41 |
| YP-046 | Duct bank 4 way 6" grs duct w/exca & backfill does not incl pave remvl | LF | 169.78 | 172.98 |
| YT-012 | Duct bank 1 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 5.23 | 5.32 |
| YT-013 | Duct bank 1 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 6.20 | 6.32 |
| YT-014 | Duct bank 1 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 7.18 | 7.31 |
| YT-015 | Duct bank 1 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 8.83 | 9.00 |
| YT-016 | Duct bank 1 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 10.78 | 10.98 |
| YT-022 | Duct bank 2 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 8.49 | 8.65 |
| YT-023 | Duct bank 2 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 10.45 | 10.65 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| YT-024 | Duct bank 2 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 13.06 | 13.31 |
| YT-025 | Duct bank 2 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 15.68 | 15.97 |
| YT-026 | Duct bank 2 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 19.59 | 19.96 |
| YT-032 | Duct bank 3 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 12.41 | 12.65 |
| YT-033 | Duct bank 3 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 15.02 | 15.30 |
| YT-034 | Duct bank 3 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 18.61 | 18.96 |
| YT-035 | Duct bank 3 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 23.51 | 23.95 |
| YT-036 | Duct bank 3 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 28.74 | 29.28 |
| YT-042 | Duct bank 4 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 15.02 | 15.30 |
| YT-043 | Duct bank 4 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 18.29 | 18.63 |
| YT-044 | Duct bank 4 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 22.86 | 23.30 |
| YT-045 | Duct bank 4 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 28.74 | 29.28 |
| YT-046 | Duct bank 4 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 35.27 | 35.93 |
| YT-062 | Duct bank 6 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 21.22 | 21.62 |
| YT-063 | Duct bank 6 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 26.12 | 26.61 |
| YT-064 | Duct bank 6 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 32.65 | 33.26 |
| YT-065 | Duct bank 6 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 40.49 | 41.26 |
| YT-066 | Duct bank 6 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 52.24 | 53.22 |
| YT-082 | Duct bank 8 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 27.42 | 27.94 |
| YT-083 | Duct bank 8 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 31.34 | 31.94 |
| YT-084 | Duct bank 8 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 41.80 | 42.58 |
| YT-085 | Duct bank 8 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 52.29 | 53.28 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| YT-086 | Duct bank 8 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 66.61 | 67.87 |
| YT-122 | Duct bank 12 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 39.18 | 39.92 |
| YT-123 | Duct bank 12 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 48.33 | 49.24 |
| YT-124 | Duct bank 12 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 61.38 | 62.54 |
| YT-125 | Duct bank 12 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 77.05 | 78.51 |
| YT-126 | Duct bank 12 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 97.95 | 99.80 |
| YT-162 | Duct bank 16 way 2" PVC duct w/exca & backfill does not incl pave remvl | LF | 52.24 | 53.22 |
| YT-163 | Duct bank 16 way 3" PVC duct w/exca & backfill does not incl pave remvl | LF | 63.99 | 65.20 |
| YT-164 | Duct bank 16 way 4" PVC duct w/exca & backfill does not incl pave remvl | LF | 82.28 | 83.83 |
| YT-165 | Duct bank 16 way 5" PVC duct w/exca & backfill does not incl pave remvl | LF | 100.56 | 102.46 |
| YT-166 | Duct bank 16 way 6" PVC duct w/exca & backfill does not incl pave remvl | LF | 130.60 | 133.07 |
| YT-15 | 15KV feeder w/4 way 4" DB, 4/0 CP grd, 3-6'x8'x6'D MHS & 3-250 MCM cab w/spl | LF | 60.08 | 61.21 |
| YT-35 | 35KV feeder w/4 way 6" DB, 4/0 CP grd, 3-9'x12'x6'D MHS & 3-500 MCM cab w/spl | LF | 101.87 | 103.79 |
| ZM-15 | Pole line complete 15KV 4/0 alum w/1 tap pole & 1 term pole 1000' run | LF | 16.98 | 17.30 |
| ZM-35 | Pole line complete 35KV 4/0 alum w/1 tap pole & 1 term pole 1000' run | LF | 17.64 | 17.97 |
| 513 | ELECTRICAL SUBSTATION | | | |
| YJ-C1 | 15KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 6,354.00 | 6,474.00 |
| YJ-C10 | 25KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 7,413.00 | 7,552.00 |
| YJ-C11 | 37.5KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 7,648.00 | 7,792.00 |
| YJ-C12 | 50KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 7,883.00 | 8,032.00 |
| YJ-C13 | 75KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 9,177.00 | 9,351.00 |
| YJ-C14 | 100KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 9,766.00 | 9,950.00 |
| YJ-C15 | 167KVA 1PH pad mtd xfmr w/conc pad & grd'g | EA | 10,119.00 | 10,310.00 |
| YJ-C16 | 75KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 16,472.00 | 16,783.00 |
| YJ-C17 | 112KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 16,905.00 | 17,224.00 |
| YJ-C18 | 150KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 18,237.00 | 18,581.00 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| YJ-C19 | 225KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 20,591.00 | 20,979.00 |
| YJ-C20 | 300KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 21,296.00 | 21,698.00 |
| YJ-C21 | 500KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 25,768.00 | 26,254.00 |
| YJ-C22 | 750KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 29,650.00 | 30,210.00 |
| YJ-C23 | 1000KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 34,121.00 | 34,765.00 |
| YJ-C24 | 1500KVA 3PH pad mtd xfmr w/conc pad & grd'g | EA | 42,828.00 | 43,636.00 |
| YX-PF | 1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 5,648.00 | 5,754.00 |
| YX-PG | 1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 5,883.00 | 5,994.00 |
| YX-PH | 1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 6,236.00 | 6,354.00 |
| YX-PI | 3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 12,237.00 | 12,468.00 |
| YX-PJ | 3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 12,354.00 | 12,587.00 |
| YX-PK | 3, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole | EA | 12,707.00 | 12,947.00 |
| YX-PLF | 1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 6,118.00 | 6,354.00 |
| YX-PLG | 1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 6,354.00 | 6,593.00 |
| YX-PLH | 1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 6,707.00 | 6,953.00 |
| YX-PLI | 3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 12,707.00 | 13,307.00 |
| YX-PLJ | 3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 12,707.00 | 13,307.00 |
| YX-PLK | 3, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy | EA | 13,060.00 | 13,666.00 |
| | **541 & 542 HEAT DISTRIBUTION** | | | |
| DK-1AA | 10" steam & 6" condensate heat distribution piping aboveground | LF | 330.00 | 336.00 |
| DK-2AA | 8" steam & 6" condensate heat distribution piping aboveground | LF | 322.00 | 328.00 |
| DK-3AA | 8" steam & 4" condensate heat distribution piping aboveground | LF | 260.00 | 265.00 |
| DK-4AA | 6" steam & 4" condensate heat distribution piping aboveground | LF | 218.00 | 222.00 |
| DK-5AA | 4" steam & 2.5" condensate heat distribution piping aboveground | LF | 192.00 | 195.00 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| DK-6AA | 3" steam & 2.5" condensate heat distribution piping aboveground | LF | 172.00 | 175.00 |
| DK-7AA | 3" steam & 2" condensate heat distribution piping aboveground | LF | 162.00 | 165.00 |
| DK-8AA | 2.5" steam & 2.5" condensate heat distribution piping aboveground | LF | 162.00 | 165.00 |
| DK-9AA | 2.5" steam & 2" condensate heat distribution piping aboveground | LF | 159.00 | 162.00 |
| DK-91A | 2.5" steam & 1.5" condensate heat distribution piping aboveground | LF | 157.00 | 160.00 |
| DK-92A | 2" steam & 2" condensate heat distribution piping aboveground | LF | 154.00 | 157.00 |
| DK-93A | 2" steam & 1.5" condensate heat distribution piping aboveground | LF | 148.00 | 151.00 |
| DK-94A | 2" steam & 1" condensate heat distribution piping aboveground | LF | 146.00 | 149.00 |
| DK-95A | 1.5" steam & 1.5" condensate heat distribution piping aboveground | LF | 142.00 | 145.00 |
| DK-96A | 1.5" steam & 1" condensate heat distribution piping aboveground | LF | 140.00 | 143.00 |
| DK-97A | 1" steam & 1" condensate heat distribution piping aboveground | LF | 138.00 | 140.00 |

For areas with unstable soil conditions increase unit prices by 20%.

551, 552, & 553 WATER DISTRIBUTION

| | | | | |
|---|---|---|---|---|
| DF-DM | Paving patch for trench. Flexible 2" surface w/12" base (incl removal) | SY | 37.87 | 38.59 |
| DC-EZ | Concrete patch for trench 6" conc over 6" base (incl removal) | SY | 61.38 | 62.54 |
| DJ-LA | Fire hydrant standard 3 way post type w/6" valve and thrust block | EA | 3,657.00 | 3,726.00 |
| DJ-AE | 4" 90 deg bend CI MJ | EA | 261.00 | 266.00 |
| DJ-AI | 6" 90 deg bend CI MJ | EA | 340.00 | 347.00 |
| DJ-AM | 8" 90 deg bend CI MJ | EA | 392.00 | 400.00 |
| DJ-AQ | 10" 90 deg bend CI MJ | EA | 515.00 | 525.00 |
| DJ-AU | 12" 90 deg bend CI MJ | EA | 653.00 | 665.00 |
| DJ-BA | 4" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 13.72 | 13.98 |
| DJ-BB | 6" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 17.64 | 17.97 |
| DJ-BC | 8" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 23.51 | 23.95 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| FY 92 | FY 93 | | | |
| DJ-BD | 10" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 30.70 | 31.28 |
| DJ-BE | 12" PVC water pipe AWWA C-900 Class 150 w/excav backfill & compaction | LF | 37.87 | 38.59 |
| QL-JE | 1" Type K copper pipe w/3' deep trenching, backfill & compaction | LF | 4.58 | 4.67 |
| QL-JM | 1-1/2" Type K copper pipe w/3' deep trenching, backfill & compaction | LF | 6.20 | 6.32 |
| QL-KA | 2" Type K copper pipe w/3' deep trenching, backfill & compaction | LF | 7.83 | 7.98 |
| DJ-LN | 4" tapping saddle tap size to 2" | EA | 169.00 | 173.00 |
| DJ-LO | 6" tapping saddle tap size to 2" | EA | 209.00 | 213.00 |
| DJ-LP | 8" tapping saddle tap size to 2" | EA | 222.00 | 227.00 |
| DJ-LQ | 10" tapping saddle tap size to 2" | EA | 248.00 | 253.00 |
| DJ-LR | 12" tapping saddle tap size to 2" | EA | 287.00 | 293.00 |
| DJ-LT | 4" x 4" tapping sleeve, 4" tapping valve & 4" tapped hole in pipe | EA | 2,057.00 | 2,096.00 |
| DJ-LV | 6" x 6" tapping sleeve, 6" tapping valve & 6" tapped hole in pipe | EA | 3,004.00 | 3,061.00 |
| DJ-LY | 8" x 8" tapping sleeve, 8" tapping valve & 8" tapped hole in pipe | EA | 3,462.00 | 3,527.00 |
| DJ-LYD | 10" x 10" tapping sleeve, 10" tapping valve & 10" tapped hole in pipe | EA | 5,485.00 | 5,589.00 |
| DJ-LYI | 12" x 12" tapping sleeve, 12" tapping valve & 12" tapped hole in pipe | EA | 7,184.00 | 7,319.00 |
| | Underground tanks for hazardous waste oil storage tanks increase cost by 120% | | | |
| 554 | SANITARY SEWERS | | | |
| DP-KA | Precast 48" dia manhole 5' deep w/frame & cover (incl poured invert) | EA | 2,187.00 | 2,228.00 |
| DP-KB | Precast 48" dia manhole 8' deep w/frame & cover (incl poured invert) | EA | 3,134.00 | 3,194.00 |
| DF-DM | Paving patch for trench. Flexible 2" surface w/12" base (incl removal) | SY | 37.87 | 38.59 |
| DC-EZ | Concrete patch for trench 6" conc over 6" base (incl removal) | SY | 61.38 | 62.54 |
| DP-EC | 4" exterior sewer cleanout | EA | 817.00 | 832.00 |
| DP-ED | 6" exterior sewer cleanout | EA | 953.00 | 971.00 |
| DP-EE | 8" exterior sewer cleanout | EA | 1,227.00 | 1,250.00 |
| DP-DA | 4" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 7.48 | 7.62 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| DP-DB | 6" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 8.16 | 8.32 |
| DP-DC | 8" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 10.12 | 10.31 |
| DP-DD | 10" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 13.72 | 13.98 |
| DP-DE | 12" PVC sewer pipe ASTM 3034, SDR-35 w/excav, backfill & compaction | LF | 16.33 | 16.64 |
| 561 & 562 | FUEL STORAGE | | | |
| QV-BF | Underground oil storage tank 550 gal fiberglass double wall (incl excav) | GAL | 20.89 | 21.29 |
| QV-BG | Underground oil storage tank 1000 gal fiberglass double wall (incl excav) | GAL | 19.59 | 19.96 |
| QV-BJ | 2000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 11.77 | 11.99 |
| QV-BI | 4000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 7.83 | 7.98 |
| QV-BK | 6000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 6.53 | 6.65 |
| QV-BL | 8000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 5.88 | 5.99 |
| QV-BLA | 10000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 5.23 | 5.32 |
| QV-BM | 12000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 4.90 | 4.99 |
| QV-BN | 15000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 4.90 | 4.99 |
| QV-BO | 20000 gal underground fiberglass fuel oil tank double wall (incl excav) | GAL | 4.58 | 4.67 |
| 71X | ROADS | | | |
| BW-AH | Stone aggregate base 6" thick | SY | 7.31 | 7.45 |
| BW-AJ | Stone aggregate base 8" thick | SY | 9.81 | 9.99 |
| DF-DD | Asphalt paving 1-1/2" overlay | SY | 7.19 | 7.32 |
| DF-DE | Asphalt paving 2" overlay | SY | 9.66 | 9.84 |
| DB-BD | Single bituminous surface treatment | SY | 2.61 | 2.66 |
| DB-BE | Double bituminous surface treatment | SY | 3.28 | 3.34 |
| DF-FF | Slurry seal | SY | 5.55 | 5.66 |
| DC-EC | Conc paving non-reinf 5000 psi 6 inch thick | SY | 32.65 | 33.26 |
| DC-EE | Conc paving non-reinf 5000 psi 8 inch thick | SY | 40.49 | 41.26 |
| DF-EG | Conc paving non-reinf 5000 psi 10 inch thick | SY | 50.93 | 51.89 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| DC-EI | Conc paving non-reinf 5000 psi 12 inch thick | SY | 58.80 | 59.98 |
| DF-GA | Painting 4" lines on pavement | LF | 0.42 | 0.43 |
| DF-GE | Inlaid pavement lane line markings 4" wide | LF | 1.70 | 1.73 |
| EA-CA | Concrete curb 6x18 cast-in-place | LF | 15.68 | 15.97 |
| EA-EA | Concrete curb & gutter cast-in-place | LF | 20.24 | 20.62 |
| EA-FA | Concrete valley gutter cast-in-place | SY | 58.77 | 59.88 |
| 72X PARKING | | | | |
| BW-AH | Stone aggregate base 6" thick | SY | 7.31 | 7.45 |
| BW-AJ | Stone aggregate base 8" thick | SY | 9.81 | 9.99 |
| DF-DD | Asphalt paving 1-1/2" overlay | SY | 7.19 | 7.32 |
| DF-DE | Asphalt paving 2" overlay | SY | 9.66 | 9.84 |
| DB-BD | Single bituminous surface treatment | SY | 2.61 | 2.66 |
| DB-BE | Double bituminous surface treatment | SY | 3.28 | 3.34 |
| DF-FF | Slurry seal | SY | 5.55 | 5.66 |
| DF-GA | Painting 4" lines on pavement | LF | 0.42 | 0.43 |
| DF-GE | Inlaid pavement lane line markings 4" wide | LF | 1.70 | 1.73 |
| EA-CA | Concrete curb 6x18 cast-in-place | LF | 15.68 | 15.97 |
| EA-EA | Concrete curb & gutter cast-in-place | LF | 20.24 | 20.62 |
| EA-FA | Conc valley gutter cast-in-place | SY | 58.77 | 59.88 |
| EA-GA | Precast concrete parking bumpers 6"x10"x6' incl dowels | EA | 47.68 | 48.58 |
| 74X SIDEWALKS | | | | |
| EA-DA | Conc sidewalks 4 inch cast-in-place no base | SY | 33.95 | 34.59 |
| 75X & 76X AIRCRAFT PAVING | | | | |
| BW-AH | Stone aggregate base 6" thick | SY | 7.31 | 7.45 |
| BW-AJ | Stone aggregate base 8" thick | SY | 9.81 | 9.99 |
| DF-DD | Asphalt paving 1-1/2" overlay | SY | 7.19 | 7.32 |
| DF-DE | Asphalt paving 2" overlay | SY | 9.66 | 9.84 |
| DB-BD | Single bituminous surface treatment | SY | 2.61 | 2.66 |
| DF-FF | Double bituminous surface treatment | SY | 3.28 | 3.34 |
| DC-EC | Slurry seal | SY | 5.55 | 5.66 |
| DC-EC | Conc paving non-reinf 5000 psi 6 inch thick | SY | 32.65 | 33.26 |
| DC-EE | Conc paving non-reinf 5000 psi 8 inch thick | SY | 40.49 | 41.26 |
| DC-EG | Conc paving non-reinf 5000 psi 10 inch thick | SY | 50.93 | 51.89 |
| DC-EI | Conc paving non-reinf 5000 psi 12 inch thick | SY | 58.80 | 59.98 |
| DF-GA | Painting 4" lines on pavement | LF | 0.42 | 0.43 |
| DF-GE | Inlaid pavement lane line markings 4" wide | LF | 1.70 | 1.73 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) FY 92 | FY 93 |
|---|---|---|---|---|
| **812 BORROW** | | | | |
| BG-BC | Borrow fill in place at Sewells Point Area from Willoughby borrow pit | CY | 11.31 | 11.52 |
| BG-BL | Borrow fill in place at Cherry Pt/Camp Lejeune from station borrow pit | CY | 12.27 | 12.51 |
| BG-BJ | Borrow fill in place from commercial Tidewater pit 30 mile round trip | CY | 18.29 | 18.63 |
| BG-BK | Borrow fill in place from commercial Tidewater pit 20 miles round trip | CY | 16.98 | 17.30 |
| **813 TOPSOIL SEED** | | | | |
| DV-AA | 4" topsoil from piles on site w/seed, fertilize lime, & fine grade | SY | 1.96 | 2.00 |
| **84X DEMOLITION** | | | | |
| BE-BB | Clear & grub medium dense areas w/disposal | AC | 3,004.00 | 3,061.00 |
| BB-EA | Demolition of masonry building complete w/disposal | CF | 0.25 | 0.26 |
| BB-EB | Demolition of wood frame building complete w/disposal | CF | 0.25 | 0.26 |
| BB-EE | Demolition of steel frame building complete w/disposal | CF | 0.59 | 0.60 |
| BC-AB | Removal of bituminous paving up to 3" thick w/disposal | SY | 4.71 | 4.80 |
| BC-AD | Removal of 6" thick non-reinforced concrete pavement w/disposal | SY | 15.68 | 15.97 |
| BC-AJ | Removal of 8" thick non-reinforced concrete pavement w/disposal | SY | 25.42 | 25.93 |
| BC-AK | Removal of 11" thick non-reinforced concrete pavement w/disposal | SY | 38.18 | 38.94 |
| BC-AL | Removal of conc sidewalk 4" thick w/disposal | SY | 3.78 | 3.86 |
| BC-BF | Removal of concrete curb & gutter | LF | 2.75 | 2.80 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| **85X STORM DRAINAGE** | | | | |
| CG-BA | 12" RCP Class III storm drainage 4 ft deep w/excav, backfill & compact | LF | 19.07 | 19.43 |
| CG-BB | 15" RCP Class III storm drainage 4 ft deep w/excav, backfill & compaction | LF | 26.12 | 26.61 |
| CG-BC | 18" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 35.27 | 35.93 |
| CG-BE | 24" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 48.98 | 52.90 |
| CG-BG | 30" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 67.91 | 73.34 |
| CG-BH | 36" RCP Class III storm drainage 5 ft deep w/excav, backfill & compaction | LF | 88.81 | 95.91 |
| CG-MW | Precast 48" dia manhole 5' deep w/frame & cover | EA | 2,189.00 | 2,230.00 |
| CG-MX | Precast 48" dia manhole 8' deep w/frame & cover | EA | 3,057.00 | 3,115.00 |
| CG-MN | Standard catch basin 5 ft deep | EA | 2,056.00 | 2,095.00 |
| CG-MO | Curb inlet max depth 8' 4' throat width, 12" to 36 " pipe w/excav & backfill | EA | 3,657.00 | 3,726.00 |
| DF-DM | Paving patch for trench. Flexible 2" surface w/12" base (incl removal) | SY | 37.87 | 38.59 |
| DC-EZ | Concrete patch for trench 6" conc over 6" base (incl removal) | SY | 58.77 | 59.88 |
| **86X FENCING** | | | | |
| CI-AC | Chain link fence 9 ga galv steel 4' high w/3 strand barbwire | LF | 13.06 | 13.31 |
| CI-AE | Chain link fence 9 ga galv steel 6' high w/3 strand barbwire | LF | 16.65 | 16.97 |
| CI-AF | Chain link fence 9 ga galv steel 7' high w/3 strand barbwire | LF | 18.29 | 18.63 |
| CI-AG | Chain link fence 9 ga galv steel 8' high w/3 strand barbwire | LF | 20.24 | 20.62 |
| CI-CA | Gate chain link 9 ga galv steel 4' high w/gate posts & barbwire | LF | 57.79 | 58.88 |
| CI-CE | Gate chain link 9 ga galv steel 6' high w/gate posts & barbwire | LF | 81.63 | 83.17 |
| CI-CF | Gate chain link 9 ga galv steel 7' high w/gate posts & barbwire | LF | 94.03 | 95.81 |
| CI-CG | Gate chain link 9 ga galv steel 8' high w/gate posts & barbwire | LF | 108.40 | 110.44 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

Table 14 (Continued)

Supporting Facilities Guidance Cost (1 July 1989)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

| CODE | DESCRIPTION | U/M | TOTAL COST ($) | |
|---|---|---|---|---|
| | | | FY 92 | FY 93 |
| 911, 912, & 913 LAND PILING | | | | |
| CB-BC | Treated wood piling 40' to 50' long 12" butt 7" tip 12 lb creosote | LF | 11.77 | 11.99 |
| CD-AB | Piling prestressed conc 10" sq, more than 60 LF long, truck delivery | LF | 14.36 | 14.63 |
| CD-CB | Piling prestressed conc 12" sq, more than 60 LF long, truck delivery | LF | 16.01 | 16.31 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 14: COST CERTIFICATION SAMPLE ESTIMATE

14.1 DD Form 1391. Figure 19 shows the DD Form 1391 segment of the cost certification estimate.

14.2 Building Budget Estimate Summary Sheet. Figure 20 shows the budget estimate summaries for the cost certification estimate.

14.3 Building Square Foot Cost Development. See Figure 21.

14.4 Cost Estimate Backup Sheet (LANTDIV). See Figure 22.

14.5 Worksheet. The following information shows the backup development for Figure 21.

FOUNDATION (P-134)

| | Surtass Support Center<br>Norfolk, VA<br>Fac. No. L-0007<br>Award Date: 03/83<br>Size: 45,300 SF<br>(Foundation with pile caps grade beams) | PW Building<br>Camp Lejeune, NC<br>Fac. No. L-0049<br>Award Date: 01/83<br>Size: 11,775<br>(Foundation without pile caps) |
|---|---|---|
| Systems Cost | 1.95 | 1.38 |
| Escalation to 04/89 | x 1.15 | x 1.17 |
| Size Factor to 17,790 SF | x 1.10 | x 0.97 |
| Area Cost Factor to Norfolk, VA | x 1.00 | x 1.10 |
| Adjusted Unit Cost | = 2.47 | = 1.72 |

UNIT COST DIFFERENCE = 2.47 - 1.72 = 0.75

USE: 0.75



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| 1. COMPONENT: NAVY | FY 1992 MILITARY CONSTRUCTION PROJECT DATA | 2. DATE: Sept. 1989 |
|---|---|---|
| 3. INSTALLATION AND LOCATION: Craney Island, Norfolk, VA | | 4. PROJECT TITLE: Public Works Building |
| 5. PROGRAM ELEMENT: | 6. CAT CODE: 219-10 | 7. PROJECT NUMBER: P- 134 |
| | | 8. PROJECT COST ($000): 2,100 |

9. COST ESTIMATES

| A.C.F.: 0.92 / F.E.B.: N/A — ITEM — DATE ESCALATED TO: 1 APRIL 1992 | U/M | QUANTITY | UNIT COST | COST ($000) |
|---|---|---|---|---|
| PRIMARY FACILITY | SF | 17,790 | 64.70 | 1,151 |
| PUBLIC WORKS BUILDING | SF | 17,790 | 64.69 | ( 1,151 ) |
| | | | | ( ) |
| | | | | ( ) |
| | | | | ( ) |
| SUPPORTING FACILITIES | LS | | | 736 |
| SPECIAL FOUNDATION FEATURES | LS | | | ( 76 ) |
| ELECTRICAL UTILITIES | LS | | | ( 132 ) |
| MECHANICAL UTILITIES | LS | | | ( 268 ) |
| ROADS, PARKING, SIDEWALKS | LS | | | ( 94 ) |
| SITE IMPROVEMENTS | LS | | | ( 67 ) |
| DEMOLITION | LS | | | ( 99 ) |
| | | | | ( ) |
| SUBTOTAL | | | | 1,887 |
| CONTINGENCIES ( 5% ) | | | | 94 |
| TOTAL CONTRACT COST | | | | 1,981 |
| SUPERVISION, INSPECTION, OVERHEAD ( 5.5% ) | | | | 109 |
| TOTAL REQUEST | | | | 2,090 |
| TOTAL REQUEST ( ROUNDED ) | | | | 2,100 |
| EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS ( NON ADD ) | | | | |

10. DESCRIPTION OF PROPOSED CONSTRUCTION

Construct a one-story masonry Public Works facility to include 1800 SF of P.O.L. operations area with foundation wall supported on piling and floor slab supported on fill. Masonry bearing walls will support metal roof joists, metal deck and built-up roof. Functions of the building will include administrative spaces, P.O.L. operations area, toilet/locker area, public works shops and storag The offices and P.O.L. operations area (without sample test area) will be air-conditioned. Shops and storage areas will be heated and ventilated. Sprinkler and fire alarm systems will be provided for the entire building. A monorail hoist will be provided in the pipeshop. Machine shop equipment will be moved from building 54 to new building. Supporting facilities will include surcharge on site, piling for foundations, site improvements, roads, parking, sidewalks, utilities and area lighting. Seven buildings are to be demolished. Asbestos removal is required in building 54.
(Air Conditioning - 10 tons)

DD FORM 1391 File:

Figure 19
DD Form 1391



Source: https://assist.dla.mil -- Downloaded: 20264O-26T13:54Z
Check the source to verify that this is the current version before use.

| 1. COMPONENT NAVY | FY 19 92 . MILITARY CONSTRUCTION PROJECT DATA | 2. DATE Sep 1989 |
|---|---|---|

3. INSTALLATION AND LOCATION
Craney Island, Naval Supply Center, Norfolk, VA

| 4. PROJECT TITLE | 5. PROJECT NUMBER |
|---|---|
| Public Works Building | P- 134 |

11. REQUIREMENT: 17,790 SF ADEQUATE: 0 SF SUBSTANDARD: 18,521 SF

PROJECT: This project involves the consolidation of existing structures and facilities into a single building. The consolidated building includes (1) PW shops and storage spaces, (2) administative offices, and (3) lunch/locker rooms. the project also calls for the demolition of seven buildings.

REQUIREMENT: The existing facilities and structures which will be consolidated under this project were identified as inadequate during the POL Modernization Survey of Craney Island conducted November, December 1981. They have also been listed for demolition in the activity's Facilities Planning Document.

CURRENT SITUATION: The existing facilities and structures are widely separated which makes them operationally and functionally inefficient. In addition, many of the facilities are structurally inadequate. Internally the existing facilities and structures have inadequate and poorly arranged space. In addition to the problems associated with the use of existing facilities and structures described above, a number of these structures are located in the 100 Year flood plain. During the period of flooding, due to storms and northeasters, these facilities are inoperable.

IMPACT IF NOT PROVIDED: Continued use of inefficiently located facilities will result in high energy and manpower requirements. Service to the fleet will continue to be seriously hindered during periods of high tide flooding.

DD FORM 1391c

Figure 19 (Continued)
DD Form 1391c



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUDGET ESTIMATE SUMMARY SHEET

P. NO. : P-134 FY 1992

TITLE: Public Works Building DATE OF ESTIMATE: Sept. 1989

LOCATION: Craney Island, Norfolk, VA DESIGN STATUS (%) Cost Certification

PREPARED BY: A.O.Noble DATE ESCALATED TO: April 1992

A.C.F.: 0.92 ESCALATION FACTOR (%)8

| DESCRIPTION | UM | QUANTITY | UNIT COST | ESCALATED COST ROUNDED | COST TRANSFRD TO 1391 |
|---|---|---|---|---|---|
| PRIMARY FACILITIES | | 17,790 | 64.70 | 1,151,000 | 1,151,000 |
| PUBLIC WORKS BUILDING | SF | 17,790 | 64.69 | 1,151,000 | |
| SUPPORTING FACILITIES | | | | | 736,000 |
| SPECIAL FOUNDATION FEATURES | | | | | 76,000 |
| LAND PILING | LF | 5,490 | 13.85 | 76,000 | |
| ELECTRICAL UTILITIES | | | | | 132,000 |
| ELECTRICAL DISTRIBTUION PRIMARY | LF | 250 | 247.00 | 62,000 | |
| ELECTRICAL SUB-STATION | KVA | 500 | 52.00 | 26,000 | |
| AREA LIGHTING | EA | 8 | 5256.00 | 42,000 | |
| COMMUNICATIONS, TELEPHONE | LF | 100 | 22.75 | 2,000 | |
| MECHANICAL UTILITIES | | | | | 268,000 |
| WATER DISTRIBUTION | LF | 400 | 52.00 | 21,000 | |
| SANITARY SEWER | LF | 150 | 47.00 | 7,000 | |
| FUEL STORAGE SYSTEM | LS | 1 | 240000.00 | 240,000 | |
| ROADS, PARKING, SIDEWALKS | | | | | 84,000 |
| ROADS | SY | 560 | 19.50 | 11,000 | |
| PARKING | SY | 3,740 | 18.45 | 69,000 | |
| SIDEWALKS | SY | 425 | 34.00 | 14,000 | |
| SITE IMPROVEMENTS | | | | | 67,000 |
| TOPSOIL,SEED | SY | 2,000 | 1.96 | 4,000 | |
| SURCHARGE, EARTH REPLACEMENT | CY | 4,800 | 12.35 | 59,000 | |
| STRIP TOPSOIL | CY | 1,200 | 2.92 | 4,000 | |
| DEMOLITION | | | | | 89,000 |
| DEMOLITION | LS | 1 | 59000.00 | 59,000 | |
| ASBESTOS REMOVAL | LS | 1 | 40000.00 | 40,000 | |

| | |
|---|---|
| TOTAL CONTRACT COST W/O CONTINGENCY | 1,887,000 |
| CONTINGENCY (5%) | 94,000 |
| TOTAL CONTRACT COST | 1,981,000 |
| SIOH (5.5%) | 109,000 |
| TOTAL BUDGET COST | 2,090,000 |
| ROUNDED | 2,100,000 |

Figure 20
Budget Estimate Summary Sheet



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## BUILDING SF COST DEVELOPMENT

TITLE: Public Works Bldg, Craney Island P#: 134

LOCATION: NSC, Norfolk, VA DATE: Sep 1989

PREPARED BY: A.O. Noble PH#: 444-9782

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | 219-10 | 17,790 SF | 0.90 | 4/92 |
| GUIDANCE FACILITY | 219-10 | 31,000 SF | 1.00 | 4/91 |

HISTORICAL GUIDANCE SOURCE: NAVFAC CODE 051 GUIDANCE COST

HISTORICAL GUIDANCE UNIT COST: $59.00/SF (7/87)

| HISTORICAL UNIT COST | | SIZE FACTOR | | AREA COST FACTOR | | ESCALATION FACTOR | | ADJUSTED UNIT COST |
|---|---|---|---|---|---|---|---|---|
| 59.00 | X | 1.07 | X | 0.90 | X | 1.03 | = | 58.52 |

### ADDITIONAL FUNCTIONAL FEATURES
(Additions/Deletions to adjusted unit cost)

| UNUSUAL FEATURES | QUANTITY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| Grade Beams & Pile Caps | 17,790 SF | 0.75 | 13,343 | 0.75 | 1.28 |
| Move Machine Shop Equipment | 17,990 SF | 0.39 | 6,938 | 0.39 | 0.67 |
| POL OPNS (Cat. Code 143-75) | 1,600 SF | 53.36 | 85,376 | 4.80 | 8.20 |
| OMSI (Table C-0.4%) | 1,041,070 | 0.00 | 4,164 | 0.23 | 0.39 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

ADDITIONAL FUNCTIONAL FEATURES TOTAL : $6.17/SF 10.54%

TOTAL BUILDING SF COST: $64.69 includes built-in equipment

Figure 21

Building SF Cost Development



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 1 of 7

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAIL. — NORFOLK, VIRGINIA — DATE Sept 1989

PROJECT Public Works Building, Craney Island — LOCATION NSC, Norfolk, VA — [ ] PRELIM. [ ] FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| Public Works Facility | 17,790 | SF | | X | 64.69 | | 1,151,000 | |
| 413. Move Machine Shop Equipment | | | | | | | | |
| Disconnect, Move and Reinstall Shop Equipment (Assume 3-man Crew at 2.5 Machines per day) | 144 | HRS | | X | 15.00 | | 2,160 | |
| Equipment Rental With Crew | 6 | Days | | X | 750.00 | | 4,500 | |
| TOTAL | | | | | | | 6,600 | Use: 7,000 |

Figure 22
Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 2 of 7

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAI. — NORFOLK, VIRGINIA — DATE Sept. 1989

PROJECT Public Works Building, Craney Island — LOCATION NSC Norfolk, VA — | | PRELIM. |_| FINAL


| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 511 - ELECTRICAL DISTRIBUTION | | | | | | | | |
| Duct bank 1 way 4" PVC with excavation and backfill | 100 | LF | | X | 7.18 | | 718.00 | |
| Duct bank 4 way 4" PVC with excavation and backfill | 150 | LF | | X | 22.86 | | 3,429.00 | |
| 3 - 1/c #2 AWG CU XLP 15 KV Shielded without termination | 100 | LF | | X | 13.72 | | 1,372.00 | |
| 4 - 1/c 500 MCM with 1/c #1 CU GRD with termination | 600 | LF | | X | 55.51 | | 33,306.00 | |
| 15 KV 4 Way Oil SW | 1 | EA | - | 18,000.00 | - | 850.00 | 18,850.00 | |
| Oil SW Enclosure | 1 | EA | - | 3,180.00 | - | 530.00 | 3,710.00 | |
| Equipment Pad | 1 | EA | - | 212.00 | - | 212.00 | 424.00 | |
| TOTAL | | | | | | | 61,809.00 | USE: 247/LF |
| 513 - ELECTRICAL SUBSTATION | 1 | EA | | X | 25,800 | | 25,800.00 | USE: 52/KVA |
| 500 KVA Pad Mtd Xfmr with grading (11.5 A, 120/208 V) | | | | | | | | |
| 514 - AREA LIGHTING | | | | | | | | |
| 2 HPS Fix. and Conc. Poles with 150 ft 2" PVC RSC 2 #6 AL and 1 #8 CU | 8 | EA | 2,287 | 18,296 | 1,539 | 12,312.00 | 30,608.00 | |
| Concrete Pole Foundation | 8 | EA | 600 | 4,800 | 40 | 320.00 | 5,120.00 | |
| Trench Excavation and Backfill | 1,200 | LF | | X | 0.75 | | 1,200.00 | |
| TOTAL | | | | | | | 42,048.00 | USE: 5256/Pole |

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

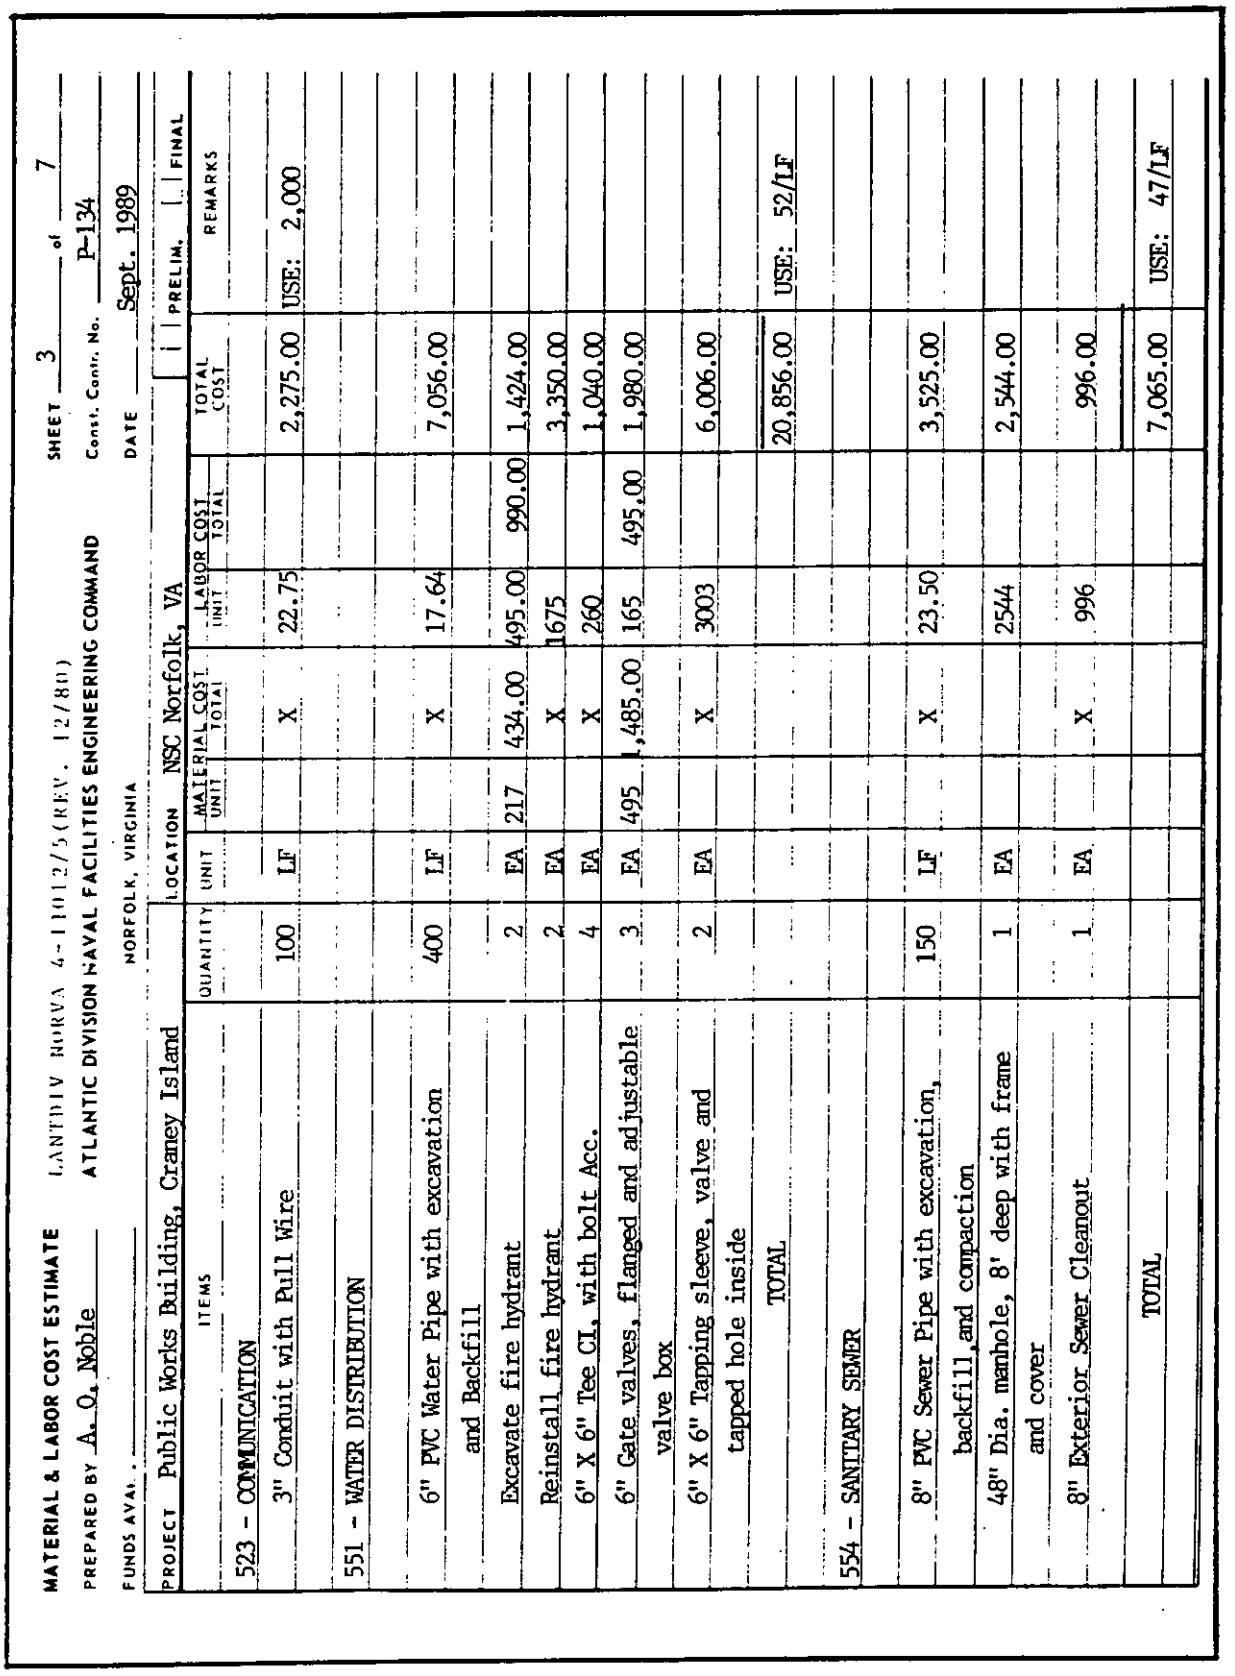

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80)
PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND
FUNDS AVAIL. — NORFOLK, VIRGINIA
SHEET 3 of 7 — Const. Contr. No. P-134 — DATE Sept. 1989
PROJECT Public Works Building, Craney Island — LOCATION NSC Norfolk, VA — [ ] PRELIM. [ ] FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 523 - COMMUNICATION | | | | | | | | |
| 3" Conduit with Pull Wire | 100 | LF | | X | 22.75 | | 2,275.00 | USE: 2,000 |
| 551 - WATER DISTRIBUTION | | | | | | | | |
| 6" PVC Water Pipe with excavation and Backfill | 400 | LF | | X | 17.64 | | 7,056.00 | |
| Excavate fire hydrant | 2 | EA | 217 | 434.00 | 495.00 | 990.00 | 1,424.00 | |
| Reinstall fire hydrant | 2 | EA | | X | 1675 | | 3,350.00 | |
| 6" X 6" Tee CI, with bolt Acc. | 4 | EA | | X | 260 | | 1,040.00 | |
| 6" Gate valves, flanged and adjustable valve box | 3 | EA | 495 | 1,485.00 | 165 | 495.00 | 1,980.00 | |
| 6" X 6" Tapping sleeve, valve and tapped hole inside | 2 | EA | | X | 3003 | | 6,006.00 | |
| TOTAL | | | | | | | 20,856.00 | USE: 52/LF |
| 554 - SANITARY SEWER | | | | | | | | |
| 8" PVC Sewer Pipe with excavation, backfill, and compaction | 150 | LF | | X | 23.50 | | 3,525.00 | |
| 48" Dia. manhole, 8' deep with frame and cover | 1 | EA | | | 2544 | | 2,544.00 | |
| 8" Exterior Sewer Cleanout | 1 | EA | | X | 996 | | 996.00 | |
| TOTAL | | | | | | | 7,065.00 | USE: 47/LF |

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80)

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — SHEET 4 of 7

FUNDS AVAIL. — NORFOLK, VIRGINIA — Const. Contr. No. P-134 — DATE Sept 1989

PROJECT Public Works Building, Craney Island — LOCATION NSC Norfolk, VA — | | PRELIM. | | FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 562 - FUEL STORAGE | | | | | | | | |
| Oil Storage Tank - Fiberglass UG, 2000 GAL | 1 | EA | - | 12,622 | - | 465 | 13,087.00 | |
| Remote Liquid Level Indicator | 1 | EA | - | 1,060 | - | 75 | 1,135.00 | |
| Fill cap for oil storage tank | 1 | EA | 29 | 29 | 3.00 | 3 | 32.00 | |
| Excavation, backfill, & compaction | 20 | CY | 1.60 | 32 | 0.74 | 15 | 47.00 | |
| Monitoring Wells | 2 | EA | | X | 4240 | | 8,480.00 | |
| TOTAL | | | | | | | 23,916.00 | USE: 24,000 |
| 713 - ROADS | | | | | | | | |
| 8" Thick stone aggregate | 560 | SY | | X | 9.80 | | 5,488.00 | |
| 2" Asphalt overlay | 560 | SY | | X | 9.66 | | 5,410.00 | |
| TOTAL | | | | | | | 10,898.00 | USE: 19.50/SY |
| 714 - SIDEWALKS | | | | | | | | |
| 4" Thick concrete | 425 | SY | | X | 34 | | 14,450.00 | USE: 34/SY |
| 813 - TOPSOIL, SEED | | | | | | | | |
| 4" Topsoil from piles on site with seed, fertilizer, & fine grade | 2,000 | SY | | X | 1.96 | | 3,920.00 | USE: 1.96/SY |

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 5 of 7

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAL. — NORFOLK, VIRGINIA — DATE Sept 1989

PROJECT Public Works Building, Craney Island — LOCATION NSC Norfolk, VA — [ ] PRELIM. [ ] FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 723 - PARKING | | | | | | | | |
| 6" Stone aggregate | 3,740 | SY | | X | 7.31 | | 27,339.00 | |
| 2" Bituminous Surface | 3,740 | SY | | X | 9.66 | | 36,116.00 | |
| Paint 4" lines on pavement | 7,000 | LF | | X | 0.42 | | 2,968.00 | |
| Precast concrete bumpers with downs | 55 | EA | | X | 47.68 | | 2,622.00 | |
| TOTAL | | | | | | | 69,045.00 | USE: 18.45/SY |
| 819 - SITE WORK | | | | | | | | |
| Strip topsoil | 1,200 | CY | 1.59 | 1908 | 1.33 | 1590 | 3,498.00 | USE: 2.92/SF |
| 816 - SURCHARGE/EARTH REPL. | | | | | | | | |
| Borrow fill in place from pit 20 miles round trip | 4,800 | CY | | X | 10.91 | | 52,368.00 | |
| Place borrow fill and compact, slope greater than 1 in 4 | 4,800 | CY | 1.00 | 4800 | 0.45 | 2160 | 6,960.00 | |
| TOTAL | | | | | | | 59,328.00 | USE: 12.35/CY |
| 911 - LAND PILING | | | | | | | | |
| Load test | 2 | EA | | X | 3180 | | 6,360.00 | |
| 45 Foot concrete pile, truck delivered | 5,470 | LF | | X | 12.70 | | 69.723.00 | |
| TOTAL | | | | | | | 76,083.00 | USE: 13.86/LF |

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 6 of 7

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAL. — NORFOLK, VIRGINIA — DATE Sept 1989

PROJECT Public Works Building, Craney Island — LOCATION NSC Norfolk, VA — [ ] PRELIM. [ ] FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 843 - DEMOLITION | | | | | | | | |
| BUILDING 34: | | | | | | | | |
| Demolition of concrete building complete with disposal | 4,375 | CF | 0.11 | 1,031 | 0.17 | 1,594 | 3,850.00 | |
| Demolition of foundation, removal, and haul | 450 | CF | 2.05 | 923 | 0.67 | 302 | 1,225.00 | |
| Disconnect electrical service | 1 | LS | | X | 285 | | 285.00 | |
| BUILDING 39: | | | | | | | | |
| Demolition of masonry building complete with disposal | 2,178 | CF | | X | 0.23 | | 501.00 | |
| Demolition of foundation | 194 | CF | 2.18 | 423 | 0.67 | 130 | 553.00 | |
| BUILDING 67: | | | | | | | | |
| Demolition of concrete building | 7,700 | CF | 0.11 | 847 | 0.18 | 1,386 | 2,233.00 | |
| Disconnect Electrical Service | 1 | LS | | X | 285 | | 285.00 | |
| BUILDINGS 87A and 87B: | | | | | | | | |
| Demolition of Building | 4,000 | CF | | X | 0.23 | | 920.00 | |
| BUILDING 167: | | | | | | | | |
| Demolish Building, CMU | 15,960 | CF | | X | 0.23 | | 3,671.00 | |
| Disconnect Water Service | 1 | EA | | X | 228 | | 228.00 | |
| Disconnect Electrical Service | 1 | LS | | X | 285 | | 285.00 | |
| Disconnect Heating Lines | 1 | EA | | X | 228 | | 228.00 | |
| SUBTOTAL | | | | | | | 14,264.00 | |

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80) — SHEET 7 of 7

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAIL. — NORFOLK, VIRGINIA — DATE Sept 1989

PROJECT Public Works Building, Craney Island — LOCATION NSC Norfolk, VA — | | PRELIM. | | FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 843 - DEMOLITION (Continued) | | | | | | | | |
| Demolish foundation of Buildings 67, 87A, 87B, and 167 | 1,400 | CF | | X | 2.50 | | 3,500.00 | |
| Demolish masonry Building 54 | 117,500 | CF | | X | 0.20 | | 23,500.00 | |
| Demolish Foundation Building 54 | 6,800 | CF | | X | 2.50 | | 17,000.00 | |
| Disconnect services | 100 | LS | | X | 6.50 | | 650.00 | |
| SUBTOTAL | | | | | | | 44,650.00 | |
| SUBTOTAL Page 6 | | | | | | | 14,264.00 | |
| TOTAL DEMOLITION, BUILDINGS | | | | | | | 58,914.00 | USE: 59,000 |
| 844 - ASBESTOS REMOVAL | | | | | | | | |
| Remove and Dispose of Asbestos, Building 54 | 1 | LS | | | | | 40,000.00 | |

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## 14.6 Cost Model Questionnaire.

GENERAL:

This questionnaire will establish a measure of the project scope early in the planning stage in a manner which will allow empirical prices to be applied. It is recognized that many design decisions cannot be made at this time; however, if a realistic price is to be developed, the needs of the activity relating to a particular project must be defined. The NAVFACENGCOM method of conceptual estimating requires cost development from guidance cost of comparable construction. Any variation from guidance cost must be supported by a definition and cost of functional features. This support is often necessary to provide adequate project funding.

BUILDING:

Under normal conditions, the building cost model will be completed at the design cost certification stage.

The completed cost model (systems 111 through 499) must state what is planned, with EMPHASIS UPON SCOPE FEATURES THAT GENERATE SIGNIFICANT COST. Assumptions must be stated. Additional narrative description for functional items is encouraged.

System 000 Building Construction:

This system describes the total function of the building. As such, it is the most important information shown on the cost model.

SUPPORTING FACILITIES:

The completed cost model (systems 500 through 999) should state what is planned with emphasis upon scope features that generate significant cost. Refer to additional guidance in the cost model questionnaire.

NOTES:

1. This Cost Model Questionnaire serves two purposes: At the budget stage it serves as a means of describing and quantifying project requirements in such a manner that empirical prices can be used to generate a project cost.

   At the final estimate stage it serves as a means of collecting subsystem numbers for storage in NAVFACENGCOM historical files.

2. The cost model questionnaire systems list includes numbered systems that are "write-in." These numbers may be used to identify systems in the project that are not identified in the questionnaire.
3. Systems followed by (1) are considered built-in equipment.
4. Exterior Systems and Special Equipment need more scope definition for accurate pricing. Show narrative description as you best understand the scope when detailed lists are not available.
5. Building system quantities should be the area in which the system occurs.
6. A completed cost model questionnaire must be included in the cost certification submittal.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

Project Title Public Works Building

Location Craney Island, NSC, Norfolk, VA

Contract Number

P# P-134 FY 92 Date Sep 1989

Completed by A. O. Noble

Phone Number (804) 444-9060

COST ENGINEERING SYSTEM (CES)

COST MODEL QUESTIONNAIRE

12/31/86

000 Building Construction Gross Building Area (SF) 17790

| Function or Category Code | % or Area |
|---|---|
| 219-10 | 37% |

Where a single building includes areas of significant cost variation as identified by category code or functional area, show a breakdown by function or category code (under subsystem 01 through 05). Show area in sq ft or by percentage to nearest 5%.

| | | |
|---|---|---|
| 20 | Number of Floors | 1 |
| 21 | Floor to Floor Height | LF |
| 22 | Length - Nearest foot | 196 LF |
| 23 | Width - Nearest foot | 99 LF |
| 25 | Irregular - Yes/No | YES |
| 26 | Building Perimeter(when irregular) | LF |
| 40 | Describe any known special considerations; scheduling, security, asbestos removal, hazardous materials | Demo of Bldg 54 may involve asbestos removal. |
| 50 | Finish floor elevation above existing grade - nearest foot. | 2 LF |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

STRUCTURAL

111 Foundation — Ground Floor Area (SF) 17,790

- __ 01 Spread Footings
- __ 02 Thickened Slab
- X 03 Pile Foundation
- __ 04 Caissons
- __ 05 Continuous Wall Footing
- X 06 Grade Beams

***** For convenience pilings are described with building foundation. *****
***** Price under the supporting facilities. 911 Piling - Land *****

911 Piling - Land — Length of Piling (LF) 5490

- __ 02 Timber
- __ 03
- __ 04 Concrete 10" Sq
- X 05 Concrete 12" Sq
- __ 06 Concrete 14" Sq
- __ 07
- __ 08 Steel

Length of Piling

- __ 20 Under 25'
- __ 21 26' - 35'
- X 22 36' - 45'
- __ 23 46' - 55'
- __ 24 56' - 65'
- __ 25 66' - 75'
- __ 26 76' - 85'
- __ 27 86' - 95'
- __ 28 Over 95'

112 Slab on Grade — Slab on Grade Area (SF) 17,790

- X 01 Floating
- __ 02 Grade Beam Supported
- __ 03 Pile Supported

Thickness

- __ 11 Under 6"
- __ 12 6"
- __ 13 8"
- __ 14 Over 8"

Floorload

- X 30 Under 100 PSF
- X 31 101 - 200 PSF
- __ 32 201 - 300 PSF
- __ 33 301 - 400 PSF
- __ 34 401 - 500 PSF
- __ 35 Over 501 PSF

113 Structural — Gross Building Area (SF) 17,790

- X 01 Bearing Wall
- __ 02 Steel Framing
- __ 03 Concrete Cast in Place
- __ 04 Wood
- __ 05
- __ 06 Concrete Precast
- __ 07 Air Inflatable

114 Supported Floor — Supported Floor (SF) _____

- __ 01 Concrete Cast in Place
- __ 02 Concrete on Steel Joists
- __ 03 Concrete on Steel Framing
- __ 04 Precast Concrete
- __ 05 Wood
- __ 06

If more than one entry give percentage of each - nearest 10%.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

115 Stairs — Risers (EA) _____

116 Roof Structure — Area of Roof (SF) 17,790

Framing

__ 02
__ 03 Precast Hollow Core
__ 04 Precast Concrete
__ 05 Wood
X 06 Steel Joist
__ 07 Steel Framing

If more than one entry, give percentage of each - nearest 10%.

117 Pre-Engineered Building — Gross Area of Building (SF) _____

__ 01 Eave height under 12'
__ 02 Eave height 12-20'
__ 03 Eave height over 20

118 Vault — Gross Floor Area (SF) _____

119 Write-in System

ARCHITECTURAL

141 Roofing — Roof Area (SF) _____

Surface

__ 10
X 11 Built-up
__ 12 Shingles
__ 13 Elast.
__ 14 Sprayed
__ 15 Metal Roofing
__ 16

142 Exterior Walls — Exterior Wall Area (SF) 10,121

| Ext. Surface | | Backup | | Height | |
|---|---|---|---|---|---|
| X | 01 Brick (below 10') | X | 21 CMU | __ | 30 Under 12' |
| __ | 02 CMU | __ | 22 Wood Studs | X | 31 12' - 20' |
| __ | 03 Drivit | __ | 23 Steel Studs | __ | 32 over 20' |
| X | 04 Metal Panels(above 10') | __ | 24 Conc Cast in Place | | |
| __ | 05 Stucco | __ | 25 Precast Concrete | | |
| __ | 06 Wood | __ | 26 Furring | | |
| __ | 07 Conc Cast In Place | | | | |
| __ | 08 Precast Concrete | | | | |

If more than one height is shown give percentage of each - nearest 10%.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

143 Interior Walls — Interior Wall Area (SF) 35,000

| | | | Height | |
|---|---|---|---|---|
| __ | 01 | Concrete | __ 21 | 8' |
| __ | 02 | Steel Studs | __ 22 | 9' |
| __ | 03 | | __ 23 | 10' |
| __ | 04 | Concrete Cast in Place | __ 24 | Over 10' |
| __ | 05 | Wood Studs | | |
| __ | 06 | | | |

If more than one entry under height, give percentage of each - nearest 10%. Give narrative description of type and size of rooms.

144 Interior Finishes — Gross Building Area (SF) 17,790

| | | | Floor | | Ceiling | |
|---|---|---|---|---|---|---|
| __ | 01 | Gypsum Board | __ 11 | | __ 21 | Acoustical |
| __ | 02 | CMU | __ 12 | Ceramic Tile | __ 22 | Gypsum Board |
| __ | 03 | Ceramic Tile | __ 13 | Quarry Tile | __ 23 | Plaster |
| __ | 04 | Wood Panels | __ 14 | Carpet | __ 24 | Concrete |
| __ | 05 | Plaster | __ 15 | Concrete | __ 25 | Spray on |
| __ | 06 | Vinyl Wall Covering | __ 16 | Terrazzo | | |
| | | | __ 17 | Special Toppings | | |
| | | | __ 18 | VCT | | |

145 Doors — Surface Area One Side (SF) 3,000 (includes windows)

| | | |
|---|---|---|
| __ | 01 | Hollow Metal Exterior |
| __ | 02 | Alum Entrance Store Front |
| __ | 03 | Folding |
| __ | 04 | Roll Up |
| __ | 05 | Overhead |
| __ | 06 | |
| __ | 07 | |
| __ | 08 | Wood Interior |
| __ | 09 | Hollow Metal Interior |

146 Windows — Surface Area One Side (SF) _____

147 Specialities — Gross Building Area (SF) 17,790

| | | | | |
|---|---|---|---|---|
| __ | 01 | Wardrobes | __ 08 | |
| __ | 02 | Jail | __ 09 | Wire Partitions |
| __ | 03 | Clean Room | __ 10 | Metal Walkways |
| __ | 04 | Case Work | __ 11 | X-Ray |
| __ | 05 | Dark Rooms | | |
| __ | 06 | | | |
| __ | 07 | Loading Dock | | |

Give estimating quantities for required ITEMS OF SIGNIFICANT COST. List shown is not complete. Detailing of toilet accessories and partitions is not required. Very large items may be more suited to using a write-in system.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currentversion before use.

(1) 148 BEQ Wardrobes — Number of Wardrobes (EA) _____
__ 01 With Chest
__ 02 Without Chest

149 Write-in System

DEMOLITION INTERIOR

171 Demolition Interior — Gross Building Area (SF) _____
__ 01 Complete Interior Partition
__ 02 Complete Interior Finishes
__ 03 Complete Interior Mechanical
__ 04 Complete Interior Electrical
__ 05 Complete Interior of Bldg 01 thru 04

172 Asbestos Removal Interior — Total Cost (LS) _____
__ 01
__ 02
__ 03

173 - 175 Write-in Systems

PLUMBING

Note: Refer to attachment #2 to determine number of fixtures for systems 211 and 213

211 Plumbing-Domestic — Number of Fixtures (EA) 22

212 Domestic Hot Water Solar — Capacity (MBTH) _____

213 Roof Drainage — Number of Drains (EA) 4

214 - 216 Write-in Systems

SPACE CONDITIONING

221 HVAC — Capacity (MBTU or TNS) _____

__ 20 Bldg Htng Plant HW, oil
__ 21 Bldg Htng Plant Steam, oil
__ 22 Bldg Htng Plant Hot air, oil
__ 23 Bldg Htng Plant Hot air, gas
__ 24 Bldg Htng Plant HW, gas
__ 25 Bldg Htng Plant steam, gas
__ 26 Bldg Htng Plant Elec.
__ 27 Base Plant Steam
__ 28 Base Plant HW
__ 29 Base Plant HTHW

Give tonnage, refer to attachment 1 if better information is not available. If building contains partial A/C, use systems 222 and 223 for each respective area.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

222 Air Conditioning — Capacity (TNS) 20

223 Heating & Ventilation — Capacity (MBTH or CFM) 350 MBT

__ 20 Bldg Htng Plant
__ 21 Bldg Htng Plant Steam, oil
X 22 Bldg Htng Plant Hot Air, oil
__ 23 Bldg Htng Plant Hot air, gas
__ 24 Bldg Htng Plant HW, gas
__ 25 Bldg Htng Plant Steam, gas
__ 26 Bldg Htng Plant Elec.
__ 27 Base Plant Steam
__ 28 Base Plant HW
__ 29 Base Plant HTHW

224 Mechanical Ventilation — Fan Capacity (CFM) _____

225 Dehumidification — Capacity(PPH) _____

226 Heating, Solar — Collector Area (SF) _____

227 Write-in System

WEIGHT HANDLING EQUIPMENT

(1) 231 Bridge Cranes — Capacity (TNS) 10

__ 01 Span under 50'
__ 02 Span 51-75'
__ 03 Span over 75'
__ 10 Capacity under 10 T
X 11 Capacity 10-20 T
__ 12 Capacity 20-30 T
__ 13 Capacity 30-40 T
__ 14 Capacity over 40 T
__ 21 Run under 50'
__ 22 Run 50-100'
__ 23 Run over 100'

(1) 232 Monorails — Capacity (TNS) 2

__ 01 Manual
X 02 Electric
__ 03 Air Operated
X 10 Capacity under 5 T
__ 11 Capacity 5-10 T
__ 12 Capacity over 10 T
X 21 Run under 50'
__ 22 Run 50 to 100'
__ 23 Run over 100'

(1) 233 Fixed Hoist — Capacity (TNS) _____

__ 01 Manual
__ 02 Electric
__ 03 Air Operated

(1) 234 Vehicle Lifts — Capacity (TNS) _____

__ 10 Capacity under 5 T
__ 11 Capacity 5-10 T
__ 12 Capacity over 10 T



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 235 Elevators — Number of Stops (EA) _____
__ 01 Electric
__ 02 Hydraulic
__ 03
__ 11 Passenger
__ 12 Freight

(1) 236 Escalators — Flights (EA) _____

(1) 237 Conveyors — Capacity (TNS/HR) _____

(1) 238 Write-in System

SPECIAL MECHANICAL PIPING SYSTEM

(1) 241 Vacuum — Capacity (CFM) _____
__ 01 Medical
__ 02 Industrial
__ 03

(1) 242 Oxygen — Outlets (EA) _____

(1) 243 Nitrogen — Outlets (EA) _____

(1) 244 Compressed Air — Capacity (CFM) 60
X 01 Low Pressure 150 below
__ 02
__ 03 High Pressure 151 up

245 Interior Steam — Capacity (PPH) _____
__ 01 High Pressure
__ 02 Medium Pressure
__ 03 Low Pressure
__ 11 Oil Fired
__ 12 Electric Fired
__ 20 Fuel Oil Storage

246, 247 Write-in Systems

SPECIAL MECHANICAL OTHER

251 Dust Collection — Capacity (CFM) _____

252 Engine Exhaust — Fan Capacity (CFM) 8000

253 - 255 Write-in Systems

FIRE PROTECTION

(1) 271 Sprinklers — Gross Area Sprinkled (SF) 17,790
__ 01 Dry
X 02 Wet
__ 03 Preaction
__ 04 Deluge
__ 05
__ 10 Light Hazard
X 11 Ordinary Hazard
__ 12 Extra Hazard
__ 13
__ 14 Includes Booster Pump



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 272 AFFF (Aqueous Film Forming Foam) Capacity (GAL) _____

__ 01 Deluge
__ 02 Pre-action
__ 03
__ 04 Oscillating Monitors

(1) 273 Carbon Dioxide Storage Capacity (LBS) _____

__ 01 Hose Reel
__ 02 Flooding Area
__ 03 Flooding Total
__ 04

(1) 274 Halon Storage Capacity (LBS) _____

__ 01
__ 02

275 Fire Alarm Gross Building Area (SF) 17,790

276, 277 Write-in Systems

POWER & LIGHTING

311 Power Connected Load (KW) 500

312 Lighting Gross Building Area (SF) 17,790

(1) 313 400 HZ Converter Capacity (KW) _____

(1) 314 Direct Current Converter Capacity (KW) _____

(1) 315 Uninterruptable Power Supply Converter Capacity (KVA) _____

(1) 316 Electrical Generators Equipment Capacity (KW) _____

__ 01 Intermittent
__ 02 Continuous
__ 03 Electrical
__ 04 Gas
__ 05 Diesel
__ 06 Turbine
__ 07

__ 40
__ 41 600 RPM
__ 42 720 RPM
__ 43 900 RPM
__ 44 1200 RPM
__ 45 1800 RPM

317, 318 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SPECIAL ELECTRICAL PROTECTION

(1) 321 Grounding Gross Building Area (SF) _____
__ 01 Lightning Grounding
__ 02 Electronic Grounding
__ 03 Protective Grounding

(1) 322 Lightning Protection Gross Building Area (SF) _____

(1) 323 - 326 Write-in Systems

SPECIAL ELECTRICAL, ELECTRONICS

(1) 331 Security Detection Gross Building Area (SF) _____
__ 01 Intrusion Alarm for Access Control
__ 02 Access Control
__ 03 TV Camera & Monitor

If layout is not available describe area covered, where does alarm sound etc. Also describe intended function of system.

(1) 332 EMCS (Energy Monitoring and Controls System) Number of Points (EA) ___
__ 01 Local Control
__ 02 Remote Control

(1) 333 Computer Communication Cable Run (LF) _____

334 - 336 Write-in Systems

COMMUNICATION

341 Telephone Gross Building Area (SF) 17,790

342 Intercom Gross Building Area (SF) _____

343 Television Gross Building Area (SF) _____

344 Public Announcement Gross Building Area (SF) _____

345 Master Clock Number of Outlets (EA) _____

(1) 346, 347 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

MEDICAL EQUIPMENT

(1) 411 Hospital Equipment — Gross Building Area (SF) _____

(1) 412 Dental Equipment — Number of Chairs (EA) _____

(1) 413, 414 Write-in Systems

FOOD SERVICE

(1) 421 Food Service Equipment — Pieces of Food Service Equip (EA) _____

(1) 422 - 425 Write-in Systems

MISCELLANEOUS EQUIPMENT

(1) 431 Chapel Equipment — Gross Building Area (SF) _____

(1) 432 Movie Theater Equipment — Gross Building Area (SF) _____

(1) 433 Rifle Range Equipment — Firing Lanes (EA) _____

(1) 434 Laboratory Equipment — Number of Pieces (EA) _____

(1) 437 Waste Disposal Equipment — Equipment Capacity (PPH) _____

(1) 438 Write-in System

SPECIAL WAREHOUSE EQUIPMENT

(1) 441 Special Warehouse Equipment — Gross Building Area (SF) _____

(1) 442 - 444 Write-in Systems

SPECIAL CONSTRUCTION

451 Hangar Doors — Surface Area One Side (SF) _____

__ 01 Sliding
__ 02 Vertical Lift
__ 10 Manual
__ 11 Power Operated

452 Vault Doors — Number (EA) _____



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

453 Blast Doors — Surface Area One Side (SF) _____

| Span | | Charge Weight (TNT Equivalent) | | Distance | |
|---|---|---|---|---|---|
| __ 01 | | __ 11 | | __ 21 | |
| __ 02 | 3 feet | __ 12 | 0 - 10 LB | __ 22 | 0 - 20 FT |
| __ 03 | 5 feet | __ 13 | | __ 23 | |
| __ 04 | 10 feet | __ 14 | 10 - 500 LB | __ 24 | 20 - 100 FT |
| __ 05 | 15 feet | __ 15 | | __ 25 | |
| __ 06 | 20 feet | __ 16 | Over 500 LB | __ 26 | Over 100 FT |

454 Raised Floor — Area of Raised Floor (SF) _____

(1) 455 Radio Frequency Shielding — Surface Area Shielded (SF) _____

456 Bowling Lanes — Number of Lanes (EA) _____

| | | | |
|---|---|---|---|
| __ 01 | New | __ 10 | W/O Auto Pin Setter |
| __ 02 | Refinished | __ 11 | W/ Auto Pin Setters |

(1) 457 Paint Spray Booth — Floor Area (SF) _____

458 Write-in System

OTHER EQUIPMENT

491 Other Miscellaneous Equipment

492 Snow Melting — Area Protected (SF) _____

(1) 496 Government-Furnished Equipment Financed from Construction Funds — Gross Building Area (SF) _____

Describe any equipment not shown elsewhere that is purchased from construction funds. Usually this is either from equipment purchased by the government and furnished to the construction contractor, or it is furnished and installed under a separate contract. Also show, if not shown elsewhere equipment not from construction funds for which installation costs will be required.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities

(Systems 500 through 999)

Note:

1. Show the following criteria suitable for the application of historical cost under each applicable system heading:

   a. Size (assume if unknown) and length of utility runs. Include storm drainage requirement. Indicate valves, fire hydrants, manholes, catch basins, and other significant extras. Depth of cut (when over 6 feet) and dewatering requirements must be shown.

   b. Area and assumed section for paved areas. Identify each type and section variation.

   c. Description of work required for grading, cut, and borrow. Describe assumed nature of materials to be moved. If rock excavation is required, state assumptions on removal requirements (e.g., rip, blast, etc.).

   d. Indicate approximate quantities of clearing and grubbing in acres, and whether heavy, medium, or light.

   e. Describe any functional features required outside the building 5-foot line such as: sewage lift stations, wash racks, and water tanks, and unsuitable soil conditions.

   f. If hazardous materials are present, state type, extent, and method of disposal.

   g. See System 911 for Piling - Land.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR ELECTRICAL

| | |
|---|---|
| 511 Electrical Distribution, Primary | Length of Run (LF) 250 |
| 512 Electrical Distribution, Secondary | Length of Run (LF) |
| 513 Substation/Transformer | Capacity (KVA) 500 |
| 514 Area Lighting | Number of Fixtures (EA) 8 |
| 515 Airfield Lighting | Length of Run (LF) |
| 516 Lightning Protection | Points of Protection (EA) |
| 517, 518 Write-in Systems | |

EXTERIOR COMMUNICATION

| | |
|---|---|
| 521 Fire Alarm | Length of Run (LF) |
| 522 Security Alarm | Length of Run (LF) |
| 523 Communication, Telephone | Length of Run (LF) 100 |
| 524 Exterior EMCS (Energy Monitoring Control System) | Length of Run (LF) |
| 525, 526 Write-in Systems | |

EXTERIOR MECHANICAL

| | |
|---|---|
| 541 Heat Distribution, Overhead | Length of Run (LF) |
| 542 Heat Distribution, Underground | Length of Run (LF) |
| 543 Chilled Water Distribution | Length of Run (LF) |
| 544 Condensate Collection (only) | Length of Run (LF) |
| 545 Gas Distribution | Length of Run (LF) |
| 546 Compressed Air Distribution | Length of Run (LF) |
| 547 Fuel Distribution | Length of Run (LF) |
| 548 Exterior Foam | Length of Run (LF) |
| 549 Write-in System | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR WATER DISTRIBUTION

| | |
|---|---|
| 551 Water Distribution | Length of Run (LF) 400 |
| 552 Fire Protection Water Distribution | Length of Run (LF) |
| 553 Salt Water Distribution | Length of Run (LF) |
| 554 Sanitary Sewers | Length of Run (LF) 150 |
| 555, 556 Write-in Systems | |

BULK STORAGE

| | |
|---|---|
| 561 Fuel Storage, Bulk | Capacity (BBL) |
| 562 Fuel Storage, Ready Issue | Capacity (GAL) 2000 |
| 563 Water Storage | Capacity (GAL) |
| 564 - 566 Write-in Systems | |

FUELING

| | |
|---|---|
| 571 Vehicle Fueling | Number of Outlets (EA) |
| 572 Aircraft Fueling | Number of Hydrants (EA) |
| 573 Marine Fueling | Number of Outlets (EA) |
| 574 - 576 Write-in Systems | |

PUMPING

| | |
|---|---|
| 581 Fuel Pumping Station | Pump Capacity (GPM) |
| 582 Water Pumping Station | Pump Capacity (GPM) |
| 583 Fire Booster Pump | Pump Capacity (GPM) |
| 584 Sewage Pump Station | Pump Capacity (GPM) |
| 585 Sewage Lift Station | Pump Capacity (GPM) |
| 586 Write-in System | |

TREATMENT FACILITY

| | |
|---|---|
| 591 Water Treatment | Capacity (MGD) |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

592 Domestic Sewage Treatment — Capacity (MGD) _____

593 Industrial Waste Treatment — Capacity (MGD) _____

594 - 596 Write-in Systems

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross M.E. Bldg Area (SF)_____

Building required to house mechanical equipment when not connected to the main building and not included in gross area shown under the primary facility.

612 Electrical Equipment Building — Gross E.E. Bldg Area (SF)_____

613 - 615 Write-in Systems

SUPPORTING STRUCTURES MISCELLANEOUS

621 Security Gate — Opening Width (LF) _____

622 Guard House — Gross Building Area (SF) _____

623 - 625 Write-in Systems

POLLUTION ABATEMENT STRUCTURES

641 Oil Water Separators — Capacity (GAL) _____

642 Electro-Static Precipitator — Airflow (SCFM) _____

643 - 645 Write-in Systems

SHOP SUPPORT STRUCTURES

651 Vehicle Grease Racks — Number of Vehicle Racks (EA) ___

652 Vehicle Wash Platforms — Number of Vehicle Bays (EA) ____

653 - 656 Write-in Systems

AIRCRAFT CLEANING FACILITY

661 Aircraft Washing Facility — Paved Area (SY) _____

662 Aircraft Rinsing Facility — Paved Area (SY) _____

663 - 666 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

PAVING

| | | |
|---|---|---|
| 711 Concrete Roads | Paved Area (SY) | |
| 712 Flexible Roads | Paved Area (SY) | |
| 713 Overlay Roads | Paved Area (SY) | 560 |
| 714 Surface Treatment Roads | Paved Area (SY) | |
| 715 Slurry Seal Road | Paved Area (SY) | |
| 716, 717 Write-in Systems | | |

PARKING

| | | |
|---|---|---|
| 721 Concrete Parking | Paved Area (SY) | |
| 722 Flexible Parking | Paved Area (SY) | |
| 723 Overlay - Parking | Paved Area (SY) | 3,740 |
| 724 Surface Treatment - Parking | Paved Area (SY) | |
| 725 Slurry Seal Parking | Paved Area (SY) | |
| 726, 727 Write-in Systems | | |

WALKS

| | | |
|---|---|---|
| 741 Concrete Walks | Paved Area (SY) | 425 |
| 742 Bituminous Walks | Paved Area (SY) | |
| 743 Special Walks | Paved Area (SY) | |
| 744 - 746 Write-in Systems | | |

AIRCRAFT PARKING CONCRETE

| | | |
|---|---|---|
| 751 Concrete Runways | Paved Area (SY) | |
| 752 Concrete Taxiways | Paved Area (SY) | |
| 753 Concrete Aprons | Paved Area (SY) | |
| 754 Repairs Concrete Paving | Paved Area (SF) | |
| 755 Crack and Joint Repair | Length of Repair (LF) | |
| 757, 758 Write-in Systems | | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

AIRCRAFT PAVING FLEXIBLE

| | |
|---|---|
| 761 Flexible Runways | Paved Area (SY) _____ |
| 762 Flexible Taxiways | Paved Area (SY) _____ |
| 763 Flexible Aprons | Paved Area (SY) _____ |
| 764 Repair Aircraft Flexible Paving | Paved Area Patched (SY)_____ |
| 765 Aircraft Paving Overlays | Paved Area (SY) _____ |
| 766 Aircraft Paving Slurry Seal | Paved Area (SY) _____ |
| 767, 768 Write-in Systems | |

INCIDENTAL PAVING WORK

| | |
|---|---|
| 771 Pavement Milling | Milled Area (SY) _____ |
| 772 - 776 Write-in Systems | |

EARTHWORK

| | |
|---|---|
| 811 Earthwork | Volume (CY) _____ |
| 812 Borrow | Volume in Place (CY) _____ |
| 813 Topsoil, Seed, Sod | Area Graded (SY) 2000 |
| 814 Landscaping | Area Planted (SY) _____ |
| 815 Site Irrigation | Number of Sprinkler Heads (EA) _____ |
| 816 Surcharge | Fill in Surcharge (CY) 4800 |
| 817 Earth Replacement | In-Place Measurement (CY) _____ |
| 818 Environmental Protection | Area Protected (ACRES) _____ |
| 819 Write-in System | |

SITE IMPROVEMENTS

| | |
|---|---|
| 821 Site Improvements | Area Developed (SY) _____ |
| 822 - 825 Write-in Systems | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SITE PREPARATION MISCELLANEOUS

831 Site Dewatering (Major) Header Pipe (LF) _____

832 - 835 Write-in Systems

DEMOLITION

841 Remove Utilities Length of Run (LF) _____

842 Remove Paving and Slabs Area Removed (SY) _____

843 Remove Structures Structure Volume (CF) _____
*** See attached for bldgs to be demolished ***

844 Remove/Dispose of Asbestos (Exterior) Total Cost (LS) _____

845 Remove/Dispose of P.C.B. Total Cost (LS) _____

846 Remove/Dispose of Contaminated Earth Volume of Earth Removed (CY) ___

847 Write-in System

STORM DRAINAGE

851 Storm Drainage Piping Length of Run (LF) _____

852 Box and Arch Culvert Length of Culvert (LF) _____

853 Drainage Facing Materials Surface Area (SY) _____

854 - 856 Write-in Systems

FENCING

861 Fencing (Perimeter) Length of Fence (LF) _____

862 Fencing (Alarm) Length of Fence (LF) _____

863 - 865 Write-in Systems

RECREATION EQUIPMENT/FIELDS

871 Playground Equipment Pieces of Equipment (EA) _____

872 Playing Field Equipment Pieces of Equipment (EA) _____

873 Tennis Courts Number of Courts (EA) _____

874 Softball/Baseball Fields Number of Fields (EA) _____



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

875 Football/Soccer Fields — Number of Fields (EA) _____

876, 877 Write-in Systems

SPECIAL BUILDING FOUNDATIONS

911 Piling - Land — Total Length (LF) _____

912 Caissons — Number of Caissons (EA) _____

913 Pressure Injected Footing — Number of Footings (EA) _____

914 Vibrofloatation — Number of Locations (EA) _____

915 Chemical Soil Stabilization — Number of Locations (EA) _____

916 Dynamic Consolidation — Number of Locations (EA) _____

917 Piling Cast-In-Place Concrete — Length of Piling (LF) _____

RAILROAD

921 Track Work - Railroad — Length of Track (LF) _____

922 - 925 Write-in Systems

MARINE STRUCTURES PIERS

931 Piling - Marine — Total Length (LF) _____

932 Dolphins — Number of Dolphins (EA) _____

933 Med Mooring — Total Cost (LS) _____

934 Pier Deck — Area of Deck (SF) _____

935 Fenders — Length of Fender (LF) _____

936 Pile Clusters — Number of Clusters (EA) _____

937 Marine Specialties — Total Cost (LS) _____

938 Write-in Systems

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls — Total Face Area (SF) _____

942 Erosion Protection - Marine — Area Covered (SY) _____



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) — Area Covered (SY) _____

944 - 946 Write-in Systems

MARINE REPAIRS

951 Underdeck Repairs — Total Cost (LS) _____

952 Pile Repairs - Marine — Length Repaired (LF) _____

953 - 957 Write-in Systems

DREDGING

961 Mobilization/Demobilization - Dredging — Total Cost (LS) _____

963 Hydraulic Dredging — Volume (CY) _____

964 Bucket Dredging — Volume (CY) _____

965 - 966 Write-in Systems

TOWERS/ANTENNAS

971 Towers — Length (LF) _____

972 Antennas — Total Cost (LS) _____

973 - 976 Write-in Systems

TUNNEL/PIPE JACKING

981 Tunneling — Volume Removed (CY) _____

982 Pipe Jacking — Length Jacked (LF) _____

983 - 986 Write-in Systems

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges — Deck Area (SF) _____

992 Overpasses — Deck Area (SF) _____

993 - 996 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 15: CES Standard Systems List

15.1 Interior. The interior systems are shown in the following list.

0XX General
000 Building Construction
00X Overhead
001 Field Overhead
002 Home Office OH
01X Additive Bid Items
02X Deductive Bid Items
03X Base Bids
04X Government Cost
041 OMSI
042 PCAS
043 Contingencies
044 SIOH

1XX General Construction
11X Structural
111 Foundation (SF)
112 Slab on Grade (SF)
113 Structural (SF)
114 Supported Floor (SF)
115 Stairs (EA)
116 Roof Structure (SF)
117 Pre-Engd Building (SF)
118 Vault (SF)
119 Write-in
13X Structural Write-in
14X Architectural
141 Roofing (SF)
142 Exterior Walls (SF)
143 Interior Walls (SF)
144 Interior Finishes (SF)
145 Doors (SF)
146 Windows (SF)
147 Specialties (SF)
148 BEQ Wardrobes (EA)
149 Write-in
16X Architectural Write-in
17X Demolition Interior
171 Demo Interior (SF)
172 Asbestos Removal Interior (LS)
173 - 175 Write-in

2XX Interior Mechanical
21X Plumbing Domestic
211 Plumbing, domestic (EA)
212 Domestic Hot Water Solar (MBTU)
213 Roof Drainage (EA)
214 - 216 Write-in
22X Space Conditioning
221 HVAC (MBTU/TNS)
222 Air Conditioning (TNS)
223 Heating, Ventln (MBTU/CFM)
224 Mechanical Ventilation (CFM)
225 Dehumidification (PPH)
226 Heating Solar (SF)
227 Write-in
23X Weight Handling Equipment
231 Bridge Cranes (TNS)(1)
232 Monorails (TNS)(1)
233 Fixed Hoist (TNS)(1)
234 Vehicle Lifts (TNS)(1)
235 Elevators (TNS)(1)
236 Escalators (TNS)(1)
237 Conveyors (TNS)(1)
238 Write-in
24X Special Mechanical Piping System
241 Vacuum (CFM)(1)
242 Oxygen (EA)(1)
243 Nitrogen (EA)(1)
244 Compressed Air (CFM)(1)
245 Interior Steam (PPH)(1)
246 - 247 Write-in
25X Special Mechanical, Other
251 Dust Collection (CFM)(1)
252 Engine Exhaust (CFM)(1)
253 - 255 Write-in
27X Interior Fire Protection
271 Sprinklers (SF)
272 AFFF (SF)
273 Carbon Dioxide (LBS)
274 Halon (LBS)
275 Fire Alarm (SF)
276 - 277 Write-in

---

(1) Built-in Equipment

---



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

3XX Interior Electrical
- 31X Power & Lighting
  - 311 Power (KW)
  - 312 Lighting (SF)
  - 313 400HZ (KW)(1)
  - 314 Direct Current (KW)(1)
  - 315 UPS (KVA)(1)
  - 316 Electrical Generators (KW)(1)
  - 317 - 318 Write-in
- 32X Special Equipment Protection
  - 321 Grounding (SF)(1)
  - 322 Lightning Protection (SF)(1)
  - 323 - 326 Write-in
- 33X Special Electrical Electronics
  - 331 Security Detection
  - 332 EMCS (EA)(1)
  - 333 Computer Communication
  - 334 - 336 Write-in
- 34X Communication
  - 341 Telephone (SF)
  - 342 Intercom (SF)
  - 343 Television (SF)
  - 344 Public Announcement (SF)
  - 345 Master Clock (EA)
  - 346 - 347 Write-in
- 35X Write-in

4XX Special Equipment
- 41X Medical Equipment
  - 411 Hospital Equipment (SF) (1)
  - 412 Dental Equip (EA)(1)
  - 413 - 414 Write-in
  - 415 Install Gov't Furnished Medical Equipment
  - 416 Gov't Furn Med Equipment
- 42X Food Service Equipment
  - 421 Food Service Equipment (SF)
  - 422 - 424 Write-in
  - 425 Install Gov't Furnished Food Service Equipment
  - 426 Gov't Furnished Food Service Equipment
- 43X Miscellaneous Equipment
  - 431 Chapel Equip (SF)(1)
  - 432 Movie Theater Equip (SF)(1)
  - 433 Rifle Range Equip (EA)(1)
  - 434 Lab Equip (EA)(1)
  - 435 Install Gov't Furnished Lab Equipment
  - 436 Gov't Furnished Lab Equipment
  - 437 Waste Disposal (PPH)(1)
  - 438 Write-in
- 44X Special Warehouse Equipment
  - 441 Special Warehouse Equipment (SF)(1)
  - 442 - 444 Write-in
  - 445 Install Gov't Furnished Warehouse Equipment
  - 446 Gov't Furnished Warehouse Equipment
- 45X Special Construction
  - 451 Hangar Doors (SF)
  - 452 Vault Doors (EA)
  - 453 Blast Doors (SF)
  - 454 Raised Floor (SF)*
  - 455 Radio Frequency Shielding (SF)(1)
  - 456 Bowling Lanes (EA)
  - 457 Paint Spray Booth (SF)(1)
  - 458 Write-in
- 49X Other Equipment
  - 491 Other Miscellaneous Equipment
  - 492 Snow Melting (SF)
  - 495 Install Other Gov't Furnished Equipment
  - 496 Other Gov't Furnished Equipment (SF)(1)
  - 499 Building Work Not Included Elsewhere (LS)

---

(1) Built-in Equipment

---

* Considered built-in equipment for category code 610-20 (Data Processing Center) only.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

15.2 Exterior. The exterior systems are shown in the following lists.

5XX Exterior Utilities
- 51X Exterior Electrical
  - 511 Electrical Distribution Primary (LF)
  - 512 Electrical Distribution Secondary (LF)
  - 513 Substation/ Transformer (KVA)
  - 514 Area Lighting (EA)
  - 515 Airfield Lighting (LF)
  - 516 Lightning Protection (EA)
  - 517 - 518 Write-in
- 52X Exterior Communication
  - 521 Fire Alarm (LF)
  - 522 Security Alarm (LF)
  - 523 Communication, Phone (LF)
  - 524 Exterior EMCS (LF)
  - 525 - 526 Write-in
- 54X Exterior Mechanical
  - 541 Heat Distribution Overhead (LF)
  - 542 Heat Distribution Underground (LF)
  - 543 Chilled Water Dist (LF)
  - 544 Condensate Collect (LF)
  - 545 Gas Distribution (LF)
  - 546 Compressed Air Dist (LF)
  - 547 Fuel Distribution (LF)
  - 548 Exterior Foam (LF)
  - 549 Write-in
- 55X Exterior Mechanical
  - 551 Water Distribution (LF)
  - 552 Fire Protection Water Distribution (LF)
  - 553 Salt Water Distribution (LF)
  - 554 Sanitary Sewers (LF)
  - 555 - 556 Write-in
- 56X Bulk Storage
  - 561 Fuel Storage Bulk (BBL)
  - 562 Fuel Storage Ready Issue (GAL)
  - 563 Water Storage (GAL)
  - 564 - 566 Write-in
- 57X Fueling
  - 571 Vehicle Fueling (EA)
  - 572 Aircraft Fueling (EA)
  - 573 Marine Fueling (EA)
  - 574 - 576 Write-in
- 58X Pumping
  - 581 Fuel Pumping Station (GPM)
  - 582 Water Pumping Station (GPM)
  - 583 Fire Booster Pump (GPM)
  - 584 Sewage Pump Station (GPM)
  - 585 Sewage Lift Station (GPM)
  - 586 Write-in
- 59X Treatment Facility
  - 591 Water Treatment (MGD)
  - 592 Domestic Sewage (MGD)
  - 593 Industrial Waste ((MGD)
  - 594 - 596 Write-in

6XX Exterior Structures
- 61X Equipment Building
  - 611 Mechical Equip Building (SF)
  - 612 Electrical Equip Building (SF)
  - 613 - 615 Write-in
- 62X Supporting Structures Miscellaneous
  - 621 Security Gate (LF)
  - 622 Guard House (SF)
  - 623 - 625 Write-in
- 64X Pollution Abatement Structures
  - 641 Oil Water Separators (GAL)
  - 642 Electrostatic Precipitator (SCFM)
  - 643 - 645 Write-in
- 65X Shop Support Structures
  - 651 Vehicle Grease Racks (EA)
  - 652 Vehicle Wash Platforms (EA)
  - 653 - 656 Write-in
- 66X AC Cleaning Facility
  - 661 AC Washing Facility (SY)
  - 662 AC Rinsing Facility (SY)
  - 663 - 666 Write-in

7XX Paving
- 71X Roads
  - 711 Concrete Roads (SY)
  - 712 Flexible Roads (SY)
  - 713 Overlay Roads (SY)
  - 714 Surface Treatment (SY)
  - 715 Slurry Seal (SY)
  - 716 - 717 Write-in



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

72X Parking
- 721 Concrete (SY)
- 722 Flexible (SY)
- 723 Overlay (SY)
- 724 Surface Treatment (SF)
- 725 Slurry Seal (SY)
- 726 - 727 Write-in

73X Write-in

74X Walks
- 741 Concrete Walks (SY)
- 742 Bituminous Walks (SY)
- 743 Special Walks (SY)
- 744 - 746 Write-in

75X Aircraft Paving Concrete
- 751 Runways (SY)
- 752 Taxiways (SY)
- 753 Aprons (SY)
- 754 Repairs Paving (SY)
- 755 Crack and Joint Repairs (LF)
- 756 - 757 Write-in

76X Aircraft Paving Flexible
- 761 Flexible Runways (SY)
- 762 Flexible Taxiways (SY)
- 763 Flexible Aprons (SY)
- 764 Repair A/C Flexible Paving (SY)
- 765 AC Paving Overlay (SY)
- 766 AC Paving Slurry Seal (SY)
- 767 - 768 Write-in

77X Incidental Paving Work
- 771 Pavement Milling (SY)
- 772 - 776 Write-in

## 8XX Site Preparation

81X Earthwork
- 811 Earthwork (CY)
- 812 Borrow (CY)
- 813 Topsoil/Seed/Sod (SY)
- 814 Landscaping (SY)
- 815 Site Irrigation (EA)
- 816 Surcharge (CY)
- 817 Earth Replacement (CY)
- 818 Environmental Protection (AC)

82X Site Improvements
- 821 Site Improvements (SY)
- 822 - 825 Write-in

83X Site Preparation Miscellaneous
- 831 Site Dewatering (Major) (LF)
- 832 - 835 Write-in

84X Demolition
- 841 Remove Utilities (LF)
- 842 Remove Paving and Slabs (SY)
- 843 Remove Structures (CF)
- 844 Remove/Dispose of Asbestos (Exterior) (LS)
- 845 Remove/Dispose of P.C.B. (LS)
- 846 Remove/Dispose of Contaminated Earth (CY)
- 847 Write-in

85X Storm Drainage
- 851 Storm Drainage Piping (LF)
- 852 Box Arch Culvert (LF)
- 853 Drainage Facing Materials (SY)
- 854 - 856 Write-in

86X Fencing
- 861 Fencing (Perimeter) (LF)
- 862 Fencing Alarm (LF)
- 863 - 865 Write-in

87X Recreation Equipment/Fields
- 871 Playground Equip (EA)
- 872 Playing Field Equip (EA)
- 873 Tennis Courts (EA)
- 874 Softball/Baseball (EA)
- 875 Football/Soccer (EA)
- 876 - 877 Write-in

## 9XX Heavy Construction

91X Special Building Foundations
- 911 Piling - Land (LF)
- 912 Caissons (EA)
- 913 Pressure Injected Footings (EA)
- 914 Vibrofloatation (EA)
- 915 Chemical Soil Stabilization (EA)
- 916 Dynamic Consolidation (EA)
- 917 Piling Cast-in-place (LF)

92X Railroad
- 921 Track Work Railroad (LF)
- 819 Write-in
- 922 - 925 Write-in

93X Marine Structures Piers
- 931 Piling-Marine (LF)
- 932 Dolphins (EA)
- 933 Med Mooring (LS)
- 934 Pier Deck (SF)
- 935 Fenders (LF)
- 936 Pile Clusters (EA)
- 937 Marine Specialties (LS)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

938 Write-in

94X Marine Structures Special
- 941 Bulkhead/Seawall (SF)
- 942 Erosion Protection-Marine (SY)
- 943 Riprap (Marine) (SY)
- 944 - 946 Write-in

95X Marine Repairs
- 951 Underdeck Repairs (LS)
- 952 Pile Repairs Marine (LF)
- 953 - 957 Write-in

96X Dredging
- 961 Mob/Demob Dredging (LS)
- 962 Hydraulic Dredging (CY)
- 963 Bucket Dredging (CY)
- 964 - 966 Write-in

97X Towers/Antennas
- 971 Towers (LF)
- 972 Antennas (LS)
- 973 - 976 Write-in

98X Tunnel/Pipe Jacking
- 981 Tunneling (LS)
- 982 Pipe Jacking (LF)
- 983 - 986 Write-in

99X Heavy Construction Miscellaneous
- 991 Bridges (SF)
- 992 Overpasses (SF)
- 993 - 996 Write-in
- 999 Supporting Facilities



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 16: SUPPLEMENTAL INFORMATION

16.1 Conversion Factors. See Appendix F.

16.2 Blank Forms and References. See Appendix G.

16.3 Acronyms and Abbreviations. See Appendix H.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX F

## CONVERSION FACTORS

| Quantity | Multiply | By | to Obtain | |
|---|---|---|---|---|
| Length | inch | 25.400 | millimeter | mm |
| | foot | 0.304800 | meter | m |
| | yard | 0.914400 | meter | m |
| | mile (U.S. Statute) | 1.609347 | kilometer | km |
| | millimeter | $39.370079 \times 10^{-3}$ | inch | in |
| | meter | 3.280840 | foot | ft |
| | meter | 1.093613 | yard | yd |
| | kilometer | 0.621370 | mile | mi |
| Area | square inch | $0.645160 \times 10^{3}$ | square millimeter | $mm^2$ |
| | square foot | 0.092903 | square meter | $m^2$ |
| | square yard | 0.836127 | square meter | $m^2$ |
| | square mile (U.S. Statute) | 2.589998 | square kilometer | $km^2$ |
| | acre | $4.046873 \times 10^{3}$ | square meter | $m^2$ |
| | acre | 0.404687 | hectare | |
| | square millimeter | $1.550003 \times 10^{-3}$ | square inch | $in^2$ |
| | square meter | 10.763910 | square foot | $ft^2$ |
| | square meter | 1.195990 | square yard | $yd^2$ |
| | square kilometer | 0.386101 | square mile | $mi^2$ |
| | square meter | $0.247104 \times 10^{-3}$ | acre | |
| | hectare | 2.471044 | acre | |
| Volume | cubic inch | $16.38706 \times 10^{3}$ | cubic millimeter | $mm^3$ |
| | cubic foot | $28.31685 \times 10^{-3}$ | cubic meter | $m^3$ |
| | cubic yard | 0.764555 | cubic meter | $m^3$ |
| | gallon (U.S.liquid) | 3.785412 | liter | l |
| | quart (U.S.liquid) | 0.946353 | liter | l |
| | cubic millimeter | $61.023759 \times 10^{-6}$ | cubic inch | $in^3$ |
| | cubic meter | 35.314662 | cubic foot | $ft^3$ |
| | cubic meter | 1.307951 | cubic yard | $yd^3$ |
| | liter | 0.264172 | gallon (U.S.liquid) | gal |
| | liter | 1.056688 | quart (U.S.liquid) | qt |
| Mass | ounce (avoirdupois) | 28.34952 | gram | g |
| | pound (avoirdupois) | 0.453592 | kilogram | kg |
| | short ton | $0.907185 \times 10^{3}$ | kilogram | kg |
| | gram | $35.273966 \times 10^{-3}$ | ounce (avoirdupois) | oz av |
| | kilogram | 2.204622 | pound (avoirdupois) | lb av |
| | kilogram | $1.102311 \times 10^{-3}$ | short ton | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX G

BLANK FORMS AND REFERENCES

## Building SF Cost Development

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

| | CAT CODE | SIZE | ACF | DATE mo / yr |
|---|---|---|---|---|
| PROPOSED FACILITY | | | | |
| GUIDANCE FACILITY | | | | |

HISTORICAL GUIDANCE SOURCE: _____

HISTORICAL GUIDANCE UNIT COST: _____

| HISTORICAL UNIT COST | SIZE FACTOR | AREA COST FACTOR | ESCALATION FACTOR | ADJUSTED UNIT COST |
|---|---|---|---|---|
| | | | | |

_____ X _____ X _____ X _____ = _____

### ADDITIONAL FUNCTIONAL FEATURES

| FUNCTIONAL FEATURES | QTY | UNIT COST | TOTAL COST | ADJUSTED U/C | %CHANGE |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

ADDITIONAL FUNCTIONAL FEATURES TOTAL: _____

TOTAL BUILDING SF COST: _____ includes built-in equipment



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

DD Form 1391

| 1. COMPONENT | FY 19___ MILITARY CONSTRUCTION PROJECT DATA | 2. DATE |
|---|---|---|
| 3. INSTALLATION AND LOCATION | 4. PROJECT TITLE | |
| 5. PROGRAM ELEMENT | 6. CATEGORY CODE | 7. PROJECT NUMBER | 8. PROJECT COST ($000) |

9. COST ESTIMATES

| ACF: FER: ITEM ESCALATED TO: | U/M | QUANTITY | UNIT COST | COST ($000) |
|---|---|---|---|---|
| | | | | |

10. DESCRIPTION OF PROPOSED CONSTRUCTION

DD FORM 1 DEC 76 1391 PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED PAGE NO.

S/N 0107 LF 001-3910 ☆ U.S. Government Printing Office 1986—785-812/17914 3-1



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

# Building Budget Estimate Summary Sheet

## BUDGET ESTIMATE SUMMARY SHEET

P. NO. : P-___ FY 19__

TITLE: _____ DATE OF ESTIMATE: _____

LOCATION: _____ DESIGN STATUS (%) _____

PREPARED BY: _____ DATE ESCALATED TO: _____

A.C.F.: _____ ESCALATION FACTOR (%) _____

| DESCRIPTION | UM | QUANTITY | UNIT COST | ESCALATED COST ROUNDED | COST TRANSFRD TO 1391 |
|---|---|---|---|---|---|
| PRIMARY FACILITIES | | | | | |
| SUPPORTING FACILITIES | | | | | |
| SPECIAL FOUNDATION FEATURES | | | | | |
| ELECTRICAL UTILITIES | | | | | |
| MECHANICAL UTILITIES | | | | | |
| ROADS, PARKING, SIDEWALKS | | | | | |
| SITE IMPROVEMENTS | | | | | |
| DEMOLITION | | | | | |

TOTAL CONTRACT COST W/O CONTINGENCY
CONTINGENCY (5%)
TOTAL CONTRACT COST
SIOH (5.5%)
TOTAL BUDGET COST
ROUNDED



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

| NAVFAC 11013/7 (1-78) *Supersedes NAVDOCKS 2417 and 2417A* | **COST ESTIMATE** | DATE PREPARED | SHEET OF |
|---|---|---|---|
| ACTIVITY AND LOCATION | CONSTRUCTION CONTRACT NO. | | IDENTIFICATION NUMBER |
| | ESTIMATED BY | | CATEGORY CODE NUMBER |
| PROJECT TITLE | STATUS OF DESIGN ☐ PED ☐ 30% ☐ 100% ☐ FINAL ☐ Other (*Specify*) _____ | | JOB ORDER NUMBER |

| ITEM DESCRIPTION | QUANTITY | | MATERIAL COST | | LABOR COST | | ENGINEERING ESTIMATE | |
|---|---|---|---|---|---|---|---|---|
| | NUMBER | UNIT | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

S/N 0105-LF-010-1335


☆ U.S. Government Printing Office: 1983—605-010/6693 2-1

MIL-HDBK-1010

Cost Estimate Backup Sheet (NAVFAC)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Cost Estimate Backup Sheet (LANTDIV)

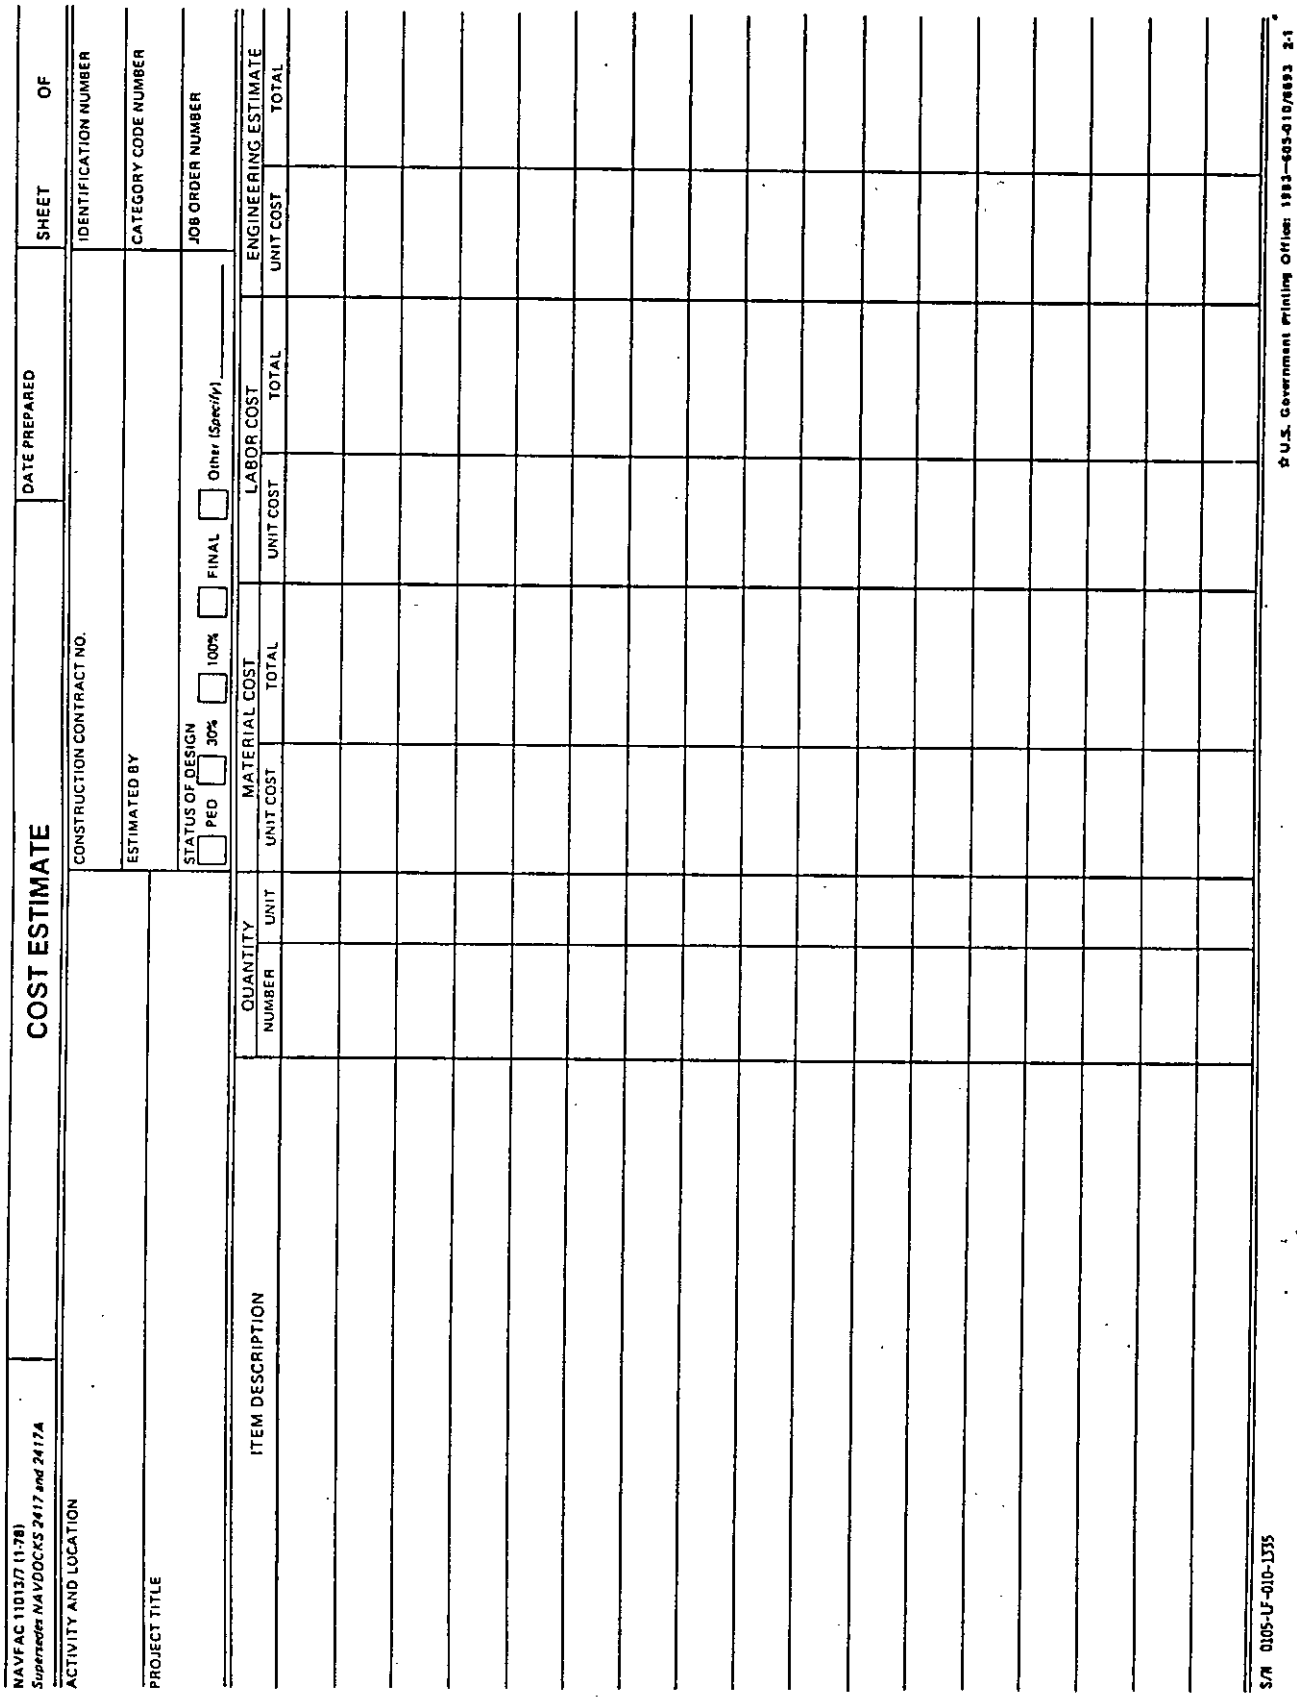

NAVFAC 11013/7 (1-78)
*Supersedes NAVDOCKS 2417 and 2417A*

**COST ESTIMATE**

DATE PREPARED

SHEET OF

ACTIVITY AND LOCATION

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

ESTIMATED BY

CATEGORY CODE NUMBER

PROJECT TITLE

STATUS OF DESIGN ☐ PED ☐ 30% ☐ 100% ☐ FINAL ☐ Other (Specify) _____

JOB ORDER NUMBER

| ITEM DESCRIPTION | QUANTITY | | MATERIAL COST | | LABOR COST | | ENGINEERING ESTIMATE | |
|---|---|---|---|---|---|---|---|---|
| | NUMBER | UNIT | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | |

## International Balance of Payments (IBOP) Implications

INTERNATIONAL BALANCE OF PAYMENTS (IBOP) IMPLICATIONS

| 1. Activity (Name and Location) | Date |
|---|---|
| 2. Project Title | 3. P-No. |

| | NORMAL PROCEDURES | | PLANNED PROCEDURE | |
|---|---|---|---|---|
| | Construction | *Construction Total Material | Construction | *Construction Total Material |
| BUDGET COST | | | | |
| LESS RETURNS TO THE US | | | | |
| a) US End Products | | | | |
| b) US Services | | | | |
| c) US Transportation | | | | |
| TOTAL RETURNS | | | | |
| FOREIGN EXCHANGE COST (FEC) | | | | |

SUMMARY OF IBOP DATA

| | NORMAL PROCEDURE | PLANNED PROCEDURE | PLANNED PROCEDURE EFFECT |
|---|---|---|---|
| CURRENT WORKING ESTIMATE | | | |
| FOREIGN EXCHANGE COST (FEC) | | | |

* Materials, supplies and equipment (including government furnished material procured abroad) acquired by the Navy from construction funds and provided to contractors for incorporation into foreign construction projects.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Cost Model Explanation

GENERAL:

This questionnaire will establish a measure of the project scope early in the planning stage in a manner which will allow empirical prices to be applied. It is recognized that many design decisions cannot be made at this time; however, if a realistic price is to be developed, the needs of the activity relating to a particular project must be defined. The NAVFACENGCOM method of conceptual estimating requires cost development from guidance cost of comparable construction. Any variation from guidance cost must be supported by a definition and cost of functional features. This support is often necessary to provide adequate project funding.

BUILDING:

Under normal conditions, the building cost model will be completed at the design cost certification stage. Therefore, this portion of the cost model is not required for the facilities study.

The completed cost model (systems 111 through 499) must state what is planned, with EMPHASIS UPON SCOPE FEATURES THAT GENERATE SIGNIFICANT COST. Assumptions must be stated. Additional narrative description for functional items is encouraged.

System 000 Building Construction

This system describes the total function of the building. As such, it is the most important information shown on the cost model.

SUPPORTING FACILITIES:

The completed cost model (systems 500 through 999) should state what is planned with emphasis upon scope features that generate significant cost. Refer to additional guidance in the cost model questionnaire.

NOTES:

1. This Cost Model Questionnaire serves two purposes:
   At the budget stage it serves as a means of describing and quantifying project requirements in such a manner that empirical prices can be used to generate a project cost.

   At the final estimate stage it serves as a means of collecting subsystem numbers, for storage in NAVFACENGCOM historical files.

2. The cost model questionnaire systems list includes numbered systems that are "write-in". These numbers may be used to identify systems in the project that are not identified in the questionnaire.

3. Systems followed by (1) are considered built-in equipment.

4. Exterior Systems and Special Equipment need more scope definition for accurate pricing. Show narrative description as you best understand the scope when detailed lists are not available.

5. Building system quantities should be the area in which the system occurs.



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the currenversion before use.

Project Title _____

Location _____

Contract Number _____

P# _____ FY __ Date _____

Completed by _____

Phone Number _____

COST ENGINEERING SYSTEM (CES)

COST MODEL QUESTIONNAIRE

12/31/86

000 Building Construction Gross Building Area (SF) _____

| Function or Category Code | % or Area |
|---|---|
| | |
| | |
| | |
| | |
| | |

Where a single building includes areas of significant cost variation as identified by category code or functional area, show a breakdown by function or category code (under sub system 01 through 05). Show area in sq. ft. or by percentage to nearest 5%.

| | | |
|---|---|---|
| 20 | Number of Floors | _____ |
| 21 | Floor to Floor Height | _____ LF |
| 22 | Length - Nearest foot | _____ LF |
| 23 | Width - Nearest foot | _____ LF |
| 25 | Irregular - Yes/No | |
| 26 | Building Perimeter(when irregular) | _____ LF |
| 40 | Describe any known special considerations; scheduling, security, asbestos removal, hazardous materials | |
| 50 | Finish floor elevation above existing grade - nearest foot. | _____ LF |



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

STRUCTURAL

111 Foundation — Ground Floor Area (SF) _____

__ 01 Spread Footings
__ 02 Thickened Slab
__ 03 Pile Foundation
__ 04 Caissons
__ 05 Continuous wall footing
__ 06 Grade Beams

***** For convenience pilings are described with building foundation. *****
***** Price under the supporting facilities. 911 Piling - Land *****

911 Piling - Land — Length of Piling (LF) _____

__ 02 Timber
__ 03
__ 04 Concrete 10" Sq
__ 05 Concrete 12" Sq
__ 06 Concrete 14" Sq
__ 07
__ 08 Steel

Length of Piling

__ 20 Under 25'
__ 21 26' - 35'
__ 22 36' - 45'
__ 23 46' - 55'
__ 24 56' - 65'
__ 25 66' - 75'
__ 26 76' - 85'
__ 27 86' - 95'
__ 28 Over 95'

112 Slab on Grade — Slab on Grade Area (SF) _____

__ 01 Floating
__ 02 Grade Beam Supported
__ 03 Pile Supported

Thickness

__ 11 Under 6"
__ 12 6"
__ 13 8"
__ 14 Over 8"

Floorload

__ 30 Under 100 PSF
__ 31 101 - 200 PSF
__ 32 201 - 300 PSF
__ 33 301 - 400 PSF
__ 34 401 - 500 PSF
__ 35 Over 501 PSF

113 Structural — Gross Building Area (SF) _____

__ 01 Bearing Wall
__ 02 Steel Framing
__ 03 Concrete Cast in Place
__ 04 Wood
__ 05
__ 06 Concrete Precast
__ 07 Air Inflatable

114 Supported Floor — Supported Floor (SF) _____

__ 01 Concrete Cast in Place
__ 02 Concrete on Steel Joists
__ 03 Concrete on Steel Framing
__ 04 Precast Concrete
__ 05 Wood
__ 06

If more than one entry give percentage of each - nearest 10%.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

115 Stairs — Risers (EA) _____

116 Roof Structure — Area of Roof (SF) _____

| | Framing |
|---|---|
| __ | 02 |
| __ | 03 Precast Hollow Core |
| __ | 04 Precast Concrete |
| __ | 05 Wood |
| __ | 06 Steel Joist |
| __ | 07 Steel Framing |

If more than one entry, give percentage of each - nearest 10%.

117 Pre Engineered Building — Gross Area of Building (SF) _____

__ 01 Eave height under 12'
__ 02 Eave height 12-20'
__ 03 Eave height over 20

118 Vault — Gross Floor Area (SF) _____

119 Write-in System

ARCHITECTURAL

141 Roofing — Roof Area (SF) _____

| | Surface |
|---|---|
| __ | 10 |
| __ | 11 Built-up |
| __ | 12 Shingles |
| __ | 13 Elast. |
| __ | 14 Sprayed |
| __ | 15 Metal Roofing |
| __ | 16 |

142 Exterior Walls — Exterior Wall Area (SF) _____

| Ext. Surface | Backup | Height |
|---|---|---|
| __ 01 Brick (below 10') | __ 21 CMU | __ 30 Under 12' |
| __ 02 CMU | __ 22 Wood Studs | __ 31 12' - 20' |
| __ 03 Drivit | __ 23 Steel Studs | __ 32 over 20' |
| __ 04 Metal Panels(above 10') | __ 24 Conc Cast in Place | |
| __ 05 Stucco | __ 25 Precast Concrete | |
| __ 06 Wood | __ 26 Furring | |
| __ 07 Conc Cast In Place | | |
| __ 08 Precast Concrete | | |

If more than one height is shown give percentage of each - nearest 10%.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

143 Interior Walls — Interior Wall Area (SF) _____

| | | | Height | |
|---|---|---|---|---|
| __ | 01 | Concrete | __ 21 | 8' |
| __ | 02 | Steel Studs | __ 22 | 9' |
| __ | 03 | | __ 23 | 10' |
| __ | 04 | Concrete Cast in Place | __ 24 | Over 10' |
| __ | 05 | Wood Studs | | |
| __ | 06 | | | |

If more than one entry under height, give percentage of each - nearest 10%. Give narrative description of type and size of rooms.

144 Interior Finishes — Gross Building Area (SF) _____

| | | | Floor | | Ceiling | |
|---|---|---|---|---|---|---|
| __ | 01 | Gypsum Board | __ 11 | | __ 21 | Acoustical |
| __ | 02 | CMU | __ 12 | Ceramic Tile | __ 22 | Gypsum Board |
| __ | 03 | Ceramic Tile | __ 13 | Quarry Tile | __ 23 | Plaster |
| __ | 04 | Wood Panels | __ 14 | Carpet | __ 24 | Concrete |
| __ | 05 | Plaster | __ 15 | Concrete | __ 25 | Spray on |
| __ | 06 | Vinyl Wall Covering | __ 16 | Terrazzo | | |
| | | | __ 17 | Special Toppings | | |
| | | | __ 18 | VCT | | |

145 Doors — Surface Area One Side (SF) _____

| | | |
|---|---|---|
| __ | 01 | Hollow Metal Exterior |
| __ | 02 | Alum Entrance Store Front |
| __ | 03 | Folding |
| __ | 04 | Roll Up |
| __ | 05 | Overhead |
| __ | 06 | |
| __ | 07 | |
| __ | 08 | Wood Interior |
| __ | 09 | Hollow Metal Interior |

146 Windows — Surface Area One Side (SF) _____

147 Specialities — Gross Building Area (SF) _____

| | | | | |
|---|---|---|---|---|
| __ | 01 | Wardrobes | __ 08 | |
| __ | 02 | Jail | __ 09 | Wire Partitions |
| __ | 03 | Clean Room | __ 10 | Metal Walkways |
| __ | 04 | Case Work | __ 11 | X-Ray |
| __ | 05 | Dark Rooms | | |
| __ | 06 | | | |
| __ | 07 | Loading Dock | | |

Give estimating quantities for required ITEMS OF SIGNIFICANT COST. List shown is not complete. Detailing of toilet accessories and partitions is not required. Very large items may be more suited to using a write-in system.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 148 BEQ Wardrobes — Number of Wardrobes (EA) _____

__ 01 With Chest
__ 02 Without Chest

149 Write-in System

DEMOLITION INTERIOR

171 Demolition Interior — Gross Building Area (SF) _____

__ 01 Complete Interior Partition
__ 02 Complete Interior Finishes
__ 03 Complete Interior Mechanical
__ 04 Complete Interior Electrical
__ 05 Complete Interior of Bldg. 01 thru 04

172 Asbestos Removal Interior — Total Cost (LS) _____

__ 01
__ 02
__ 03

173 - 175 Write-in Systems

PLUMBING

Note: Refer to attachment #2 to determine number of fixtures for systems 211 and 213

211 Plumbing-Domestic — Number of Fixtures (EA) _____

212 Domestic Hot Water Solar — Capacity (MBTH) _____

213 Roof Drainage — Number of Drains (EA) _____

214 - 216 Write-in Systems

SPACE CONDITIONING

221 HVAC — Capacity (MBTU or TNS) _____

__ 20 Bldg. Htng Plant HW, oil
__ 21 Bldg. Htng Plant Steam, oil
__ 22 Bldg. Htng Plant Hot air, oil
__ 23 Bldg. Htng Plant Hot air, gas
__ 24 Bldg. Htng Plant HW, gas
__ 25 Bldg. Htng Plant steam, gas
__ 26 Bldg. Htng Plant Elec.
__ 27 Base Plant Steam
__ 28 Base Plant HW
__ 29 Base Plant HTHW

Give tonnage, refer to attachment 1 if better information is not available. If building contains partial A/C, use systems 222 and 223 for each respective area.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

222 Air Conditioning — Capacity (TNS) _____

223 Heating & Ventilation — Capacity (MBTH or CFM) _____

__ 20 Bldg. Htng Plant Steam, oil
__ 21 Bldg. Htng Plant Hot Air, oil
__ 22 Bldg. Htng Plant Hot air, gas
__ 23 Bldg. Htng Plant HW, gas
__ 24 Bldg. Htng Plant Steam, gas
__ 25 Bldg. Htng Plant Elec.
__ 26 Base Plant Steam
__ 27 Base Plant HW
__ 28 Base Plant HTHW
__ 29

224 Mechanical Ventilation — Fan Capacity (CFM) _____

225 Dehumidification — Capacity(PPH) _____

226 Heating, Solar — Collector Area (SF) _____

227 Write-in System

WEIGHT HANDLING EQUIPMENT

(1) 231 Bridge Cranes — Capacity (TNS) _____

__ 01 Span under 50'
__ 02 Span 51-75'
__ 03 Span over 75'
__ 10 Capacity under 10 T
__ 11 Capacity 10-20 T
__ 12 Capacity 20-30 T
__ 13 Capacity 30-40 T
__ 14 Capacity over 40 T
__ 21 Run under 50'
__ 22 Run 50-100'
__ 23 Run over 100'

(1) 232 Monorails — Capacity (TNS) _____

__ 01 Manual
__ 02 Electric
__ 03 Air Operated
__ 10 Capacity under 5 T
__ 11 Capacity 5-10 T
__ 12 Capacity over 10 T
__ 21 Run under 50'
__ 22 Run 50 to 100'
__ 23 Run over 100'

(1) 233 Fixed Hoist — Capacity (TNS) _____

__ 01 Manual
__ 02 Electric
__ 03 Air Operated

(1) 234 Vehicle Lifts — Capacity (TNS) _____

__ 10 Capacity under 5 T
__ 11 Capacity 5-10 T
__ 12 Capacity over 10 T



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 235 Elevators — Number of Stops (EA) _____

__ 01 Electric
__ 02 Hydraulic
__ 03

__ 11 Passenger
__ 12 Freight

(1) 236 Escalators — Flights (EA) _____

(1) 237 Conveyors — Capacity (TNS/HR) _____

(1) 238 Write-in System

SPECIAL MECHANICAL PIPING SYSTEM

(1) 241 Vacuum — Capacity (CFM) _____

__ 01 Medical
__ 02 Industrial
__ 03

(1) 242 Oxygen — Outlets (EA) _____

(1) 243 Nitrogen — Outlets (EA) _____

(1) 244 Compressed Air — Capacity (CFM) _____

__ 01 Low Pressure 150 below
__ 02
__ 03 High Pressure 151 up

245 Interior Steam — Capacity (PPH) _____

__ 01 High Pressure
__ 02 Medium Pressure
__ 03 Low Pressure

__ 11 Oil Fired
__ 12 Electric Fired

__ 20 Fuel Oil Storage

246, 247 Write-in Systems

SPECIAL MECHANICAL OTHER

251 Dust Collection — Capacity (CFM) _____

252 Engine Exhaust — Fan Capacity (CFM) _____

253 - 255 Write-in Systems

FIRE PROTECTION

271 Sprinklers — Gross Area Sprinkled (SF) _____

__ 01 Dry
__ 02 Wet
__ 03 Preaction
__ 04 Deluge
__ 05

__ 10 Light Hazard
__ 11 Ordinary Hazard
__ 12 Extra Hazard
__ 13
__ 14 Includes Booster Pump



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

272 AFFF (Aqueous Film Forming Foam) Capacity (GAL) _____
__ 01 Deluge
__ 02 Pre-action
__ 03
__ 04 Oscillating Monitors

273 Carbon Dioxide Storage Capacity (LBS)_____
__ 01 Hose Reel
__ 02 Flooding Area
__ 03 Flooding Total
__ 04

274 Halon Storage Capacity (LBS) _____
__ 01
__ 02

275 Fire Alarm Gross Building Area (SF) _____

276, 277 Write-in Systems

POWER & LIGHTING

311 Power Connected Load (KW) _____

312 Lighting Gross Building Area (SF) _____

(1) 313 400 HZ Converter Capacity (KW) _____

(1) 314 Direct Current Converter Capacity (KW) _____

(1) 315 Uninterruptable Power Supply Converter Capacity (KVA) _____

(1) 316 Electrical Generators Equipment Capacity (KW) _____

| | | | |
|---|---|---|---|
| __ | 01 Intermittent | __ | 40 |
| __ | 02 Continuous | __ | 41 600 RPM |
| __ | 03 Electrical | __ | 42 720 RPM |
| __ | 04 Gas | __ | 43 900 RPM |
| __ | 05 Diesel | __ | 44 1200 RPM |
| __ | 06 Turbine | __ | 45 1800 RPM |
| __ | 07 | | |

317, 318 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SPECIAL ELECTRICAL PROTECTION

(1) 321 Grounding Gross Building Area (SF) _____
__ 01 Lightning Grounding
__ 02 Electronic Grounding
__ 03 Protective Grounding

(1) 322 Lightning Protection Gross Building Area (SF) _____

(1) 323 - 326 Write-in Systems

SPECIAL ELECTRICAL, ELECTRONICS

(1) 331 Security Detection Gross Building Area (SF) _____
__ 01 Intrusion Alarm for Access Control
__ 02 Access Control
__ 03 TV Camera & Monitor

If layout is not available describe area covered, where does alarm sound etc. Also describe intended function of system.

(1) 332 EMCS (Energy Monitoring & Controls System) Number of Points (EA) _____
__ 01 Local Control
__ 02 Remote Control

(1) 333 Computer Communication Cable Run (LF) _____

334 - 336 Write-in Systems

COMMUNICATION

341 Telephone Gross Building Area (SF) _____

342 Intercom Gross Building Area (SF) _____

343 Television Gross Building Area (SF) _____

344 Public Announcement Gross Building Area (SF) _____

345 Master Clock Number of Outlets (EA) _____

(1) 346, 347 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MEDICAL EQUIPMENT

(1) 411 Hospital Equipment — Gross Building Area (SF) _____

(1) 412 Dental Equipment — Number of Chairs (EA) _____

(1) 413, 414 Write-in Systems

FOOD SERVICE

421 Food Service Equipment — Pieces of Food Service Equip (EA) _____

422 - 425 Write-in Systems

MISCELLANEOUS EQUIPMENT

(1) 431 Chapel Equipment — Gross Building Area (SF) _____

(1) 432 Movie Theater Equipment — Gross Building Area (SF) _____

(1) 433 Rifle Range Equipment — Firing Lanes (EA) _____

(1) 434 Laboratory Equipment — Number of Pieces (EA) _____

(1) 437 Waste Disposal Equipment — Equipment Capacity (PPH) _____

(1) 438 Write-in System

SPECIAL WAREHOUSE EQUIPMENT

(1) 441 Special Warehouse Equipment — Gross Building Area (SF) _____

(1) 442 - 444 Write-in Systems

SPECIAL CONSTRUCTION

451 Hanger Doors — Surface Area One Side (SF) _____

__ 01 Sliding
__ 02 Vertical Lift
__ 10 Manual
__ 11 Power Operated

452 Vault Doors — Number (EA) _____



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

453 Blast Doors — Surface Area One Side (SF) _____

| Span | | Charge Weight (TNT Equivalent) | | Distance | |
|---|---|---|---|---|---|
| __ 01 | | __ 11 | | __ 21 | |
| __ 02 | 3 feet | __ 12 | 0 - 10 LBS | __ 22 | 0 - 20 FT |
| __ 03 | 5 feet | __ 13 | | __ 23 | |
| __ 04 | 10 feet | __ 14 | 10 - 500 LBS | __ 24 | 20 - 100 FT |
| __ 05 | 15 feet | __ 15 | | __ 25 | |
| __ 06 | 20 feet | __ 16 | Over 500 LBS | __ 26 | Over 100 FT |

454 Raised Floor — Area of Raised Floor (SF) _____

(1) Only for CAT Code 610-20 (Data Processing Center)

(1) 455 Radio Frequency Shielding — Surface Area Shielded (SF) _____

456 Bowling Lanes — Number of Lanes (EA) _____

__ 01 New
__ 02 Refinished
__ 10 W/O Auto Pin Setter
__ 11 W/ Auto Pin Setters

(1) 457 Paint Spray Booth — Floor Area (SF) _____

458 Write-in System

OTHER EQUIPMENT

491 Other Miscellaneous Equipment

492 Snow Melting — Area Protected (SF) _____

(1) 496 Government furnished equipment Financed from Construction Funds — Gross Building Area (SF) _____

Describe any equipment not shown elsewhere that is purchased from construction funds. Usually this is either from equipment purchased by the government and furnished to the construction contractor, or it is furnished and installed under a separate contract. Also show, if not shown elsewhere equipment not from construction funds for which installation costs will be required.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities

(Systems 500 through 999)

Note:

1. Show the following criteria suitable for the application of historical cost; under each applicable system heading;

   a. Size (assume if unknown) and length of utility runs. Include storm drainage requirement. Indicate valves, fire hydrants, manholes, catch basins and other significant extras. Depth of cut (when over 6 feet) and dewatering requirements must be shown.

b. Area and assumed section for paved areas. Identify each type and section variation.

   c. Description of work required for grading, cut and borrow. Describe assumed nature of materials to be moved. If rock excavation is required, state assumptions on removal requirements (e.g., rip, blast, etc.).

   d. Indicate approximate quantities of clearing and grubbing in acres, and whether heavy, medium, or light.

   e. Describe any functional features required outside the building 5 foot line such as: sewage lift stations, wash racks and water tanks, and unsuitable soil conditions

   f. If hazardous materials are present, state type, extent and method of disposal.

   g. See System 911 for Piling - Land.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR ELECTRICAL

| | |
|---|---|
| 511 Electrical Distribution, Primary | Length of Run (LF) _____ |
| 512 Electrical Distribution, Secondary | Length of Run (LF) _____ |
| 513 Substation/Transformer | Capacity (KVA) _____ |
| 514 Area Lighting | Number of Fixtures (EA) _____ |
| 515 Airfield Lighting | Length of Run (LF) _____ |
| 516 Lightning Protection | Points of Protection (EA) _____ |
| 517, 518 Write-in Systems | |

EXTERIOR COMMUNICATION

| | |
|---|---|
| 521 Fire Alarm | Length of Run (LF) _____ |
| 522 Security Alarm | Length of Run (LF) _____ |
| 523 Communication, Telephone | Length of Run (LF) _____ |
| 524 Exterior EMCS (Energy Monitoring Control System) | Length of Run (LF) _____ |
| 525, 526 Write-in Systems | |

EXTERIOR MECHANICAL

| | |
|---|---|
| 541 Heat Distribution, Overhead | Length of Run (LF) _____ |
| 542 Heat Distribution, Underground | Length of Run (LF) _____ |
| 543 Chilled Water Distribution | Length of Run (LF) _____ |
| 544 Condensate Collection (only) | Length of Run (LF) _____ |
| 545 Gas Distribution | Length of Run (LF) _____ |
| 546 Compressed Air Distribution | Length of Run (LF) _____ |
| 547 Fuel Distribution | Length of Run (LF) _____ |
| 548 Exterior Foam | Length of Run (LF) _____ |
| 549 Write-in System | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR WATER DISTRIBUTION

| | |
|---|---|
| 551 Water Distribution | Length of Run (LF) _____ |
| 552 Fire Protection Water Distribution | Length of Run (LF) _____ |
| 553 Salt Water Distribution | Length of Run (LF) _____ |
| 554 Sanitary Sewers | Length of Run (LF) _____ |
| 555, 556 Write-in Systems | |

BULK STORAGE

| | |
|---|---|
| 561 Fuel Storage, Bulk | Capacity (BBL) _____ |
| 562 Fuel Storage, Ready Issue | Capacity (GAL) _____ |
| 563 Water Storage | Capacity (GAL) _____ |
| 564 - 566 Write-in Systems | |

FUELING

| | |
|---|---|
| 571 Vehicle Fueling | Number of Outlets (EA) _____ |
| 572 Aircraft Fueling | Number of Hydrants (EA) _____ |
| 573 Marine Fueling | Number of Outlets (EA) _____ |
| 574 - 576 Write-in Systems | |

PUMPING

| | |
|---|---|
| 581 Fuel Pumping Station | Pump Capacity (GPM) _____ |
| 582 Water Pumping Station | Pump Capacity (GPM) _____ |
| 583 Fire Booster Pump | Pump Capacity (GPM) _____ |
| 584 Sewage Pump Station | Pump Capacity (GPM) _____ |
| 585 Sewage Lift Station | Pump Capacity (GPM) _____ |
| 586 Write-in System | |

TREATMENT FACILITY

| | |
|---|---|
| 591 Water Treatment | Capacity (MGD) _____ |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

592 Domestic Sewage Treatment — Capacity (MGD) _____

593 Industrial Waste Treatment — Capacity (MGD) _____

594 - 596 Write-in Systems

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross M.E. Bldg Area (SF) _____

Building required to house mechanical equipment when not connected to the main building and not included in gross area shown under the primary facility.

612 Electrical Equipment Building — Gross E.E. Bldg Area (SF) _____

613 - 615 Write-in Systems

SUPPORTING STRUCTURES MISCELLANEOUS

621 Security Gate — Opening Width (LF) _____

622 Guard House — Gross Building Area (SF) _____

623 - 625 Write-in Systems

POLLUTION ABATEMENT STRUCTURES

641 Oil Water Separators — Capacity (GAL) _____

642 Electro-Static Precipitator — Air Flow (SCFM) _____

643 - 645 Write-in Systems

SHOP SUPPORT STRUCTURES

651 Vehicle Grease Racks — Number of Vehicle Racks (EA) ___

652 Vehicle Wash Platforms — Number of Vehicle Bays (EA) ____

653 - 656 Write-in Systems

AIRCRAFT CLEANING FACILITY

661 Aircraft Washing Facility — Paved Area (SY) _____

662 Aircraft Rinsing Facility — Paved Area (SY) _____

663 - 666 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PAVING

| | |
|---|---|
| 711 Concrete Roads | Paved Area (SY) _____ |
| 712 Flexible Roads | Paved Area (SY) _____ |
| 713 Overlay Roads | Paved Area (SY) _____ |
| 714 Surface Treatment Roads | Paved Area (SY) _____ |
| 715 Slurry Seal Road | Paved Area (SY) _____ |
| 716, 717 Write-in Systems | |

PARKING

| | |
|---|---|
| 721 Concrete Parking | Paved Area (SY) _____ |
| 722 Flexible Parking | Paved Area (SY) _____ |
| 723 Overlay - Parking | Paved Area (SY) _____ |
| 724 Surface Treatment - Parking | Paved Area (SY) _____ |
| 725 Slurry Seal Parking | Paved Area (SY) _____ |
| 726, 727 Write-in Systems | |

WALKS

| | |
|---|---|
| 741 Concrete Walks | Paved Area (SY) _____ |
| 742 Bituminous Walks | Paved Area (SY) _____ |
| 743 Special Walks | Paved Area (SY) _____ |
| 744 - 746 Write-in Systems | |

AIRCRAFT PARKING CONCRETE

| | |
|---|---|
| 751 Concrete Runways | Paved Area (SY) _____ |
| 752 Concrete Taxiways | Paved Area (SY) _____ |
| 753 Concrete Aprons | Paved Area (SY) _____ |
| 754 Repairs Concrete Paving | Paved Area (SF) _____ |
| 755 Crack and Joint Repair | Length of Repair (LF) _____ |
| 757, 758 Write-in Systems | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

AIRCRAFT PAVING FLEXIBLE

| | |
|---|---|
| 761 Flexible Runways | Paved Area (SY) _____ |
| 762 Flexible Taxiways | Paved Area (SY) _____ |
| 763 Flexible Aprons | Paved Area (SY) _____ |
| 764 Repair Aircraft Flexible Paving | Paved Area Patched (SY) _____ |
| 765 Aircraft Paving Overlays | Paved Area (SY) _____ |
| 766 Aircraft Paving Slurry Seal | Paved Area (SY) _____ |
| 767, 768 Write-in Systems | |

INCIDENTAL PAVING WORK

| | |
|---|---|
| 771 Pavement Milling | Milled Area (SY) _____ |
| 772 - 776 Write-in Systems | |

EARTHWORK

| | |
|---|---|
| 811 Earthwork | Volume (CY) _____ |
| 812 Borrow | Volume in Place (CY) _____ |
| 813 Topsoil, Seed, Sod | Area Graded (SY) _____ |
| 814 Landscaping | Area Planted (SY) _____ |
| 815 Site Irrigation | No. of Sprinkler Heads (EA) _____ |
| 816 Surcharge | Fill in Surcharge (CY) _____ |
| 817 Earth Replacement | In-Place Measurement (CY) _____ |
| 818 Environmental Protection | Area Protected (ACRES) _____ |
| 819 Write-in System | |

SITE IMPROVEMENTS

| | |
|---|---|
| 821 Site Improvements | Area Developed (SY) _____ |
| 822 - 825 Write-in Systems | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SITE PREPARATION MISCELLANEOUS

831 Site Dewatering (Major) — Header Pipe (LF) _____

832 - 835 Write-in Systems

DEMOLITION

841 Remove Utilities — Length of Run (LF) _____

842 Remove Paving and Slabs — Area Removed (SY) _____

843 Remove Structures — Structure Volume (CF) _____

844 Remove/Dispose of Asbestos (Exterior) — Total Cost (LS) _____

845 Remove/Dispose of P.C.B. — Total Cost (LS) _____

846 Remove/Dispose of Contaminated Earth — Volume of Earth Removed (CY) ___

847 Write-in System

STORM DRAINAGE

851 Storm Drainage Piping — Length of Run (LF) _____

852 Box and Arch Culvert — Length of Culvert (LF) _____

853 Drainage Facing Materials — Surface Area (SY) _____

854 - 856 Write-in Systems

FENCING

861 Fencing (Perimeter) — Length of Fence (LF) _____

862 Fencing (Alarm) — Length of Fence (LF) _____

863 - 865 Write-in Systems

RECREATION EQUIPMENT/FIELDS

871 Playground Equipment — Pieces of Equipment (EA) _____

872 Playing Field Equipment — Pieces of Equipment (EA) _____

873 Tennis Courts — Number of Courts (EA) _____

874 Softball/Baseball Fields — Number of Fields (EA) _____



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

875 Football/Soccer Fields — Number of Fields (EA) _____

876, 877 Write-in Systems

SPECIAL BUILDING FOUNDATIONS

911 Piling - Land — Total Length (LF) _____

912 Caissons — Number of Caissons (EA) _____

913 Pressure Injected Footing — Number of Footings (EA) _____

914 Vibrofloatation — Number of Locations (EA) _____

915 Chemical Soil Stabilization — Number of Locations (EA) _____

916 Dynamic Consolidation — Number of Locations (EA) _____

917 Piling Cast-In-Place Concrete — Total Length (LF) _____

RAILROAD

921 Track Work - Railroad — Length of Track (LF) _____

922 - 925 Write-in Systems

MARINE STRUCTURES PIERS

931 Piling - Marine — Total Length (LF) _____

932 Dolphins — Number of Dolphins (EA) _____

933 Med Mooring — Total Cost (LS) _____

934 Pier Deck — Area of Deck (SF) _____

935 Fenders — Length of Fender (LF) _____

936 Pile Clusters — Number of Clusters (EA) _____

937 Marine Specialities — Total Cost (LS) _____

938 Write-in System

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls — Total Face Area (SF) _____

942 Erosion Protection - Marine — Area Covered (SY) _____



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) Area Covered (SY) _____

944 - 946 Write-in Systems

MARINE REPAIRS

951 Underdeck Repairs Total Cost (LS) _____

952 Pile Repairs Marine Length Repaired (LF)_____

953 - 957 Write-in Systems

DREDGING

961 Mobilization/Demobilization - Dredging Total Cost (LS) _____

963 Hydraulic Dredging Volume (CY) _____

964 Bucket Dredging Volume (CY) _____

965 - 966 Write-in Systems

TOWERS/ANTENNAS

971 Towers Length (LF) _____

972 Antennas Total Cost (LS) _____

973 - 976 Write-in Systems

TUNNEL/PIPE JACKING

981 Tunneling Volume Removed (CY) _____

982 Pipe Jacking Length Jacked (LF) _____

983 - 986 Write-in Systems

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges Deck Area (SF) _____

992 Overpasses Deck Area (SF) _____

993 - 996 Write-in Systems



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Air Conditioning Tonnage Guide

| CATEGORY CODE | TITLE | SQUARE FEET OF FLOOR AREA / TON OF A/C |
|---|---|---|
| 171-15 | Reserve Centers | 450 - 600 |
| 171-20 | Applied Instruction Building | NO STANDARD |
| 171-25 | Auditorium | 0.04 - 0.06 tons/seat |
| 171-35 | Flight Simulator | 100 - 300 |
| 610-10 | Administration Building | 350 - 400 |
| 721-11 | UEPH | 1000 - 1200 |
| 722-10 | Dining Facility | 175 - 450 |
| 724-11 | UOPH | 1000 - 1200 |
| 730-83 | Chapel | 300 - 500; or 0.02 - 0.03 tons/seat |
| 740-02 | Location Exchange | NO STANDARD |
| 740-20 | Temporary Lodging | 550 - 750 |
| 740-23 | Commissary | 800 - 900 |
| 740-25 | Family Service Center | 375 - 400 |
| 740-40 | Bowling Alley | 0.8 - 1.4 tons/alley |
| 740-63 | Enlisted Men's & Officers Clubs | 600 - 650 |
| 740-74 | Child Care Center | 350 - 450 |
| | Classrooms | 400 - 500 |
| | Computer Room | 50 - 150 |
| | Dispensaries | 450 - 550 |
| | Hospital Patient Rooms | 450 - 550 |
| | Married Personnel Quarters | 900 - 1275 |
| | Recreation Rooms | 375 - 450 |
| | Shops (Precision Equipment) | 450 - 500 |

## Estimating Electrical Loads for Air Conditioning Systems

It is frequently necessary to estimate the power requirements for air conditioning systems when preparing a MILCON project and in other instances. For years, a rough rule of thumb was to use one (1) kilowatt per ton of cooling for any type system. Use of this rule neglects variation in cooling system efficiencies and the power consumption of auxiliaries such as fans and pumps.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Plumbing Fixture Count

| | |
|---|---|
| Floor Drains (All Sizes) | 1/3 Fixture |
| Roof Drains (All Sizes) | 1 Fixture |
| Floor Sink (All Sizes) | 1/3 Fixture |
| Water Closet | 1 Fixture |
| Lavatories | 1 Fixture |
| Kitchen Sink | 1 Fixture |
| Service Sink | 1 Fixture |
| Bidets | 1 Fixture |
| Electric Water Cooler | 1 Fixture |
| Drinking Fountain | 1/2 Fixture |
| Hand Wash Fountain (180 ) | 3 Fixture |
| Hand Wash Fountain (360 ) | 4 Fixture |
| Bathtub | 1 Fixture |
| Water Heater | 0 Fixture |
| Urinal | 1 Fixture |
| Single Shower Fixture | 1/2 Fixture |
| Pre Fab. Shower (incl drain and fix) | 1 Fixture |
| Multi Head Shower (SS) | 1 Fixture |
| Emergency Shower & Eye Wash | 1 Fixture |
| Eye Wash | 1/2 Fixture |
| Emergency Shower | 1/2 Fixture |
| Dishwasher Connection | 1/2 Fixture |
| Washing Machine Connection | 1/2 Fixture |
| Garbage Disposal | 1/4 Fixture |
| Rough-in Piping (HW, CW, Waste) | 1/2 Fixture |
| Mop Sink | 1 Fixture |

The above table to be used to determine number of fixtures for Standard System Descriptions, Systems 211 and 213 .



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX H

## ACRONYMS AND ABBREVIATIONS

| | | |
|---|---|---|
| A | ABSLA | Approved Basic Stock Level of Ammunition |
| | ACF | Area Cost Factor |
| | ADCA | Anticipated Date of Contract Award |
| | A&E | Architect and Engineer |
| | AGI | Activity General Information |
| | AH | Alternate Host |
| | AICUZ | Air Installations Compatible Use Zones |
| | AIS | Annual Inspection Summary |
| | ASD | Assistant Secretary of Defense |
| B | BAM | Baseline Assessment Memorandum |
| | BASE REP | Shore Base Readiness Report |
| | BEAP | Base Exterior Architecture Plan |
| | BEQ | Bachelor Enlisted Quarters |
| | BESEP | Base Electronics Systems Engineering Plan |
| | BFR | Basic Facility Requirements |
| | BLS | Base Loading System |
| | BOQ | Bachelor Officer Quarters |
| C | CAUSE | Computer Assited Utility Systems Evaluation |
| | CCD | Category Code Directory (data base) |
| | CCN | Category Code Number |
| | CES | Computerized Estimating System |
| | CES-H | Computerized Estimating System - Historical |
| | CIP | Capital Improvements Plan |
| | CL3-D | Class 3 (Relocatable); planned for disposition (planning action) |
| | CL3-I | Class 3 (Relocatable); used on interim basis (planning action) |
| | CL3-U | Class 3 (Relocatable); temporary use (planning action) |
| | CMC | Commandant, Marine Corps |
| | CNET | Chief of Naval Education and Training |
| | CNO | Chief of Naval Operations |
| | CO | Commanding Officer |
| | COMNAVFACENGCOM | Commander, Naval Facilities Engineering Command |
| | CONSTR | New Construction (planning action) |
| | CONVFR | Convert From (planning action) |
| | CONVTO | Convert To (planning action) |
| | CPS | (Final) Consolidated Personnel Summary |
| | CPV | Current Plant Value |
| | CY | Cubic Yards (unit of measure) |
| D | D | Planning Action Designator |
| | DASN | Deputy Assistant Secretary of the Navy |
| | DCNO | Deputy Chief of Naval Operations |
| | DDESB | Department of Defense Explosives Safety Board |
| | DEMOL | Demolition (planning action) |
| | DF | Discount Factor |
| | DISPOS | Disposable Asset (planning action) |
| | DPS | Decision Package Sets |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | | |
|---|---|---|
| | DRA | Defense Relocation Account (funds) |
| | DoD | Department of Defense |
| E | EA | Economic Analysis |
| | EA | Each (unit of measure) |
| | EAF | Environmental Adjustment Factor |
| | ECIP | Energy Conservation Investment Program |
| | EE | Engineering Evaluation |
| | EFD | Engineering Field Division |
| | EMCS | Energy Monitoring and Control Systems |
| | EOD | Explosives Ordnance Disposal |
| F | FACSO | Facilities Systems Office (Port Hueneme, CA) |
| | FEC | Foreign Exchange Cost |
| | FEP | Facility Energy Plans |
| | FER | Foreign Exchange Rate |
| | FHS | Family Housing Plans |
| | FPD | Facility Planning Document |
| | FRP | Facilities Requirements Plan |
| | FUR | Facilities Utilization Report |
| | FYDP | Five Year Defense Program |
| G | GEMS | Graphics Engineering and Mapping System |
| H | H/T | Host/Tenant |
| | HCA | Hazard Control Assessment |
| | HVAC | Heating, Ventilation, and Air Conditioning |
| I | IBOP | International Balance of Payments |
| | ID | Planning Action Identifiers |
| | IP | Investment Program |
| J | JFAI | Joint Formal Acceptance Inspection |
| L | LS | Lump Sum (unit of measure) |
| M | MAGIC | Master Activity General Information and Control |
| | MARCORPS | Marine Corps |
| | MBTU | Million British Thermal Units |
| | MCNR | Military Construction Naval Reserve |
| | MCON | Military Construction, Navy |
| | MCP/MIS | Military Construction Programming Management Information System |
| | MILCON | Military Construction |
| | MILPERS | Naval Military Personnel Command |
| | MODIFY | Modification (planning action) |
| N | NACIP | Navy Assessments and Control of Installation Pollutants |
| | NADEP * | Naval Aviation Depot |
| | NAF | Nonappropriated Funded; Nonappropriated Fund |
| | NAVAIRSYSCOM | Naval Air Systems Command |
| | NAVCOMPT | Comptroller of the Navy |
| | NAVELEXSECCEN | Naval Electronic Systems Security Engineering Center |
| | NAVFAC | Naval Facilities Engineering Command (for directives and publications) |
| | NAVFACENGCOM | Naval Facilities Engineering Command |
| | NAVFACENGCOMHQ | Naval Facilities Engineering Command, Headquarters |
| | NAVMEDCOM | Naval Medical Command |
| | NAVOSH | Navy Occupational Safety and Health |

* Formerly NARF



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | | |
|---|---|---|
| | NAVRESSO | Navy Resale and Services Support Office |
| | NAVSEASYSCOM | Naval Sea Systems Command |
| | NAVSUPSYSCOM | Naval Supply Systems Command |
| | NCR | National Capital Region |
| | NFADB | Navy Facility Assets Data Base |
| | NFH | Navy Family Housing |
| | NMCRC | Navy Marine Corps Reserve Centers |
| | NPV | Net Present Value |
| | NS | Net Square Feet (unit of measure) |
| O | O&M,N | Operations & Maintenance, Navy (funds) |
| | OCR | Occupational Safety and Health Control Report |
| | OMB | Office of Management and Budget |
| | OPNAV | Office of the Chief of Naval Operations |
| | OSD | Office of the Secretary of Defense |
| | OUTG-C | Outgrant, continue (planning action) |
| | OUTG R | Outgrant, retrieve (planning action |
| P | PART FRP | Partial Facilities Requirements Plan |
| | PCR | Pollution Control Report |
| | PCS | Permanent Change of Station |
| | PEA | Preliminary Environmental Assessment |
| | PED | Project Engineering Documentation |
| | PHA | Preliminary Hazard Analysis |
| | PID | Project Identification Document |
| | POM | Program Objectives Memorandum |
| | PVA | Present Value Analysis (economic analysis) |
| | PWC | Public Works Center |
| R | RAC | Risk Assessment Code |
| | RCRA | Resource Conservation and Recovery Act |
| | RDT&E | Research, Development, Test & Evaluation |
| | REASFR | Reassignment From (planning action) |
| | REASTO | Reassignment To (planning action) |
| | RENOV | Renovation (planning action) |
| | REPLCE | Replace (planning action) |
| | RETAIN | Retain For Contingency (planning action) |
| | RETR | Retrieve (planning action identifier) |
| | RJE | Remote Job Entry |
| | RL | Requirements List |
| S | SA | Special Area |
| | SCF | Supplemental Category Flag |
| | SECDEF | Secretary of Defense |
| | SECNAV | Secretary of the Navy |
| | SF | Square Feet, Gross (unit of measure) |
| | SFMR | Supply Facility Management Report |
| | SFPB | Shore Facilities Programming Board |
| | SFPS | Shore Facilities Planning System |
| | SH | Stacking Height (unit of measure) |
| | SIMA | Shore Intermediate Maintenance Activity |
| | SIOH | Supervision, Inspection, and Overhead |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

| | | |
|---|---|---|
| | SIR | Savings to Investment Ratio (economic analysis) |
| | SNDL | Standard Navy Distribution List |
| | SPP | Sponsor Program Proposal |
| | SY | Square Yards (unit of measure) |
| T | TCF | Total Cubic Feet (unit of measure) |
| | TDY | Temporary Duty |
| | TOA | Total Obligation Authority |
| | TPAA | Total Proposed Adequate Assets |
| U | UIC | Unit Identification Code |
| | UM | Unit of Measure |
| | UPH | Unaccompanied Personnel Housing (now called bachelor housing) |
| | USA | Utility System Assessments |
| | USE | Continued Use (planning action) |
| | UTS | Utility Technical Studies |
| V | VAC | Vacant (planning action identifier) |
| | VI | Validation Indicator |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# PART 3: CONSTRUCTION COST ESTIMATES



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 17: CONSTRUCTION COST ESTIMATES

17.1 General.

17.1.1 Detailed Cost Estimate Required With Each Submittal. Prepare all estimates in the system format either manually or in the Cost Engineering Systems (CES) format. The estimate detail for each submittal shall be consistent with the level of design required for that submittal. Accurate quantity take-off, inclusion of all elements of construction, and accurate unit prices for the project's geographic location are fundamental to the development of a good cost estimate.

17.1.2 Uses of the Cost Estimate. Properly prepared cost estimates provide a check of plans and specifications for constructability, coordination conflicts, discrepancies, and omissions. Cost estimates are used by the Government to establish and verify budget cost, and to develop historical data for future estimating and verification of contract bid prices.

Final Government estimates are to be classified "For Official Use Only."

17.2 Preliminary (35 Percent) Estimate.

17.2.1 Preliminary Estimate Based on Materials Take-Off. The estimate for this submittal shall reflect cost based on reasonably accurate take-off of materials and systems consistent with the level of design. For those elements of the project where the status of design does not permit a reasonably accurate take-off of quantities or firm pricing of individual items of work, systems unit prices may be used. Lump sum costs are not acceptable. USE OF EMPIRICAL COSTS SHALL BE MINIMIZED.

17.2.2 Preliminary Estimate Should Monitor the Estimated Construction Cost. The 35 percent estimate may be either in manual (use CES Systems) or CES format. The 35 percent estimate, through adjustments, should monitor the estimated construction cost until the prefinal estimate is prepared. It is very important that if indications of cost exceeding allotted funds are confirmed, the Project Manager be contacted for instructions.

17.3 Prefinal Estimate.

17.3.1 Prefinal Requirements. Prepare the prefinal estimate from complete drawings and specifications. Full and accurate description of each system shall be provided. Quotations must be obtained for all items of substantial quantity or cost. Documentation must be provided for all line items that represent more than one percent of the contract cost or are of such nature that a standard price is not available. Documentation may be in the form of written quotations or may be taken by telephone. In either case the documentation must show company name, person contacted, and date of quote. The first data for each system shall be a narrative description followed by applicable sub-system numbers (CES Standard System and Sub-System List). Instructions for inserting the system descriptions when using the CES micro programs are available in the CES Estimates Guide.

17.3.2 Structure of Estimates and Work Requiring Multiple Estimates. Prepare



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

separate estimates for each new non-identical building, structure, or addition costing over $50,000 contract cost. Costs of alteration work to existing buildings will not be included with the building addition costs. When one construction contract contains more than one type of work (e.g., new construction, repair, equipment installation), the estimate shall be structured such that each type of work is identified separately.

In addition to an overall or composite summary sheet, each type of work requires a separate summary sheet. Costs from these separate summary sheets must be directly transferable to the composite summary sheet.

17.3.3 CES Estimates. For all projects over $1,000,000, all new buildings or additions over $500,000, a CES estimate is required. The A&E will be required to prepare the estimate using the NAVFACENGCOM CES Version 4.0 which is a part of the Construction Criteria Base (CCB). Hard copies of estimates will be submitted with each submittal. With the 100 percent estimate, a floppy disk containing the complete estimate will also be submitted. The A&E shall be responsible for preparing, loading, printing, and checking the estimate prior to prefinal submission. Contact should be made with the Project Manager prior to prefinal submission to reconfirm programmed construction costs for the contract. Where A&E estimate exceeds programmed construction costs, recommendations for cost reduction or proposed bid items should be provided with the prefinal submission.

Minimum computer equipment necessary for running estimates is as follows:

a) Hardware

(1) Microcomputer

(2) 640K main memory

(3) Standard microcomputer printer

(4) Fixed disk (8 megabytes minimum)

b) Minimum Software Requirements

(1) DOS Version 2.0 (or greater)

c) Workstation (Representative of NAVFACENGCOM Equipment)

(1) Zenith 248 personal computer

(2) 20 megabyte hard disks with 640K main memory

(3) Laser printer



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

17.4 Final Estimate. Same as prefinal except for correction and inclusion of prefinal comments. When the final estimate varies by more than +10 percent of the low bid, A&E review and analysis of the estimate will be required at no additional cost to the Government. This analysis shall compare the complete project by specification section tabulating a comparison of the Government estimate and contractor's proposal. Reasons for differences are to be stated. A more detailed format may be obtained from Code 407.

Examples from a CES estimate are included for illustration in Section 18. The summary sheet and factors sheets are followed by the backup report by systems, summary backup report by specification section, detailed backup report by specification section, and printout of loaded data.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 18: SAMPLE CONSTRUCTION COST ESTIMATE

18.1 Summary Report - System. Figure 23 is an example of a CES summary sheet.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT
SYSTEM

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

| | COST/ SYS BASED ON 8168.00 | SYSTEM UNITS | U/M | COST/SYS UNIT | TOTAL MJ MATL COST | TOTAL MJ LABOR COST | TOTAL MJ EQUIP COST | TOTAL CONTRACT COST |
|---|---|---|---|---|---|---|---|---|
| BUILDING SYSTEMS | | | | | | | | |
| 111 FOUNDATION | 9.39 | 8020.00 | SF | 9.56 | 33560 | 34138 | 8996 | 76694 |
| 112 SLAB ON GRADE | 7.84 | 8020.00 | SF | 7.99 | 42522 | 19724 | 1810 | 64056 |
| 115 STAIRS | 1.59 | 32.00 | RI | 405.60 | 9667 | 3112 | 201 | 12979 |
| 116 ROOF STRUCTURE | 8.96 | 7673.00 | SF | 9.54 | 57164 | 15505 | 494 | 73163 |
| 142 EXTERIOR WALLS | 11.46 | 9598.00 | SF | 9.76 | 35443 | 57123 | 1074 | 93640 |
| 143 INTERIOR WALLS | 5.02 | 5236.00 | SF | 7.83 | 14973 | 25369 | 658 | 41000 |
| 144 INTERIOR FINISHES | 2.39 | 8168.00 | SF | 2.39 | 8919 | 7772 | 2809 | 19501 |
| 145 DOORS | 4.82 | 863.00 | SF | 45.66 | 32562 | 6708 | 134 | 39404 |
| 147 SPECIALITIES | 1.23 | 8168.00 | SF | 1.23 | 6671 | 2734 | 679 | 10085 |
| 211 PLUMBING - DOMESTIC | 1.48 | 12.00 | EA | 1009.39 | 8008 | 4105 | 0 | 12113 |
| 223 HEATING AND VENT. | 8.04 | 10144.00 | CFM | 6.48 | 38672 | 27019 | 0 | 65690 |
| 238 LOADING DOCK,RAMP,CANOPY | 1.77 | 552.00 | SF | 26.17 | 8348 | 5664 | 436 | 14448 |
| 271 SPRINKLERS | 1.06 | 7636.00 | | 1.13 | 2772 | 5883 | 0 | 8655 |
| 275 FIRE ALARM SYSTEM | 0.09 | 8168.00 | SF | 0.09 | 380 | 361 | 0 | 741 |
| 311 POWER | 1.83 | 64.85 | KW | 229.99 | 8720 | 6195 | 0 | 14915 |
| 312 LIGHTING SYSTEM | 1.27 | 8168.00 | SF | 1.27 | 5629 | 4727 | 0 | 10357 |
| 341 TELEPHONE | 0.06 | 8168.00 | SF | 0.06 | 151 | 336 | 0 | 487 |
| SUBTOTAL | 68.31 | | | | 314161 | 226476 | 17292 | 557929 |
| HEAVY CONSTRUCTION | | | | | | | | |
| 942 EROSION PROTECTION-MARINE | | 20.00 | SY | 264.89 | 955 | 4343 | 0 | 5298 |
| SUBTOTAL HEAVY CONSTRUCTION | | | | | 955 | 4343 | 0 | 5298 |
| UTILITIES | | | | | | | | |
| 511 ELECTRICAL DISTRIBUTION, PRIMARY | | 200.00 | LF | 53.70 | 4444 | 3836 | 2460 | 10740 |
| 513 ELECT SUBSTATION | | 75.00 | KVA | 132.00 | 8450 | 1011 | 439 | 9900 |
| 523 COMMUNICATION TELEPHONE | | 640.00 | LF | 4.29 | 1260 | 1483 | 0 | 2743 |
| 541 HEAT DISTRIBUTION OVERHEAD | | 190.00 | LF | 121.42 | 15554 | 7072 | 443 | 23069 |
| 551 WATER DISTRIBUTION | | 170.00 | LF | 52.19 | 4840 | 2798 | 1235 | 8873 |
| 554 SANITARY SEWERS | | 85.00 | LF | 18.57 | 596 | 729 | 253 | 1578 |
| SUBTOTAL UTILITIES | | | | | 35143 | 16929 | 4830 | 56903 |
| SITE PREPARATION & IMPROVEMENTS | | | | | | | | |
| 741 CONCRETE WALKS | | 556.00 | SY | 17.29 | 6844 | 1696 | 1071 | 9611 |
| 811 EARTHWORK | | 333.00 | CY | 4.00 | 0 | 789 | 542 | 1331 |
| 813 TOPSOIL/SEED/SOD | | 1672.00 | SY | 2.45 | 406 | 3055 | 643 | 4104 |
| 814 LANDSCAPING | | 43.00 | SY | 54.82 | 922 | 1435 | 0 | 2357 |

**Figure 23**
**Summary Report - System**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT N62470-83-B-3281
SYSTEM

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 2

| | COST/ SYS BASED ON 8168.00 | SYSTEM UNITS | U/M | COST/SYS UNIT | TOTAL MJ MATL COST | TOTAL MJ LABOR COST | TOTAL MJ EQUIP COST | TOTAL CONTRACT COST |
|---|---|---|---|---|---|---|---|---|
| 842 REMOVE PAVING AND SLABS | | 1.00 | LS | 1621.17 | 166 | 827 | 628 | 1621 |
| SUBTOTAL SITE PREPARATION & IMPROVEMENTS | | | | | 8338 | 7801 | 2885 | 19025 |
| TOTAL SUPPORT COSTS(UTIL & SITE PREP) | | | | | 43482 | 24730 | 7715 | 75927 |
| BASE BID | | | | | | | | |
| ITEM A | | | | | 358598 | 255549 | 25007 | 639154 |
| TOTAL CONTRACT COST.....BASE BID | | | | | 358598 | 255549 | 25007 | 639154 |
| ADDITIVE | | | | | | | | |
| 011 ADDITIVE ITEM | | 1.00 | LS | 34539.27 | 22448 | 10005 | 2086 | 34539 |
| TOTAL ESTIMATE CONTRACT | | | | | 381046 | 265554 | 27093 | 673693 |

**Figure 23 (Continued)**
**Summary Report - System**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.2 Input Report. Figure 24 is an example of mark-up factors and modifier factors.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INPUT REPORT
MARK-UP

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-8-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA
ESTIMATORS: CEK FA FRI NEP
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

CAT CODE: 441-30
UIC: N60191
P-NO.: P-734

PRIME MARK-UP

| | | | |
|---|---|---|---|
| TAX ON MATERIAL | 4.0% | | |
| TAX & INSURANCE ON LABOR | 18.0% | | |
| TAX ON EQUIPMENT | 4.0% | | |
| PRIME OVERHEAD | MAT'L | LABOR | EQUIP |
| | 12% | 12% | 12% |
| PRIME PROFIT | MAT'L | LABOR | EQUIP |
| | 10% | 10% | 10% |
| BOND | 1.00% | | |
| MISC. TAXES | 0% | | |
| ESCALATION | 0% | | |
| BUDGET | 0.00% | | |
| MATERIAL COMPOSITE MARK-UP | 1.294 | | |
| LABOR COMPOSITE MARK-UP | 1.468 | | |
| EQUIPMENT COMPOSITE MARK-UP | 1.294 | | |

SPECIFICATION SECTIONS
MARKED UP FOR PRIME

03XXX 06XXX
08XXX

SUB MARK-UP A

| | | | |
|---|---|---|---|
| TAX ON MATERIAL | 4.0% | | |
| TAX & INSURANCE ON LABOR | 18.0% | | |
| TAX ON EQUIPMENT | 4.0% | | |
| SUB OVERHEAD | MAT'L | LABOR | EQUIP |
| | 12% | 12% | 12% |
| SUB PROFIT | MAT'L | LABOR | EQUIP |
| | 10% | 10% | 10% |
| PRIME OVERHEAD | MAT'L | LABOR | EQUIP |
| | 5% | 5% | 5% |
| PRIME PROFIT | MAT'L | LABOR | EQUIP |
| | 5% | 5% | 5% |
| BOND | 1.00% | | |
| MISC. TAXES | 0% | | |
| ESCALATION | 0% | | |
| BUDGET | 0.00% | | |
| MATERIAL COMPOSITE MARK-UP | 1.427 | | |
| LABOR COMPOSITE MARK-UP | 1.619 | | |
| EQUIPMENT COMPOSITE MARK-UP | 1.427 | | |

SPECIFICATION SECTIONS
MARKED UP FOR SUB

XXXXX

**Figure 24**
**Input Report**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INPUT REPORT
MODIFIER

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281

PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

| SPEC | ACT | SYS | MATL | LABOR | EQUIP |
|---|---|---|---|---|---|
| 02XXX | | | 1.000 | 1.720 | 1.000 |
| 04XXX | | | 1.000 | 1.200 | 1.000 |
| 07XXX | | | 1.000 | 1.100 | 1.000 |
| 02680 | | | 1.000 | 1.200 | 1.000 |
| XXXXX | | | 1.000 | 1.000 | 1.000 |
| 16XXX | | | 1.050 | 1.050 | 1.050 |

**Figure 24 (Continued)**
**Input Report**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.3 Backup Report - System Specification. Figure 25 is a random example of the backup report by systems.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT
SYSTEM-SPEC

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| 000 BLDG CONSTRUCTION | | | | | | | | | |
| SYSDC1 1-STORY CONC MASONRY UNIT STRUC SPREAD FOOTGSW/REINF | | | | | | | | | |
| SYSDC2 CONC FLOOR SLAB ON FILL,STL BAR JOISTS AND METALDECK ROOF | | | | | | | | | |
| SYSDC3 CONST W/ BALLAST SGL PLYMEMBR ROOF OVER RIGID INSUL | | | | | | | | | |
| SYSDC4 PLUMBING,HEATING, VENTILATION AND ELECT WORK | | | | | | | | | |
| | SUBTOTAL-SUBSPEC SECTION 01000 | | | | 0 | | 0 | | 0 |
| | SUBTOTAL-SPEC SECTION 01000 | | | | 0 | | 0 | | 0 |
| | CONTRACT COST | | | 1.427 | 0 | 1.619 | 0 | 1.427 | 0 |
| | TOTAL FOR SPEC SECTION 01000 | | | | | | | | 0 |
| | SUBTOTAL-SYSTEM 000 | | | | 0 | | 0 | | 0 |
| | CONTRACT COST | | | | 0 | | 0 | | 0 |
| | TOTAL FOR SYSTEM 000 | | | | | | | | 0 |
| 011 ADDITIVE ITEM | | | | | | | | | |
| 02050 DEMOLITION AND REMOVAL - | | | | | | | | | |
| 02052 PAVEMENT | | | | | | | | | |
| BCAL | REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL | 37.00 | SY | 0.00 | 0 | 0.52 | 19 | 1.05 | 39 |
| BCAL | REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL | 1.11 | SY | 0.00 | 0 | 0.52 | 1 | 1.05 | 1 |
| | SUBTOTAL-SUBSPEC SECTION 02052 | | | | 0 | | 20 | | 40 |
| 02053 SITE UTILITIES | | | | | | | | | |
| BCBF | REMOVAL OF PLAIN CONC CURB AND 2FT GUTTER | 87.00 | LF | 0.58 | 50 | 1.38 | 120 | 0.67 | 58 |
| BCEB | REMOVE AND RESET FIRE HYDRANT | 1.00 | EA | 0.00 | 0 | 427.13 | 427 | 154.69 | 155 |
| | SUBTOTAL-SUBSPEC SECTION 02053 | | | | 50 | | 547 | | 213 |
| | SUBTOTAL-SPEC SECTION 02050 | | | | 50 | | 567 | | 253 |
| | CONTRACT COST | | | 1.427 | 72 | 1.619 | 917 | 1.427 | 361 |
| | TOTAL FOR SPEC SECTION 02050 | | | | | | | | 1350 |
| 02200 EARTHWORK- | | | | | | | | | |
| 02221 UTILITIES TRENCH AND BACKFILL | | | | | | | | | |
| BIFAP | TRENCH EXCAV, BACKFILL, & COMPACTION BY UTILITY TRACTOR W/ 2' | 3.33 | CY | 0.00 | 0 | 1.67 | 6 | 2.72 | 9 |

**Figure 25**
**Backup Report - System Specification**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-B-3281 PRINTING DATE: 09/10/87 14
SYSTEM-SPEC DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 13

| | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|
| 116 ROOF STRUCTURE | | | | | | | | |
| ISUDCU SCUPPER COPPER 16 OZ | | | | | | | | |
| 12" X 12" | 3.00 | EA | 117.19* | 352 | 16.88 | 51 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 07600 | | | | 1162 | | 270 | | 0 |
| SUBTOTAL-SPEC SECTION 07600 | | | | 1162 | | 270 | | 0 |
| CONTRACT COST | | | 1.427 | 1659 | 1.619 | 438 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 07800 | | | | | | | | 2097 |
| 07800 SKYLIGHTS | | | | | | | | |
| 07800 SKYLIGHTS | | | | | | | | |
| IUSG-D SKYLIGHT PLASTIC DOME | | | | | | | | |
| DBL GLAZED | 107.00 | SF | 20.50 | 2193 | 1.39 | 148 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 07800 | | | | 2193 | | 148 | | 0 |
| SUBTOTAL-SPEC SECTION 07800 | | | | 2193 | | 148 | | 0 |
| CONTRACT COST | | | 1.427 | 3130 | 1.619 | 240 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 07800 | | | | | | | | 3370 |
| 07920 SEALANTS | | | | | | | | |
| 07920 SEALANTS | | | | | | | | |
| IMFSE CALK EXT CLS B TYPE II | | | | | | | | |
| TT-S-227 TWO COMPONENT | | | | | | | | |
| 1/4X1/2 | 380.00 | LF | 0.21 | 80 | 0.32 | 121 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 07920 | | | | 80 | | 121 | | 0 |
| SUBTOTAL-SPEC SECTION 07920 | | | | 80 | | 121 | | 0 |
| CONTRACT COST | | | 1.427 | 114 | 1.619 | 196 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 07920 | | | | | | | | 310 |
| SUBTOTAL-SYSTEM 116 | | | | 40091 | | 9626 | | 354 |
| CONTRACT COST | | | | 57164 | | 15505 | | 494 |
| TOTAL FOR SYSTEM 116 | | | | | | | | 73163 |
| 142 EXTERIOR WALLS | | | | | | | | |
| SYSDC1 12" CMU REINF CONC FILLED 25 AFF | | | | | | | | |
| SYSDC2 CEMENT BASE WATERPROOF TEXTURE FINISH | | | | | | | | |
| SYSDCS 02 | | | | | | | | |
| 03300 CAST-IN-PLACE CONCRETE - | | | | | | | | |
| 03250 ACCESORIES | | | | | | | | |
| EXE CAST-IN-PLACE SPLASH | | | | | | | | |
| BLOCK 2'X3' | 3.00 | EA | 26.00* | 78 | 10.00* | 30 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 03250 | | | | 78 | | 30 | | 0 |
| 03300 CAST-IN-PLACE CONCRETE - | | | | | | | | |
| EHTT RUBBER CONTROL JOINT | 419.00 | LF | 1.25* | 524 | 0.20* | 84 | 0.00* | 0 |

**Figure 25 (Continued)**
**Backup Report - System Specification**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-8-3281
SYSTEM-SPEC

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 14

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| 142 EXTERIOR WALLS | | | | | | | | | |
| EXTS | PRECAST CONCRETE LINTEL 12" X 8" | 19.00 | LF | 7.50* | 142 | 2.00* | 38 | 0.00* | 0 |
| EXTU | PRECAST CONCRETE LINTEL 12" X 16" | 38.00 | LF | 20.00* | 760 | 4.00* | 152 | 0.00* | 0 |
| | SUBTOTAL-SUBSPEC SECTION 03300 | | | | 1426 | | 274 | | 0 |
| 04202 REINFORCING FOR MASONRY WALLS | | | | | | | | | |
| EFIE | REBAR #5-#6 MASONRY WALL VERT | 5.79 | TN | 520.00 | 3011 | 397.29 | 2300 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 04202 | | | | 3011 | | 2300 | | 0 |
| | SUBTOTAL-SPEC SECTION 03300 | | | | 4515 | | 2604 | | 0 |
| | CONTRACT COST | | | 1.294 | 5842 | 1.468 | 3823 | 1.294 | 0 |
| | TOTAL FOR SPEC SECTION 03300 | | | | | | | | 9665 |
| 04200 UNIT MASONRY | | | | | | | | | |
| 04200 UNIT MASONRY | | | | | | | | | |
| FAFK | MORTAR FILLED CMU CELLS 4" WIDE TYPE S | 919.00 | SF | 0.14 | 129 | 0.32 | 298 | 0.03 | 28 |
| FAGO | MORTAR FILLED INDIVIDUAL CMU CELLS 12" WIDE TYPE S | 3504.00 | VLF | 0.82 | 2873 | 0.48 | 1682 | 0.05 | 175 |
| FCQE | REINF-TRUSS TYPE HEAVY PLAIN 12" WIDE | 6966.00 | LF | 0.12 | 836 | 0.08 | 585 | 0.00 | 0 |
| FFAN | BOND BEAM 12TK SHGT W/O GROUT OR REINF | 1869.00 | LF | 1.19 | 2224 | 2.11 | 3947 | 0.03 | 56 |
| FFJF | CMU HOLLOW 4" RGLR WT LOAD BEARING | 919.00 | SF | 0.81 | 744 | 2.15 | 1974 | 0.03 | 28 |
| FFJN | CMU HOLLOW 12" RGLR WT LOAD BEARING | 7769.00 | SF | 1.72 | 13363 | 3.10 | 24053 | 0.06 | 466 |
| | SUBTOTAL-SUBSPEC SECTION 04200 | | | | 20169 | | 32539 | | 753 |
| | SUBTOTAL-SPEC SECTION 04200 | | | | 20169 | | 32539 | | 753 |
| | CONTRACT COST | | | 1.427 | 28781 | 1.619 | 52681 | 1.427 | 1074 |
| | TOTAL FOR SPEC SECTION 04200 | | | | | | | | 82536 |
| 09500 ACOUSTICAL TREATMENT | | | | | | | | | |
| 09500 ACOUSTICAL TREATMENT | | | | | | | | | |
| KBATE | TEXTURE COATING EXTERIOR WALLS AND SOFFITS | 9568.00 | SF | 0.06 | 574 | 0.04 | 383 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 09500 | | | | 574 | | 383 | | 0 |
| | SUBTOTAL-SPEC SECTION 09500 | | | | 574 | | 383 | | 0 |
| | CONTRACT COST | | | 1.427 | 819 | 1.619 | 620 | 1.427 | 0 |
| | TOTAL FOR SPEC SECTION 09500 | | | | | | | | 1439 |
| | SUBTOTAL-SYSTEM 142 | | | | 25258 | | 35526 | | 753 |
| | CONTRACT COST | | | | 35443 | | 57123 | | 1074 |
| | TOTAL FOR SYSTEM 142 | | | | | | | | 93640 |

**Figure 25 (Continued)**
**Backup Report - System Specification**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-B-3281
SYSTEM-SPEC

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 23

| | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|
| 147 SPECIALITIES | | | | | | | | |
| 10800 TOILET AND BATH ACCESSORIES | | | | | | | | |
| 10800 TOILET AND BATH ACCESSORIES | | | | | | | | |
| LXHMDA MIRROR 1/4" PLATE GLASS | | | | | | | | |
| OVER 5 SF | 11.13 | SF | 5.04 | 56 | 2.08 | 23 | 0.34 | 4 |
| LXIT MIRROR 18X32 W/S.S. | | | | | | | | |
| FRAME | 1.00 | EA | 62.72 | 63 | 8.32 | 8 | 1.40 | 1 |
| LXKSJ TOWEL DISPENSER S.S. | | | | | | | | |
| SURFACE MOUNTED | 2.00 | EA | 25.44 | 51 | 7.04 | 14 | 1.17 | 2 |
| LXSSO SOAP DISP STAINLESS ST | | | | | | | | |
| WALL MTD | 2.00 | EA | 36.65 | 73 | 9.60 | 19 | 1.61 | 3 |
| LXVSO TOILET TISSUE DISP S.S. | | | | | | | | |
| SINGLE ROLL WALL MTD | 2.00 | EA | 23.00 | 46 | 3.52 | 7 | 0.58 | 1 |
| LXYSO WASTE RECEPTACLE | | | | | | | | |
| STAINLESS ST WALL MTD | 2.00 | EA | 108.15 | 216 | 14.40 | 29 | 2.33 | 5 |
| SUBTOTAL-SUBSPEC SECTION 10800 | | | | 505 | | 101 | | 17 |
| SUBTOTAL-SPEC SECTION 10800 | | | | 505 | | 101 | | 17 |
| CONTRACT COST | | | 1.427 | 721 | 1.619 | 163 | 1.427 | 24 |
| TOTAL FOR SPEC SECTION 10800 | | | | | | | | 908 |
| 11162 FIXED TYPE INDUSTRIAL DOCKBOARD | | | | | | | | |
| 11162 FIXED TYPE INDUSTRIAL DOCKBOARD | | | | | | | | |
| MVESRR DOCK LEVELER 6X8 10 TON | | | | | | | | |
| CAP. TYPE 1 | 1.00 | EA | 2835.00 | 2835 | 174.72 | 175 | 2.62 | 3 |
| MVLRME LAMINATED RUBBER BUMPERS | | | | | | | | |
| 6" TK 10"X36" | 3.00 | EA | 63.00 | 189 | 9.84 | 30 | 1.61 | 5 |
| SUBTOTAL-SUBSPEC SECTION 11162 | | | | 3024 | | 204 | | 7 |
| SUBTOTAL-SPEC SECTION 11162 | | | | 3024 | | 204 | | 7 |
| CONTRACT COST | | | 1.427 | 4315 | 1.619 | 331 | 1.427 | 11 |
| TOTAL FOR SPEC SECTION 11162 | | | | | | | | 4657 |
| SUBTOTAL-SYSTEM 147 | | | | 4675 | | 1689 | | 476 |
| CONTRACT COST | | | | 6672 | | 2734 | | 679 |
| TOTAL FOR SYSTEM 147 | | | | | | | | 10085 |

++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++

211 PLUMBING - DOMESTIC

SYSDC1 LAV COUNTERTOP URINAL WALL HUNG PRESS RED STA 20 GA ELEC WATER HEATER
SYSDC2 ELEC WATER COOLER DELUGE SHWR AND EYEWASH CI PIPE
SYSDC3 OFFICE TO 68 DEG WHSE TO 50 DEG
SYSDC5 04, 05, 27

15400 PLUMBING

15060 PIPING
QA@61A BACKFLOW PREVENTOR COMP.
ASSEMBLE QUOTE VIERK
SUPPLY CO 1.00 EA 550.00* 550 64.00* 64 0.00* 0

**Figure 25 (Continued)**
**Backup Report - System Specification**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT M62470-83-B-3281 PRINTING DATE: 09/10/87 14
SYSTEM-SPEC DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 32

| | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|
| 275 FIRE ALARM SYSTEM | | | | | | | | |
| SUBTOTAL-SUBSPEC SECTION 16110 | | | | 109 | | 118 | | 0 |
| 16120 CONDUCTORS | | | | | | | | |
| WGAA 14 THHN-THWN SOLID CU | 600.00 | LF | 0.03 | 19 | 0.12 | 69 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 16120 | | | | 19 | | 69 | | 0 |
| 16130 OUTLET BOXES | | | | | | | | |
| WPHC 6X6X4 JUNC BOX GALV S COV | 1.00 | EA | 3.23 | 3 | 5.58 | 6 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 16130 | | | | 3 | | 6 | | 0 |
| SUBTOTAL-SPEC SECTION 16402 | | | | 131 | | 192 | | 0 |
| CONTRACT COST | | | 1.427 | 187 | 1.619 | 312 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 16402 | | | | | | | | 499 |
| 16721 EXTERIOR FIRE ALARM SYSTEM | | | | | | | | |
| 16721 EXTERIOR FIRE ALARM SYSTEM | | | | | | | | |
| ZSIA FIRE ALARM PULL STATION WATERPROOF | 1.00 | EA | 78.75 | 79 | 6.90 | 7 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 16721 | | | | 79 | | 7 | | 0 |
| 16722 INTERIOR FIRE ALARM SYSTEM | | | | | | | | |
| ZSY FA TELEPHONE INTERFACE TERMINAL BOARD & CABINET | 1.00 | EA | 52.50* | 52 | 12.86* | 13 | 0.00* | 0 |
| SUBTOTAL-SUBSPEC SECTION 16722 | | | | 52 | | 13 | | 0 |
| SUBTOTAL-SPEC SECTION 16721 | | | | 131 | | 20 | | 0 |
| CONTRACT COST | | | 1.427 | 187 | 1.619 | 32 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 16721 | | | | | | | | 219 |
| 16722 INTERIOR FIRE ALARM SYSTEM | | | | | | | | |
| 16722 INTERIOR FIRE ALARM SYSTEM | | | | | | | | |
| ZSQ CO2 PRESSURE SWITCH CONNECTION | 1.00 | EA | 3.67 | 4 | 11.01 | 11 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 16722 | | | | 4 | | 11 | | 0 |
| SUBTOTAL-SPEC SECTION 16722 | | | | 4 | | 11 | | 0 |
| CONTRACT COST | | | 1.427 | 5 | 1.619 | 18 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 16722 | | | | | | | | 23 |
| SUBTOTAL-SYSTEM 275 | | | | 266 | | 223 | | 0 |
| CONTRACT COST | | | | 380 | | 361 | | 0 |
| TOTAL FOR SYSTEM 275 | | | | | | | | 741 |

311 POWER

SYSDC1 GRS CONDUIT CONNECTORS STRAP/FASTENER PNLBOARD SWITCHES
SYSDC2 RECEPTABLE BATT CHARGER STARTER OVERCURRENT PROTDEVICES
SYSDCS 04

**Figure 25 (Continued)**
**Backup Report - System Specification**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-B-3281 PRINTING DATE: 09/10/87 14
SYSTEM-SPEC DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 35

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| 311 POWER | | | | | | | | | |
| XXG23A | 3 POLE 15-60 AMP 240V 10K AIC CIRCUIT BREAKER BOLT-IN | 3.00 | EA | 50.65 | 152 | 10.85 | 33 | 0.00 | 0 |
| XXG43B | 3 POLE 70-100 AMP 480V 14K AIC CIRCUIT BREAKER | 1.00 | EA | 271.68 | 272 | 16.15 | 16 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 16180 | | | | 1367 | | 344 | | 0 |
| 16850 | HEATING AND COOLING | | | | | | | | |
| XHCT | ELECTRIC HTR CONNECTION | 1.00 | EA | 4.20 | 4 | 11.01 | 11 | 0.00 | 0 |
| XHCW | CONNECT WATER HEATER | 1.00 | EA | 4.20 | 4 | 11.01 | 11 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 16850 | | | | 8 | | 22 | | 0 |
| | SUBTOTAL-SPEC SECTION 16402 | | | | 5964 | | 3722 | | 0 |
| | CONTRACT COST | | | 1.427 | 8510 | 1.619 | 6026 | 1.427 | 0 |
| | TOTAL FOR SPEC SECTION 16402 | | | | | | | | 14536 |
| 16852 | ELECTRIC SPACE HEATING EQUIPMENT | | | | | | | | |
| 16852 | ELECTRIC SPACE HEATING EQUIPMENT | | | | | | | | |
| ZXTA | THERMOSTAT-LINE VOLTAGE | 7.00 | EA | 21.00 | 147 | 14.90 | 104 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 16852 | | | | 147 | | 104 | | 0 |
| | SUBTOTAL-SPEC SECTION 16852 | | | | 147 | | 104 | | 0 |
| | CONTRACT COST | | | 1.427 | 210 | 1.619 | 169 | 1.427 | 0 |
| | TOTAL FOR SPEC SECTION 16852 | | | | | | | | 379 |
| | SUBTOTAL-SYSTEM 311 | | | | 6111 | | 3826 | | 0 |
| | CONTRACT COST | | | | 8720 | | 6195 | | 0 |
| | TOTAL FOR SYSTEM 311 | | | | | | | | 14915 |
| 312 | LIGHTING SYSTEM | | | | | | | | |
| | SYSDC1 SWITCHES AND RECEPTABLE 18W LPS WALL MTD BEJAMINOLW FLOUR LAMP | | | | | | | | |
| | SYSDCS 04 | | | | | | | | |
| 16402 | INTERIOR WIRING SYSTEM - | | | | | | | | |
| 16110 | CONDUIT | | | | | | | | |
| VB*B | 1/2" EMT WITH COUPLING CONNECTOR STRAPS AND FASTENERS | 420.00 | LF | 0.21 | 88 | 0.89 | 375 | 0.00 | 0 |
| VEB | 1/2 GRS CONDUIT | 1510.00 | LF | 0.55 | 824 | 0.59 | 888 | 0.00 | 0 |
| VEMA | 1/2" 1H STRAP STAMP RC | 200.00 | EA | 0.09 | 19 | 0.59 | 118 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 16110 | | | | 932 | | 1380 | | 0 |
| 16120 | CONDUCTORS | | | | | | | | |
| WGBA | 12 THHN-THWN SOLID CU | 7720.00 | LF | 0.04 | 324 | 0.13 | 973 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 16120 | | | | 324 | | 973 | | 0 |

**Figure 25 (Continued)**
**Backup Report - System Specification**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

18.4 Summary Report - Specification Section. Figure 26 is an example of the summary backup report by specification section.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT:
SPEC SECTION

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI MEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

| | MATERIAL | | LABOR | | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|
| | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SPEC SECT |
| 02050 DEMOLITION AND REMOVAL - | | | | | | | |
| 02052 PAVEMENT | 62 | | 226 | | 188 | | |
| 02053 SITE UTILITIES | 178 | | 1170 | | 427 | | |
| SUBTOTAL SPEC SECTION 02050 | | 239 | | 1397 | | 615 | 2251 |
| 02200 EARTHWORK- | | | | | | | |
| 02202 CLEAR AND GRUB | 0 | | 296 | | 376 | | |
| 02210 SITE GRADING | 0 | | 3343 | | 804 | | |
| 02214 BORROW | 4593 | | 3155 | | 4888 | | |
| 02221 UTILITIES TRENCH AND BACKFILL | 0 | | 196 | | 282 | | |
| 02222 STRUCTURE EXCAVATION | 0 | | 3843 | | 0 | | |
| SUBTOTAL SPEC SECTION 02200 | | 4593 | | 10833 | | 6350 | 21776 |
| 02250 SOIL TREAT. FOR SUBTER. TERMITE CON | | | | | | | |
| 02250 SOIL TREAT. FOR SUBTER. TERMITE CON | 229 | | 2457 | | 801 | | |
| SUBTOTAL SPEC SECTION 02250 | | 229 | | 2457 | | 801 | 3487 |
| 02270 SLOPE PROTECTION AND EROSION CONTRL | | | | | | | |
| 02270 SLOPE PROTECTION AND EROSION CONTRL | 955 | | 4343 | | 0 | | |
| SUBTOTAL SPEC SECTION 02270 | | 955 | | 4343 | | 0 | 5298 |
| 02485 TURF | | | | | | | |
| 02485 TURF | 406 | | 512 | | 406 | | |
| SUBTOTAL SPEC SECTION 02485 | | 406 | | 512 | | 406 | 1323 |
| 02490 TREES, PLANTS AND GROUND COVER | | | | | | | |
| 02490 TREES, PLANTS AND GROUND COVER | 922 | | 1435 | | 0 | | |
| SUBTOTAL SPEC SECTION 02490 | | 922 | | 1435 | | 0 | 2357 |
| 02672 BITUMINOUS PRIME COAT | | | | | | | |
| 02672 BITUMINOUS PRIME COAT | 384 | | 52 | | 66 | | |
| SUBTOTAL SPEC SECTION 02672 | | 384 | | 52 | | 66 | 502 |
| 02680 BITUMINOUS CONCRETE PAVEMENT(VA,NC) | | | | | | | |
| 02680 BITUMINOUS CONCRETE PAVEMENT(VA,NC) | 4594 | | 709 | | 652 | | |
| SUBTOTAL SPEC SECTION 02680 | | 4594 | | 709 | | 652 | 5955 |
| 02686 GRADED AGGREGATE BSE CRS 4 FLEX PAV | | | | | | | |
| 02686 GRADED AGGREGATE BSE CRS 4 FLEX PAV | 3086 | | 310 | | 643 | | |
| SUBTOTAL SPEC SECTION 02686 | | 3086 | | 310 | | 643 | 4039 |
| 02695 EXTERIOR STEAM DISTRIBUTION | | | | | | | |
| 02694 PIPING (UNDERGROUND) | 3660 | | 1836 | | 117 | | |
| 02695 EXTERIOR STEAM DISTRIBUTION | 3941 | | 174 | | 0 | | |
| SUBTOTAL SPEC SECTION 02695 | | 7602 | | 2010 | | 117 | 9728 |

**Figure** 26
Summary Report - Specification Section



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 2

| | MATERIAL | | LABOR | | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|
| | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SPEC SECT |
| 02697 EXT PUMPED CONDENSATE RETURN SYS | | | | | | | |
| 02697 EXT PUMPED CONDENSATE RETURN SYS | 2028 | | 969 | | 60 | | |
| SUBTOTAL SPEC SECTION 02697 | | 2028 | | 969 | | 60 | 3057 |
| 02713 EXT WATER DISTRIBUTION SYSTEM | | | | | | | |
| 02710 PIPE, WATER DISTRIBUTION | 3346 | | 1683 | | 761 | | |
| 02711 STRUCTURES | 5543 | | 5798 | | 1748 | | |
| 02713 EXT WATER DISTRIBUTION SYSTEM | 115 | | 111 | | 27 | | |
| SUBTOTAL SPEC SECTION 02713 | | 9004 | | 7592 | | 2536 | 19133 |
| 02722 EXTERIOR SANITARY SEWER SYSTEM | | | | | | | |
| 02723 PIPE | 582 | | 616 | | 100 | | |
| SUBTOTAL SPEC SECTION 02722 | | 582 | | 616 | | 100 | 1298 |
| SUBTOTAL SPEC DIVISION 02 | | 34625 | | 33233 | | 12346 | 80204 |
| 03300 CAST-IN-PLACE CONCRETE - | | | | | | | |
| 03100 FORMWORK | 8969 | | 13473 | | 377 | | |
| 03200 REINFORCING | 9373 | | 5337 | | 0 | | |
| 03250 ACCESORIES | 657 | | 599 | | 0 | | |
| 03251 CURB, CURB & GUTTER, & VALLEY GUTTR | 1381 | | 1673 | | 0 | | |
| 03252 SIDEWALKS | 54 | | 40 | | 0 | | |
| 03300 CAST-IN-PLACE CONCRETE - | 2848 | | 547 | | 0 | | |
| 03301 CONCRETE PLACEMENT | 43367 | | 15513 | | 3650 | | |
| 04202 REINFORCING FOR MASONRY WALLS | 9132 | | 6783 | | 0 | | |
| SUBTOTAL SPEC SECTION 03300 | | 75782 | | 43964 | | 4028 | 123774 |
| SUBTOTAL SPEC DIVISION 03 | | 75782 | | 43964 | | 4028 | 123774 |
| 04200 UNIT MASONRY | | | | | | | |
| 04200 UNIT MASONRY | 46294 | | 87182 | | 1700 | | |
| SUBTOTAL SPEC SECTION 04200 | | 46294 | | 87182 | | 1700 | 135176 |
| 04520 MASONRY RESTORATION | | | | | | | |
| 04520 MASONRY RESTORATION | 883 | | 1603 | | 2443 | | |
| SUBTOTAL SPEC SECTION 04520 | | 883 | | 1603 | | 2443 | 4930 |
| SUBTOTAL SPEC DIVISION 04 | | 47177 | | 88785 | | 4144 | 140106 |
| 05120 STRUCTURAL STEEL | | | | | | | |
| 05120 STRUCTURAL STEEL | 9265 | | 4252 | | 0 | | |
| SUBTOTAL SPEC SECTION 05120 | | 9265 | | 4252 | | 0 | 13517 |
| 05210 STEEL JOISTS | | | | | | | |
| 05210 STEEL JOISTS | 10106 | | 2539 | | 7 | | |
| SUBTOTAL SPEC SECTION 05210 | | 10106 | | 2539 | | 7 | 12651 |
| 05311 STEEL ROOF DECKING | | | | | | | |
| 05311 STEEL ROOF DECKING | 7993 | | 1615 | | 0 | | |
| SUBTOTAL SPEC SECTION 05311 | | 7993 | | 1615 | | 0 | 9608 |

**Figure 26 (Continued)**
**Summary Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 3

| | MATERIAL | | LABOR | | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|
| | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SPEC SECT |
| 05400 COLD-FORMED METAL FRAMING | | | | | | | |
| 05400 COLD-FORMED METAL FRAMING | 125 | | 177 | | 3 | | |
| SUBTOTAL SPEC SECTION 05400 | | 125 | | 177 | | 3 | 305 |
| 05500 METAL FABRICATIONS | | | | | | | |
| 05500 METAL FABRICATIONS | 21286 | | 4802 | | 451 | | |
| SUBTOTAL SPEC SECTION 05500 | | 21286 | | 4802 | | 451 | 26539 |
| SUBTOTAL SPEC DIVISION 05 | | 48775 | | 13384 | | 461 | 62620 |
| 06100 ROUGH CARPENTRY | | | | | | | |
| 06100 ROUGH CARPENTRY | 451 | | 791 | | 110 | | |
| SUBTOTAL SPEC SECTION 06100 | | 451 | | 791 | | 110 | 1352 |
| SUBTOTAL SPEC DIVISION 06 | | 451 | | 791 | | 110 | 1352 |
| 07160 BITUMINOUS DAMPPROOFING | | | | | | | |
| 07160 BITUMINOUS DAMPPROOFING | 442 | | 661 | | 0 | | |
| SUBTOTAL SPEC SECTION 07160 | | 442 | | 661 | | 0 | 1103 |
| 07220 ROOF INSULATION | | | | | | | |
| 07220 ROOF INSULATION | 15672 | | 2538 | | 0 | | |
| SUBTOTAL SPEC SECTION 07220 | | 15672 | | 2538 | | 0 | 18210 |
| 07230 PERIMETER & UNDER-SLAB INSULATION | | | | | | | |
| 07230 PERIMETER & UNDER-SLAB INSULATION | 1295 | | 859 | | 0 | | |
| SUBTOTAL SPEC SECTION 07230 | | 1295 | | 859 | | 0 | 2154 |
| 07530 ELASTOMERIC SHT ROOFING SYS(EPDM) | | | | | | | |
| 07530 ELASTOMERIC SHT ROOFING SYS(EPDM) | 11140 | | 2516 | | 106 | | |
| SUBTOTAL SPEC SECTION 07530 | | 11140 | | 2516 | | 106 | 13762 |
| 07600 FLASHING AND SHEET METAL | | | | | | | |
| 07600 FLASHING AND SHEET METAL | 1659 | | 438 | | 0 | | |
| SUBTOTAL SPEC SECTION 07600 | | 1659 | | 438 | | 0 | 2097 |
| 07800 SKYLIGHTS | | | | | | | |
| 07800 SKYLIGHTS | 3130 | | 240 | | 0 | | |
| SUBTOTAL SPEC SECTION 07800 | | 3130 | | 240 | | 0 | 3370 |
| 07920 SEALANTS | | | | | | | |
| 07920 SEALANTS | 827 | | 2681 | | 0 | | |
| SUBTOTAL SPEC SECTION 07920 | | 827 | | 2681 | | 0 | 3508 |
| SUBTOTAL SPEC DIVISION 07 | | 34165 | | 9932 | | 106 | 44204 |
| 08110 HOLLOW METAL DOORS AND FRAMES | | | | | | | |
| 08110 HOLLOW METAL DOORS AND FRAMES | 3935 | | 718 | | 0 | | |
| SUBTOTAL SPEC SECTION 08110 | | 3935 | | 718 | | 0 | 4653 |
| 08331 OVERHEAD COILING DOORS | | | | | | | |
| 08331 OVERHEAD COILING DOORS | 17151 | | 2202 | | 0 | | |
| SUBTOTAL SPEC SECTION 08331 | | 17151 | | 2202 | | 0 | 19353 |

Figure 26 (Continued)
Summary Report - Specification Section



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 4

| | MATERIAL | | LABOR | | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|
| | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SPEC SECT |
| 08529 ALUMINUM STORM WINDOWS | | | | | | | |
| 08529 ALUMINUM STORM WINDOWS | 2148 | | 176 | | 0 | | |
| SUBTOTAL SPEC SECTION 08529 | | 2148 | | 176 | | 0 | 2324 |
| 08710 FINISH HARDWARE | | | | | | | |
| 08710 FINISH HARDWARE | 5074 | | 816 | | 0 | | |
| SUBTOTAL SPEC SECTION 08710 | | 5074 | | 816 | | 0 | 5890 |
| 08730 WEATHERSTRIPPING | | | | | | | |
| 08730 WEATHERSTRIPPING | 109 | | 1185 | | 129 | | |
| SUBTOTAL SPEC SECTION 08730 | | 109 | | 1185 | | 129 | 1423 |
| SUBTOTAL SPEC DIVISION 08 | | 28416 | | 5098 | | 129 | 33643 |
| 09250 GYPSUM WALLBOARD | | | | | | | |
| 09250 GYPSUM WALLBOARD | 85 | | 150 | | 3 | | |
| SUBTOTAL SPEC SECTION 09250 | | 85 | | 150 | | 3 | 238 |
| 09500 ACOUSTICAL TREATMENT | | | | | | | |
| 09500 ACOUSTICAL TREATMENT | 1530 | | 1099 | | 72 | | |
| SUBTOTAL SPEC SECTION 09500 | | 1530 | | 1099 | | 72 | 2701 |
| 09910 PAINTING OF BUILDING (FIELD PNTNG) | | | | | | | |
| 09910 PAINTING OF BUILDING (FIELD PNTNG) | 4758 | | 4704 | | 1555 | | |
| SUBTOTAL SPEC SECTION 09910 | | 4758 | | 4704 | | 1555 | 11016 |
| SUBTOTAL SPEC DIVISION 09 | | 6372 | | 5952 | | 1630 | 13955 |
| 10201 METAL (WALL) (AND) (DOOR) LOUVERS | | | | | | | |
| 10201 METAL (WALL) (AND) (DOOR) LOUVERS | 256 | | 29 | | 4 | | |
| SUBTOTAL SPEC SECTION 10201 | | 256 | | 29 | | 4 | 289 |
| 10400 BULTN BRDS, DIR,CRD HLDRS,SGNS, LET | | | | | | | |
| 10400 BULTN BRDS, DIR,CRD HLDRS,SGNS, LET | 45 | | 27 | | 4 | | |
| SUBTOTAL SPEC SECTION 10400 | | 45 | | 27 | | 4 | 76 |
| 10500 LOCKERS | | | | | | | |
| 10500 LOCKERS | 1845 | | 203 | | 30 | | |
| SUBTOTAL SPEC SECTION 10500 | | 1845 | | 203 | | 30 | 2078 |
| 10800 TOILET AND BATH ACCESSORIES | | | | | | | |
| 10800 TOILET AND BATH ACCESSORIES | 721 | | 163 | | 24 | | |
| SUBTOTAL SPEC SECTION 10800 | | 721 | | 163 | | 24 | 908 |
| SUBTOTAL SPEC DIVISION 10 | | 2867 | | 422 | | 62 | 3351 |
| 11162 FIXED TYPE INDUSTRIAL DOCKBOARD | | | | | | | |
| 11162 FIXED TYPE INDUSTRIAL DOCKBOARD | 9696 | | 885 | | 53 | | |
| SUBTOTAL SPEC SECTION 11162 | | 9696 | | 885 | | 53 | 10635 |
| SUBTOTAL SPEC DIVISION 11 | | 9696 | | 885 | | 53 | 10635 |
| 12331 PREFABRICATED VANITIES | | | | | | | |
| 12331 PREFABRICATED-VANITIES | | | | | | | |

**Figure 26 (Continued)**
**Summary Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 5

| | MATERIAL | | LABOR | | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|
| | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SPEC SECT |
| | 250 | | 129 | | 2 | | |
| SUBTOTAL SPEC SECTION 12331 | | 250 | | 129 | | 2 | 381 |
| SUBTOTAL SPEC DIVISION 12 | | 250 | | 129 | | 2 | 381 |
| 13947 ENERGY MONITORING AND CONTROL SYS | | | | | | | |
| 13947 ENERGY MONITORING AND CONTROL SYS | 4977 | | 3838 | | 0 | | |
| SUBTOTAL SPEC SECTION 13947 | | 4977 | | 3838 | | 0 | 8815 |
| SUBTOTAL SPEC DIVISION 13 | | 4977 | | 3838 | | 0 | 8815 |
| 15250 INSULATION | | | | | | | |
| 15250 INSULATION | 776 | | 1486 | | 0 | | |
| SUBTOTAL SPEC SECTION 15250 | | 776 | | 1486 | | 0 | 2263 |
| 15330 FIRE EXTING. SPRNKLR SYS (WET PIPE) | | | | | | | |
| 15330 FIRE EXTING. SPRNKLR SYS (WET PIPE) | 2772 | | 5883 | | 0 | | |
| SUBTOTAL SPEC SECTION 15330 | | 2772 | | 5883 | | 0 | 8655 |
| 15400 PLUMBING | | | | | | | |
| 15060 PIPING | 7182 | | 8038 | | 0 | | |
| 15440 FIXTURES AND EQUIPMENT | 5120 | | 1339 | | 0 | | |
| SUBTOTAL SPEC SECTION 15400 | | 12302 | | 9377 | | 0 | 21679 |
| 15801 | | | | | | | |
| 15060 PIPING | 7159 | | 4629 | | 0 | | |
| 15850 HVAC EQUIPMENT | 16811 | | 3184 | | 0 | | |
| 15880 AIR SUPPLY, SHEET METAL | 6327 | | 10140 | | 0 | | |
| 15971 CONTROLS | 454 | | 82 | | 0 | | |
| SUBTOTAL SPEC SECTION 15801 | | 30751 | | 18035 | | 0 | 48785 |
| 15971 CONTROLS | | | | | | | |
| 15971 CONTROLS | 602 | | 0 | | 0 | | |
| SUBTOTAL SPEC SECTION 15971 | | 602 | | 0 | | 0 | 602 |
| SUBTOTAL SPEC DIVISION 15 | | 47202 | | 34781 | | 0 | 81983 |
| 16301 UNDERGROUND ELECTRIC WORK | | | | | | | |
| 16110 CONDUIT | 230 | | 805 | | 0 | | |
| 16120 CONDUCTORS | 515 | | 0 | | 0 | | |
| 16411 DUCT BANK | 289 | | 199 | | 43 | | |
| SUBTOTAL SPEC SECTION 16301 | | 1034 | | 1004 | | 43 | 2082 |
| 16302 OVERHEAD ELECTRIC WORK | | | | | | | |
| 16570 POLE LINE WORK | 2729 | | 2873 | | 3539 | | |
| SUBTOTAL SPEC SECTION 16302 | | 2729 | | 2873 | | 3539 | 9140 |
| 16402 INTERIOR WIRING SYSTEM - | | | | | | | |
| 16110 CONDUIT | 6576 | | 9773 | | 0 | | |
| 16120 CONDUCTORS | 3353 | | 5259 | | 0 | | |

**Figure 26 (Continued)**
**Summary Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 6

| | MATERIAL | | LABOR | | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|
| | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SUB SPEC SECT | SPEC SECT | SPEC SECT |
| 16130 OUTLET BOXES | 42 | | 28 | | 0 | | |
| 16134 PANELBOARDS | 1784 | | 440 | | 0 | | |
| 16140 SWITCHES RECEPTACLES | 2069 | | 496 | | 0 | | |
| 16150 MOTORS | 58 | | 314 | | 0 | | |
| 16160 STARTERS | 275 | | 78 | | 0 | | |
| 16180 OVERCURRENT PROTECTION DEVICE | 1951 | | 557 | | 0 | | |
| 16402 INTERIOR WIRING SYSTEM - | 56 | | 81 | | 0 | | |
| 16850 HEATING AND COOLING | 12 | | 36 | | 0 | | |
| SUBTOTAL SPEC SECTION 16402 | | 16176 | | 17061 | | 0 | 33237 |
| 16462 PAD MOUNTED TRANSFORMERS | | | | | | | |
| 16462 PAD MOUNTED TRANSFORMERS | 8450 | | 1011 | | 439 | | |
| SUBTOTAL SPEC SECTION 16462 | | 8450 | | 1011 | | 439 | 9900 |
| 16510 INTERIOR LIGHTING | | | | | | | |
| 16510 INTERIOR LIGHTING | 11437 | | 2100 | | 0 | | |
| SUBTOTAL SPEC SECTION 16510 | | 11437 | | 2100 | | 0 | 13537 |
| 16700 COMMUNICATIONS | | | | | | | |
| 16120 CONDUCTORS | 61 | | 94 | | 0 | | |
| SUBTOTAL SPEC SECTION 16700 | | 61 | | 94 | | 0 | 154 |
| 16721 EXTERIOR FIRE ALARM SYSTEM | | | | | | | |
| 16721 EXTERIOR FIRE ALARM SYSTEM | 112 | | 11 | | 0 | | |
| 16722 INTERIOR FIRE ALARM SYSTEM | 75 | | 21 | | 0 | | |
| SUBTOTAL SPEC SECTION 16721 | | 187 | | 32 | | 0 | 219 |
| 16722 INTERIOR FIRE ALARM SYSTEM | | | | | | | |
| 16722 INTERIOR FIRE ALARM SYSTEM | 5 | | 18 | | 0 | | |
| SUBTOTAL SPEC SECTION 16722 | | 5 | | 18 | | 0 | 23 |
| 16852 ELECTRIC SPACE HEATING EQUIPMENT | | | | | | | |
| 16852 ELECTRIC SPACE HEATING EQUIPMENT | 210 | | 169 | | 0 | | |
| SUBTOTAL SPEC SECTION 16852 | | 210 | | 169 | | 0 | 379 |
| SUBTOTAL SPEC DIVISION 16 | | 40289 | | 24361 | | 4021 | 68671 |
| TOTAL | | 381046 | | 265554 | | 27093 | 673693 |

**Figure 26 (Continued)**
**Summary Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

18.5 Detailed Backup Report - Specification Section. Figure 27 is a random example of a detailed backup report by specification section.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT:
SPEC SECTION

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-8-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA
ESTIMATORS: CEK FA FRI MEP
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

CAT CODE: 441-30
UIC: N60191
P-NO.: P-734

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| 02050 | DEMOLITION AND REMOVAL - | | | | | | | | |
| 02052 | PAVEMENT | | | | | | | | |
| BCAA | REMOVAL OF BITUMINOUS PAVING UP TO 3 INCHES WITH DISPOSAL | 92.00 | SY | 0.46 | 42 | 1.07 | 98 | 0.55 | 51 |
| BCAB | REMOVAL OF BITUMINOUS PAVING FOR PIPE TRENCH | 1.11 | SY | 0.93 | 1 | 2.15 | 2 | 1.10 | 1 |
| BCAL | REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL | 38.00 | SY | 0.00 | 0 | 0.52 | 20 | 1.05 | 40 |
| BCAL | REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL | 37.00 | SY | 0.00 | 0 | 0.52 | 19 | 1.05 | 39 |
| BCAL | REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL | 1.11 | SY | 0.00 | 0 | 0.52 | 1 | 1.05 | 1 |
| | SUBTOTAL-SUBSPEC SECTION 02052 | | | | 43 | | 140 | | 132 |
| 02053 | SITE UTILITIES | | | | | | | | |
| BCBA | REMOVAL OF PLAIN CONC CURBS | 80.00 | LF | 0.25 | 20 | 0.60 | 48 | 0.30 | 24 |
| BCBF | REMOVAL OF PLAIN CONC CURB AND 2FT GUTTER | 93.00 | LF | 0.58 | 54 | 1.38 | 128 | 0.67 | 62 |
| BCBF | REMOVAL OF PLAIN CONC CURB AND 2FT GUTTER | 87.00 | LF | 0.58 | 50 | 1.38 | 120 | 0.67 | 58 |
| BCEB | REMOVE AND RESET FIRE HYDRANT | 1.00 | EA | 0.00 | 0 | 427.13 | 427 | 154.69 | 155 |
| | SUBTOTAL-SUBSPEC SECTION 02053 | | | | 124 | | 723 | | 299 |
| | SUBTOTAL-SPEC SECTION 02050 | | | | 168 | | 863 | | 431 |
| | CONTRACT COST | 1.427 | | | 239 | 1.619 | 1397 | 1.427 | 615 |
| | TOTAL FOR SPEC SECTION 02050 | | | | | | | | 2251 |
| 02200 | EARTHWORK- | | | | | | | | |
| 02202 | CLEAR AND GRUB | | | | | | | | |
| BFBB | CLEAR AND GRUB MEDIUM DENSE AREAS W/DISPOSAL | 0.33 | ACR | 0.00 | 0 | 553.10 | 183 | 798.52 | 264 |
| | SUBTOTAL-SUBSPEC SECTION 02202 | | | | 0 | | 183 | | 264 |
| 02210 | SITE GRADING | | | | | | | | |
| BGAAK | SITE GRADING BALANCE CUT & FILL SANDY CLAY 200 FT 75HP DOZER | 333.33 | CY | 0.00 | 0 | 1.46 | 487 | 1.14 | 380 |
| BGAAN | SPREAD TOPSOIL BY EQUIP FROM PILES ON SITE (LEVEL SITE) | 183.00 | CY | 0.00 | 0 | 8.58 | 1571 | 0.91 | 167 |

**Figure 27**
**Detailed Backup Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281 PRINTING DATE: 09/10/87 14
SPEC SECTION DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 2

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| BGAEAC | BULK EXCAVATION WITH 1CY BACKHOE UNCLASSIFIED EARTH | 18.56 | CY | 0.00 | 0 | 0.38 | 7 | 0.91 | 17 |
| | SUBTOTAL-SUBSPEC SECTION 02210 | | | | 0 | | 2065 | | 563 |
| 02214 BORROW | | | | | | | | | |
| BGCBF | HAUL BORROW FILL SAND TO SITE UP TO 20 MI ROUND TRIP | 75.00 | CY | 0.00 | 0 | 0.74 | 55 | 1.55 | 116 |
| BGCBJ | BORROW FILL SAND COMPACT IN PLACE W/ HAUL TO SITE UP TO 30 MI RO | 806.00 | CY | 2.25 | 1813 | 2.17 | 1747 | 3.74 | 3014 |
| BGCBJ | BORROW FILL IN PLACE W/ HAUL TO SITE UP TO 30 MI RO | 16.00 | CY | 2.25 | 36 | 2.17 | 35 | 3.74 | 60 |
| BGCBLA | GRAVEL POROUS FILL UNDER FLOOR SLABS 90-100 3/4 SIEVE | 89.00 | CY | 15.38 | 1369 | 1.26 | 112 | 2.64 | 235 |
| | SUBTOTAL-SUBSPEC SECTION 02214 | | | | 3218 | | 1949 | | 3425 |
| 02221 | UTILITIES TRENCH AND BACKFILL | | | | | | | | |
| BIFAP | TRENCH EXCAV BACKFILL & COMPACTION BY UTILITY TRACTOR W/2' WIDE BKHOE | 38.22 | CY | 0.00 | 0 | 1.67 | 64 | 2.72 | 104 |
| BIFAP | TRENCH EXCAV BACKFILL & COMPACTION BY UTILITY TRACTOR W/2' WIDE BKHOE | 3.33 | CY | 0.00 | 0 | 1.67 | 6 | 2.72 | 9 |
| BIFAP | TRENCH EXCAV BACKFILL & COMPACTION BY UTILITY TRACTOR W/2' WIDE BKHOE | 27.78 | CY | 0.00 | 0 | 1.67 | 46 | 2.72 | 76 |
| BIFAP | TRENCH EXCAV, BACKFILL, & COMPACTION BY UTILITY TRACTOR W/ 2' | 3.33 | CY | 0.00 | 0 | 1.67 | 6 | 2.72 | 9 |
| | SUBTOTAL-SUBSPEC SECTION 02221 | | | | 0 | | 121 | | 198 |
| 02222 | STRUCTURE EXCAVATION | | | | | | | | |
| BIGDA | STRUCTURAL EXCAVATION HAND TRIMMING & SHAPING UNCLASSIFIED E | 144.00 | CY | 0.00 | 0 | 11.99 | 1726 | 0.00 | 0 |
| BIGDA | LOADING DOCK RAMP CANOPY HAND TRIMMING & SHAPING UNCLASSIFIED E | 54.00 | CY | 0.00 | 0 | 11.99 | 647 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 02222 | | | | 0 | | 2374 | | 0 |
| | SUBTOTAL-SPEC SECTION 02200 | | | | 3218 | | 6691 | | 4450 |
| | CONTRACT COST | | | 1.427 | 4593 | 1.619 | 10833 | 1.427 | 6350 |
| | TOTAL FOR SPEC SECTION 02200 | | | | | | | | 21776 |
| 02250 | SOIL TREAT. FOR SUBTER. TERMITE CON | | | | | | | | |
| 02250 | SOIL TREAT. FOR SUBTER. TERMITE CON | | | | | | | | |
| BLAAA | SOIL TREATMENT TERMITE CONTROL PRETREATMENT UNDER SLABS SM | 8020.00 | SF | 0.02 | 160 | 0.19 | 1517 | 0.07 | 561 |

Figure 27 (Continued)
Detailed Backup Report - Specification Section



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 9

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| | SUBTOTAL-SUBSPEC SECTION 04202 | | | | 7057 | | 4621 | | 0 |
| | SUBTOTAL-SPEC SECTION 03300 | | | | 58564 | | 29948 | | 3113 |
| | CONTRACT COST | | | 1.294 | 75782 | 1.468 | 43964 | 1.294 | 4028 |
| | TOTAL FOR SPEC SECTION 03300 | | | | | | | | 123774 |
| | SUBTOTAL SPEC DIVISION 03 | | | | 75782 | | 43964 | | 4028 |
| | | | | | | | | | 123774 |
| 04200 | UNIT MASONRY | | | | | | | | |
| 04200 | UNIT MASONRY | | | | | | | | |
| FAFK | MORTAR FILLED CMU CELLS 4" WIDE TYPE S | 919.00 | SF | 0.14 | 129 | 0.32 | 298 | 0.03 | 28 |
| FAGO | MORTAR FILLED INDIVIDUAL CMU CELLS 12" WIDE TYPE S | 784.00 | VLF | 0.82 | 643 | 0.48 | 376 | 0.05 | 39 |
| FAGO | MORTAR FILLED INDIVIDUAL CMU CELLS 12" WIDE TYPE S | 3504.00 | VLF | 0.82 | 2873 | 0.48 | 1682 | 0.05 | 175 |
| FCOC | REINF-TRUSS TYPE HEAVY PLAIN 8" WIDE | 2464.00 | LF | 0.11 | 271 | 0.06 | 148 | 0.00 | 0 |
| FCOE | REINF-TRUSS TYPE HEAVY PLAIN 12" WIDE | 6966.00 | LF | 0.12 | 836 | 0.08 | 585 | 0.00 | 0 |
| FCPCA | FLEXIBLE METAL TIES | 171.00 | EA | 0.15* | 26 | 0.18* | 31 | 0.00* | 0 |
| FCPE | REINF-TRUSS TYPE HEAVY GALV 12" WIDE | 860.00 | LF | 0.22 | 189 | 0.08 | 72 | 0.00 | 0 |
| FFAJ | BOND BEAM 8TK 8HGT W/O GROUT OR REINF | 441.00 | LF | 1.11 | 490 | 1.69 | 746 | 0.03 | 13 |
| FFAN | BOND BEAM 12TK 8HGT W/O GROUT OR REINF | 387.00 | LF | 1.19 | 461 | 2.11 | 817 | 0.03 | 12 |
| FFAN | BOND BEAM 12TK 8HGT W/O GROUT OR REINF | 1869.00 | LF | 1.19 | 2224 | 2.11 | 3947 | 0.03 | 56 |
| FFDJ | PRECAST MASONRY LINTEL 8"WX8"H (6.5LF TO 10LF) | 29.00 | LF | 5.50 | 159 | 1.51 | 44 | 0.00 | 0 |
| FFJF | CMU HOLLOW 4" RGLR WT LOAD BEARING | 919.00 | SF | 0.81 | 744 | 2.15 | 1974 | 0.03 | 28 |
| FFJF | CMU HOLLOW 4" RGLR WT LOAD BEARING | 138.00 | SF | 0.81 | 112 | 2.15 | 296 | 0.03 | 4 |
| FFJJ | CMU HOLLOW 8" RGLR WT LOAD BEARING | 4941.00 | SF | 1.29 | 6374 | 2.51 | 12392 | 0.05 | 247 |
| FFJN | CMU HOLLOW 12" RGLR WT LOAD BEARING | 2063.00 | SF | 1.72 | 3548 | 3.10 | 6387 | 0.06 | 124 |
| FFJN | CMU HOLLOW 12" RGLR WT LOAD BEARING | 7769.00 | SF | 1.72 | 13363 | 3.10 | 24053 | 0.06 | 466 |
| | SUBTOTAL-SUBSPEC SECTION 04200 | | | | 32441 | | 53849 | | 1192 |
| | SUBTOTAL-SPEC SECTION 04200 | | | | 32441 | | 53849 | | 1192 |
| | CONTRACT COST | | | 1.427 | 46294 | 1.619 | 87182 | 1.427 | 1700 |
| | TOTAL FOR SPEC SECTION 04200 | | | | | | | | 135176 |

**Figure 27 (Continued)**
**Detailed Backup Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 202640-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 10

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| 04520 MASONRY RESTORATION | | | | | | | | | |
| 04520 MASONRY RESTORATION | | | | | | | | | |
| FUX | COATING ON CMU WALLS | | | | | | | | |
| | CUT FACE | 2063.00 | SF | 0.30* | 619 | 0.48* | 990 | 0.83 | 1712 |
| | SUBTOTAL-SUBSPEC SECTION 04520 | | | | 619 | | 990 | | 1712 |
| | SUBTOTAL-SPEC SECTION 04520 | | | | 619 | | 990 | | 1712 |
| | CONTRACT COST | | | 1.427 | 883 | 1.619 | 1603 | 1.427 | 2443 |
| | TOTAL FOR SPEC SECTION 04520 | | | | | | | | 4930 |
| | SUBTOTAL SPEC DIVISION 04 | | | | 47177 | | 88785 | | 4144 |
| | | | | | | | | | 140106 |
| 05120 STRUCTURAL STEEL | | | | | | | | | |
| 05120 STRUCTURAL STEEL | | | | | | | | | |
| G88C | ANGLE CROSS BRIDGING & BRACING A-36 | 6335.00 | LB | 0.52 | 3294 | 0.19 | 1204 | 0.00 | 0 |
| GBPC | MISC SHAPES (ANGLES,BARS CHANNELS ETC) | 20.00 | LB | 0.52 | 10 | 0.23 | 5 | 0.00 | 0 |
| GBPC | MISC SHAPES (ANGLES,BARS CHANNELS ETC) | 1010.00 | LB | 0.52 | 525 | 0.23 | 232 | 0.00 | 0 |
| GBPD | MISC STL SHAPES A36 | 168.00 | LB | 0.48 | 81 | 0.25 | 42 | 0.00 | 0 |
| GBPD | MISC STL SHAPES A36 CANOPY FRAMING | 1749.00 | LB | 0.48 | 840 | 0.25 | 437 | 0.00 | 0 |
| GBPD | MISC STL SHAPES A36 | 256.00 | LB | 0.48 | 123 | 0.25 | 64 | 0.00 | 0 |
| GBPD | MISC STL SHAPES A36 | 1235.00 | LB | 0.48 | 593 | 0.25 | 309 | 0.00 | 0 |
| GBPE | MISC STL SHAPES A36 2"X2"X1/4" ANGLE FOR TRENCH GRATING FRAME | 1334.00 | LB | 0.77 | 1027 | 0.25 | 333 | 0.00 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 05120 | | | | 6493 | | 2626 | | 0 |
| | SUBTOTAL-SPEC SECTION 05120 | | | | 6493 | | 2626 | | 0 |
| | CONTRACT COST | | | 1.427 | 9265 | 1.619 | 4252 | 1.427 | 0 |
| | TOTAL FOR SPEC SECTION 05120 | | | | | | | | 13517 |
| 05210 STEEL JOISTS | | | | | | | | | |
| 05210 STEEL JOISTS | | | | | | | | | |
| GFU | JOIST "H" SERIES | 11.10 | TN | 638.00 | 7082 | 141.29 | 1568 | 0.42 | 5 |
| | SUBTOTAL-SUBSPEC SECTION 05210 | | | | 7082 | | 1568 | | 5 |
| | SUBTOTAL-SPEC SECTION 05210 | | | | 7082 | | 1568 | | 5 |
| | CONTRACT COST | | | 1.427 | 10106 | 1.619 | 2539 | 1.427 | 7 |
| | TOTAL FOR SPEC SECTION 05210 | | | | | | | | 12651 |
| 05311 STEEL ROOF DECKING | | | | | | | | | |
| 05311 STEEL ROOF DECKING | | | | | | | | | |
| GHPFGH | ROOF DECK MET 20 GA SHOP PRIMED 1-1/2" DP NON-COMPOSITE & NO | 7253.00 | SF | 0.73 | 5295 | 0.13 | 943 | 0.00 | 0 |
| GHPFGH | ROOF DECK MET 20 GA SHOP PRIMED 1-1/2" DP NON-COMPOSITE & NO | 420.00 | SF | 0.73 | 307 | 0.13 | 55 | 0.00 | 0 |

Figure 27 (Continued)
Detailed Backup Report - Specification Section



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 11

| | | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|---|
| | SUBTOTAL-SUBSPEC SECTION 05311 | | | | 5601 | | 997 | | 0 |
| | SUBTOTAL-SPEC SECTION 05311 | | | | 5601 | | 997 | | 0 |
| | CONTRACT COST | | | 1.427 | 7993 | 1.619 | 1615 | 1.427 | 0 |
| | TOTAL FOR SPEC SECTION 05311 | | | | | | | | 9608 |
| 05400 COLD-FORMED METAL FRAMING | | | | | | | | | |
| 05400 COLD-FORMED METAL FRAMING | | | | | | | | | |
| GKCDG | SUSP SYS PLAS & GYP BD CEILINGS 1-1/2" GALV ATTACHED TO JO | 237.00 | SF | 0.37 | 88 | 0.46 | 109 | 0.01 | 2 |
| | SUBTOTAL-SUBSPEC SECTION 05400 | | | | 88 | | 109 | | 2 |
| | SUBTOTAL-SPEC SECTION 05400 | | | | 88 | | 109 | | 2 |
| | CONTRACT COST | | | 1.427 | 125 | 1.619 | 177 | 1.427 | 3 |
| | TOTAL FOR SPEC SECTION 05400 | | | | | | | | 305 |
| 05500 METAL FABRICATIONS | | | | | | | | | |
| 05500 METAL FABRICATIONS | | | | | | | | | |
| GLBFH | ANCHOR BOLTS 3/8"X10" LG | 14.00 | EA | 1.91 | 27 | 1.55 | 22 | 0.03 | 0 |
| GLFHS | EXP SHIELD INCL DRILLING 1/2" 1-UNIT | 100.00 | EA | 1.41 | 141 | 11.20 | 1120 | 1.91 | 191 |
| GLFHS | EXP SHIELD INCL DRILLING 1/2" 1-UNIT | 14.00 | EA | 1.41 | 20 | 11.20 | 157 | 1.91 | 27 |
| GLJJAC | BOLT HS 3/8"DIA 1" THRU 1-3/4" LG W/POS LOCK NUT ASTM A-325 | 391.00 | EA | 0.86 | 336 | 0.00 | 0 | 0.00 | 0 |
| GLJJAC | BOLT HS 5/8" DIA 1" THRU 1-3/4" LG W/POS LOCK NUT ASTM A-325 | 28.00 | EA | 0.86 | 24 | 0.00 | 0 | 0.00 | 0 |
| GLVL-E | 5/8" X 14" THRU BOLTS | 44.00 | EA | 4.60* | 202 | 5.00* | 220 | 2.00* | 88 |
| GNF | CHANNEL DOOR FR W/ANCHOR | 3199.00 | LB | 0.83 | 2655 | 0.15 | 480 | 0.00 | 0 |
| GPEIM | GRATING GALV STL RECT 1-1/2 X 3/16" BEARING BAR | 49.00 | SF | 7.40 | 363 | 0.45 | 22 | 0.01 | 0 |
| GPEIM | GRATING GALV STL RECT 2"X3/16" BEARING BAR | 560.00 | SF | 7.40 | 4144 | 0.45 | 252 | 0.01 | 6 |
| GPKL | GRATING ADD FOR STRAIGHT BANDING (EDGES) | 844.00 | LF | 2.36 | 1992 | 0.00 | 0 | 0.00 | 0 |
| GQUX | STAIR TREAD NOSING EXTRUDED ALUM 4" X1/4"TK | 176.00 | LF | 4.50* | 792 | 2.00* | 352 | 0.00* | 0 |
| GSLFJT | CUSTOM STEEL STAIR RAIL 1-1/2" DIA 3-RAIL WELDED STL W/3/4"SQ BALLUSTER | 131.00 | LF | 32.00* | 4192 | 2.50* | 327 | 0.03 | 4 |
| GSLFRT | RAILING PIPE 1-1/2" DIA WALL MTD WELDED STL | 7.00 | LF | 4.11 | 29 | 2.00 | 14 | 0.02 | 0 |
| | SUBTOTAL-SUBSPEC SECTION 05500 | | | | 14917 | | 2966 | | 316 |
| | SUBTOTAL-SPEC SECTION 05500 | | | | 14917 | | 2966 | | 316 |
| | CONTRACT COST | | | 1.427 | 21286 | 1.619 | 4802 | 1.427 | 451 |
| | TOTAL FOR SPEC SECTION 05500 | | | | | | | | 26539 |
| | SUBTOTAL SPEC DIVISION 05 | | | | 48775 | | 13384 | | 461 |
| | | | | | | | | | 62620 |

**Figure 27 (Continued)**
**Detailed Backup Report - Specification Section**



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 12

| | QUAN | U/M | MUP | EXT | LUP | EXT | EUP | EXT |
|---|---|---|---|---|---|---|---|---|
| 06100 ROUGH CARPENTRY | | | | | | | | |
| 06100 ROUGH CARPENTRY | | | | | | | | |
| HABVGZ BLOCKING & NAILERS | | | | | | | | |
| SYP NO 2 COMMON TREATED | 763.00 | BF | 0.41 | 313 | 0.64 | 488 | 0.10 | 76 |
| HABVGZ BLOCKING & NAILERS | | | | | | | | |
| SYP NO 2 COMMON TREATED | 10.00 | BF | 0.41 | 4 | 0.64 | 6 | 0.10 | 1 |
| HAE2R CANT STRIPS 4X4 FIBERBD | 110.00 | LF | 0.29 | 32 | 0.40 | 44 | 0.07 | 8 |
| SUBTOTAL-SUBSPEC SECTION 06100 | | | | 349 | | 539 | | 85 |
| SUBTOTAL-SPEC SECTION 06100 | | | | 349 | | 539 | | 85 |
| CONTRACT COST | | 1.294 | | 451 | 1.468 | 791 | 1.294 | 110 |
| TOTAL FOR SPEC SECTION 06100 | | | | | | | | 1352 |
| SUBTOTAL SPEC DIVISION 06 | | | | 451 | | 791 | | 110 |
| | | | | | | | | 1352 |
| 07160 BITUMINOUS DAMPPROOFING | | | | | | | | |
| 07160 BITUMINOUS DAMPPROOFING | | | | | | | | |
| IBEHS BITUM MTRPRFG BRUSH ON | | | | | | | | |
| 1 COAT | 3094.00 | SF | 0.10 | 309 | 0.13 | 408 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 07160 | | | | 309 | | 408 | | 0 |
| SUBTOTAL-SPEC SECTION 07160 | | | | 309 | | 408 | | 0 |
| CONTRACT COST | | 1.427 | | 442 | 1.619 | 661 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 07160 | | | | | | | | 1103 |
| 07220 ROOF INSULATION | | | | | | | | |
| 07220 ROOF INSULATION | | | | | | | | |
| IENR INSULATION RGD PERLITE | | | | | | | | |
| ROOF TAPERED 3/16"/LF | | | | | | | | |
| MM-I-529 | 136.00 | BF | 0.39 | 53 | 0.10 | 13 | 0.00 | 0 |
| IENRI INSULATION RGD PERLITE | | | | | | | | |
| ROOF 5.25" TK C=.07 | | | | | | | | |
| R=14.29 MM-I-5 | 7435.00 | SF | 1.47 | 10929 | 0.21 | 1554 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 07220 | | | | 10982 | | 1567 | | 0 |
| SUBTOTAL-SPEC SECTION 07220 | | | | 10982 | | 1567 | | 0 |
| CONTRACT COST | | 1.427 | | 15672 | 1.619 | 2538 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 07220 | | | | | | | | 18210 |
| 07230 PERIMETER & UNDER-SLAB INSULATION | | | | | | | | |
| 07230 PERIMETER & UNDER-SLAB INSULATION | | | | | | | | |
| IEOPD INSULATION RGD URETHANE | | | | | | | | |
| PERIMETER OR WALL 1" TK | | | | | | | | |
| R=6.67 C=.15 H | 2837.00 | SF | 0.32 | 908 | 0.19 | 531 | 0.00 | 0 |
| SUBTOTAL-SUBSPEC SECTION 07230 | | | | 908 | | 531 | | 0 |
| SUBTOTAL-SPEC SECTION 07230 | | | | 908 | | 531 | | 0 |
| CONTRACT COST | | 1.427 | | 1295 | 1.619 | 859 | 1.427 | 0 |
| TOTAL FOR SPEC SECTION 07230 | | | | | | | | 2154 |

Figure 27 (Continued)
Detailed Backup Report - Specification Section



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.6 Input Listing (Sorted). Figure 28 is an example of a printout of loaded data.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COST ENGINEERING SYSTEM  LISTING OF : ESTIMATE INPUT FOR E1833281  DATE: 09/10/87  PAGE: 1

```
00 01 01 14
01 ENGINEERING
02 N62470-83-B-3281 P-734
03 HAZARDOUS/FLAMMABLE STORAGE BUILDING
04 441-30
05 N.A.S. OCEANA, VA.BEACH, VIRGINIA
06 N60191
07 05/22/88
08 CEK FA FRI NEP
09    8168.00
10 SF
11 09/11/85
12 01
13 A 03XXX  4.0 18.0  4.0 12 12 12 10 10 10 1.00  0   0  0.00
13 A 06XXX
13 A 08XXX
14 A XXXXX  4.0 18.0  4.0 12 12 12 10 10 10  5  5  5  5  5 1.00  0   0  0.00
17 02XXX      1.000 1.720 1.000
17 04XXX      1.000 1.200 1.000
17 07XXX      1.000 1.100 1.000
17 02680      1.000 1.200 1.000
17 XXXXX      1.000 1.000 1.000
17 16XXX      1.050 1.050 1.050
000 SYSDC1      0.00          0.00  01000 01000          0.00       0.00      0.00 1-STORY CONC MASONRY UNIT STRUC SPRE
                                                                                   AD FOOTG W/REINF
000 SYSDC2      0.00          0.00  01000 01000          0.00       0.00      0.00 CONC FLOOR SLAB ON FILL, STL BAR JOISTS
                                                                                   AND META DECK ROOF
000 SYSDC3      0.00          0.00  01000 01000          0.00       0.00      0.00 CONST W/ BALLAST SGL PLY MEMBR ROOF OVER
                                                                                   RIGID INSUL
000 SYSDC4      0.00          0.00  01000 01000          0.00       0.00      0.00 PLUMBING,HEATING, VENTILATION AND
                                                                                   ELECT WORK
011 AAAAAA      1.00 LS       0.00                       0.00       0.00      0.00 ADDITIVE ITEM
011 BCAL       37.00 SY       0.00  02050 02052          0.00       0.30      1.05 REMOVAL OF CONC SIDEWALK 4" THICK W/DISP
                                                                                   OSAL
011 BCAL        1.11 SY       0.00  02050 02052          0.00       0.30      1.05 REMOVAL OF CONC SIDEWALK 4" THICK W/DISP
                                                                                   OSAL
011 BC8F       87.00 LF       0.00  02050 02053          0.58       0.80      0.67 REMOVAL OF PLAIN CONC CURB AND 2FT GU
                                                                                   TTER
011 BCEB        1.00 EA       0.00  02050 02053          0.00     248.33    154.69 REMOVE AND RESET FIRE HYDRANT
011 BIFAP       3.33 CY       0.00  02200 02221          0.00       0.97      2.72 TRENCH EXCAV, BACKFILL, & COMPACTION BY
                                                                                   UTILITY TRACTOR W/ 2'
011 CIAKX     372.00 SY       0.00                       0.00       0.00      0.00
011 CMBA       65.00 LF       0.00  03300 03251          1.76       2.76      0.00 CONC CURB 6X18 CAST-IN- PLACE VDH CG-2
011 CMBI       39.00 SY       0.00  03300 03251         10.00       9.00      0.00 CONC VALLEY GUTTER CG-10 CAST-IN-PLACE
011 CXAE      372.00 SY       1.50  02672 02672          0.29       0.02      0.05 BITUMINOUS PRIME COAT (RC-70) OR (MC-
                                                                                   70)
011 CXDE      372.00 SY     150.00  02680 02680          2.96       0.31      0.49 ASPHALT WEARING/SURFACE COURSE FOR FLEX
                                                                                   IBLE PVM 2" THK
011 CXDQ      372.00 SY      66.00  02680 02680          0.50       0.08      0.00 POLYPROPYLENE NONWOVEN PAVING FABRIC
011 DQGLX       1.00 EA      64.00  02713 02711        370.01      56.06     17.75 8X6 TAPPING SLEEVE
```

**Figure 28**
**Input Listing (Sorted)**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COST ENGINEERING SYSTEM LISTING OF : ESTIMATE INPUT FOR E1833281 DATE: 09/10/87 PAGE: 2

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 011 DOGLYK | 1.00 EA | 64.00 | 02713 02711 | 332.02 | 94.63 | 30.00 | 6 INCH TAPPING VALVE MJ |
| 011 DOGLYP | 1.00 EA | 64.00 | 02713 02711 | 0.00 | 100.87 | 112.22 | TAP 6 INCH HOLE IN PIPE |
| 011 LOUEP | 16.00 EA | 443.00 | 10500 10500 | 80.80 | 7.84 | 1.31 | LOCKER STD 12WX60HX15D BAKED ON ENAMEL 1-TIER |
| 011 MVESRR | 1.00 EA | 5500.00 | 11162 11162 | 2700.00 | 175.00 | 2.62 | QUOTE FROM MONTGOMERY DOOR INC CAR TY PE 1 |
| 011 MVLRME | 17.00 EA | 31.00 | 11162 11162 | 63.00 | 9.84 | 1.61 | LAMINATED RUBBER BUMPERS 6" TK 10"X36" |
| 011 NCVHHL | 4.17 LF | 0.00 | 12331 12331 | 42.00 | 19.04 | 0.40 | VANITY WITH BACK SPLASH LAMINATED PLAST IC OVER PLYWOOD W/WALL |
| 011 VMMA | 68.00 EA | 0.14 | 16402 16110 | 1.16 | 3.36 | 0.00 | 1/2" ROD BEAM CLAMP |
| 011 VMME | 450.00 LF | 1.26 | 16402 16110 | 2.54 | 1.26 | 0.00 | 3/8" ALL THREAD ROD |
| 011 VMMHA | 450.00 LF | 0.00 | 16402 16110 | 1.13 | 1.68 | 0.00 | 1-1/2" HANGER CHANNEL HOLES |
| 011 VMNE | 68.00 EA | 0.00 | 16402 16110 | 0.50 | 1.00 | 0.00 | 1/4" BOLT |
| 011 VMNF | 240.00 EA | 0.00 | 16402 16110 | 0.34 | 1.00 | 0.00 | 1" NUT & LOCK WASHER |
| 011 ZA51 | 4.00 EA | 0.00 | 16510 16510 | 115.71 | 25.17 | 0.00 | EMER. SHELF MT. BATT. PACK UNIT W/2 H EADS LEA CAL. LITH ELU- |
| 011 ZA91D | 136.00 EA | 0.00 | 16510 16510 | 1.30 | 0.00 | 0.00 | LAMP 40W MED. BIPIN BASE F40T12/CW/RS 48 " |
| 011 ZAA8D | 34.00 EA | 0.00 | 16510 16510 | 134.85 | 21.68 | 0.00 | 8' 4F40 LAMPS PLASTIC HOUSING WET LOC . FLUOR. LITH. 8500240A |
| 011 ZHA | 24.00 HR | 0.00 | 16302 16570 | 0.00 | 8.88 | 22.40 | POLE LINE / BUCKET TRUCK |
| 011 ZHAB | 8.00 HR | 0.00 | 16302 16570 | 0.00 | 8.88 | 26.40 | POLE CAT (AUGER) W/TRLR |
| 011 ZLLA | 1.00 EA | 2857.00 | 16302 16570 | 211.20 | 63.77 | 0.00 | WOOD POLE TRTD/CCA/ACA 40 LF CL 2 TYPE C |
| 011 ZM#Z8 | 3.00 EA | 0.00 | 16302 16570 | 68.25 | 46.17 | 0.00 | POLE PLATE 16302L-35, DN GUY 0-15KV W /10" ANCHOR, 2.4 M. |
| 011 ZURAI | 1.00 JOB | 0.00 | 16402 16120 | 25.00 | 588.00 | 0.00 | REM & REL EXIST TEL CABLE |
| 111 AAAAAA | 8020.00 SF | 0.00 | | 0.00 | 0.00 | 0.00 | FOUNDATION |
| 111 BGCBJ | 806.00 CY | 0.00 | 02200 02214 | 2.25 | 1.26 | 3.74 | BORROW FILL SAND COMPACT IN PLACE W/ HAU L TO SIT UP TO 30 MI RO |
| 111 BIGDA | 144.00 CY | 0.00 | 02200 02222 | 0.00 | 6.97 | 0.00 | STRUCTURAL EXCAVATION HAND TRIMMING & SHAPING UNCLASSIFIED E |
| 111 BLAAA | 8020.00 SF | 0.05 | 02250 02250 | 0.02 | 0.11 | 0.07 | SOIL TREATMENT TERMITE CONTROL PRETREA TMENT UNDER SLABS SM |
| 111 EBIRC | 774.00 SF | 3.62 | 03300 03100 | 0.63 | 1.25 | 0.05 | FORM FTG & PILE CAP PLYWD 3-USE |
| 111 EFDE | 0.48 TN | 2000.00 | 03300 04202 | 520.00 | 379.38 | 0.00 | REBAR #5-#6 BOND BEAMS |
| 111 EFDI | 2.12 TN | 2000.00 | 03300 04202 | 962.00 | 379.38 | 0.00 | REBAR #5-#6 GALV BOND BEAMS |
| 111 EFFE | 0.85 TN | 2000.00 | 03300 03200 | 520.00 | 231.68 | 0.00 | REBAR #5-#6 FOUNDATIONS |
| 111 EFIE | 1.97 TN | 2000.00 | 03300 04202 | 520.00 | 397.29 | 0.00 | REBAR #5-#6 MASONRY WALL VERT |
| 111 EHTT | 108.00 LF | 0.00 | 03300 03300 | 1.25 | 0.20 | 0.00 | RUBBER CONTROL JOINT |
| 111 EKIMP | 164.00 CY | 0.00 | 03300 03301 | 52.73 | 5.12 | 0.79 | PLACE CONC 2500 OR 3000# FTG OR PILE CAP BY HAND BUGGY |
| 111 ENEZC | 387.00 LF | 0.00 | 03300 03301 | 0.68 | 0.31 | 0.08 | CONC FOR BOND BEAM 3000# 8"H X 12"W |
| 111 ENFZC | 1869.00 LF | 0.00 | 03300 03301 | 1.67 | 1.53 | 0.39 | CONC FOR BOND BEAM 3000# 16"H X 12"W |
| 111 FAGO | 784.00 VLF | 0.00 | 04200 04200 | 0.82 | 0.40 | 0.05 | MORTAR FILLED INDIVIDUAL CMU CELLS 12" W IDE TYPE S |
| 111 FCPE | 860.00 LF | 0.74 | 04200 04200 | 0.22 | 0.07 | 0.00 | REINF-TRUSS TYPE HEAVY GALV 12" WIDE |
| 111 FFAN | 387.00 LF | 10607.00 | 04200 04200 | 1.19 | 1.76 | 0.03 | BOND BEAM 12TK 8HGT W/O GROUT OR RE JNF |
| 111 FFJN | 2063.00 SF | 0.00 | 04200 04200 | 1.72 | 2.58 | 0.06 | CMU HOLLOW 12" RGLR WT LOAD BEARING |

Figure 28 (Continued)
Input Listing (Sorted)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# PART 4: OTHER TYPES OF ESTIMATES



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 19: ESTIMATES FOR CHANGE ORDERS

19.1 Estimates for Change Orders. Estimates for change orders to the contract plans and specifications shall be accomplished with adequate backup to negotiate. These estimates must use the "Estimate for Change Order" summary sheet (NAVFAC 4330/43). Estimates and summaries must be prepared for both increases and decreases in contract cost. Documentation must also be provided for "no-cost" changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

19.2 Sample Change Order Estimate. Figure 29 is an example of a change order estimate summary.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

**PROPOSAL/ESTIMATE FOR CONTRACT MODIFICATION** **DATE:** 15 July 1987

*NAVFAC 4330/43 (8/88)*

**CONTRACT TITLE:** Leachate Collection/Treatment System, Little Creek **CONTRACT NO:** 81-1762

**ROICC OFFICE:** Little Creek

**DESCRIPTION:** Lagoons #1 and #2 Modification

| PRIME CONTRACTOR'S WORK | | | | | Revisions/Comments |
|---|---|---|---|---|---|
| 1. Direct Materials | | | | | |
| 2. Sales Tax on Materials | ___% of line 1 | % | | | |
| 3. Direct Labor | | | | | |
| 4. Insurance, Taxes, and Fringe Benefits | ___% of line 3 | % | | | |
| 5. Rental Equipment | | | | | |
| 6. Sales Tax on Rental Equipment | ___% of line 5 | % | | | |
| 7. Equipment Ownership and Operating Expenses | | | | | |
| 8. SUBTOTAL (add lines 1 - 7) | | | | | |
| 9. Field Overhead | 10.00% of line 8 | % | | | |
| 10. SUBTOTAL (Add Lines 8 & 9) | | | | | |

Prime Remarks:

| SUB-CONTRACTOR'S WORK | | | | | |
|---|---|---|---|---|---|
| 11. Direct Materials | | | | 4,773 | |
| 12. Sales Tax on Materials | 4.5% of line 11 | 4.5 % | | 215 | |
| 13. Direct Labor | | | | 2,386 | |
| 14. Insurance, Taxes, and Fringe Benefits | 20 % of line 13 | 20 % | | 477 | |
| 15. Rental Equipment | | | | | |
| 16. Sales Tax on Rental Equipment | ___% of line 15 | % | | | |
| 17. Equipment Ownership and Operating Expenses | | | | | |
| 18. SUBTOTAL (add lines 11 - 17) | | | | | 7,851 |
| 19. Field Overhead | 10.00% of line 18 | 10 % | | 785 | |
| 20. SUBTOTAL (add lines 18 & 19) | | | | | 8,636 |
| 21. Home Office Overhead | 3.00% of line 20 | 3 % | | 259 | |
| 22. Profit | 10 % of line 20 | 10 % | | 869 | |
| 23. SUBTOTAL (Add Lines 20 - 22) | | | | | 9,764 |

Sub's Remarks:

| SUMMARY | | | | |
|---|---|---|---|---|
| 24. Prime Contractor's Work (from line 10) | | | | |
| 25. Sub-contractor's Work (from line 23) | | | 9,764 | |
| 26. SUBTOTAL (add lines 24 & 25) | | | | 9,764 |
| 27. Prime Overhead on sub-contractor | 5.00% of line 25 | 5 % | 488 | |
| 28. Prime's Home Office Overhead | 3.00% of line 24 | % | | |
| 29. Prime's Profit | 10 % of line 26 | 10 % | 976 | |
| 30. SUBTOTAL (add lines 26 - 29) | | | | 11,228 |
| 31. Prime Contractor's Bond Premium | 1/2 % of line 30 | 1/2 % | 56 | |
| 32. TOTAL COST (Add Lines 30 & 32) | | | | 11,284 |

Estimated time extension and justification

Prime Contractor name:

Sub-contractor name: Code 407


Signature & Title of preparer

Date

Figure 29
Change Order Estimate



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

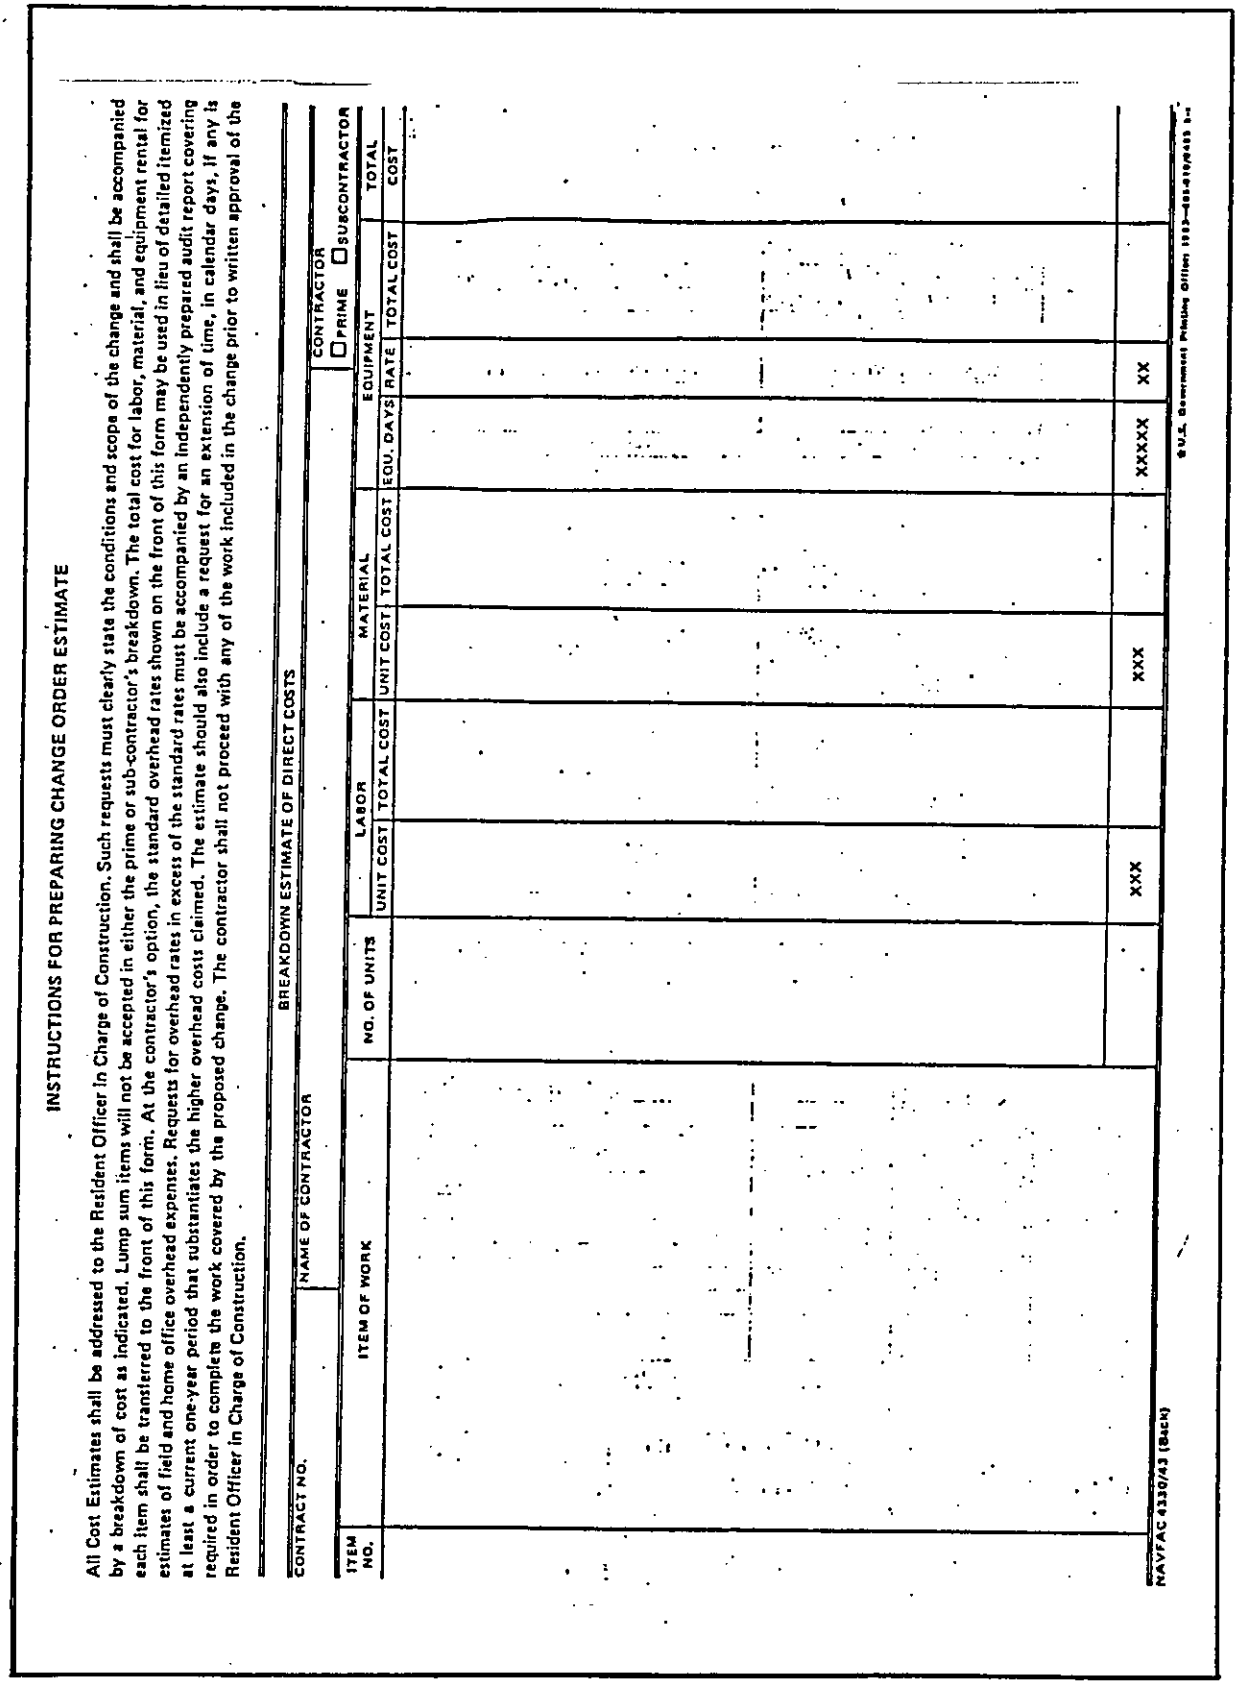

INSTRUCTIONS FOR PREPARING CHANGE ORDER ESTIMATE

All Cost Estimates shall be addressed to the Resident Officer in Charge of Construction. Such requests must clearly state the conditions and scope of the change and shall be accompanied by a breakdown of cost as indicated. Lump sum items will not be accepted in either the prime or sub-contractor's breakdown. The total cost for labor, material, and equipment rental for each item shall be transferred to the front of this form. At the contractor's option, the standard overhead rates shown on the front of this form may be used in lieu of detailed itemized estimates of field and home office overhead expenses. Requests for overhead rates in excess of the standard rates must be accompanied by an independently prepared audit report covering at least a current one-year period that substantiates the higher overhead costs claimed. The estimate should also include a request for an extension of time, in calendar days, if any is required in order to complete the work covered by the proposed change. The contractor shall not proceed with any of the work included in the change prior to written approval of the Resident Officer in Charge of Construction.

BREAKDOWN ESTIMATE OF DIRECT COSTS

CONTRACT NO. | NAME OF CONTRACTOR | CONTRACTOR ☐ PRIME ☐ SUBCONTRACTOR

| ITEM NO. | ITEM OF WORK | NO. OF UNITS | LABOR | | | MATERIAL | | | EQUIPMENT | | | TOTAL |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | UNIT COST | TOTAL COST | | UNIT COST | TOTAL COST | | EQU. DAYS | RATE | TOTAL COST | COST |
| | | | XXX | | | XXX | | | XXXXX | XX | | |

NAVFAC 4330/43 (BACK)

U.S. Government Printing Office: 1983—681-819/6455

Figure 29 (Continued)
Change Order Estimate



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

19.2.1 Change Order Cost Estimate Backup Sheet (LANTDIV). Figure 30 is a sample Cost Estimate Backup Sheet (LANTDIV).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 1 of 4

PREPARED BY A. O. Noble — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAIL. — NORFOLK, VIRGINIA — DATE Sept 1989

PROJECT Leachate Collection/ Trtmt Sys. — LOCATION NAB Little Creek — [ ] PRELIM. [X] FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| Ball Valve Actuators - 2" Valve -ASSUME | 2 | EA | 317.00 | 634.00 | 37.64 | | | Johnson Controls |
| Existing Valve has actuator connections | | | | | | | | Model V-5252-618 |
| 1 1/4" Sch 40 Pipe | 10 | LF | .90 | 9.00 | 1.78 | 18.00 | | CES-QAC7AC |
| 1 1/4" 150# 90° Elbow | 2 | EA | 1.51 | 3.00 | 16.36 | 33.00 | | CES-QAGAJG |
| Sump Pump - 25 GPM @ 20' Head, Bronze | 1 | EA | 2452 | 2452.00 | 472.46 | 472.00 | | CES-RMPGBD |
| Float Switch - Mercury With Mounting | 1 | EA | 93.50 | 94.00 | 55.94 | 56.00 | | CES-WWJ |
| 1 1/4" 150# Union | 1 | EA | 3.28 | 3.00 | 18.50 | 19.00 | | CES-QAGIJG |
| 1 1/4" Check Valve 150# | 1 | EA | 28.49 | 29.00 | 20.92 | 21.00 | | CES-RCFAAH |
| 1 1/4" Gate Valve 150# | 1 | EA | 12.27 | 12.00 | 14.04 | 14.00 | | CES-RAFAB |
| Wall Penetration | 1 | EA | 14.96 | 15.00 | 30.76 | 31.00 | | CES-VZD |
| Caution Sign for Control Building | 1 | EA | 46.66 | 47.00 | 5.12 | 5.00 | | CES-LMVA1 |
| Fan Covers 12" | 2 | EA | 29.31 | 59.00 | Labor In Bolts | | | McMaster-CARR |
| 1/4" Expansion Bolts | 4 | EA | 2.00 | 8.00 | 3.08 | 12.00 | | CES-GLBFG |
| 1/4" Expansion Shields | 4 | EA | .63 | 3.00 | 8.00 | 32.00 | | CES-GLFDS |

Figure 30
Change Order Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil/ Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 2 of 4

PREPARED BY CCS — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. 81-1762

FUNDS AVAI. C. O. — NORFOLK, VIRGINIA — DATE 7/15/89

PROJECT Leachate Collection/Treatment System — LOCATION NAB, Little Creek — [ ] PRELIM. [X] FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| Nuts 3/4" Dia X 2 1/2" With Bolt | 4 | EA | 2.32 | 9.00 | - | - | | CES-GLJLBD |
| Std Size Red Bricks | 6 | EA | 3.00 | 3.00 | | | | Heckinger |
| Concrete Equip. Pad, Reinf. | 0.40 | CY | 123.53 | 49.00 | 228.30 | 91.00 | | EK # 50 |
| SUBTOTAL | | | | 3429.00 | | 804.00 | | |
| Material Sales Tax | | | | 1.045 | | | | |
| | | | | 3583.00 | | | | |

Figure 30 (Continued)
Change Order Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 3 of 4

PREPARED BY CCS — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. 81-1762

FUNDS AVAI. C. O. — NORFOLK, VIRGINIA — DATE 7/15/87

PROJECT Leachate Collection/Treatment System — LOCATION NAB, Little Creek — | | PRELIM. |X| FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| 30A, 240V, 4W Disc SW W/NEMA 4 Enclosure | 1 | EA | 388.30 | 388.00 | 88.52 | 89.00 | 477.00 | XUSD |
| 1/2" LT Flex Conduit W/3 #12 Wires (6 FT) | 5 | EA | 9.19 | 46.00 | 22.44 | 112.00 | 158.00 | VD#B |
| 3 #12 Wires in 1/2" PVC Conduit | 145 | LF | .37 | 54.00 | 1.68 | 244.00 | 298.00 | VG#CAA |
| 1/2" GRS Conduit | 90 | LF | .62 | 56.00 | 1.12 | 101.00 | 157.00 | VEB |
| 1/2" GRS 90° Elbow | 5 | EA | 2.00 | 10.00 | 7.02 | 35.00 | 45.00 | VEQB |
| 1/2" GRS LB Conduit Body | 3 | EA | 2.96 | 9.00 | 11.24 | 34.00 | 43.00 | VEOQ |
| 1/2" GRS Coupler | 9 | EA | 1.67 | 15.00 | 11.24 | 101.00 | 116.00 | VEPO |
| #12 THHN-THWN Solid CU | 270 | LF | .08 | 22.00 | .26 | 70.00 | 92.00 | WGBA |
| 3/4" Plastic Bushing | 7 | EA | .28 | 2.00 | 2.24 | 16.00 | 18.00 | VGNXA |
| 3/4" GRS Nipple | 7 | EA | .46 | 3.00 | 2.24 | 16.00 | 19.00 | VEIM |
| Saw 3/4" PVC Coated GRS | 9 | EA | 0 | 0 | 6.20 | 56.00 | 56.00 | VEU |
| 3/4" GRS Connector | 9 | EA | 2.65 | 24.00 | 10.60 | 90.00 | 114.00 | VEV |
| Disconnect Existing Circuits | 21 | EA | 0 | 0 | 4.68 | 90.00 | 90.00 | VEW |
| Trench and Backfill | 145 | LF | .25 | 36.00 | .18 | 26.00 | 62.00 | BFFKE |
| Mobilize/Demobilize for Trenching | 1 | EA | 147.46 | 147.00 | 26.06 | 26.00 | 173.00 | BFFLEA |
| Sawcut Bituminous Pavement | 145 | LF | .76 | 110.00 | .74 | 107.00 | | BDHH |
| Remove Bituminous Pavement | 16 | SY | 2.79 | 45.00 | 2.80 | 45.00 | 90.00 | BDAB |
| Starter Contacts | 4 | EA | 5.50 | 22.00 | 2.00 | 8.00 | 30.00 | VEX |
| 1/2" PVC Conduit | 60 | LF | .13 | 7.00 | 1.06 | 64.00 | 71.00 | VGB |
| 16/3 50 Flexible Cord | 130 | LF | .29 | 38.00 | .98 | 127.00 | 165.00 | WDB |
| 1/2" GRS Conduit | 70 | LF | .62 | 43.00 | 1.12 | 78.00 | 121.00 | VEB |
| 1/2" GRS 90° Elbow | 4 | EA | 2.00 | 8.00 | 7.02 | 28.00 | 36.00 | VEQB |
| 1/2" GRS LB Conduit Body | 2 | EA | 2.96 | 6.00 | 11.24 | 23.00 | 29.00 | VEOQ |
| 1/2" GRS Coupler | 7 | EA | 1.67 | 12.00 | 11.24 | 79.00 | 91.00 | VEPO |
| 4" J-Box W/NEMA 4 Enclosure | 2 | EA | 11.44 | 23.00 | 28.10 | 56.00 | 79.00 | WPLB |
| 1' Concrete Wall Penetration | 1 | EA | 17.60 | 18.00 | 53.92 | 54.00 | 72.00 | VZD |

Figure 30 (Continued)
Change Order Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

**MATERIAL & LABOR COST ESTIMATE** LANTDIV NORVA 4-11012/5(REV. 12/80) SHEET 4 of 4

PREPARED BY CCS — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. 81-1762

FUNDS AVAL. C. O. — NORFOLK, VIRGINIA — DATE 7/15/87

PROJECT Leachate Collection/Treatment System — LOCATION NAB, Little Creek — | | PRELIM. |X| FINAL

| ITEMS | QUANTITY | UNIT | MATERIAL COST UNIT | MATERIAL COST TOTAL | LABOR COST UNIT | LABOR COST TOTAL | TOTAL COST | REMARKS |
|---|---|---|---|---|---|---|---|---|
| Bituminous Paving for Pipe Trench | 16 | SY | 10.67 | 171.00 | 6.57 | 105.00 | 207.00 | CJBJ |
| 2" PVC RGS Conduit | 1 | EA | 4.63 | 5.00 | 2.94 | 3.00 | 8.00 | VFG |
| 2" PVC RGS Coupling | 1 | EA | 4.93 | 5.00 | - | - | 5.00 | VFNT |
| Reconnect Existing Circuits | 21 | EA | .10 | 2.00 | 3.36 | 71.00 | 73.00 | VFW |
| Disconnect Low Level Alarm | 1 | EA | - | - | 34.96 | 35.00 | 35.00 | WWI |
| Patch PVC Coating on PVC RGS | 1 | EA | - | - | 34.96 | 35.00 | 35.00 | WWI |
| Conduit With Plasteel Epoxy | 1 | LB | 16.69 | 17.00 | 34.86 | 35.00 | 52.00 | McMaster - CARR |
| SUBTOTAL | | | | 1344.00 | | 2059.00 | | |
| Material Sales Tax (4.5%) | | | | 1.045 | | | | |
| | | | | 1404.00 | | | | |
| Total Materials (w/o Tax) | | | | 4773.00 | | | | |
| Total Labor | | | | | | 2863.00 | | |

* NOTE: CES Material Increased by 10%, Labor productivity decreased 50% for small job.

Figure 30 (Continued)
Change Order Cost Estimate Backup Sheet (LANTDIV)





Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 20: ESTIMATES FOR NEGOTIATED CONSTRUCTION CONTRACTS

20.1 Negotiated Construction Contracts. In addition to requirements established for competitively bid construction contracts, estimates for negotiated construction contracts shall meet the following requirements:

a) Use a computer run CES estimate unless estimated construction cost is less than $50,000.

b) Final estimate must accurately reflect the final plans and specifications. Direct comparison with the construction contractors estimate will be made in quantity take-offs; quotes for major material; crew size, equipment, and production rates; and area labor rates. Field overhead must be itemized as System 001. Where conflicts exist between A&E estimate and construction contractor estimate, the A&E will provide prompt verification for items in question.

c) Should conflicts between plans and specifications occur, the A&E will promptly clarify intent and prepare a draft "as negotiated" amendment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 21: ESTIMATES FOR SPECIAL PROJECTS

21.1 Two-Step Procedures. OPNAVINST 11010.20 provides detailed definitions, policy, cost limitations, preparation, and submittal procedures for special project estimates. Projects will be submitted in two steps. The first step submittal will identify the requirement and appropriate cost estimate. The second step submittal, made when funding is probable, will include the engineering and detailed cost data necessary to define and justify work to be done. The two-step procedure is used only for projects funded from Operations and Maintenance, Navy (O&M,N) or Research, Development, Test and Evaluation, Navy (RDT&E,N) appropriations.

The major claimant determines funding potential from the step one submittal. If the funding is programmed, the activity is required to submit the step-two form, NAVFAC Form 11014/64.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 22: SUPPLEMENTAL INFORMATION

22.1 Blank Forms. See Appendix H.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX I

## BLANK FORMS

### Estimate for Change Order

**PROPOSAL/ESTIMATE FOR CONTRACT MODIFICATION** **DATE:**

*NAVFAC 4330/43 (8/88)*

**CONTRACT TITLE:** **CONTRACT NO:**

**ROICC OFFICE:**

**DESCRIPTION:**

| | | PRIME CONTRACTOR'S WORK | | | Revisions/Comments |
|---|---|---|---|---|---|
| 1. Direct Materials | | | | | |
| 2. Sales Tax on Materials | ____% of line 1 | ____% | | | |
| 3. Direct Labor | | | | | |
| 4. Insurance, Taxes, and Fringe Benefits | ____% of line 3 | ____% | | | |
| 5. Rental Equipment | | | | | |
| 6. Sales Tax on Rental Equipment | ____% of line 5 | ____% | | | |
| 7. Equipment Ownership and Operating Expenses | | | | | |
| 8. SUBTOTAL (add lines 1 - 7) | | | | | |
| 9. Field Overhead | 10.00% of line 8 | ____% | | | |
| 10. **SUBTOTAL (Add Lines 8 & 9)** | | | | | |

Prime Remarks:

| | | SUB-CONTRACTOR'S WORK | | | |
|---|---|---|---|---|---|
| 11. Direct Materials | | | | | |
| 12. Sales Tax on Materials | ____% of line 11 | ____% | | | |
| 13. Direct Labor | | | | | |
| 14. Insurance, Taxes, and Fringe Benefits | ____% of line 13 | ____% | | | |
| 15. Rental Equipment | | | | | |
| 16. Sales Tax on Rental Equipment | ____% of line 15 | ____% | | | |
| 17. Equipment Ownership and Operating Expenses | | | | | |
| 18. SUBTOTAL (add lines 11 - 17) | | | | | |
| 19. Field Overhead | 10.00% of line 18 | ____% | | | |
| 20. SUBTOTAL (add lines 18 & 19) | | | | | |
| 21. Home Office Overhead | 3.00% of line 20 | ____% | | | |
| 22. Profit | ____% of line 20 | ____% | | | |
| 23. **SUBTOTAL (Add Lines 20 - 22)** | | | | | |

Sub's Remarks:

| | | SUMMARY | | | |
|---|---|---|---|---|---|
| 24. Prime Contractor's Work (from line 10) | | | | | |
| 25. Sub-contractor's Work (from line 23) | | | | | |
| 26. SUBTOTAL (add lines 24 & 25) | | | | | |
| 27. Prime Overhead on sub-contractor | 5.00% of line 25 | ____% | | | |
| 28. Prime's Home Office Overhead | 3.00% of line 24 | ____% | | | |
| 29. Prime's Profit | ____% of line 28 | ____% | | | |
| 30. SUBTOTAL (add lines 26 - 29) | | | | | |
| 31. Prime Contractor's Bond Premium | ____% of line 30 | ____% | | | |
| 32. **TOTAL COST (Add Lines 30 & 32)** | | | | | |

Estimated time extension and justdication

Prime Contractor name:

Sub-contractor name:

Signature & Title of preparer

Date



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Estimate for Change Order (Continued)

### INSTRUCTIONS FOR PREPARING PROPOSAL/ESTIMATE FOR CONTRACT MODIFICATION

All Contract Modification Proposals shall be addressed to the Resident Officer in Charge of Construction. Proposals must clearly state the conditions and scope of the modification and shall be accompanied by a breakdown of cost, as indicated. Lump sum costs will not be accepted in either the prime or sub-contractor's breakdown of direct cost. The total cost for labor, material, and equipment rental (or ownership) for each item shall be transferred to the corresponding item on the front of this form. At the contractor's option, the overhead rates printed on the front of this form may be used for proposals under $ 500,000 in lieu of detailed itemized estimates of overhead costs. The proposal should also include a request for an extension of time, in calendar days, only if overall completion of contract is impacted by the proposed modification. The contractor shall not proceed with any of the work included in the modification prior to receipt of an executed modification of contract (SF30).

**BREAKDOWN OF DIRECT COSTS** Contract No._____ Date:_____

| ITEMS OF WORK FOR Prime Contractor | QTY | UNIT | MATERIAL | | LABOR | | R O | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | Unit Cost | Total Cost | Unit Cost | Total Cost | | Days | Rate | Total |
| | | | | | | | | | | |
| DIRECT Prime Contractor's TOTALS | | | | | | | R | Total (Rental) | | |
| | | | | | | | O | Total (Owned) | | |

| ITEMS OF WORK FOR Sub-contractor | QTY | UNIT | MATERIAL | | LABOR | | R O | EQUIPMENT | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | Unit Cost | Total Cost | Unit Cost | Total Cost | | Days | Rate | Total |
| | | | | | | | | | | |
| DIRECT Sub-contractor's TOTALS | | | | | | | R | Total (Rental) | | |
| | | | | | | | O | Total (Owned) | | |

*NAVFAC 4330/43 (Back)*



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

## Special Project Request

SPECIAL PROJECT REQUEST
NAVFAC 11014/64 (REV. 5-74)
*Supersedes NAVFAC 9-11014/64 (11-68)*
S/N 0108-LF-003-4230

Sheet 1 of 2

***STEP TWO SUBMISSION***

1. ACTIVITY &NDL NO. | ACTIVITY NAME AND LOCATION | DATE SUBMITTED

2. PROJECT NO. | TITLE

3. TYPE
a. ☐ MAINT./REPAIR b. ☐ MINOR CONSTRUCTION/ ALTERATION c. ☐ AIR CONDITIONING ☐ EQUIPMENT INSTALLATION

4. DESCRIBE AND STATE FUNCTION OF FACILITY

a. PROPERTY RECORD CARD NO.

b. NAVY CATEGORY CODE

c. BLDG. OR STRUCTURE NO.

5. WHAT IS THE EFFECT OF THIS PROJECT ON THE MISSION OF THE ACTIVITY?

6. THE REQUIREMENT FOR THE FACILITY IS BASED ON:
a. ☐ A CHANGE IN MISSION b. ☐ FULL-TIME CONTINUING NEED c. ☐ 3 TO 5 YEAR NEED d. ☐ LESS THAN 3 YEARS' NEED e. ☐ CURRENTLY REQUIRED LESS THAN 50% OF TIME f. ☐ RESERVED FOR FUTURE REQUIREMENTS

| 7a. EST. FUNDED COST | b. EST. PROJECT COST | c. EST. PLANNING COST | d. TOTAL FUNDS REQUESTED | e. EST. FACIL. REPL. COST |
|---|---|---|---|---|
| $ | $ | $ | $ | $ |

8. DATE FACILITY CONSTRUCTED

9. IS FACILITY ON AN APPROVED BASIC FACILITY REQUIREMENTS LIST? *If "NO," how was need determined?*
☐ YES ☐ NO

10. IS PROJECT LISTED ON ANNUAL INSPECTION SUMMARY? *If answer is "NO," and AIS is applicable, explain exclusion.*
☐ YES ☐ NO ☐ N.A.

11. DESCRIBE CONDITION TO BE CORRECTED, OR PROBLEM TO BE SOLVED WITH PROPOSED SOLUTION. *Attach additional description if necessary. ONE PAGE ONLY.*

12. WHY IS THE PROPOSED SOLUTION BEST – AND WHAT ALTERNATIVES WERE CONSIDERED?

13. WERE ANY NON-NAVY EXPERTS INVITED TO REVIEW THIS PROBLEM AND THIS SOLUTION? *Explain effect on solution.*
a. ☐ YES b. ☐ NO

14. HAS EFD DESIGN DIVISION REVIEWED SOLUTION? a. ☐ YES b. ☐ NO

15. CAN ANOTHER FACILITY BE ECONOMICALLY ADAPTED FOR THIS FUNCTION? a. ☐ YES b. ☐ NO

*16. CAN PROJECT BE FUNDED IN PHASES? *How? How many?*
a. ☐ YES b. ☐ NO

*17. THIS PROJECT IS THE RESULT OF
a. ☐ INADEQUATE MAINTENANCE b. ☐ FACILITY AGE c. ☐ DEFICIENT CONSTR. d. ☐ DEFICIENT DESIGN e. ☐ OTHER: _____

*18. HAS THIS SPECIFIC PROBLEM BEEN CORRECTED PREVIOUSLY?
a. ☐ YES b. ☐ NO *When?*

HOW LONG WILL PROPOSED CORRECTIVE ACTION LAST? _____ YEARS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Special Project Request (Continued)

19. ARE COMPONENTS BEING INCREASED IN SIZE OR CAPACITY? *Explain the difference, including cost.*

a. ☐ YES b. ☐ NO

20. ARE MATERIALS PROPOSED FOR USE THE SAME AS THOSE EXISTING? *If "NO," explain the difference, including cost.*

a. ☐ YES b. ☐ NO

21. PROJECT IS PLANNED TO BE ACCOMPLISHED BY

a. ☐ STATION LABOR b. ☐ CONTRACT

22. HAS A PROJECT EVER BEEN SUBMITTED FOR THE REPLACEMENT OF THIS OR SIMILAR FACILITIES? *Check and explain if "YES."*

a. ☐ YES b. ☐ NO *When?*

23. ANTICIPATED SAVINGS IF PROJECT IS DONE THIS YEAR AS COMPARED TO A DEFERRAL OF ONE YEAR.

| PROBABLE INCREASE IN PROJECT COST FOR ANY JUSTIFIABLE REASON | REDUCTION IN CURRENT MAINT. COST | REDUCTION IN CURRENT OPERATIONS COST |
|---|---|---|
| $ | $ | $ |

JUSTIFY ANY SAVINGS INDICATED

WHAT IS PAY BACK PERIOD OF PROJECT? *(In years)*

WILL ACCOMPLISHMENT GENERATE REQUIREMENTS FOR ADDITIONAL M&O FUNDS OR PERSONNEL? a. ☐ NO b. ☐ YES *Est. Ann.*

24. WHAT WOULD BE THE EFFECT OF DEFERRING THE PROJECT ONE YEAR?

*25. IF THE PROJECT IS NOT ACCOMPLISHED NOW, IN HOW MANY YEARS WILL THERE BE SERIOUS DAMAGE TO THE FACILITY AND/OR ITS CONTENTS OR IMPAIRMENT TO ESSENTIAL OPERATIONS? *Explain, include loss value to facility and/or contents.*

YEARS BEFORE SERIOUS DAMAGE OCCURS_____.

*26. HAS THE REDUCED UTILIZATION OF THIS SPECIFIC FACILITY AFFECTED A LARGE FACILITY SYSTEM OPERATION? *Explain.*

a. ☐ YES b. ☐ NO BY HOW MUCH?_____%.

27. ARE THERE ANY OTHER FACTORS INVOLVED? *Check and explain.*

a. ☐ MORALE b. ☐ HEALTH c. ☐ PUBLIC RELATIONS d. ☐ SAFETY e. ☐ FIRE PROTECTION f. ☐ SECURITY g. ☐ OTHER

28. CERTIFICATION BY RESPONSIBLE OFFICER AT ACTIVITY: I am personally cognizant of the need for, the essentiality of, and the proposed method of accomplishment of this project and certify that the above information is correct, and that this project meets all criteria specified in OPNAVINST 11010.20 and subsequent changes thereto.

| SIGNATURE | TITLE | DATE |
|---|---|---|
| | | |

29. EFD TECHNICAL VALIDATION *(if required) (see para 7303, OPNAVINST 11010.20C)*

| SIGNATURE | TITLE | DATE |
|---|---|---|
| | | |

ENCLOSURES:

a. ☐ ENGINEERING EST. *(NAVFAC 2417)* b. ☐ LOCATION PLAN(S) c. ☐ DRAWINGS d. ☐ PHOTOGRAPHS

**NOT applicable to Minor Construction, Alterations, or Equipment Installation*

NAVFAC 11014/64 (REV. 9-74)
Sheet 2 of 2

☆ U.S. GOVERNMENT PRINTING OFFICE:

S/N 0105-LF-003-4230



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## Section 23: CES STANDARD SYSTEMS NARRATIVES

23.1 CES Standard Systems Narratives. The following information describes the systems content.

BUILDING SYSTEMS INTERIOR

000 Building Construction

Includes the total cost of all Systems 001 through 499. Total building cost to the 5-foot line. This system is not to be used for estimate preparation.

OVERHEAD

001 Field Overhead Total Cost Lump Sum

Includes Project Manager, Superintendent, Timekeeper, Field Engineer, Clerical Staff, Field Offices, Utilities, Field Storage, and any other field incurred cost necessary to administer the project in the field. For projects outside the United States, includes shipping, transportation of personnel per diem and temporary housing.

002 Home Office Overhead Total Cost Lump Sum

Includes the portion of Home Office costs allocated to the project being priced.

003 Contractor Quality Control Total Cost Lump Sum

Includes costs for the Field Contractor Quality Control Staff. Testing requirements are included with other systems as applicable.

*011 Additive 1 Total Cost Lump Sum

Includes all costs associated with Additive Item 1 as described in the specifications. When an additive is a separate building or involves substantial work it may be advisable to run a separate estimate to develop the cost and transfer only the total to the master estimate.

*Typical for all Additive and Deductive items.

041 OMSI Total Cost Lump Sum

Includes costs associated with preparation of an Operation and Maintenance Service Instruction.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

042 PCAS | Percent | Lump Sum

Includes costs associated with Post Contract Award Services.

043 Contingencies | Percent | Lump Sum

Includes contingency allowance. The contingency entered is not an estimating contingency but a contingency for change orders.

044 SIOH | Percent | Lump Sum

Supervision, Inspection, and Overhead. Includes an allowance for Government administration of the construction contract.

GENERAL CONSTRUCTION

111 Foundation | Ground Floor | Sq. Ft.

Includes excavation and backfill for foundation and basement construction, pile caps, footings, grade beams, piers, foundation walls, basement walls, fill under floor slabs, and all required construction to the first floor elevation, excluding all structural floor slabs, ground slabs, basement structural framing, piling, special foundations, and soil treatment. See 84X for removing unsuitable materials and 816 for surcharging.

112 Slab on Grade | Slab on Grade | Sq. Ft.

Includes all ground slabs and vapor barriers, waterproofing, wire mesh, capillary fill, and soil treatment. Includes ground slab, reinforcing steel, waterproofing, and soil treatment for structural slab placed on fill where fill is used as form. Borrow fill under slab is included in System 111.

113 Structural | Gross Building Area | Sq. Ft.

Includes structural frame consisting of skeleton frame of building, e.g., columns, girders, cantilevered members extending beyond exterior walls, and fireproofing. Excludes framing in direct support of floor or roof construction.

114 Supported Floor | Supported Floor | Sq. Ft.

Includes construction of structurally integrated or independently supported floors, e.g., steel decking, joists, beams, slabs, precast concrete decking with topping steel reinforcing, and other related items to provide a complete structural floor. Excludes applied finishes.

115 Stairs | Number of Risers | Each

Includes interior and exterior stairs, landings, platforms, and railings.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

116 Roof Structure — Roof Area — Sq. Ft.

Includes construction of structurally integrated or independently supported roofs, e.g., precast concrete roof slabs, concrete topping, steel decking, joists, and beams. Roofing is included in 141.

117 Pre-Engineered Building — Gross Building Area — Sq. Ft.

Includes steel frame, siding, roofing, insulation, doors, windows, and all other work normally furnished by the pre-engineered building subcontractor. Does not include sliding or roll-up doors.

118 Vault — Gross Floor Area — Sq. Ft.

Includes walls, ceiling construction, and floor slab. Only includes work incurred to construct vault. See System 452 for vault door.

ARCHITECTURAL

141 Roofing — Roof Area — Sq. Ft.

Includes roof curbing, roof insulation, roofing, gravel stops, gutters, downspouts, flashing, skylights, roof-access hatches, and other related roofing items. Roof structure is included in 116.

142 Exterior Walls — Exterior Wall Area — Sq. Ft.

Includes bearing or non-bearing walls from inside rough wall to outside finish wall, parapet walls, dampproofing, flashing, insulation waterproofing, balcony walls, and handrails. Includes exterior finishes, caulking, and painting.

143 Interior Walls — Interior Wall — Sq. Ft.

Includes partitions, bearing or non-bearing walls, extending from floor-to-floor or floor-to-ceiling excluding finishes. Includes masonry walls, steel or wood stud walls, studs only and excludes painting, gypsum board, or other applied finish.

144 Interior Finishes — Gross Building Area — Sq. Ft.

Includes finishes applied to floors, walls, ceilings, stairs, and ramps, such as wall covering, resilient flooring tile, terrazzo, wood, carpeting, acoustical tile, plaster, paint, gypsum board, suspended ceiling systems, caulking, and all related trim work.

145 Doors — Surface Area One Side — Sq. Ft.

Includes all exterior and interior doors, frames, hardware, caulking, and painting, see 45X for 451 Hangar Doors, 452, Vault Doors, and 453 Blast Doors.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

146 Windows — Surface Area One Side — Sq. Ft.

Includes windows, glazed wall systems, glazing, caulking, and painting.

147 Specialties — Gross Building Area — Sq. Ft.

Includes chalk and tack boards, signs and plaques, flagpoles, telephone enclosures, ladders, lockers, storage shelving, toilet and bath accessories, fireplaces, compartments and cubicles, movable partitions, identifying devices, protective covers, postal specialties, scales, exterior sun control devices, and wardrobe specialties, excluding special mechanical or electrical equipment.

148 BEQ Wardrobes — Number — Each

Includes furnishing and installing prefabricated wardrobes and chests for BEQs.

DEMOLITION INTERIOR

171 Demolition Interior — Gross Building Area — Sq. Ft.

Includes all interior building demolition connected with new construction or alterations. Also include any work on, or in, the exterior wall. Do not include complete building demolition, see System 84X.

172 Asbestos Removal Interior — Total Cost — Lump Sum

Includes costs for removal of asbestos from any interior areas of buildings to be rehabilitated. Includes all costs for sealing off areas, asbestos removal, monitoring, testing, disposal, change areas, disposal suits, respirators, and other related costs. (See System 844 for exterior asbestos removal.)

PLUMBING

211 Plumbing - Domestic — Number of Fixtures — Each

Includes water supply and treatment, waste water disposal and treatment, plumbing equipment, fixtures and trim, and insulation, e.g., hot and cold water pipes, waste, soil and vent pipes, hot water heaters, water coolers, and floor drains.

212 Domestic Hot Water Solar — Capacity — MBTH

Includes piping, solar panels, supports, and controls necessary for solar-heated domestic hot water system. Does not include piping normal to System 211 Plumbing - Domestic. When the solar system heats both the building and domestic hot water use System 226.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

213 Roof Drainage — Number of Drains — Each

Includes roof drains, pipes, and fittings.

SPACE CONDITIONING

221 Heating, Ventilation, and Air Conditioning — Capacity — MBTU or Tons

Includes heating, ventilating, and air conditioning systems, e.g., heat generating equipment, refrigeration, air distribution, piping, controls and instrumentation, and insulation.

222 Air Conditioning — Capacity — Tons

Includes air conditioning systems, e.g., refrigeration, air distribution, piping, controls and instrumentation, and insulation.

223 Heating and Ventilation — Capacity — MBTH

Includes heating, ventilating systems, e.g., heating generating equipment, air distribution, piping, controls and instrumentation, and insulation. See System 224 for ventilation only.

224 Mechanical Ventilation — Fan Capacity — CFM

Includes fans, supports, duct work, and controls for a mechanical ventilation system. See System 223 for combined heating and ventilation.

225 Dehumidification — Capacity — PPH

Includes equipment, duct work and controls for a dehumidification system. Use System 221 or 222 where dehumidification is an integral part of an air conditioning system.

226 Heating, Solar — Collector Area — Sq. Ft.

Includes piping, solar panels, supports, and controls necessary for a solar-heated building heating system. Does not include work normal to the building and included under System 221 or 223. (See note under System 212.)

WEIGHT HANDLING EQUIPMENT

231 Bridge Cranes — Capacity — Tons

Includes crane rails, bridge, hoists, trolleys, and electrification. Power supply at hoist area only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

232 Monorails | Capacity | Tons

Includes rail, hoist, trolley and electrification, and air supply. Power supply at hoist area only.

233 Fixed Hoist | Capacity | Tons

Includes hoist, support electrification, and air supply. Power supply at hoist area only.

234 Vehicle Lifts | Capacity | Tons

Includes lift, pit, electrification, and air supply. Power supply at hoist area only.

235 Elevators | Number of Stops | Each

Passenger of freight elevators including conveyor cab, doors, controls, and rails.

236 Escalators | Flights | Each

Includes equipment and power supply at escalator area.

237 Conveyors | Capacity | Tons/hr

Includes equipment, foundations, controls, and power supply at conveyor area only.

SPECIAL MECHANICAL PIPING

241 Vacuum | Capacity | CFM

Includes vacuum pump, piping, connectors, and controls. (Industrial or medical.)

242 Oxygen | Outlets | Each

Includes piping, tanks, and accessories.

243 Nitrogen | Outlets | Each

Includes piping, tanks, and accessories.

244 Compressed Air | Capacity | CFM

Includes air compressors, dryers, after coolers, piping, controls, valves, gauges, and filters.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

245 Interior Steam | Capacity | PPH

Includes steam generator, piping, and outlets. Does not include steam source that serves other uses. Do not use this system for steam heating.

SPECIAL MECHANICAL - OTHER

251 Dust Collection | Capacity | CFM

Includes equipment supports and duct work associated with an interior dust collection system.

252 Engine Exhaust | Fan Capacity | CFM

Includes door exhaust ports, fans, and exhaust duct (flexible and rigid).

INTERIOR FIRE PROTECTION

271 Sprinklers | Gross Area Sprinkled | Sq. Ft.

Includes sprinkler pipe, fittings, valves, pumping equipment, tanks, sprinkler heads, and controls.

272 AFFF | Area Protected | Sq. Ft.

Aqueous Film Forming Foam. Includes equipment, piping, and controls necessary for an AFFF System. Includes storage tanks and foam when only the facility being priced is served.

273 Carbon Dioxide | Storage Capacity | Pounds

Includes storage cylinders, hose reels, piping, nozzles, and controls.

274 Halon | Storage Capacity | Pounds

Includes storage cylinder, controls, piping, and nozzles.

275 Fire Alarm | Gross Building Area | Sq. Ft.

Includes control panels, power supplies, detectors, manual alarm station, alarm devices, conduit, and wire.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

POWER & LIGHTING

311 Power — Connected Load — KW

Includes all interior distribution for power and special electrical systems, e.g., switchboards, transformers, motor controls, distribution switches, motor starters, feeders, branch-circuit wiring and devices, panels, and lightning protection. Exclude all interior distribution for lighting fixtures and emergency lighting, e.g., light fixtures, panels, branch-circuit wiring, and devices for lighting.

312 Lighting — Gross Building Area — Sq. Ft.

Includes all interior lighting fixtures, exit and emergency lighting, branch-circuit wiring, conduit, and devices for light fixtures only. Panels are included in System 311.

313 400 HZ — Converter Capacity — KW

Includes frequency changer, control system, wire, conduit, and devices to install a 400-Hz power system.

314 Direct Current — Converter Capacity — KW

Includes rectifier battery charger, battery bank, wire, conduit, and devices to install a direct current power system.

315 Uninterruptable Power Supply — Converter Capacity — KVA

Includes battery bank, rectifier, and static inverter for solid-state equipment and flywheel, motor, generator, and battery bank for rotary equipment plus all associated wiring, conduit, switches, panels, and switchgear.

316 Electrical Generators — Equipment Capacity — KW

Includes diesel, gas and gasoline engines, day tanks, valves, piping and fittings, generators, operating and synchronizing controls, transfer switches, and wiring.

SPECIAL ELECTRICAL PROTECTION

321 Grounding — Gross Building Area — Sq. Ft.

Includes cable, ground rods, clamps, and connections for grounding system.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

322 Lighting Protection — Gross Building Area — Sq. Ft.

Includes base plate, lighting mast, concrete foundations, ground rods, cables, and connections for a complete building lighting protection system.

SPECIAL ELECTRICAL/ELECTRONICS

331 Security Detection — Gross Building Area — Sq. Ft.

Includes control panels, power supplies, detectors, alarm stations, alarm devices, and wire conduit.

332 Energy Monitoring and Control System — Points of Controls — Each

Includes control panels, devices, wiring, and conduit.

333 Computer Communication — Cable Run — Lin. Ft.

Includes wiring, cable tray, and devices necessary for a complete computer communication system.

COMMUNICATION

341 Telephone — Gross Building Area — Sq. Ft.

Includes control panels, devices, wire, and conduit.

342 Intercom — Gross Building Area — Sq. Ft.

Includes master stations, substations, control panels, speakers, wire, and conduit. Includes System 344 public announcement when it is combined with the intercommunication system.

343 Television — Gross Building Area — Sq. Ft.

Includes antenna, booster amplifiers, circuit wiring, conduit, cameras, control consoles, and monitors.

344 Public Announcement — Gross Building Area — Sq. Ft.

Includes master stations, substations, control panels, speakers, wire, and conduit. See System 342 for combined intercommunication and public announcement systems.

345 Master Clock — Number of Outlets — Each

Includes wire, conduit, and devices for a master clock system.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

4XX Special Equipment

Note: Equipment may be obtained for various funding sources and by different procurement methods. See Standard System Descriptions 4x5 - 4x6 Use: Install Government-furnished _____ equipment to allow for contractor cost of installation for Government-furnished equipment; use Government-furnished _____ equipment to allow for the cost of procuring equipment when financed from construction funds.

MEDICAL EQUIPMENT

411 Hospital Equipment — Gross Building Area — Sq. Ft.

Includes contractor furnished and installed built-in hospital equipment. Mechanical and electrical work are not included.

412 Dental Equipment — Number of Chairs — Each

Includes contractor furnished and installed built-in dental equipment. Mechanical and electrical work are not included.

415 Install Government Furnished Medical Equipment

416 Government Furnished Medical Equipment

FOOD SERVICE EQUIPMENT

421 Food Service Equipment — Pieces of Food Service Equipment — Each

Includes contractor furnished and installed built-in food service equipment.

425 Install Government-Furnished Food Service Equipment

426 Government-Furnished Food Service Equipment

MISCELLANEOUS EQUIPMENT

431 Chapel Equipment — Gross Building Area — Sq. Ft.

Includes contractor furnished and installed built-in chapel equipment.

432 Movie Theater Equipment — Gross Building Area — Sq. Ft.

Includes contractor furnished and installed built-in equipment for showing films, such as projection booth windows, curtains, and projection screens.

Small rear projection screens should be included under 491 Other Equipment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

433 Rifle Range Equipment — Firing Lanes — Each

Includes targets, guides, baffles, and bullet stops.

434 Laboratory Equipment — Number Pieces — Each

Includes case work, benches, testing equipment apparatus, and other equipment designated as laboratory equipment. Mechanical and electrical work not included.

435 Install Government-Furnished Laboratory Equipment

436 Government-Furnished Laboratory Equipment

437 Waste Disposal Equipment — Equipment Capacity — PPH

Includes built-in compactors, incinerators, and shredders with installation cost. Enclosures, mechanical, and electrical work not included.

SPECIAL WAREHOUSE EQUIPMENT

441 Special Warehouse Equipment — Gross Building Area — Sq. Ft.

Includes built-in storage racks and conveying systems, in-rack special sprinkler system, dock leveler, dock door seals, and rubber bumpers with installation cost. Building mechanical and electrical work not included.

445 Install Government-Furnished Warehouse Equipment

446 Government-Furnished Warehouse Equipment

SPECIAL CONSTRUCTION

451 Hangar Doors — Surface Area One Side — Sq. Ft.

Includes tracks, guides, operators doors, and controls. Does not include structural steel supports or concrete. Electrical work at door only.

452 Vault Doors — Number — Each

Includes vault door and frame.

453 Blast Doors — Surface Area One Side — Sq. Ft.

Includes doors, frames track, operators, and controls.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

454 Raised Floor — Area of Raised Floor — Sq. Ft.

Includes floor system, panel covering such as carpet, ramps, steps, closure panels, cable cutouts, and airflow panels, with installation cost. Railing to be a speciality item.

455 Radio Frequency Shielding — Surface Area Shielded — Sq. Ft.

Includes wall floors and ceiling panels, doors, filters, filter cabinets, wave guides, and enclosures for telephone cypher locks, and fire alarm pull box with installation cost. Mechanical and electrical services not included.

456 Bowling Lanes — Number of Lanes — Each

Includes lanes and installation with pinsetter, returns, and other associated equipment.

457 Paint Spray Booth — Floor Area — Sq. Ft.

Includes booth and equipment procured with booth. Mechanical and electrical hookup at booth area included.

OTHER EQUIPMENT

491 Other Miscellaneous Equipment — Total Cost — Lump Sum

Includes special equipment not included above. Also refer to System 147 Specialties.

492 Snow Melting — Area Protected — Sq. Ft.

495 Install Government-Furnished Miscellaneous Equipment

496 Government-Furnished Miscellaneous Equipment

499 Building Work Not Included Elsewhere — Total Cost — Lump Sum

Used when partial data is loaded and it is desirable to combine several systems of no historical value. (Rehabilitation and Alteration projects are the ones for which this system is normally used; very seldom, if ever, is this system used for new work.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## SUPPORTING FACILITIES

### UTILITIES

#### EXTERIOR ELECTRICAL

511 Electrical Distribution, Primary — Length of Run — Lin. Ft.

Includes overhead power distribution, e.g., poles, crossarms, insulators, guying, terminations, lightning protection, wire and cable, and underground distribution. Examples of underground distribution are excavation and backfill, concrete encased duct bank, direct burial duct, manholes, handholes, cable, terminations, stress cones, and grounding. All for primary distribution to transformer or substation.

512 Electrical Distribution, Secondary — Length of Run — Lin. Ft.

Includes overhead power distribution, e.g. poles, crossarms, insulators, guying, terminations, lighting protection, wire and cable and underground distribution. Examples of underground distribution are excavation, backfill concrete encased and direct burial duct bank, manholes, handholes, cable terminations, stress cones, and grounding.

513 Substation/Transformer — Capacity — KVA

Includes overhead transformer, e.g. fuse cutouts, transformers, substation including concrete, fence, steel framing and enclosure, and pad-mounted transformer. Examples of pad-mounted transformers are disconnect services, transformers, substation including concrete steel framing, fencing, and enclosure.

514 Area Lighting — Number of Fixtures — Each

Includes poles, fixtures, excavation and backfill, concrete work, wire, duct, and conduit.

515 Airfield Lighting — Length of Run — Lin. Ft.

Includes excavation and backfill, duct, conduit, devices, transformer, relays, and wiring necessary to install the airfield lighting.

516 Lightning Protection — Points of Protection — Each

Includes base plate, lighting mast, concrete foundations, ground rods, cables, and connections for a complete exterior lightning protection system.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR COMMUNICATION

521 Fire Alarm — Length of Run — Lin. Ft.

Includes excavation, backfill, duct, conduit, devices, and wire necessary to install an exterior fire alarm system.

522 Security Alarm — Length of Run — Lin. Ft.

Includes excavation and backfill, duct, conduit, and junction boxes. Wiring cable, devices, and their installation are not MCON funded.

523 Communication, Telephone — Length of Run — Lin. Ft.

Includes excavation and backfill, duct, conduit, devices, and wire necessary to install an exterior communication system.

524 Exterior EMCS — Length of Run — Lin. Ft.

Includes cable, duct, conduit necessary for EMCS systems outside the building 5-foot line.

EXTERIOR MECHANICAL

541 Heat Distribution, Overhead — Length of Run — Lin. Ft.

Includes supports, piping, insulation, and valves to install overhead steam and hot water distribution systems outside the 5-foot line.

542 Heat Distribution, Underground — Length of Run — Lin. Ft.

Includes excavation, backfill, manholes, supports, piping insulation, and valves to install underground steam and hot water distribution systems outside the 5-foot line.

543 Chilled Water Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, manholes, supports, piping, insulation, and valves to install chilled water distribution systems outside the 5-foot line.

544 Condensate Collection (only) — Length of Run — Lin. Ft.

Includes excavation, backfill, manholes, supports, piping, and valves to install a condensate collection system.

545 Gas Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, piping, valves, and other miscellaneous work to install a complete gas system outside the 5-foot line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

546 Compressed Air Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, piping, valves, and devices to install a complete compressed air distribution system outside the 5-foot line.

547 Fuel Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, piping, pipe coatings, valves, and devices to install a complete fuel distribution system outside the 5-foot line.

548 Exterior Foam System — Length of Run — Lin. Ft.

Includes distribution piping, foam storage and proportioning equipment, booster pump, and emergency power.

551 Water Distribution — Length of Run — Lin. Ft.

Includes complete potable water distribution system, e.g., utility service connections, fire hydrants, excavation and backfill, pipe, valves, and fittings. Use when domestic and fire water System 552 are combined in one line.

552 Fire Protection Water Distribution — Length of Run — Lin. Ft.

Includes complete fire water distribution system, e.g., utility service connection fire hydrants, excavation and backfill, pipe, valves, and fittings.

553 Salt Water Distribution — Length of Run — Lin. Ft.

Includes complete salt water distribution system, e.g., utility service connections, fire hydrants, excavation and backfill, pipe, valves, and fittings.

554 Sanitary Sewers — Length of Run — Lin. Ft.

Includes complete sanitary sewer system, e.g., utility service connections, excavation and backfill, sheeting and shoring, dewatering, pipe and fittings, manholes, cleanouts, septic disposal and process, and acid waste system outside the 5-foot line.

BULK STORAGE

561 Fuel Storage, Bulk — Capacity — BBL

Includes tanks, foundation, coatings, fire protection, and level controls. Does not include piping or other special foundation work.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

562 Fuel Storage, Ready Issue — Capacity — Gal

Includes excavation, backfill, gravel fill, concrete, tiedowns, tanks, accessories, piping at tank, coatings, and monitoring wells. (Does not include long runs of supply piping.)

563 Water Storage — Capacity — Gal

Includes ground level and elevated storage tanks, foundation, coatings, lighting, valves, and piping required at tanks. Does not include piling or other special foundation work.

FUELING

571 Vehicle Fueling — Number of Outlets — Each

Includes concrete island, pumps, piping to within 5 feet of tank and electrical work to panel.

572 Aircraft Fueling — Number of Hydrants — Each

Includes hydrants, filter, supports, loading arms, piping, and canopy. System includes truck loading stand for loading of fueling trucks.

573 Marine Fueling — Number of Outlets — Each

Includes hydrants, filters, supports, loading arms, piping, and canopy.

PUMPING

581 Fuel Pumping Station — Pump Capacity — GPM

Includes all work to install a complete fuel pumping station to the 5-foot line. Includes excavation and backfill, pit, pump, piping, valves, structure, electrical work at pump, and other miscellaneous work.

582 Water Pumping Station — Pump Capacity — GPM

Includes all work to install a complete water pumping station to the 5-foot line. Includes building, pit excavation and backfill, piping, pumps, electrical, and other miscellaneous work.

583 Fire Booster Pump — Pump Capacity — GPM

Includes all work to install a complete water booster pumping station to the 5-foot line, if within a separate building. If pump is contained within building, include in System 271. Includes pump, piping valves, electrical work at pump, and other miscellaneous work to install a complete fire booster pump.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

584 Sewage Pump Station — Pump Capacity — GPM

Includes all work to install a complete sewage pumping station to the 5-foot line. Includes building, wet well, dry well, excavation and backfill, piping, pumps, electrical, and other miscellaneous work.

585 Sewage Lift Station — Pump Capacity — GPM

Includes all work to install a complete sewage lift station to the 5-foot line. Includes building, wet well, excavation, backfill, piping, pumps, electrical, and other miscellaneous work.

TREATMENT FACILITY

591 Water Treatment — Capacity (Million gal/day) — MGD

Includes excavation, backfill, piping, pumps, equipment, controls, and other necessary accessories to install a complete water treatment system.

592 Domestic Sewage Treatment — Capacity (Million gal/day) — MGD

Includes excavation, backfill, piping, pumps, equipment, controls, and other necessary accessories to install a complete domestic sewage treatment system.

593 Industrial Waste Treatment — Capacity (Million gal/day) — MGD

Includes excavation, backfill, piping, pumps, equipment, controls, and other necessary accessories to install a complete industrial waste treatment system.

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross Building Area (MEB) — Sq. Ft.

Includes all work to construct a mechanical equipment building as part of a larger building project. Includes building construction, mechanical, and electrical work.

612 Electrical Equipment Building — Gross Building Area (EEB) — Sq. Ft.

Includes all work to construct an electrical equipment building as part of a larger building project. Includes building construction, mechanical, and electrical work.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUPPORTING STRUCTURES
MISCELLANEOUS

| | | | |
|---|---|---|---|
| 621 | Security Gate | Opening Width | Lin. Ft. |

Includes mechanically operated gate, foundation, supports, operating mechanism controls, and electrical work at gate.

| | | | |
|---|---|---|---|
| 622 | Guard House | Gross Building Area | Sq. Ft. |

Includes structure, canopy, apron, curb, lighting, and mechanical and electrical work. Use for entrance gate structure as well as other guard house. This system is not intended for large structures that are a primary facility.

POLLUTION ABATEMENT STRUCTURES

| | | | |
|---|---|---|---|
| 641 | Oil Water Separators | Capacity | Gal. |

Includes excavation, backfill, concrete structure, miscellaneous metals, thru-wall piping, and other work necessary to install a complete oil water separator.

| | | | |
|---|---|---|---|
| 642 | Electrostatic Precipitator | Airflow | SCFM |

Includes all work to install precipitator. Includes breeching (inlet and outlet), structural supports, control system, and ash hopper.

SHOP SUPPORT STRUCTURES

| | | | |
|---|---|---|---|
| 651 | Vehicle Grease Rack | Number of Vehicle Racks | Each |

Includes all work necessary to install an exterior grease rack. Includes excavation, backfill, concrete, miscellaneous metal, and other required items.

| | | | |
|---|---|---|---|
| 652 | Vehicle Wash Platform | Number of Vehicle Bays | Each |

Includes all work to install a complete vehicle wash platform. Includes excavation, backfill, paving, piping, accessories, and electrical work to edge of platform. Does not include distribution piping.

AIRCRAFT CLEANING FACILITY

| | | | |
|---|---|---|---|
| 661 | Aircraft Washing Facility | Paved Area | Sq. Yd. |

Includes paving, drainage, water supply, washing equipment controls, and other necessary items to install a complete aircraft washing facility. Do not include access paving or long utility supply runs.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

662 Aircraft Rinsing Facility — Paved Area — Sq. Yd.

Includes paving, drainage, water supply rinsing equipment, controls, and other necessary items to install a complete aircraft rinsing facility. Do not include access paving or long utility supply runs.

## SITE PREPARATION & IMPROVEMENTS

### ROADS

711 Concrete Roads — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, fine grading, compaction, sub-base course, base course, edge forms, concrete reinforcement, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings.

712 Flexible Roads — Paved Area — Sq. Yd.

Includes bituminous concrete paving, tack and seal coats, curbs, curbs and gutters, subgrade preparation, fine grading, compaction, sub-base course, base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings.

713 Overlay Road — Paved Area — Sq. Yd.

Includes flexible paving overlay of existing roads. Includes cleaning, sweeping, leveling courses, minor patching, tack coat, and pavement marking.

714 Surface Treatment - Road — Paved Area — Sq. Yd.

Includes bituminous surface treatment over existing pavement or base course. Includes cleaning, sweeping, minor patching, tack or prime coat, and pavement marking.

715 Slurry Seal Road — Paved Area — Sq. Yd.

Includes slurry seal over existing road. Includes cleaning, sweeping, minor patching, and pavement marking.

### PARKING

721 Concrete Parking — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, fine grading, compaction, sub-base course, base course, edge forms, concrete reinforcement, curbing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

722 Flexible Parking — Paved Area — Sq. Yd.

Includes bituminous concrete paving, tack and seal coats, curbs, curbs and gutters, fine grading, compaction, sub-base course, base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings.

723 Overlay Parking — Paved Area — Sq. Yd.

Includes flexible paving overlay of existing parking areas. Includes cleaning, sweeping, leveling course, minor patching, tack coat, and pavement marking.

724 Surface Treatment - Parking — Paved Area — Sq. Yd.

Includes bituminous surface treatment over existing pavement or base course. Includes cleaning, sweeping, leveling courses, minor patching, tack or prime coat, and pavement marking.

725 Slurry Seal Parking — Paved Area — Sq. Yd.

Includes slurry seal over existing parking area. Includes cleaning, sweeping, minor patching, and pavement marking.

WALKS

741 Concrete Walks — Paved Area — Sq. Yd.

Includes concrete paving, base course, edge forms, concrete reinforcement, finishing, edging, and exterior steps.

742 Bituminous Walks — Paved Area — Sq. Yd.

Includes bituminous paving, base course, edging, and exterior steps.

743 Special Walks — Paved Area — Sq. Yd.

Includes brick paving, limestone paving, flagstone paving, other paving materials, base course, and exterior steps.

AIRCRAFT PAVING CONCRETE

751 Concrete Runways — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, edge forms, reinforcing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings when constructed for aircraft runways.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

752 Concrete Taxiways | Paved Area | Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, edge forms, reinforcing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings when constructed for aircraft taxiing.

753 Concrete Aprons | Paved Area | Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, edge forms, reinforcing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings when constructed for aircraft parking.

754 Repairs Concrete Paving | Paved Area | Sq. Ft.

Includes removing and replacing individual slabs, partial slab removal and replacement, spall repairs, full depth repairs, and other miscellaneous patching.

755 Crack and Joint Repair | Length of Repair | Lin. Ft.

Includes cleaning and resealing joints and crack repairs.

AIRCRAFT PAVING FLEXIBLE

761 Flexible Runways | Paved Area | Sq. Yd.

Includes bituminous concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings when constructed for aircraft runways.

762 Flexible Taxiways | Paved Area | Sq. Yd.

Includes bituminous concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings when constructed for aircraft taxiing.

763 Flexible Aprons | Paved Area | Sq. Yd.

Includes bituminous concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings when constructed for aircraft parking.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

764 Repairs Aircraft Flexible Paving — Paved Area Patched — Sq. Yd.

Includes removing and replacing small area of flexible paving including sub-base course, base course, tack or prime coat, and surface material.

765 Aircraft Paving Overlay — Paved Area — Sq. Yd.

Includes flexible overlays of aircraft paving. Includes cleaning, sweeping, tack coat, minor patching, leveling courses, and pavement marking.

766 Aircraft Paving Slurry Seal — Paved Area — Sq. Yd.

Includes slurry seal applied over existing aircraft paving. Includes cleaning, sweeping, minor patching, tack coat, and pavement markings.

INCIDENTAL PAVING WORK

771 Pavement Milling — Milled Area — Sq. Yd.

Includes bituminous and concrete milling with removal and disposal cost. Savings from recycled materials should be reflected in other systems.

EARTHWORK

811 Earthwork — Volume — Cu. Yd.

Includes site grading, site excavation, soil stabilization, soil treatment, and site clearing.

812 Borrow — Volume in Place — Cu. Yd.

Includes all work to provide off-site borrow material compacted in place.

813 Topsoil, Seed, Sod — Area Graded — Sq. Yd.

Includes fine grading and leveling, fertilizer and limestone application, spreading and leveling topsoil, seeding, mulching, and sodding.

814 Landscaping — Area Planted — Sq. Yd.

Includes trees, shrubs, ground covers, and planters.

815 Site Irrigation — Number Sprinkler Heads — Each

Includes underground piping, sprinkler heads, and controls to install a site irrigation system.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

816 Surcharge — Fill in Surcharge — Cu. Yd.

Includes cost for obtaining, placing, monitoring, and removing to disposal area all required surcharge. If used for site fill does not include cost of compaction.

817 Earth Replacement — Earth Replaced (In place Measurement) — Cu. Yd.

Includes cost of removing and disposal of existing material, obtaining, placing, compacting, and proof rolling new material for improved bearing capacity. (See 846 for contaminated earth removal.)

818 Environmental Protection — Area Protected — Acres

Includes all cost for temporary environmental protection work required due to clearing, grubbing, earthwork, or other related work. (Measure to nearest tenth of acre.)

SITE IMPROVEMENTS

821 Site Improvements — Area Developed — Sq. Yd.

Includes retaining walls, terrace and perimeter walls, signs, site furnishings, fountains, pools and watercourse, flagpoles, and other miscellaneous related items.

SITE PREPARATION

831 Site Dewatering (Major) — Header Pipe — Lin. Ft.

Includes all costs for site dewatering where the dewatering is a major item and is required for several systems. Includes furnishing, installing, operating, and removal of well pointing system.

DEMOLITION

841 Remove Utilities — Length of Run — Lin. Ft.

Includes excavation, utility removal, capping, and backfill as required to remove existing utility lines.

842 Remove Paving and Slabs — Area Removed — Sq. Yd.

Includes removal and disposal of material from both bituminous and portland cement concrete paved areas.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

843 Remove Structures | Structure Volume | Cu. Ft.

Includes complete cost for removal of structure, foundation, and interior equipment. Removal of hazardous materials is not included. See Systems 844 and 845.

844 Remove/Dispose of Asbestos (Exterior) | Total Cost | Lump Sum

Includes costs for removal of asbestos from any exterior areas including buildings to be demolished. Included are costs for sealing off areas, asbestos removal, monitoring testing disposal, change areas, disposable suits, respirators, and other related costs. (See System 172 for interior asbestos removal.)

845 Remove/Dispose of P.C.B. | Total Cost | Lump Sum

Includes costs for removing and disposing of P.C.B. contaminated areas. Included are costs for sealing off area, removal of contaminated materials, monitoring, testing change area, disposal suits, respirators, disposal, and other related cost.

846 Remove/Dispose of Contaminated Earth | Earth Removed | Cu. Yd.

Includes cost of removing and disposing of existing industrial and hazardous materials.

STORM DRAINAGE

851 Storm Drainage Piping | Length of Run | Lin. Ft.

Includes utility service connections, excavation and backfill, sheeting and shoring, dewatering, pipe and fittings, manholes, catch basins, curb inlets, dry wells, ditches and culverts, retention ponds, and headwalls.

852 Box and Arch Culvert | Length of Culvert | Lin. Ft.

Includes excavation, backfill, forming, concrete, reinforcing steel accessories, steel arch, and bedding materials.

853 Drainage Facing Materials | Surface Area | Sq. Yds.

Includes stone riprap, fabrics, and other materials used as facing materials for outfalls and slope protection from storm water runoff.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

FENCING

861 Fencing (Perimeter) Length of Fence Lin. Ft.

Includes footings, posts, fencing materials, gates, and turnstiles for perimeter fencing. Includes station perimeter and individual facility. Does not include fencing for fields in Systems 872, 874, 875. See 621 for mechanically operated security gate.

862 Fencing (Alarm) Length of Fence Lin. Ft.

Includes footing post fencing materials gate and turnstiles when fence is part of a security alarm system.

RECREATION EQUIPMENT/FIELDS

871 Playground Equipment Pieces of Equipment Each

Includes swings, slides, and other items of recreation-type equipment for children's playgrounds.

872 Playing Field Equipment Pieces of Equipment Each

Includes costs for playing field equipment not shown elsewhere.

873 Tennis Courts Number of Courts Each

Includes paving, fencing, lighting, and nets for a complete tennis court.

874 Softball/Baseball Fields Number of Fields Each

Includes grading, topsoil and seeding drainage, infield, dugouts, fencing, and lighting as required for a complete softball or baseball field.

875 Football/Soccer Fields Number of Fields Each

Includes grading, topsoil and seeding, drainage, fencing, goals, benches, and lighting as required for a complete football or soccer field.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

## HEAVY CONSTRUCTION

### SPECIAL BUILDING FOUNDATIONS

| | | | |
|---|---|---|---|
| 911 | Piling - Land | Length of Piling | Lin. Ft. |

Piling driven from land based equipment used for building foundations or bulkhead tieback systems. Includes mobilization and demobilization, pile cutoff, and piling. Includes pile tests if not a separate bid item.

| | | | |
|---|---|---|---|
| 912 | Caissons | Number of Caissons | Each |

Includes excavation, concrete, and reinforcing for foundation caissons.

| | | | |
|---|---|---|---|
| 913 | Pressure Injected Footings | Number of Footings | Each |

Includes drilling, concrete, and reinforcing a complete pressure injected footing system.

| | | | |
|---|---|---|---|
| 914 | Vibrofloatation | Number of Locations | Each |

Includes specialized vibratory probe for penetration and extraction, and furnishing and placing sand backfill.

| | | | |
|---|---|---|---|
| 915 | Chemical Soil Stabilization | Number of Locations | Each |

Includes grouting equipment and specialized chemicals for injection into unstable subsurface materials.

| | | | |
|---|---|---|---|
| 916 | Dynamic Consolidation | Number of Locations | Each |

Includes equipment, consolidation effort, sand, backfill, and testing.

| | | | |
|---|---|---|---|
| 917 | Piling - Cast-in-Place | Length of Piling | Lin. Ft. |

Includes drilling, casing concrete, and reinforcing for a complete cast-in-place piling system.

### RAILROAD

| | | | |
|---|---|---|---|
| 921 | Track Work - Railroad | Length of Track | Lin. Ft. |

Includes subgrade preparation, ballast, ties, rail, switches, and other accessories for a complete track system.



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

MARINE STRUCTURES PIERS

931 Piling - Marine | Length of Piling | Lin. Ft.

Piling driven from floating equipment or land equipment used to support piers or similar waterfront structures. Includes mobilization and demobilization, pile cutoff, and piling. Includes pile tests if not a separate bid item.

932 Dolphins | Number of Dolphins | Each

Includes piling, cap and accessories for a complete dolphin.

933 Med Mooring | Total Cost | Lump Sum

Includes chain, anchors, buoys and other accessories for a complete Med mooring.

934 Pier Deck | Area of Deck | Sq. Ft.

Includes mobilization and demobilization, cast-in-place or precast concrete pile caps, trench sections, deck panels, manholes or transformer vaults, embedded conduit, drains, and expansion joints.

935 Fenders | Length of Fender | Lin. Ft.

Includes mobilization and demobilization, wales, chocks, fender piles, rubber fenders, pneumatic fenders, and associated hardware.

936 Pile Clusters | Number of Clusters | Each

Includes piles and accessories required for a complete pile cluster.

937 Marine Specialties | Total Cost | Lump Sum

Includes mobilization and demobilization, bollards, cleats, brows, camels, oil booms, and other marine specialties.

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls | Total Face Area | Sq. Ft.

Includes mobilization and demobilization, sheet piles, concrete cap, relieving platform, and tieback system.

942 Erosion Protection Marine | Area Covered | Sq. Yd.

Includes mobilization and demobilization, filled bags, concrete and asphalt surfaces, ground mats, sand fences, precast structural items, and filter cloth.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) — Area Covered — Sq. Yd.

Includes bed preparation, all layers of stone, and other required work to place riprap for slope protection from wave action.

MARINE REPAIRS

951 Underdeck Repair — Total Cost — Lump Sum

Includes mobilization and demobilization, repair of cracks, spalls, beam, and cap repairs.

952 Pile Repairs Marine — Length Repaired — Lin. Ft.

Includes costs for removal and replacement of existing concrete including forms and reinforcing and repair for timber piling. All for marine structures.

DREDGING

961 Mobilization/Demobilization Dredging — Total Cost — Lump Sum

Includes outfitting and moving equipment to and from site, dike work, spillways, pipeline laying, and other work not directly associated with actual moving of dredged materials.

962 Hydraulic Dredging — Volume — Cu. Yd.

Includes costs for actual moving of material by hydraulic means from in-place location to disposal area.

963 Bucket Dredging — Volume — Cu. Yd.

Includes pumping of material from scow to disposal area.

TOWERS/ANTENNAS

971 Towers — Length — Lin. Ft.

Includes foundations, ground screens, tower lighting, and accessories.

972 Antennas — Total Cost — Lump Sum

Includes cost for installing or repairing antennas.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

TUNNEL/PIPE JACKING

981 Tunneling — Total Cost — Lump Sum

Includes drilling equipment, excavation, disposal, liners, conduits, and other required work.

982 Pipe Jacking — Length Jacked — Lin. Ft.

Includes jacking pits, jacking equipment, conduit, and other required items.

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges — Deck Area — Sq. Ft.

Includes foundation, supports, caps, beams, deck, rails, lights, and accessories required for a complete bridge. Foundation piling not included.

992 Overpasses — Deck Area — Sq. Ft.

Includes foundation, supports, caps, beams, deck, rails, lights, and accessories required for a complete bridge. Foundation piling not included.

999 Supporting Facilities — Total Cost — Lump Sum

Includes all work outside the building 5-foot line. This system is not used for estimates.

23.2 Award Cost Data. See Appendix J.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# APPENDIX J

## AWARD COST DATA
(Printed 08 August 1989)

ACF = 1.0



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR 6CI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 110-10 | MPA DISPERSAL HARDSTANDS | KEFLAVIK ICELAND | 3.00 | 2260 | 82/11/08 | 107,527 | SY | $57.25 | $25.56 |
| | | AVERAGE OF ADJUSTED UNIT COST | $25.56 | | | | | | |
| | | AVERAGE FACILITY SIZE | 107527 | SY | | | | | |
| 111-20 | AERIAL TARGET 3 OF 6 | CHERRY POINT NC | 0.92 | 2612 | 88/09/16 | 1,111 | SY | $71.47 | $90.05 |
| | | AVERAGE OF ADJUSTED UNIT COST | $90.05 | | | | | | |
| | | AVERAGE FACILITY SIZE | 1111 | SY | | | | | |
| 113-20 | ACFT PARKING APRON | TUSTIN CALIFORNIA | 1.19 | 2513 | 87/01/30 | 109,627 | SY | $35.58 | $37.52 |
| 113-20 | AIRCRAFT PARKING APRON | SAN DIEGO CA | 1.28 | 2402 | 84/01/31 | 93,026 | SY | $32.57 | $33.06 |
| 113-20 | AIRCRAFT PARKING AREA | NAS,WHITING FLD,MILTON,FL | 0.85 | 2402 | 84/01/13 | 62,059 | SY | $25.89 | $36.55 |
| | | AVERAGE OF ADJUSTED UNIT COST | $35.71 | | | | | | |
| | | AVERAGE FACILITY SIZE | 88237 | SY | | | | | |
| 116-15 | AIRCRAFT RINSE FACILITY | CHERRY POINT NC | 0.87 | 2565 | 87/09/18 | 1,710 | SY | $121.85 | $172.22 |
| 116-15 | AIRCRAFT RINSE FACILITY | MCAS BEAUFORT SC | 0.94 | 2557 | 87/08/19 | 910 | SY | $95.89 | $115.04 |
| | | AVERAGE OF ADJUSTED UNIT COST | $143.63 | | | | | | |
| | | AVERAGE FACILITY SIZE | 1310 | SY | | | | | |
| 116-56 | COMB ARCRFT ORD LOAD AREA | CHERRY POINT NC | 0.90 | 2438 | 85/06/07 | 97,263 | SY | $36.92 | $53.62 |
| 116-56 | COMBAT AIRCRAFT ORD | MCAS, KANEOHE BAY, HI | 1.34 | 2418 | 84/12/28 | 13,300 | SY | $90.75 | $72.48 |
| | | AVERAGE OF ADJUSTED UNIT COST | $63.05 | | | | | | |
| | | AVERAGE FACILITY SIZE | 55281 | SY | | | | | |
| 125-10 | FUEL LINE | NORFOLK VIRGINIA | 0.95 | 2581 | 88/02/04 | 2,689 | LF | $132.01 | $163.01 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $163.01 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2689 | LF | | | | | |
| 131-15 | COMMUNICATION BLDG 2 OF 2 | MCAS BEAUFORT, SC | 0.94 | 2438 | 85/06/13 | 3,523 | SF | $91.73 | $126.24 |
| 131-15 | COMMUNICATION CENTER | YUMA ARIZONA | 1.19 | 2616 | 88/11/23 | 1,996 | SF | $75.19 | $70.31 |
| | | AVERAGE OF ADJUSTED UNIT COST | $98.27 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2759 | SF | | | | | |
| 131-25 | TELEMETRY BLDG | ROOSEVELT ROADS PR | 1.10 | 2612 | 88/09/01 | 9,000 | SF | $195.76 | $214.89 |
| 131-25 | SATTELITE COMM GRND TERMI | SIGONELLA ITALY | 1.00 | 2440 | 85/09/27 | 2,647 | SF | $224.57 | $251.06 |
| | | AVERAGE OF ADJUSTED UNIT COST | $232.97 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5823 | SF | | | | | |
| 131-35 | SATELLITE TERMINAL BLDG | CHESAPEAKE VIRGINIA | 0.92 | 2598 | 88/07/08 | 20,550 | SF | $245.32 | $310.78 |
| | | AVERAGE OF ADJUSTED UNIT COST | $310.78 | | | | | | |
| | | AVERAGE FACILITY SIZE | 20550 | SF | | | | | |
| 131-40 | TELEPH XCHNGE BLDG | CAMP PENDLETON CALIFORNIA | 1.20 | 2348 | 83/02/08 | 9,116 | SF | $93.72 | $104.90 |
| 131-40 | TELEPHONE EXCHANGE BLDG | MCRD PARRIS ISLAND, SC | 0.94 | 2195 | 82/03/17 | 5,851 | SF | $94.51 | $142.98 |
| 131-40 | TELEPHONE XCHGE BLDG | LEMOORE CALIFORNIA | 1.20 | 2406 | 83/12/21 | 2,570 | SF | $146.28 | $136.96 |
| | | AVERAGE OF ADJUSTED UNIT COST | $128.28 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5845 | SF | | | | | |
| 133-72 | RADAR AIR TRAFFIC CON CEN | NAS CORPUS CHRISTI,TX | 0.91 | 2295 | 82/12/17 | 6,866 | SF | $101.85 | $152.23 |
| 133-72 | RADAR AIR TRAFFIC CTL CTR | JACKSONVILLE NC | 0.90 | 2406 | 84/02/27 | 6,828 | SF | $70.40 | $101.48 |
| 133-72 | RADAR AIR TRAFFIC CTL CEN | NAS KEY WEST,FL | 0.87 | 2581 | 88/02/05 | 6,447 | SF | $106.82 | $146.97 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $133.56 | | | | | | |
| | | AVERAGE FACILITY SIZE | 6713 | SF | | | | | |
| 134-40 | RADAR OPERATIONAL FAC | NAS, BARBERS PT, HI | 1.34 | 2417 | 84/06/12 | 2,300 | SF | $89.51 | $83.67 |
| | | AVERAGE OF ADJUSTED UNIT COST | $83.67 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2300 | SF | | | | | |
| 137-10 | METEOROLOGICAL BLDG | MONTEREY CA | 1.33 | 2406 | 83/12/30 | 52,780 | SF | $98.69 | $97.27 |
| 137-10 | METEOROLOGICAL BUILDING | PEARL HARBOR HAWAII | 1.27 | 2433 | 86/01/10 | 20,827 | SF | $126.07 | $114.38 |
| | | AVERAGE OF ADJUSTED UNIT COST | $105.82 | | | | | | |
| | | AVERAGE FACILITY SIZE | 36803 | SF | | | | | |
| 141-12 | AIRFIELD FACILITIES | MEMBASA KENYA | 1.05 | 2295 | 82/12/02 | 10,463 | SF | $27.99 | $35.16 |
| | | AVERAGE OF ADJUSTED UNIT COST | $35.16 | | | | | | |
| | | AVERAGE FACILITY SIZE | 10463 | SF | | | | | |
| 141-25 | COM.STRUT.& FIRE/RESC.STA | NADC WARMINSTER PA | 1.07 | 2414 | 83/07/25 | 12,800 | SF | $79.19 | $92.82 |
| | | AVERAGE OF ADJUSTED UNIT COST | $92.82 | | | | | | |
| | | AVERAGE FACILITY SIZE | 12800 | SF | | | | | |
| 141-30 | SQUADRON OPERAT./NDI FAC | KEESLER AFB BILOXI, MS | 0.85 | 2595 | 88/06/30 | 54,050 | SF | $73.98 | $108.03 |
| 141-30 | SQUADRON OPS FACILITY | ANDREWS AFB | 1.08 | 2195 | 82/04/27 | 15,620 | SF | $59.76 | $70.67 |
| 141-30 | AERIAL PORT TRNG FAC | NAS DALLAS, TEXAS | 1.02 | 2014 | 81/03/30 | 12,060 | SF | $47.76 | $62.84 |
| | | AVERAGE OF ADJUSTED UNIT COST | $80.51 | | | | | | |
| | | AVERAGE FACILITY SIZE | 27243 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 141-40 | COMP OP & TRNG FAC | POINT MUGU CALIFORNIA | 1.18 | 2616 | 88/11/10 | 38,100 | SF | $90.15 | $93.07 |
| 141-40 | SQUADRON OPER. FAC. | CLARK AB, RP | 0.89 | 2598 | 88/07/01 | 19,700 | SF | $38.08 | $50.87 |
| 141-40 | SQUADRON OPERS BLDG | NAS NEW ORLEANS, LA | 0.94 | 2445 | 86/03/27 | 14,570 | SF | $89.60 | $113.50 |
| 141-40 | ACFT OPS BLDG PF #1 | CAMP PENDLETON MCAS | 1.11 | 2513 | 87/01/22 | 9,880 | SF | $91.70 | $89.67 |
| | AVERAGE OF ADJUSTED UNIT COST | | $86.77 | | | | | | |
| | AVERAGE FACILITY SIZE | | 20562 | SF | | | | | |
| 141-70 | CONTROL TOWER | FALLON NEVADA | 1.34 | 2509 | 87/02/20 | 9,644 | SF | $143.54 | $136.07 |
| 141-70 | AIRCRAFT CONTROL TOWER | MYRTLE BEACH AFB, SC | 0.93 | 2352 | 83/03/04 | 5,834 | SF | $134.63 | $192.13 |
| 141-70 | CONTROL TOWER | NAS CHASE FIELD, TEXAS | 0.87 | 2421 | 84/11/16 | 2,998 | SF | $158.16 | $210.52 |
| 141-70 | LCAC COMPLEX CONTROL TWR | NAB LCREEK NORFOLK VA | 0.98 | 2457 | 85/07/24 | 2,196 | SF | $116.36 | $130.64 |
| | AVERAGE OF ADJUSTED UNIT COST | | $167.34 | | | | | | |
| | AVERAGE FACILITY SIZE | | 5168 | SF | | | | | |
| 141-87 | LOX FACILITY | KEFLAVIK ICELAND | 3.00 | 2295 | 82/12/17 | 5,582 | SF | $239.70 | $105.41 |
| | AVERAGE OF ADJUSTED UNIT COST | | $105.41 | | | | | | |
| | AVERAGE FACILITY SIZE | | 5582 | SF | | | | | |
| 141-88 | ALRT SHEL/ANG A/CRFT APR | NAS NEW ORLEANS, LA | 0.94 | 2612 | 88/09/15 | 13,991 | SF | $64.08 | $79.02 |
| | AVERAGE OF ADJUSTED UNIT COST | | $79.02 | | | | | | |
| | AVERAGE FACILITY SIZE | | 13991 | SF | | | | | |
| 143-10 | EMERGENCY VEHICLE GARAGE | ADAK ALASKA | 3.55 | 2581 | 88/02/11 | 3,066 | SF | $180.34 | $59.59 |
| | AVERAGE OF ADJUSTED UNIT COST | | $59.59 | | | | | | |
| | AVERAGE FACILITY SIZE | | 3066 | SF | | | | | |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 143-11 | VEHICLE MAIN TRAN FAC 2-2 | NMCRC MIAMI, FL | 0.95 | 2440 | 85/09/04 | 5,776 | SF | $52.54 | $68.62 |
| | AVERAGE OF ADJUSTED UNIT COST | | $68.62 | | | | | | |
| | AVERAGE FACILITY SIZE | | 5776 | SF | | | | | |
| 143-15 | RANGE OPERATIONS CENTER | VIEGUES, PR | 1.05 | 2493 | 86/06/16 | 10,662 | SF | $200.71 | $232.17 |
| | AVERAGE OF ADJUSTED UNIT COST | | $232.17 | | | | | | |
| | AVERAGE FACILITY SIZE | | 10662 | SF | | | | | |
| 143-20 | EOD COMPLEX OPER/OFFICE | NORFOLK VIRGINIA | 0.95 | 2504 | 86/09/03 | 30,250 | SF | $70.15 | $93.00 |
| 143-20 | ORDNANCE OPERATIONS BUILD | NAVMAG, LUALUALEI, HI | 1.34 | 2428 | 85/03/27 | 23,966 | SF | $73.54 | $71.28 |
| 143-20 | ORDNANCE OPERATIONS BLDG | JACKSONVILLE NC | 0.92 | 2617 | 88/12/22 | 3,600 | SF | $81.64 | $86.28 |
| | AVERAGE OF ADJUSTED UNIT COST | | $83.52 | | | | | | |
| | AVERAGE FACILITY SIZE | | 19272 | SF | | | | | |
| 143-25 | SEAL TEAM OPER FAC | NORFOLK VIRGINIA | 0.93 | 2595 | 88/06/30 | 102,170 | SF | $63.68 | $86.83 |
| 143-25 | SEAL TM TRNG & SUPT BLDG | NAVSTA PEARL, HI | 1.34 | 2523 | 87/05/04 | 15,500 | SF | $124.07 | $99.20 |
| 143-25 | DUS TRAINING FACILITY | NORFOLK VIRGINIA | 0.98 | 2417 | 84/06/28 | 12,968 | SF | $79.31 | $88.92 |
| 143-25 | NSCT OPERATIONS CENTER | NORFOLK VIRGINIA | 0.92 | 2598 | 88/07/28 | 11,900 | SF | $44.24 | $48.73 |
| | AVERAGE OF ADJUSTED UNIT COST | | $80.92 | | | | | | |
| | AVERAGE FACILITY SIZE | | 35634 | SF | | | | | |
| 143-40 | FLT COMP PROG OPNS BLDG | SAN DIEGO CALIF | 1.28 | 2440 | 85/09/30 | 86,627 | SF | $97.13 | $97.06 |
| 143-40 | COMPUTER PROG OPS CENTER | NSTL BAY ST LOUIS, MS | 0.98 | 2402 | 84/01/30 | 71,400 | SF | $71.82 | $94.26 |
| 143-40 | COMPUTER PROGRAMMING FAC | NTTC PENSACOLA, FL | 0.82 | 2595 | 88/06/10 | 67,197 | SF | $59.22 | $84.25 |
| | AVERAGE OF ADJUSTED UNIT COST | | $91.85 | | | | | | |
| | AVERAGE FACILITY SIZE | | 75074 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 143-41 | AMPHIB OPERATIONS BLDG #4 | NORFOLK VIRGINIA | 0.92 | 2612 | 88/09/14 | 54,635 | SF | $57.50 | $77.06 |
| 143-41 | AMPHIB OPS BLDG #3 | NORFOLK VIRGINIA | 0.93 | 2528 | 87/07/31 | 31,877 | SF | $79.91 | $107.20 |
| 143-41 | AMPHIB OPS BLDG #1 | NORFOLK VIRGINIA | 0.93 | 2528 | 87/07/31 | 30,040 | SF | $76.02 | $101.97 |
| 143-41 | AMPHIB OPERATIONS BLDG #6 | NORFOLK VIRGINIA | 0.92 | 2612 | 88/09/14 | 16,197 | SF | $81.05 | $96.34 |
| 143-41 | AMPHIB OPERATIONS BLDG #5 | NORFOLK VIRGINIA | 0.92 | 2612 | 88/09/14 | 10,560 | SF | $89.72 | $100.93 |
| 143-41 | AMPHIB OPS BLDG #2 | NORFOLK VIRGINIA | 0.93 | 2528 | 87/07/31 | 5,928 | SF | $108.34 | $119.25 |
| | | AVERAGE OF ADJUSTED UNIT COST | $100.45 | | | | | | |
| | | AVERAGE FACILITY SIZE | 24872 SF | | | | | | |
| 143-45 | ARMORIES | MCAS, KANEOHE BAY, HI | 1.34 | 2428 | 84/08/12 | 17,000 | SF | $87.33 | $85.55 |
| 143-45 | ARMORY | MCRD PARRIS ISLAND, SC | 0.94 | 2219 | 82/06/28 | 9,860 | SF | $64.53 | $96.57 |
| 143-45 | ARMORY | MCB/MCAGCC 29 PALMS CA | 1.20 | 2220 | 82/05/28 | 8,400 | SF | $111.80 | $127.06 |
| 143-45 | ARMORY | TWENTYNINE PALMS CALIF | 1.20 | 2424 | 85/01/30 | 8,064 | SF | $91.25 | $94.03 |
| 143-45 | ARMORY | EL TORO CALIFORNIA | 1.20 | 2200 | 82/02/04 | 7,820 | SF | $77.64 | $88.15 |
| 143-45 | ARMORY | TUSTIN CALIFORNIA | 1.19 | 2528 | 87/07/20 | 5,363 | SF | $91.03 | $84.82 |
| | | AVERAGE OF ADJUSTED UNIT COST | $96.03 | | | | | | |
| | | AVERAGE FACILITY SIZE | 9417 SF | | | | | | |
| 143-47 | READY CREW FACILITY | ANDREWS AFB | 1.08 | 2249 | 82/09/18 | 22,500 | SF | $66.36 | $69.51 |
| | | AVERAGE OF ADJUSTED UNIT COST | $69.51 | | | | | | |
| | | AVERAGE FACILITY SIZE | 133313 SF | | | | | | |
| 156-10 | WATERFRONT TRANSIT SHED | NS MAYPORT, FLORIDA | 0.85 | 2493 | 86/06/13 | 5,200 | SF | $36.84 | $54.26 |
| 156-10 | WATERFRONT TRANSIT SHED | NORFOLK VIRGINIA | 0.91 | 2581 | 88/02/04 | 5,021 | SF | $55.88 | $73.50 |
| | | AVERAGE OF ADJUSTED UNIT COST | $63.88 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5110 SF | | | | | | |
| 159-20 | DEGAUSSING RNG OPS FAC | SAN DIEGO NS | 1.21 | 2493 | 86/06/27 | 4,100 | SF | $169.98 | $177.73 |
| 159-20 | DEGAUSSING BUILDING | NAVSTA, PEARL HARBOR, HI | 1.34 | 2428 | 85/03/22 | 1,600 | SF | $244.96 | $211.08 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $194.40 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2850 | SF | | | | | |
| 159-64 | SPECIAL WARFARE OPNS BLDG | SAN DIEGO CALIFORNIA | 1.17 | 2427 | 85/04/30 | 25,816 | SF | $77.32 | $84.98 |
| 159-64 | SP WARFR OPS BLDG PF #1 | CORONADO NAB | 1.23 | 2496 | 86/08/20 | 25,712 | SF | $68.04 | $69.17 |
| 159-64 | WATERFRONT SUPPORT FAC | NSYD CHARLESTON, SC | 0.93 | 2016 | 81/02/09 | 21,008 | SF | $45.29 | $74.63 |
| 159-64 | SWIMMER DEL VEH FAC | SAN DIEGO CALIFORNIA | 1.23 | 2579 | 88/01/29 | 16,200 | SF | $269.84 | $247.66 |
| | | AVERAGE OF ADJUSTED UNIT COST | $119.11 | | | | | | |
| | | AVERAGE FACILITY SIZE | 22184 | SF | | | | | |
| 159-66 | LANDING CRAFT RAMP/PARKIN | NCSC PANAMA CIT, FLORIDA | 0.85 | 2406 | 83/12/15 | 5,333 | SY | $87.22 | $129.13 |
| | | AVERAGE OF ADJUSTED UNIT COST | $129.13 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5333 | SY | | | | | |
| 165-10 | FY-87 MAINT DREDGE | NORFOLK VIRGINIA | 0.91 | 2521 | 87/04/06 | 770,150 | CY | $2.39 | $3.31 |
| 165-10 | DREDGING (MOB/DEMOB) | NORFOLK VIRGINIA | 0.98 | 2351 | 83/05/09 | 637,616 | CY | $3.61 | $4.93 |
| 165-10 | MAINT DRED'G (MOB/DEMOB) | NORFOLK VIRGINIA | 0.98 | 2421 | 84/11/02 | 571,315 | CY | $3.71 | $4.92 |
| 165-10 | MAINT DREDGING | YORKTOWN VIRGINIA | 0.95 | 2521 | 87/04/27 | 214,610 | CY | $5.54 | $6.30 |
| 165-10 | MAINT DRUDGING FY-87 | PORTSMOUTH VIRGINIA | 0.95 | 2523 | 87/05/26 | 102,220 | CY | $4.08 | $4.35 |
| | | AVERAGE OF ADJUSTED UNIT COST | $4.76 | | | | | | |
| | | AVERAGE FACILITY SIZE | 459182 | CY | | | | | |
| 171-10 | COMPUTER TECH TRAIN FAC | KEESLER AFB BILOXI MS | 0.98 | 2433 | 85/05/22 | 113,169 | SF | $57.69 | $80.49 |
| 171-10 | ACADEMIC INSTRUCTION FAC | NTC ORLANDO, FLORIDA | 0.86 | 2249 | 82/09/24 | 31,302 | SF | $40.89 | $65.98 |
| 171-10 | ACADEMIC INSTR BLDG | GUANTANAMO BAY CUBA | 1.60 | 2440 | 85/09/11 | 31,300 | SF | $92.64 | $74.07 |
| 171-10 | ADMIN/TRAINING BLDG | CHESAPEAKE VIRGINIA | 0.93 | 2581 | 88/02/05 | 30,241 | SF | $67.23 | $86.53 |
| 171-10 | TRAINING FACILITY | NSY, PEARL HARBOR, HI | 1.34 | 2424 | 84/10/18 | 25,901 | SF | $82.00 | $75.67 |
| 171-10 | CCT ACADEMIC INST BLDG | CBC GULFPORT, MS | 0.86 | 2565 | 87/09/02 | 23,657 | SF | $46.05 | $61.36 |
| 171-10 | COMM ELECTRNCS TRN COMPLX | NAS MIRAMAR, CA | 1.11 | 2526 | 87/06/27 | 17,452 | SF | $73.85 | $73.84 |
| 171-10 | COMM-ELEC TRNG FAC | NAS BARBER'S PT. | 1.34 | 2455 | 86/04/15 | 16,700 | SF | $86.33 | $72.89 |
| 171-10 | ACADEMIC INSTR BLDG | CBC GULFPORT MS | 0.87 | 2443 | 86/02/03 | 16,350 | SF | $60.91 | $79.61 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 171-10 | CE/UT ACADEMIC INST BLDG | CBC GULFPORT, MS | 0.86 | 2565 | 87/09/30 | 14,460 | SF | $68.11 | $84.21 |
| 171-10 | RECRUIT TRAIN BLDG | MCRD PARRIS ISLAND, SC | 0.94 | 2513 | 87/01/09 | 9,500 | SF | $66.56 | $74.18 |
| 171-10 | APPL INSTR BLDG (DIESEL) | NORFOLK VIRGINIA | 0.98 | 2418 | 84/12/03 | 7,533 | SF | $71.77 | $78.37 |
| | AVERAGE OF ADJUSTED UNIT COST | | $75.60 | | | | | | |
| | AVERAGE FACILITY SIZE | | 31260 | SF | | | | | |
| 171-15 | RESERVE TRAIN FAC 1 OF 2 | NMCRC MIAMI, FL | 0.95 | 2440 | 85/09/04 | 55,212 | SF | $49.47 | $68.01 |
| 171-15 | RESERVE TRAINING BUILDING | NMCRC W. PALM BEACH, FL | 0.93 | 2612 | 88/09/29 | 47,129 | SF | $68.63 | $90.04 |
| 171-15 | RESERVE TRAINING CENTER | NMCRC GRNVL, SC | 0.95 | 2581 | 88/02/18 | 43,398 | SF | $54.97 | $70.70 |
| 171-15 | ARMED FORCES RESERVE CENT | NAS CORPUS CHRISTI, TEXAS | 0.91 | 2430 | 84/09/28 | 43,100 | SF | $53.24 | $75.93 |
| 171-15 | RESERVE TRAINING BUILDING | NMCRC AMARILLO, TX | 0.86 | 2612 | 88/09/23 | 32,765 | SF | $65.80 | $91.43 |
| 171-15 | N&MRC TRAINING BLDG | NMCRC HOUSTON, TEXAS | 1.02 | 2233 | 82/07/20 | 32,360 | SF | $66.19 | $90.70 |
| 171-15 | AVIATION TECH TRN BLDG | NAS DALLAS, TEXAS | 1.02 | 2432 | 85/02/28 | 23,961 | SF | $66.88 | $80.03 |
| 171-15 | RESERVE FORCES OP TRN FAC | KEESLER AFB, BILOXI, MS | 0.98 | 1918 | 80/03/03 | 18,423 | SF | $59.78 | $89.98 |
| 171-15 | U. S. ARMY RESERVE CENTER | AMERICAN SAMOA | 2.40 | 2428 | 85/03/08 | 11,250 | SF | $160.00 | $73.56 |
| 171-15 | CIVIL ENGR TRNG FAC | TRAVIS AFB | 1.22 | 2598 | 88/07/29 | 5,975 | SF | $96.60 | $78.20 |
| 171-15 | ANG MED TRG & ADMIN FAC | MOFFETT FIELD CALIFORNIA | 1.25 | 2430 | 83/09/30 | 5,800 | SF | $94.43 | $79.10 |
| | AVERAGE OF ADJUSTED UNIT COST | | $80.69 | | | | | | |
| | AVERAGE FACILITY SIZE | | 29433 | SF | | | | | |
| 171-20 | APPLIED INSTR BLDG | DAM NECK V BEACH VA | 0.98 | 2402 | 84/01/30 | 113,400 | SF | $51.87 | $73.31 |
| 171-20 | APPLIED INSTRUCTION BLDG | NAS MEMPHIS MILLINGTON,TN | 1.00 | 2311 | 83/01/13 | 84,480 | SF | $45.20 | $65.08 |
| 171-20 | OS "A" INSTRUCTION BLDG | DAM NECK V BEACH VA | 0.98 | 2504 | 86/09/30 | 81,000 | SF | $63.79 | $86.48 |
| 171-20 | APPLIED INSTRUCTION BLDG | NTC ORLANDO, FLORIDA | 0.86 | 2422 | 84/04/20 | 79,600 | SF | $35.14 | $56.13 |
| 171-20 | APPLIED INSTRUCTION BLDG | SAN DIEGO CALIF | 1.28 | 2424 | 84/10/24 | 79,253 | SF | $76.21 | $80.83 |
| 171-20 | BASIC ENL SUB SCHOOL | NEW LON,GROTON,CT | 1.13 | 2418 | 84/12/28 | 73,376 | SF | $87.09 | $104.90 |
| 171-20 | APPLIED INSTR BLDG | NAS MEMPHIS,MILLINGTON,TN | 0.95 | 2504 | 86/09/10 | 67,768 | SF | $63.52 | $86.93 |
| 171-20 | FLEET TRAINING CENTER | SAN DIEGO CALIFORNIA | 1.20 | 2427 | 85/04/15 | 60,400 | SF | $54.55 | $60.97 |
| 171-20 | APPLIED INSTRUCTION BLDG | NAS CECIL FIELD, FLORIDA | 0.90 | 2195 | 82/04/14 | 58,300 | SF | $48.88 | $79.69 |
| 171-20 | AVIATION SURV TRAIN FAC | NAS PENSACOLA, FLORIDA | 0.85 | 2195 | 82/03/02 | 56,596 | SF | $51.37 | $88.68 |
| 171-20 | APPLIED INSTRUCTION BLDG | NAS MEMPHIS, TENNESSEE | 1.00 | 2402 | 84/01/20 | 53,812 | SF | $51.70 | $69.33 |
| 171-20 | INSTRUMENTMAN TRG FAC 1-2 | NTTC PENSACOLA, FL | 0.84 | 2589 | 87/12/14 | 52,000 | SF | $57.80 | $85.61 |
| 171-20 | APPLIED INSTRUCTION BLDG | SAN DIEGO CALIFORNIA | 1.28 | 2233 | 82/07/09 | 51,998 | SF | $79.20 | $89.25 |
| 171-20 | APPLIED ENGR INSTR BLDG | NORFOLK VIRGINIA | 0.98 | 2418 | 84/12/31 | 48,750 | SF | $61.48 | $82.68 |
| 171-20 | APPLIED INSTRUCTION BLDG | PORT HUENEME CA NCTC | 1.11 | 2504 | 86/09/17 | 48,038 | SF | $61.62 | $70.65 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 171-20 | APPLIED INSTRUCTION BLDG | LEMOORE CALIFORNIA | 1.20 | 2406 | 83/12/23 | 40,818 | SF | $68.76 | $75.90 |
| 171-20 | APPLIED INST BLDG | NORFOLK VIRGINIA | 0.98 | 2430 | 83/09/29 | 37,638 | SF | $74.47 | $98.62 |
| 171-20 | WEAPONS TRAINING BLDG | NOS INDIAN HEAD MD | 1.08 | 2194 | 82/01/25 | 31,094 | SF | $45.24 | $60.21 |
| 171-20 | HELICOPTER TRAINING FAC | NORFOLK VIRGINIA | 0.91 | 2581 | 88/02/09 | 29,250 | SF | $76.20 | $101.26 |
| 171-20 | OPER TRNR FAC PF #1 | SAN DIEGO CALIF | 1.23 | 2445 | 86/03/31 | 28,686 | SF | $73.02 | $75.79 |
| 171-20 | ACADEMIC INSTR BLDG PF #2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/30 | 28,112 | SF | $65.76 | $70.03 |
| 171-20 | WEAPONS TRNG FACILITY | NTC ORLANDO, FL | 0.84 | 2598 | 88/07/01 | 27,000 | SF | $78.16 | $111.79 |
| 171-20 | APPLIED INSTRUCTION BLDG | CAMP LEJEUNE N C | 0.84 | 2509 | 86/11/13 | 26,961 | SF | $53.55 | $79.31 |
| 171-20 | WEAPONS TRAINING FACILITY | SAN DIEGO CALIF | 1.23 | 2581 | 88/02/11 | 26,500 | SF | $100.53 | $98.84 |
| 171-20 | APPLIED INSTR BLDG | NORFOLK VIRGINIA | 0.98 | 2402 | 84/01/06 | 23,715 | SF | $58.03 | $75.39 |
| 171-20 | INFANTRY SCHOOL | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/30 | 23,540 | SF | $90.00 | $93.90 |
| 171-20 | STEEL WRKRS BLDG(1 OF 2) | NCTC GULFPORT, MS | 0.85 | 2616 | 88/11/15 | 22,693 | SF | $62.17 | $84.65 |
| 171-20 | APPLIED INSTRUCTION BLDG | NTTC PENSACOLA, FL | 0.85 | 2195 | 82/03/05 | 22,400 | SF | $48.47 | $78.65 |
| 171-20 | APPLIED INSTRUCTION BLDG. | NORFOLK VIRGINIA | 0.98 | 2352 | 83/03/25 | 22,085 | SF | $47.80 | $62.78 |
| 171-20 | BUILDERS BLDG(2 OF 2) | NCTC GULFPORT, MS | 0.85 | 2616 | 88/11/15 | 21,114 | SF | $49.34 | $66.52 |
| 171-20 | WATER SURVUVAL TRNG FAC | NAS JACKSONVILLE, FLORIDA | 0.91 | 2017 | 80/12/04 | 18,840 | SF | $70.05 | $112.18 |
| 171-20 | SHIP PROPUL TRAIN BLDG | NTC ORLANDO, FLORIDA | 0.92 | 2428 | 85/03/27 | 18,490 | SF | $56.16 | $73.19 |
| 171-20 | MOBILE MINE ASSEMB GRP AC | N8 CHARLESTON, SC | 0.91 | 2526 | 87/06/04 | 18,250 | SF | $52.42 | $66.38 |
| 171-20 | APPLIED INSTRUCTION BLDG | NTTC PENSACOLA, FLORIDA | 0.85 | 2351 | 83/05/11 | 17,800 | SF | $66.11 | $96.31 |
| 171-20 | APPLIED INSTR BLDG | TUSTIN CALIFORNIA | 1.19 | 2496 | 86/08/27 | 17,400 | SF | $94.13 | $91.38 |
| 171-20 | APPLIED INST BLDG--2 OF 2 | NS MAYPORT, FLORIDA | 0.90 | 2428 | 83/08/05 | 17,200 | SF | $55.45 | $73.16 |
| 171-20 | H-2 LAMPS TNG FACILITY | NORFOLK VIRGINIA | 0.93 | 2516 | 87/03/26 | 16,690 | SF | $70.52 | $86.08 |
| 171-20 | APPLIED INSTRUCTION BLDG | NORFOLK VIRGINIA | 0.98 | 1919 | 80/06/30 | 14,637 | SF | $51.86 | $77.30 |
| 171-20 | CRYPTO TRAINING BLDG | NTTC PENSACOLA, FL | 0.82 | 2596 | 88/04/25 | 14,190 | SF | $83.95 | $110.56 |
| 171-20 | ACADEMIC INSTR BLDG PF #1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/30 | 13,910 | SF | $71.23 | $67.50 |
| 171-20 | APPLIED INSTR BLDG | CBC GULFPORT MS | 0.87 | 2443 | 86/02/01 | 13,480 | SF | $52.07 | $68.04 |
| 171-20 | COMBINED ARMS TRAINER FAC | TWENTYNINE PALMS MCAGCC | 1.26 | 2510 | 86/12/10 | 12,859 | SF | $74.02 | $64.42 |
| 171-20 | FLEET TRAINING FACILITY | CHERRY POINT NC | 0.90 | 2430 | 83/09/30 | 12,515 | SF | $58.69 | $73.86 |
| 171-20 | FIRE FIGHTING SCHOOL | NORFOLK VIRGINIA | 0.98 | 2413 | 84/03/30 | 12,505 | SF | $63.09 | $73.43 |
| 171-20 | CONST BATTALION UNIT COMP | NS MAYPORT, FLORIDA | 0.90 | 2418 | 84/12/14 | 12,300 | SF | $57.82 | $73.13 |
| 171-20 | ITU STUDIO (3 OF 3) | CHERRY POINT NC | 0.87 | 2557 | 87/08/20 | 11,943 | SF | $81.05 | $99.37 |
| 171-20 | DRILL INSTR TRNG FAC | MCRD PARRIS ISLAND, SC | 0.94 | 2195 | 82/03/08 | 11,560 | SF | $61.27 | $81.00 |
| 171-20 | TACT FACILITY (2 OF 3) | CHERRY POINT NC | 0.87 | 2557 | 87/08/20 | 11,483 | SF | $99.39 | $121.87 |
| 171-20 | COMM/ELEC TRAINING FAC | PMRF BARKING SANDS, HI | 1.34 | 2509 | 87/02/11 | 10,680 | SF | $102.77 | $82.63 |
| 171-20 | AIR COMBAT TRAIN FAC | MCAS BEAUFORT, SC | 0.89 | 2499 | 86/07/31 | 10,417 | SF | $80.29 | $97.58 |
| 171-20 | AERIAL PORT TRNG FAC | CHASN AFB, SC | 0.91 | 2581 | 88/02/22 | 10,188 | SF | $76.28 | $87.02 |
| 171-20 | APPLIED INSTRUCTION BLDG | NAS MEMPHIS, TN | 0.94 | 2619 | 89/01/19 | 10,143 | SF | $75.83 | $82.52 |
| 171-20 | OPER TRNR FAC PF #2 | SAN DIEGO CALIF | 1.23 | 2445 | 86/03/31 | 9,250 | SF | $76.30 | $67.38 |
| 171-20 | FLEET TRAINING FAC | NS MAYPORT, FL | 0.85 | 2443 | 86/02/04 | 8,907 | SF | $67.65 | $86.52 |
| 171-20 | AVIATION PHYSIOLOGY TRNG | CHERRY POINT NC | 0.86 | 2440 | 85/09/14 | 8,802 | SF | $86.72 | $109.76 |
| 171-20 | FLEET TRAINING UNIT FAC | NS CHARLESTON, SC | 0.93 | 2428 | 84/08/08 | 8,400 | SF | $49.52 | $57.74 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 171-20 | C-130 TRAINER FACILITY | CHERRY POINT NC | 0.87 | 2595 | 88/06/24 | 7,996 | SF | $98.19 | $114.51 |
| 171-20 | ACADEMIC INSTR BLDG PF #5 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/30 | 7,880 | SF | $74.91 | $67.28 |
| 171-20 | MARASTU TRNG BLDG | NAS NEW ORLEANS, LA | 0.94 | 2613 | 89/02/27 | 6,914 | SF | $107.44 | $114.17 |
| 171-20 | TRAINING & ADMIN BLDG | CAMP PENDLETON CALIFORNIA | 1.20 | 2430 | 84/09/12 | 6,784 | SF | $93.57 | $83.74 |
| 171-20 | AIR COMBAT TRAIN DEBR FAC | NAS KEY WEST, FLORIDA | 1.07 | 2523 | 87/05/19 | 6,724 | SF | $118.14 | $113.24 |
| 171-20 | ACADEMIC INSTR BLDG PF #3 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/30 | 6,693 | SF | $65.73 | $58.03 |
| 171-20 | ACADEMIC INSTR BLDG PF #4 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/30 | 6,693 | SF | $65.73 | $58.03 |
| 171-20 | VEH MAINT TEA FAC | NORFOLK VIRGINIA | 0.95 | 2496 | 86/08/26 | 6,643 | SF | $77.39 | $84.45 |
| 171-20 | ACFT MAINT TRNG BLDG | CAMP PENDLETON CALIFORNIA | 1.14 | 2510 | 86/12/29 | 6,510 | SF | $95.91 | $86.73 |
| 171-20 | TRAIN RANGE DEBRIEF FAC | NAS CECIL FLD, FLORIDA | 0.85 | 2499 | 86/07/31 | 6,447 | SF | $87.85 | $107.02 |
| 171-20 | APPLIED INSTRUCTION BLDG | TRAVIS AFB, FAIRFIELD CA | 1.27 | 2457 | 85/07/17 | 5,984 | SF | $118.16 | $98.00 |
| 171-20 | AUXIL APPLIED INSTR BLDG | NAS MEMPHIS MILLINGTON,TN | 1.00 | 2249 | 82/09/16 | 5,400 | SF | $64.41 | $73.48 |
| 171-20 | UN-IN FRS INSTR BLDG | NAS, PENSACOLA, FLORIDA | 0.85 | 2017 | 80/12/23 | 5,230 | SF | $45.46 | $68.03 |
| 171-20 | OPERATNL FLIGHT TRNG BLDG | SAN DIEGO CALIFORNIA | 1.28 | 2076 | 81/05/14 | 3,800 | SF | $86.35 | $81.98 |
| 171-20 | NAVY TACT INTEROP SUP FAC | NS CHARLESTON, SC | 0.93 | 2428 | 84/08/08 | 3,600 | SF | $61.13 | $68.30 |
| 171-20 | DIESEL/DYNO TRAINER FAC | NORFOLK VIRGINIA | 0.91 | 2581 | 88/02/10 | 3,343 | SF | $99.74 | $107.14 |
| 171-20 | LIGHT ATTACK WPNS SCHOOL | LEMOORE CALIFORNIA | 1.14 | 2421 | 84/11/05 | 2,665 | SF | $77.68 | $70.42 |
| 171-20 | APPLIED INST BLDG 1 OF 2 | NORFOLK VIRGINIA | 0.92 | 2616 | 88/11/07 | 2,000 | SF | $83.24 | $86.54 |
| | AVERAGE OF ADJUSTED UNIT COST | | $82.91 | | | | | | |
| | AVERAGE FACILITY SIZE | | 25116 SF | | | | | | |
| 171-35 | HELO OP-TRAINER BLDG | NAS JACKSONVILLE, FL | 0.87 | 2617 | 88/12/30 | 80,195 | SF | $60.56 | $88.50 |
| 171-35 | OPR TRAINING FAC | SAN DIEGO CA | 1.23 | 2581 | 88/02/19 | 65,000 | SF | $105.29 | $107.98 |
| 171-35 | OPERATION TRAIN FAC-1OF2 | NS MAYPORT, FLORIDA | 0.90 | 2428 | 83/08/05 | 58,000 | SF | $58.33 | $85.97 |
| 171-35 | PATROL A/CFT TR BLDGS/MOD | NAS JACKSONVILLE, FL | 0.85 | 2493 | 86/06/10 | 51,860 | SF | $53.85 | $81.85 |
| 171-35 | OPERATIONAL TRAINER FAC | LEMOORE CALIFORNIA | 1.20 | 2352 | 83/03/28 | 41,590 | SF | $72.29 | $81.63 |
| 171-35 | OPERATIONAL TRAINER FAC | SAN DIEGO CALIFORNIA | 1.28 | 2200 | 82/02/24 | 35,866 | SF | $100.96 | $113.08 |
| 171-35 | OPERATIONAL TRAINING FAC | NAS CECIL FIELD, FLORIDA | 0.90 | 2219 | 82/06/22 | 35,078 | SF | $68.88 | $108.78 |
| 171-35 | OPERATIONAL TRAINER FAC | NAS CECIL FIELD, FLORIDA | 0.90 | 2419 | 83/11/16 | 30,582 | SF | $82.46 | $119.45 |
| 171-35 | COMPOSITE GROUP TRAINING | BARKSDALE AFB, LA | 0.94 | 2440 | 85/09/10 | 30,000 | SF | $65.12 | $89.54 |
| 171-35 | OPERATIONAL TRAINER FAC | DAM NECK V BEACH VA | 0.98 | 2406 | 84/02/17 | 29,900 | SF | $74.83 | $100.09 |
| 171-35 | OPERATIONAL TRAIN FAC | NAS WHITING FIELD, FL | 0.96 | 2428 | 84/08/10 | 25,590 | SF | $67.25 | $90.05 |
| 171-35 | FLIGHT SIMULATOR BLDG | CHERRY POINT NC | 0.90 | 2430 | 83/09/09 | 24,413 | SF | $67.12 | $94.81 |
| 171-35 | READINESS TRAINING FACIL. | DAM NECK V BEACH VA | 0.98 | 2295 | 82/12/29 | 24,404 | SF | $59.16 | $81.26 |
| 171-35 | FLIGHT SIMULATOR BLDG | MCAS EL TORO, SANTA ANA | 0.96 | 2249 | 82/09/15 | 23,773 | SF | $92.99 | $133.07 |
| 171-35 | OPERATIONS TRAINER FAC. | DAM NECK V BEACH VA | 0.98 | 2220 | 82/05/19 | 23,400 | SF | $58.98 | $82.91 |
| 171-35 | OP TRN FAC (BLD #2,3,4) | CHERRY POINT NC | 0.87 | 2509 | 87/02/24 | 21,177 | SF | $76.35 | $104.85 |
| 171-35 | OPER TRAIN FAC (BLDG 1) | CHERRY POINT NC | 0.87 | 2509 | 87/02/24 | 20,056 | SF | $66.99 | $91.10 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 171-35 | KC-10 FLIGHT SIM TR FAC | BARKSDALE AFB, LOUISIANA | 1.01 | 2200 | 82/02/10 | 20,010 | SF | $65.75 | $87.83 |
| 171-35 | OPERTNL TRAINER FAC | CAMP PENDLETON CALIFORNIA | 1.18 | 2440 | 85/09/16 | 19,574 | SF | $89.27 | $92.03 |
| 171-35 | OPERATIONAL TRAIN FAC | NAS NEW ORLEANS, LA | 0.95 | 2441 | 85/10/22 | 19,519 | SF | $62.42 | $79.89 |
| 171-35 | UPS/LIFE CYCLE SUP BLDG | CHESAPEAKE VIRGINIA | 0.93 | 2581 | 88/02/05 | 17,435 | SF | $84.62 | $101.65 |
| 171-35 | C.A.S.T. FACILITY | CAMP LEJEUNE N C | 0.95 | 2616 | 89/03/30 | 13,757 | SF | $85.57 | $95.64 |
| 171-35 | OPERATIONAL TRAINER FAC | NAVSTA NORFOLK | 0.98 | 2430 | 84/09/07 | 12,290 | SF | $79.33 | $91.68 |
| 171-35 | OPERATIONAL TRAIN FAC | FBMSTC, NS, CHARLESTON,SC | 0.93 | 2083 | 81/06/09 | 11,889 | SF | $71.39 | $100.52 |
| 171-35 | WEAPONS TRAINING BLDG | VALLEJO CALIFORNIA | 1.21 | 2616 | 88/11/15 | 10,820 | SF | $64.41 | $55.00 |
| 171-35 | DIESEL ENGINE TRN'G BLDG, | N.T.C. GREAT LAKES ILL. | 1.06 | 2428 | 84/08/28 | 6,000 | SF | $99.29 | $99.83 |
| 171-35 | VFR TOWER TRNG FACILITY | NAS MEMPHIS, TN | 0.94 | 2616 | 88/11/10 | 5,200 | SF | $132.75 | $138.52 |
| 171-35 | OPERATIONAL TRAINER FAC | NAS DALLAS, TEXAS | 0.93 | 2440 | 85/09/13 | 5,186 | SF | $84.99 | $96.10 |
| 171-35 | OPER FLGHT TRNR FAC PF#1 | EL TORO CALIFORNIA | 1.19 | 2523 | 87/05/29 | 3,998 | SF | $135.46 | $113.83 |
| 171-35 | OPERATIONAL TRAINER FAC | MCAS(H) TUSTIN, CAL. | 1.20 | 2347 | 83/04/27 | 3,942 | SF | $84.70 | $75.87 |
| 171-35 | FLIGHT SIM TRAIN SUP FAC | BARKSDALE AFB, LOUISIANA | 1.01 | 2419 | 83/11/01 | 1,557 | SF | $111.16 | $113.84 |
| | AVERAGE OF ADJUSTED UNIT COST | | $96.68 | | | | | | |
| | AVERAGE FACILITY SIZE | | 24797 | SF | | | | | |
| 171-45 | TRAINING EQUIP CTR 1 OF 2 | NTEC ORLANDO, FL | 0.80 | 2440 | 85/09/26 | 261,160 | SF | $61.70 | $102.91 |
| 171-45 | TRAINING O. AID CTR 2-2 | NTEC ORLANDO, FLORIDA | 0.80 | 2440 | 85/09/26 | 32,120 | SF | $62.38 | $84.13 |
| 171-45 | WPN SYS SEC FAC/MED TRNG | NAS DALLAS, TX | 0.93 | 2616 | 89/03/21 | 12,006 | SF | $103.14 | $106.08 |
| | AVERAGE OF ADJUSTED UNIT COST | | $97.70 | | | | | | |
| | AVERAGE FACILITY SIZE | | 101762 | SF | | | | | |
| 171-50 | INDOOR 25 YRD PISTOL RNG | NS CHARLESTON, SC | 0.93 | 2184 | 81/12/03 | 4,708 | SF | $41.37 | $61.66 |
| | AVERAGE OF ADJUSTED UNIT COST | | $61.66 | | | | | | |
| | AVERAGE FACILITY SIZE | | 4708 | SF | | | | | |
| 171-60 | RECRUIT PROCESS'G BLDG | SAN DIEGO CALIFORNIA | 1.28 | 2417 | 84/06/07 | 113,000 | SF | $66.33 | $66.92 |
| 171-60 | RECRUIT PROCESSING FAC. | N.T.C. GREAT LAKES IL | 1.04 | 2428 | 85/03/30 | 99,220 | SF | $68.55 | $84.74 |
| 171-60 | RECRUIT PROCESSING FAC | MCRC, PARRIS ISLAND, SC | 0.94 | 2348 | 83/02/28 | 83,512 | SF | $57.52 | $78.12 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | AVERAGE OF ADJUSTED UNIT COST | | $76.59 | | | | | | |
| | AVERAGE FACILITY SIZE | | 98577 | SF | | | | | |
| 171-77 | STORAGE BUILDING | CAMP PENDLETON CALIFORNIA | 1.20 | 2352 | 83/03/24 | 10,752 | SF | $32.16 | $34.50 |
| | AVERAGE OF ADJUSTED UNIT COST | | $34.50 | | | | | | |
| | AVERAGE FACILITY SIZE | | 10752 | SF | | | | | |
| 179-40 | 100M PISTL/200M RIFL RNGE | DAM NECK V BEACH VA | 0.93 | 2516 | 87/03/20 | 8,152 | SF | $74.95 | $101.02 |
| 179-40 | SMALL ARMS TRAINING FAC | DAM NECK V BEACH VA | 0.93 | 2516 | 87/03/20 | 4,011 | SF | $74.69 | $91.17 |
| | AVERAGE OF ADJUSTED UNIT COST | | $96.09 | | | | | | |
| | AVERAGE FACILITY SIZE | | 6081 | SF | | | | | |
| 179-45 | FF TRAINER FAC PF #1 | SAN FRANCISCO CALIFORNIA | 1.21 | 2596 | 88/04/27 | 27,356 | SF | $160.60 | $162.95 |
| 179-45 | FIRE FIGHTING TRAIN UNIT | TRAIN CTR, G.LAKES | 1.09 | 2595 | 88/06/08 | 24,300 | SF | $121.42 | $135.39 |
| 179-45 | FF TRNR BLDG PF #2 | SAN FRANCISCO CALIFORNIA | 1.21 | 2596 | 88/04/27 | 17,030 | SF | $99.05 | $98.43 |
| 179-45 | PUMP TRNR BLDG PF #3 | SAN FRANCISCO CALIFORNIA | 1.21 | 2596 | 88/04/27 | 6,285 | SF | $53.77 | $45.86 |
| 179-45 | TRAINING MOCK UP BLDG | FMWTC, NS, CHARLESTON, SC | 0.93 | 2348 | 83/02/08 | 6,240 | SF | $32.17 | $39.47 |
| | AVERAGE OF ADJUSTED UNIT COST | | $96.42 | | | | | | |
| | AVERAGE FACILITY SIZE | | 16242 | SF | | | | | |
| 179-55 | COMBAT SWIMMER TRAINER | NORFOLK VIRGINIA | 0.93 | 2526 | 87/06/24 | 28,022 | SF | $103.47 | $138.92 |
| 179-55 | COMBAT SWIMMER TRNG FAC | SAN DIEGO CALIFORNIA | 1.23 | 2564 | 87/11/25 | 22,495 | SF | $90.50 | $89.57 |
| 179-55 | CMBT TRNG POOL/TANK | ELI TORO CA MCAS | 1.20 | 2510 | 86/12/31 | 20,820 | SF | $94.47 | $96.90 |
| 179-55 | HELICOPTER ESCAPE TRAINER | LEMOORE CALIFORNIA | 1.14 | 2528 | 87/07/23 | 16,555 | SF | $117.07 | $119.41 |
| | AVERAGE OF ADJUSTED UNIT COST | | $111.20 | | | | | | |
| | AVERAGE FACILITY SIZE | | 21973 | SF | | | | | |
| 211-03 | CORROSION CONTROL FAC | CASTLE AFB MERCED, CA | 1.15 | 2441 | 85/11/21 | 37,035 | SF | $66.54 | $74.76 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 211-03 | CORR CONTROL WASHRACK FAC | CHASN AFB, SC | 0.91 | 2509 | 87/02/25 | 34,933 | SF | $97.92 | $135.26 |
| 211-03 | CORROSION CONTROL HANGAR | KANEOHE BAY HAWAII | 1.44 | 2611 | 88/08/23 | 16,818 | SF | $296.36 | $225.15 |
| 211-03 | CORROSION CONTROL FAC | YUMA ARIZONA | 1.21 | 2579 | 88/01/29 | 14,454 | SF | $14.34 | $12.87 |
| | AVERAGE OF ADJUSTED UNIT COST | | $112.01 | | | | | | |
| | AVERAGE FACILITY SIZE | | 25810 SF | | | | | | |
| 211-05 | AIRCRAFT MAINT HANGAR | NAS CECIL FIELD, FLORIDA | 0.90 | 2195 | 82/03/30 | 118,238 | SF | $47.88 | $78.06 |
| 211-05 | AIRCRAFT MAINT. HANGAR | VIRGINIA BEACH VIRGINIA | 0.95 | 2504 | 86/09/30 | 116,502 | SF | $63.07 | $85.39 |
| 211-05 | AIRCRAFT MAINT HANGAR | SAN DIEGO CALIFORNIA | 1.28 | 2348 | 83/02/01 | 100,306 | SF | $66.24 | $70.24 |
| 211-05 | MAINTENANCE HANGAR | NAF MAYPORT FL | 0.85 | 2432 | 85/02/03 | 92,100 | SF | $67.18 | $103.57 |
| 211-05 | COMP ACFT MAINT HANGAR | POINT MUGU ANG | 1.18 | 2611 | 88/08/24 | 83,920 | SF | $95.01 | $98.28 |
| 211-05 | MAINTENANCE HANGAR | JACKSONVILLE NC | 0.80 | 2565 | 87/09/10 | 81,824 | SF | $100.21 | $154.03 |
| 211-05 | MAINTENANCE HANGAR | NAS CECIL FIELD, FL | 0.90 | 2402 | 84/01/27 | 79,412 | SF | $55.84 | $81.46 |
| 211-05 | MAINT HANGAR | CHERRY POINT NC | 0.90 | 2414 | 83/07/06 | 75,800 | SF | $46.11 | $66.93 |
| 211-05 | MAINTENANCE HANGAR | CAMP PENDLETON MCAF | 1.14 | 2510 | 86/12/23 | 74,578 | SF | $92.80 | $102.28 |
| 211-05 | HELICOPTER HANGAR | NORFOLK VIRGINIA | 0.95 | 2504 | 86/09/24 | 72,749 | SF | $64.09 | $84.97 |
| 211-05 | ARCFT MAINT HANGAR | FALLON NEVADA | 1.21 | 2195 | 82/03/30 | 71,628 | SF | $69.10 | $82.05 |
| 211-05 | MAINTENANCE HANGAR | NS MAYPORT FLORIDA | 0.90 | 2416 | 83/10/20 | 68,000 | SF | $54.41 | $78.92 |
| 211-05 | ACFT MAINT HANGAR | OAK HARBOR WA | 1.16 | 2581 | 88/02/01 | 58,726 | SF | $87.91 | $91.64 |
| 211-05 | ACRFT MA HGR & AUTO HB SH | NAS ATLANTA, GA | 0.87 | 2595 | 88/06/30 | 46,014 | SF | $86.84 | $116.46 |
| 211-05 | MAINTENANCE HANGARS PF 1 | TUSTIN CALIFORNIA | 1.19 | 2513 | 87/01/30 | 45,959 | SF | $84.79 | $85.85 |
| 211-05 | MAINTENANCE HANGAR PF 2 | TUSTIN CALIFORNIA | 1.19 | 2513 | 87/01/30 | 45,959 | SF | $84.79 | $85.85 |
| 211-05 | NARU-AIRCRFT MAINT HANGAR | OAK HARBOR WASHINGTON | 1.30 | 2352 | 83/03/15 | 39,380 | SF | $90.02 | $86.54 |
| 211-05 | AIRCRAFT MAINT. HANGAR | NAS MEMPHIS, TN | 0.94 | 2595 | 88/06/15 | 39,072 | SF | $73.78 | $88.06 |
| 211-05 | MAINTENANCE HANGAR | OAK HARBOR WA | 1.30 | 2432 | 85/02/05 | 38,834 | SF | $102.78 | $94.64 |
| 211-05 | AIRCRFT MAINT HANGAR | NAS DALLAS, TEXAS | 1.02 | 2418 | 84/12/21 | 36,855 | SF | $69.25 | $80.95 |
| 211-05 | ACFT MAINT HANGAR PF #1 | FALLON NEVADA | 1.34 | 2509 | 87/02/20 | 36,301 | SF | $102.94 | $88.29 |
| 211-05 | MAINTENANCE HANGAR ADD | CHERRY POINT NC | 0.87 | 2595 | 88/06/17 | 35,400 | SF | $74.78 | $95.51 |
| 211-05 | MAINTENANCE HANGAR | SAN DIEGO CA | 1.18 | 2428 | 85/03/29 | 29,200 | SF | $89.49 | $86.76 |
| 211-05 | MAINTENANCE HANGAR | POINT MUGU CALIFORNIA | 1.20 | 2438 | 85/06/11 | 29,041 | SF | $86.93 | $82.54 |
| 211-05 | LCAC MAINT HANGER | CAMP PENDLETON CALIFORNIA | 1.20 | 2430 | 84/09/12 | 24,619 | SF | $102.85 | $96.21 |
| 211-05 | IMA COMPLEX PF #1 | TUSTIN CALIFORNIA | 1.20 | 2595 | 88/06/30 | 19,725 | SF | $118.92 | $102.32 |
| 211-05 | AIRCRAFT SUPPORT FACILITY | NAS, BARBERS POINT, HI | 1.34 | 2194 | 82/01/25 | 12,735 | SF | $109.43 | $96.31 |
| 211-05 | ACFT MAINT HANGAR PF #2 | FALLON NEVADA | 1.34 | 2509 | 87/02/20 | 4,027 | SF | $84.61 | $62.97 |
| 211-05 | MAINTENANCE HANGAR PF 4 | TUSTIN CALIFORNIA | 1.19 | 2513 | 87/01/30 | 2,000 | SF | $70.50 | $58.99 |
| 211-05 | MAINTENANCE HANGAR PF 3 | TUSTIN CALIFORNIA | 1.19 | 2513 | 87/01/30 | 1,672 | SF | $252.20 | $211.04 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $93.23 | | | | | | |
| | | AVERAGE FACILITY SIZE | 52685 | SF | | | | | |
| 211-06 | LCAC MAINTNCE SHOPS | CAMP PENDLETON CALIFORNIA | 1.20 | 2430 | 84/09/12 | 20,525 | SF | $82.55 | $85.71 |
| | | AVERAGE OF ADJUSTED UNIT COST | $85.71 | | | | | | |
| | | AVERAGE FACILITY SIZE | 20525 | SF | | | | | |
| 211-07 | SQUADRON SUPPORT FACILITY | KEFLAVIK ICELAND | 2.56 | 2479 | 86/05/07 | 7,411 | SF | $330.30 | $157.59 |
| | | AVERAGE OF ADJUSTED UNIT COST | $157.59 | | | | | | |
| | | AVERAGE FACILITY SIZE | 7411 | SF | | | | | |
| 211-08 | F18 FUEL MAINT FAC | MCAS BEAUFORT SF | 0.94 | 2557 | 87/08/17 | 11,900 | SF | $84.15 | $106.00 |
| | | AVERAGE OF ADJUSTED UNIT COST | $106.00 | | | | | | |
| | | AVERAGE FACILITY SIZE | 11900 | SF | | | | | |
| 211-10 | AIRCRAFT INTERMED MAINT F | NS MAYPORT, FLORIDA | 0.90 | 2430 | 83/09/27 | 76,547 | SF | $43.48 | $63.36 |
| 211-10 | AIRCRAFT MAINTENANCE FAC | NAS CECIL FIELD, FLORIDA | 0.90 | 2311 | 83/01/19 | 16,000 | SF | $42.72 | $54.54 |
| | | AVERAGE OF ADJUSTED UNIT COST | $58.95 | | | | | | |
| | | AVERAGE FACILITY SIZE | 46273 | SF | | | | | |
| 211-14 | VSTOL AIRCRAFT REWORK FAC | CHERRY POINT NC | 0.87 | 2568 | 87/10/05 | 160,800 | SF | $77.67 | $105.26 |
| | | AVERAGE OF ADJUSTED UNIT COST | $105.26 | | | | | | |
| | | AVERAGE FACILITY SIZE | 160800 | SF | | | | | |
| 211-21 | ENGINE MAINT SHOP | NAS JACKSONVILLE, FL | 0.87 | 2616 | 89/03/21 | 80,030 | SF | $43.34 | $61.99 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 211-21 | MULTI-PURP A/CFT MAINT SH | KEESLER AFB BILOXI, MS | 0.98 | 2427 | 85/04/30 | 36,281 | SF | $51.01 | $66.94 |
| 211-21 | ENGINE MAINT SHOP | CHERRY POINT NC | 0.90 | 2414 | 83/07/06 | 32,175 | SF | $37.44 | $53.23 |
| 211-21 | ACFT ENG I & R SHOP | PT MUGU CALIFORNIA | 1.18 | 2611 | 88/08/24 | 14,000 | SF | $71.20 | $62.47 |
| 211-21 | ADAL A/CFT ENGINE I&R SHO | BARKSDALE AFB, LA | 0.94 | 2433 | 85/05/20 | 5,600 | SF | $77.41 | $86.12 |
| 211-21 | LAMPS MK III FAC | SIGONELLA ITALY | 1.10 | 2433 | 86/01/29 | 4,500 | SF | $61.01 | $57.51 |
| 211-21 | SUPT EQUIP MAINT FAC | PT MUGU CALIFORNIA | 1.18 | 2611 | 88/08/24 | 4,320 | SF | $115.59 | $93.87 |
| | | AVERAGE OF ADJUSTED UNIT COST | $68.87 | | | | | | |
| | | AVERAGE FACILITY SIZE | 32842 SF | | | | | | |
| 211-24 | ENGINE BLADE REWORK FACY | CHERRY POINT NC | 0.87 | 2565 | 87/09/18 | 67,300 | SF | $77.66 | $105.37 |
| | | AVERAGE OF ADJUSTED UNIT COST | $105.37 | | | | | | |
| | | AVERAGE FACILITY SIZE | 67300 SF | | | | | | |
| 211-32 | A/CFT STRUCT RPR FAC | NARF PNCLA, FLORIDA | 0.84 | 2528 | 87/07/08 | 104,000 | SF | $68.92 | $98.26 |
| | | AVERAGE OF ADJUSTED UNIT COST | $98.26 | | | | | | |
| | | AVERAGE FACILITY SIZE | 104000 SF | | | | | | |
| 211-34 | GEAR BOX TEST FAC | NARF, PENSACOLA, FL | 0.96 | 2433 | 85/05/07 | 2,500 | SF | $147.82 | $191.62 |
| | | AVERAGE OF ADJUSTED UNIT COST | $191.62 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2500 SF | | | | | | |
| 211-45 | AVIONICS SHOP | NAS, BARPT, HI | 1.34 | 2432 | 85/02/04 | 34,500 | SF | $78.84 | $77.10 |
| 211-45 | AVIONICS SHOP | ST GEORGES PARISH BERMUDA | 1.60 | 2612 | 88/09/26 | 26,239 | SF | $126.17 | $95.22 |
| 211-45 | AVIONICS SHOP | CHERRY POINT NC | 0.90 | 2402 | 84/01/27 | 11,502 | SF | $57.01 | $74.62 |
| 211-45 | AVIONICS SHOP | CLARK A.B. | 0.90 | 2612 | 88/09/30 | 10,000 | SF | $86.38 | $102.07 |
| 211-45 | ACFT INT MAINT DEPOT | FALLON NEVADA | 1.34 | 2619 | 89/01/19 | 9,000 | SF | $86.58 | $67.90 |
| | | AVERAGE OF ADJUSTED UNIT COST | $83.38 | | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE FACILITY SIZE | 18248 SF | | | | | | |
| 211-52 | GUN TEST FACILITY | ALAMEDA CALIF | 1.25 | 2433 | 85/05/20 | 19,480 | SF | $132.83 | $132.24 |
| | | AVERAGE OF ADJUSTED UNIT COST | $132.24 | | | | | | |
| | | AVERAGE FACILITY SIZE | 19480 SF | | | | | | |
| 211-54 | AVIATION ARMAMENT SHOP | YUMA MCAS | 1.19 | 2612 | 88/09/28 | 13,396 | SF | $77.39 | $75.38 |
| | | AVERAGE OF ADJUSTED UNIT COST | $75.38 | | | | | | |
| | | AVERAGE FACILITY SIZE | 13396 SF | | | | | | |
| 211-60 | AMF EAST LEAN-TO BLDG 407 | SIGONELLA ITALY | 1.19 | 2220 | 82/05/07 | 20,612 | SF | $60.54 | $72.27 |
| 211-60 | AMF ENGINE MAINT SHOP | SIGONELLA ITALY | 1.19 | 2220 | 82/05/07 | 16,291 | SF | $80.57 | $95.19 |
| 211-60 | AMF AIR FRAME SHOP | SIGONELLA ITALY | 1.19 | 2220 | 82/05/07 | 9,490 | SF | $78.01 | $83.55 |
| | | AVERAGE OF ADJUSTED UNIT COST | $83.67 | | | | | | |
| | | AVERAGE FACILITY SIZE | 15464 SF | | | | | | |
| 211-72 | PLATING & CLEANING FAC | NARF JACKSONVILLE, FL | 0.91 | 2249 | 82/09/28 | 125,000 | SF | $92.81 | $143.02 |
| 211-72 | AIRCRAFT REWORK FAC | NORFOLK VIRGINIA | 0.91 | 2591 | 88/03/18 | 96,100 | SF | $86.38 | $114.35 |
| 211-72 | PLATING SHOP | NORFOLK VIRGINIA | 0.98 | 2249 | 82/09/30 | 84,451 | SF | $113.35 | $155.72 |
| 211-72 | PLATING SHOP | ALAMEDA CALIF | 1.21 | 2597 | 88/05/26 | 77,280 | SF | $139.78 | $132.04 |
| | | AVERAGE OF ADJUSTED UNIT COST | $136.28 | | | | | | |
| | | AVERAGE FACILITY SIZE | 95707 SF | | | | | | |
| 211-75 | MOBILE AERIAL PORT FAC | POINT MUGU CALIFORNIA | 1.18 | 2616 | 88/11/10 | 20,500 | SF | $98.98 | $101.13 |
| 211-75 | PARACHUTE SURV EQUIP SHOP | CAMP PENDLETON CA MCB | 1.14 | 2510 | 86/12/12 | 20,240 | SF | $51.49 | $56.74 |
| 211-75 | PARACHUTE/SURV SHOP | CHERRY POINT NC | 0.86 | 2504 | 86/09/10 | 12,350 | SF | $52.38 | $72.20 |
| 211-75 | PARACHUTE/SURVIVAL SHOP | YUMA ARIZONA | 1.25 | 2424 | 85/01/23 | 7,480 | SF | $81.99 | $74.47 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $76.13 | | | | | | |
| | | AVERAGE FACILITY SIZE | 15142 | SF | | | | | |
| 211-76 | MATERIALS LABORATORY | NARF JACKSONVILLE FLURIDA | 0.91 | 2417 | 84/06/21 | 16,400 | SF | $95.62 | $131.63 |
| | | AVERAGE OF ADJUSTED UNIT COST | $131.63 | | | | | | |
| | | AVERAGE FACILITY SIZE | 16400 | SF | | | | | |
| 211-81 | ENGINE TEST CELL | CAMP PENDLETON CALIFORNIA | 1.12 | 2595 | 88/06/24 | 5,655 | SF | $404.95 | $439.46 |
| 211-81 | JET ENGINE TEST CELL | NAS KINGSVILLE, TX | 0.96 | 2568 | 87/10/14 | 4,620 | SF | $566.83 | $710.41 |
| 211-81 | JET ENGINE TEST CELL | NAS, CUBI PT, RP | 0.85 | 2430 | 83/09/23 | 4,000 | SF | $207.67 | $301.41 |
| | | AVERAGE OF ADJUSTED UNIT COST | $483.76 | | | | | | |
| | | AVERAGE FACILITY SIZE | 4758 | SF | | | | | |
| 211-89 | POWER CHECK PAD | BARKSDALE AFB, LOUISIANA | 1.01 | 2016 | 81/02/13 | 1 | EA | $296,399.00 | $440,778.79 |
| 211-89 | POWER CHECK PAD | MCAS KANEOHE BAY, HI | 1.34 | 2510 | 86/12/31 | 1 | EA | $384,409.00 | $346,075.52 |
| 211-89 | AIRCRAFT POWER CHECK FAC | NAS ATLANTA,MARIETTA,GA | 0.94 | 1974 | 80/08/04 | 1 | EA | $121,964.00 | $199,027.23 |
| 211-89 | POWER CHECK PAD | NAS NEW ORLEANS, LA | 1.03 | 2418 | 84/07/26 | 1 | EA | $358,168.00 | $435,460.86 |
| | | AVERAGE OF ADJUSTED UNIT COST | $355,335.60 | | | | | | |
| | | AVERAGE FACILITY SIZE | 1 | EA | | | | | |
| 211-90 | A/CFT ANALYS & PROCESS FA | CCAD CORPUS CHRISTI, TX | 0.90 | 2528 | 87/07/01 | 66,578 | SF | $79.30 | $111.08 |
| 211-90 | ROTARY WING RPR FAC | CORPUS CH ARMY DPOT,TEXAS | 0.91 | 2445 | 86/03/04 | 48,058 | SF | $62.52 | $87.70 |
| 211-90 | ADV POWER TRAIN TEST FAC | NAS CORPUS CHRISTI, TEXAS | 0.91 | 2195 | 82/04/28 | 11,180 | SF | $131.66 | $170.57 |
| | | AVERAGE OF ADJUSTED UNIT COST | $123.11 | | | | | | |
| | | AVERAGE FACILITY SIZE | 41938 | SF | | | | | |
| 211-96 | A/CFT GEN SQAD PARTS STOR | ENGLAND AFB, LOUISIANA | 1.01 | 2427 | 85/04/15 | 20,200 | SF | $27.21 | $35.00 |
| 211-96 | VARIOUS ACRAFT MAINT FAC | ENGLAND AFB,ALEXANDRIA,LA | 1.01 | 2200 | 82/02/11 | 6,100 | SF | $33.51 | $41.13 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $38.06 | | | | | | |
| | | AVERAGE FACILITY SIZE | 13150 | SF | | | | | |
| 211-99 | HAZARDOUS MATER CON FAC | NARF PENSACOLA, FLORIDA | 0.85 | 2118 | 81/08/21 | 9,880 | SF | $39.94 | $69.25 |
| 211-99 | HAZARDOUS MATS STOR FAC | NARF JACKSONVILLE, FL | 0.91 | 2428 | 83/08/23 | 8,346 | SF | $53.35 | $73.84 |
| | | AVERAGE OF ADJUSTED UNIT COST | $71.54 | | | | | | |
| | | AVERAGE FACILITY SIZE | 9113 | SF | | | | | |
| 212-10 | ALCM SUPPORT FACS 1-2 | BARKSDALE AFB, LOUISIANA | 1.01 | 2417 | 84/06/08 | 68,885 | SF | $89.45 | $120.59 |
| 212-10 | MISSILE REWORK SHOP | NAVMAG LLL, WEST LOCH | 1.39 | 2611 | 88/08/31 | 8,792 | SF | $274.79 | $202.87 |
| 212-10 | MISSILE MAINTENANCE FAC | NAVMAG LUALUALEI, HI | 1.34 | 2510 | 86/12/31 | 5,230 | SF | $289.71 | $222.91 |
| 212-10 | MISSILE INTEGRATION FAC | NAS CECIL FIELD, FL | 0.94 | 2616 | 88/11/09 | 4,996 | SF | $46.57 | $48.59 |
| | | AVERAGE OF ADJUSTED UNIT COST | $148.74 | | | | | | |
| | | AVERAGE FACILITY SIZE | 21975 | SF | | | | | |
| 212-20 | MSLE EQPMNT MAINT SHOP | YUMA ARIZONA | 1.02 | 2433 | 85/05/30 | 10,462 | SF | $77.42 | $98.39 |
| 212-20 | MISSLE MAINTENANCE FAC | SIGONELLA ITALY | 1.19 | 2430 | 83/09/07 | 6,203 | SF | $51.84 | $53.74 |
| 212-20 | MISSILE MAINT SHOP | MYRTLE BEACH AFB, SC | 0.93 | 2406 | 83/12/07 | 5,270 | SF | $97.48 | $126.83 |
| | | AVERAGE OF ADJUSTED UNIT COST | $92.98 | | | | | | |
| | | AVERAGE FACILITY SIZE | 7311 | SF | | | | | |
| 212-30 | AIR LAUNCH IMA FACILITY | YORKTOWN VIRGINIA | 0.92 | 2612 | 88/09/23 | 57,610 | SF | $120.65 | $160.02 |
| 212-30 | MOTOR ASSEM BLDG--2 OF 2 | NOTU CAPE CANAVERAL, FL | 0.96 | 2406 | 83/12/27 | 11,340 | SF | $107.48 | $122.51 |
| 212-30 | MISSILE CHECKOUT BLD-1OF2 | NOTU CAPE CANAVERAL,FL | 0.96 | 2406 | 83/12/27 | 7,606 | SF | $121.36 | $134.82 |
| | | AVERAGE OF ADJUSTED UNIT COST | $139.11 | | | | | | |
| | | AVERAGE FACILITY SIZE | 34774 | SF | | | | | |
| 213-30 | MACHINE SHOP (SIMA) | NS MAYPORT, FLORIDA | 0.90 | 1897 | 80/01/17 | 172,500 | SF | $51.06 | $96.33 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 213-30 | SIMA | SAN FRANCISCO CALIFORNIA | 1.21 | 2509 | 87/02/09 | 106,012 | SF | $89.36 | $92.83 |
| 213-30 | S.I.M.A. (SHOPS) | LONG BEACH CALIFORNIA | 1.20 | 2427 | 85/04/05 | 89,236 | SF | $70.91 | $75.99 |
| 213-30 | SHORE INTER. MAINT. FAC. | LCREEK NORFOLK VA | 0.98 | 2220 | 82/05/07 | 82,379 | SF | $62.40 | $89.53 |
| 213-30 | S.I.M.A. | NS CHARLESTON, SC | 0.93 | 2118 | 81/08/31 | 67,158 | SF | $46.39 | $70.59 |
| 213-30 | S.I.M.A. | SAN DIEGO CALIFORNIA | 1.28 | 2352 | 83/03/31 | 46,543 | SF | $58.89 | $54.83 |
| 213-30 | S.I.M.A. | NAVSTA PEARL HARBOR | 1.34 | 2348 | 83/02/25 | 32,976 | SF | $111.93 | $96.17 |
| 213-30 | S.I.M.A. | SAN DIEGO CALIFORNIA | 1.28 | 2352 | 83/03/31 | 32,249 | SF | $60.97 | $54.74 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $78.87 | | | | | |
| | | AVERAGE FACILITY SIZE | | 78631 | SF | | | | |
| 213-55 | PIPE SHOP | NSYD, CHARLESTON, SC | 0.93 | 1896 | 80/02/20 | 125,000 | SF | $55.21 | $98.74 |
| 213-55 | PIPE SHOP | NSY, PEARL HARBOR, HI | 1.34 | 2017 | 80/12/24 | 77,436 | SF | $97.84 | $106.40 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $102.57 | | | | | |
| | | AVERAGE FACILITY SIZE | | 101218 | SF | | | | |
| 213-58 | LCAC COMPLEX - MAINT BAYS | NAB LCREEK NORFOLK VA | 0.98 | 2438 | 85/06/24 | 25,192 | SF | $61.62 | $81.33 |
| 213-58 | EOD CPLX VEH/BT MAIN 2OF3 | NORFOLK VIRGINIA | 0.95 | 2504 | 86/09/03 | 9,225 | SF | $54.90 | $62.95 |
| 213-58 | US ARMY RESERVE CENTER | ROOSEVELT ROADS PR | 1.10 | 2597 | 88/05/02 | 8,584 | SF | $90.23 | $85.38 |
| 213-58 | BOAT SHOP/PARALOFT BLDG | SAN DIEGO CALIFORNIA | 1.17 | 2422 | 84/04/30 | 7,267 | SF | $103.24 | $96.76 |
| 213-58 | UDT FACILITES | ROOSEVELT ROADS RQ | 1.10 | 2565 | 87/09/18 | 4,000 | SF | $104.70 | $95.21 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $84.32 | | | | | |
| | | AVERAGE FACILITY SIZE | | 19718 | SF | | | | |
| 213-59 | ABRASIVE BLAST FACILITY | NAVSHIPREPFAC, RP | 0.89 | 2516 | 87/03/06 | 6,000 | SF | $168.83 | $228.29 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $228.29 | | | | | |
| | | AVERAGE FACILITY SIZE | | 6000 | SF | | | | |
| 213-60 | F/G & PAINT FACILITY | SAN DIEGO CALIFORNIA | 1.28 | 2418 | 84/12/24 | 11,329 | SF | $107.80 | $105.45 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $105.45 | | | | | | |
| | | AVERAGE FACILITY SIZE | 11329 | SF | | | | | |
| 213-61 | SERV. SHOPS CONSOLID. FAC | NSY, PEARL HARBOR | 1.34 | 2455 | 86/04/15 | 155,500 | SF | $70.82 | $65.18 |
| | | AVERAGE OF ADJUSTED UNIT COST | $65.18 | | | | | | |
| | | AVERAGE FACILITY SIZE | 155500 | SF | | | | | |
| 213-70 | WTRFRT SERV SUP BLDG A | NSYD CHARLESTON, SC | 0.81 | 2440 | 85/09/12 | 12,026 | SF | $69.13 | $110.32 |
| 213-70 | WATERFRONT PROD SUPT FAC | ALAMEDA CALIFORNIA | 1.21 | 2509 | 87/02/13 | 6,900 | SF | $94.95 | $91.05 |
| | | AVERAGE OF ADJUSTED UNIT COST | $100.68 | | | | | | |
| | | AVERAGE FACILITY SIZE | 9463 | SF | | | | | |
| 213-75 | AMPHIBIOUS VEH MAINT SHOP | CAMP LEJEUNE N C | 0.90 | 2418 | 84/07/25 | 52,283 | SF | $48.30 | $70.00 |
| 213-75 | LCAC COMPLEX MAINT SHOP | NAB LCREEK NORFOLK VA | 0.98 | 2438 | 85/06/24 | 33,312 | SF | $59.60 | $77.06 |
| 213-75 | VEHICLE MAINTENANCE FAC | LCREEK NORFOLK VA | 0.98 | 2419 | 83/11/25 | 19,650 | SF | $78.00 | $92.24 |
| | | AVERAGE OF ADJUSTED UNIT COST | $79.76 | | | | | | |
| | | AVERAGE FACILITY SIZE | 35081 | SF | | | | | |
| 213-77 | PERFORMANCE MONITOR FAC | NS CHARLESTON, SC | 0.93 | 2424 | 84/10/24 | 2,800 | SF | $87.36 | $117.33 |
| | | AVERAGE OF ADJUSTED UNIT COST | $117.33 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2800 | SF | | | | | |
| 214-10 | LT. ARMORED VEH MAINT FAC | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/07 | 66,690 | SF | $53.36 | $82.65 |
| 214-10 | COMBAT VEH MAINT. SHOP | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/07 | 29,302 | SF | $69.97 | $103.83 |
| 214-10 | TACT VEH/COMM MAINT FAC | CAMP PENDLETON CALIFORNIA | 1.14 | 2526 | 87/06/23 | 29,054 | SF | $60.16 | $66.57 |
| 214-10 | COMBAT VEH. MAINT. SHOP | CAMP LEJEUNE N C | 0.90 | 2347 | 83/04/04 | 27,562 | SF | $40.99 | $61.85 |
| 214-10 | COMBAT VEH. MAINT. SHOP | CAMP LEJEUNE N C | 0.90 | 2195 | 82/04/14 | 25,305 | SF | $44.95 | $71.76 |
| 214-10 | COMBAT VEHICLE MAINT SHOP | CAMP LEJEUNE N C | 0.86 | 2504 | 86/09/10 | 24,150 | SF | $65.63 | $96.12 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 214-10 | COMBAT VEH MAINT SHOP | CAMP LEJEUNE N C | 0.90 | 2430 | 84/09/14 | 21,300 | SF | $51.66 | $74.50 |
| 214-10 | MAINTENANCE SHOP | CAMP LEJEUNE N C | 0.90 | 2414 | 83/07/25 | 19,000 | SF | $51.08 | $73.39 |
| 214-10 | COMBAT VEH MAINT SHOP(2D) | CAMP LEJEUNE N C | 0.90 | 2430 | 84/09/14 | 12,180 | SF | $50.95 | $68.48 |
| 214-10 | TACTICAL VEH MAINT FAC | CAMP PENDLETON CA MCB | 1.14 | 2445 | 86/03/24 | 6,397 | SF | $119.11 | $114.50 |
| 214-10 | VEHICLE MAINT SHOP | BARSTOW CALIFORNIA | 1.25 | 2617 | 88/12/15 | 5,900 | SF | $57.62 | $46.77 |
| 214-10 | TACT VEHICLE MAINT SHOPS | CAMP PENDLETON CALIFORNIA | 1.20 | 2311 | 83/01/28 | 5,371 | SF | $47.40 | $44.99 |
| 214-10 | TACTICAL VEH MAINT FAC | CAMP PENDLETON CA MCB | 1.14 | 2445 | 86/03/24 | 4,307 | SF | $119.61 | $111.05 |
| 214-10 | COMBAT VEH MAINT FAC | NAS ATLANTA, GA | 0.87 | 2611 | 88/08/04 | 3,390 | SF | $74.50 | $84.14 |
| 214-10 | TACT VEHICLE MAINT SHOPS | CAMP PENDLETON CALIFORNIA | 1.20 | 2311 | 83/01/28 | 3,000 | SF | $73.44 | $67.37 |
| 214-10 | TACTVEHICLE MAINT SHOPS | CAMP PENDLETON CALIFORNIA | 1.20 | 2311 | 83/01/28 | 3,000 | SF | $74.39 | $68.25 |
| 214-10 | COMBAT VEHIC MAINT FAC | MCRC TEXARKANA, TX | 0.99 | 2504 | 86/09/04 | 2,120 | SF | $79.09 | $79.83 |
| 214-10 | NEW VEHICLE MAINT SHOP | NMCRC NEW ORLEANS, LA | 1.03 | 2417 | 84/06/25 | 1,653 | SF | $113.49 | $114.07 |
| | AVERAGE OF ADJUSTED UNIT COST | | $79.45 | | | | | | |
| | AVERAGE FACILITY SIZE | | 16093 | SF | | | | | |
| 214-20 | TRANSPORTATION SHOPS | OAKLAND CA | 1.21 | 2591 | 88/03/31 | 92,243 | SF | $91.65 | $97.26 |
| 214-20 | AUTOMOTIVE MAINT FACILITY | MCAS, KANEOHE BAY, HI | 1.34 | 1918 | 80/03/05 | 71,191 | SF | $42.29 | $54.75 |
| 214-20 | SEAVEE EQUIP MAINT BLDG | CBC GULFPORT, MS | 0.87 | 2504 | 86/09/14 | 33,840 | SF | $53.45 | $77.38 |
| 214-20 | AUTO MAINT COMPLEX 1 OF 2 | ENGLAND AFB ALEXANDRIA LA | 1.01 | 1902 | 80/04/02 | 29,432 | SF | $54.64 | $89.70 |
| 214-20 | VEHICLE MAINTENANCE FAC | CAMP SMITH, HALAWA HTS,HI | 1.34 | 2194 | 82/01/22 | 20,900 | SF | $71.37 | $74.99 |
| 214-20 | VEH. MAINT. FAC(WES BLDG) | CHERRY POINT NC | 0.90 | 2311 | 83/01/28 | 18,758 | SF | $46.55 | $67.76 |
| 214-20 | VEH.MAINT.FAC(MACG BLDG) | CHERRY POINT NC | 0.90 | 2311 | 83/01/28 | 16,305 | SF | $47.98 | $67.80 |
| 214-20 | AUTO VEH MAINT SHOP | SIGONELLA ITALY | 1.00 | 2440 | 85/09/27 | 12,951 | SF | $59.15 | $68.60 |
| 214-20 | VEHICLE MAINT BLDG 2 OF 2 | NAS CORPUS CHRISTI, TEXAS | 0.91 | 2430 | 84/09/28 | 11,734 | SF | $65.19 | $81.89 |
| 214-20 | AUTO MAINT FAC | POINT MUGU CALIFORNIA | 1.18 | 2616 | 88/11/09 | 10,980 | SF | $89.89 | $80.15 |
| 214-20 | MATERIAL HANDLING EQ MAIN | CHARLESTON AFB, SC | 0.91 | 2565 | 87/09/14 | 8,174 | SF | $64.56 | $74.11 |
| 214-20 | AUTOMOTIVE SHOP | NORFOLK VIRGINIA | 0.92 | 2616 | 89/03/30 | 5,401 | SF | $105.51 | $113.45 |
| 214-20 | SLFT SUPT MAINF FAC PF #2 | SAN DIEGO CALIFORNIA | 1.21 | 2513 | 87/01/28 | 5,000 | SF | $47.26 | $39.87 |
| 214-20 | US ARMY RESRV CTR OMS BLD | ROOSEVELT ROADS PR | 1.10 | 2597 | 88/05/02 | 4,482 | SF | $102.86 | $92.39 |
| 214-20 | MIUW VEHICLE MAINT FAC | N&MCRC MOBILE, ALA | 1.00 | 2612 | 88/09/02 | 2,480 | SF | $79.21 | $75.88 |
| 214-20 | COMBAT/AUTO VEH MNT SHOP | NAVSTA, PEARL HARBOR, HI | 1.34 | 1981 | 80/09/19 | 1,440 | SF | $52.05 | $49.06 |
| | AVERAGE OF ADJUSTED UNIT COST | | $75.31 | | | | | | |
| | AVERAGE FACILITY SIZE | | 21581 | SF | | | | | |
| 214-30 | REFUELING VEH MAINT SHOP | LAJES AZORES | 1.38 | 2504 | 86/09/12 | 3,600 | SF | $83.78 | $75.67 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 214-30 | REFUELING VEHICLE SHOP | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/20 | 2,568 | SF | $84.21 | $86.06 |
| | AVERAGE OF ADJUSTED UNIT COST | | $80.86 | | | | | | |
| | AVERAGE FACILITY SIZE | | 3084 | SF | | | | | |
| 214-51 | TACT VEH MAINT FAC PF #1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/23 | 36,610 | SF | $69.87 | $75.97 |
| 214-51 | COMBAT VM SHOPS MT/ORD | CAMP LEJEUNE N C | 0.92 | 2611 | 88/08/16 | 30,516 | SF | $75.10 | $98.61 |
| 214-51 | MAINTENANCE FACILITY | EL TORO CALIFORNIA | 1.20 | 2428 | 84/08/08 | 29,985 | SF | $63.95 | $69.22 |
| 214-51 | TACT VEH MAINT FAC PF #2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/12 | 28,800 | SF | $63.34 | $68.09 |
| 214-51 | COMBAT VM SHOPS MT/ENG | CAMP LEJEUNE N C | 0.92 | 2611 | 88/08/16 | 26,323 | SF | $79.20 | $103.99 |
| 214-51 | AUTO ORGANIZATIONAL SHOP | CAMP LEJEUNE N C | 0.85 | 2455 | 86/04/07 | 25,800 | SF | $56.12 | $84.82 |
| 214-51 | AUTO MAINT FAC PF 1 | YUMA ARIZONA | 1.19 | 2616 | 88/11/23 | 18,978 | SF | $69.61 | $68.38 |
| 214-51 | TACT VEH MAINT FAC PF #1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/12 | 15,134 | SF | $74.28 | $74.43 |
| 214-51 | TACT VEH MAINT FAC PF #3 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/12 | 12,960 | SF | $47.44 | $46.18 |
| 214-51 | AUTO MAINT FAC | CAMP PENDLETON CALIFORNIA | 1.14 | 2581 | 88/02/12 | 12,180 | SF | $77.40 | $74.43 |
| 214-51 | TACT VEH MAINT FAC PF #3 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/23 | 9,528 | SF | $68.15 | $63.41 |
| 214-51 | TACT VEH MAINT FAC PF #5 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/12 | 8,222 | SF | $76.33 | $69.72 |
| 214-51 | AUTO MAINT FAC PF 2 | YUMA ARIZONA | 1.19 | 2616 | 88/11/23 | 7,916 | SF | $92.53 | $79.64 |
| | AVERAGE OF ADJUSTED UNIT COST | | $75.14 | | | | | | |
| | AVERAGE FACILITY SIZE | | 20227 | SF | | | | | |
| 214-53 | FLD MAINT CMPLX SHOP BLDG | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/13 | 53,066 | SF | $53.42 | $80.97 |
| 214-53 | FIELD MAINT CMPLX INC II | CAMP LEJEUNE N C | 0.84 | 2596 | 88/04/27 | 46,618 | SF | $66.17 | $97.74 |
| 214-53 | EQUIPMENT MAINT FAC PF#2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/09 | 42,160 | SF | $55.78 | $60.60 |
| 214-53 | FIELD MAINT FAC PF #2 | CAMP PENDLETON CALIFORNIA | 1.14 | 2581 | 88/02/01 | 22,000 | SF | $34.56 | $36.66 |
| 214-53 | EQUIPMENT MAINT FAC PF#1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/09 | 20,400 | SF | $68.90 | $71.83 |
| 214-53 | EQUIPMENT MAINT FAC PF#6 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/09 | 19,874 | SF | $37.74 | $39.34 |
| 214-53 | COMBAT VEHICLE MAINT SHOP | CAMP LEJEUNE N C | 0.84 | 2597 | 88/05/02 | 19,813 | SF | $76.77 | $107.62 |
| 214-53 | FIELD MAINT FAC PF #1 | CAMP PENDLETON CALIFORNIA | 1.14 | 2581 | 88/02/01 | 15,600 | SF | $68.85 | $68.12 |
| 214-53 | VEHICLE MAINTENANCE SHOP | NORFOLK VIRGINIA | 0.92 | 2619 | 89/04/19 | 14,550 | SF | $69.04 | $82.61 |
| 214-53 | MAINTENANCE SHOP | CHERRY POINT NC | 0.90 | 2422 | 84/04/27 | 13,763 | SF | $54.66 | $71.62 |
| 214-53 | EQUIPMENT MAINT FAC PF#5 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/09 | 13,440 | SF | $47.92 | $46.22 |
| 214-53 | EQUIPMENT MAINT FAC PF#4 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/09 | 7,942 | SF | $43.68 | $39.55 |
| 214-53 | FLD MAINT CMPLX INSPC STA | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/13 | 7,502 | SF | $68.87 | $85.15 |
| 214-53 | EQUIPMENT MAINT FAC PF#3 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/09 | 5,800 | SF | $90.27 | $80.33 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $69.16 | | | | | | |
| | | AVERAGE FACILITY SIZE | 21609 | SF | | | | | |
| 214-55 | WASH & STRIP PADS, PF=4 | YUMA ARIZONA | 1.25 | 2076 | 81/05/20 | 800 | SF | $23.58 | $27.50 |
| | | AVERAGE OF ADJUSTED UNIT COST | $27.50 | | | | | | |
| | | AVERAGE FACILITY SIZE | 800 | SF | | | | | |
| 215-30 | HEAVY GUN SHOP | MCAS, KANEOHE, HI | 1.34 | 2443 | 86/02/03 | 28,900 | SF | $61.76 | $57.11 |
| | | AVERAGE OF ADJUSTED UNIT COST | $57.11 | | | | | | |
| | | AVERAGE FACILITY SIZE | 28900 | SF | | | | | |
| 215-50 | WEAPONS SYS SHOP/STORAGE | ANDREWS AFB MD | 1.08 | 2249 | 82/09/16 | 12,700 | SF | $42.44 | $52.89 |
| | | AVERAGE OF ADJUSTED UNIT COST | $52.89 | | | | | | |
| | | AVERAGE FACILITY SIZE | 12700 | SF | | | | | |
| 216-10 | AMMUNITION OVERHAUL SHOP | NWS CHARLESTON, SC | 0.81 | 2496 | 86/08/25 | 14,354 | SF | $146.42 | $228.42 |
| 216-10 | EXPLOS OPS FAC PF#1 | KEYPORT WA | 1.14 | 2579 | 88/01/29 | 8,896 | SF | $116.02 | $116.00 |
| | | AVERAGE OF ADJUSTED UNIT COST | $172.21 | | | | | | |
| | | AVERAGE FACILITY SIZE | 11625 | SF | | | | | |
| 216-30 | MINE ASSEMBLY PLANT | NS CHARLESTON, SC | 0.93 | 2311 | 83/01/03 | 16,800 | SF | $34.15 | $48.11 |
| | | AVERAGE OF ADJUSTED UNIT COST | $48.11 | | | | | | |
| | | AVERAGE FACILITY SIZE | 16800 | SF | | | | | |
| 216-40 | TORPEDO INTER MAINT FAC | YORKTOWN VIRGINIA | 0.92 | 2612 | 88/09/29 | 28,950 | SF | $130.25 | $164.11 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $164.11 | | | | | | |
| | | AVERAGE FACILITY SIZE | 28950 | SF | | | | | |
| 216-50 | WPNS/RELEASE SYS SHOP-1-2 | BARKSDALE AFB,SHREVEPORT, | 1.01 | 2219 | 82/06/15 | 8,520 | SF | $50.31 | $67.96 |
| | | AVERAGE OF ADJUSTED UNIT COST | $67.96 | | | | | | |
| | | AVERAGE FACILITY SIZE | 8520 | SF | | | | | |
| 216-77 | AMMUNITION MAINT SHOP | ENGLAND AFB ALEXANDRIA LA | 1.01 | 2295 | 82/12/16 | 4,997 | SF | $57.57 | $75.20 |
| | | AVERAGE OF ADJUSTED UNIT COST | $75.20 | | | | | | |
| | | AVERAGE FACILITY SIZE | 4997 | SF | | | | | |
| 217-10 | COMM VEH MAINT FAC | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/26 | 58,400 | SF | $62.16 | $96.28 |
| 217-10 | ELECTR/COMM MAINT SHOP | NAVPHIBASE LITTLE CREEK | 0.98 | 2418 | 84/07/11 | 33,160 | SF | $82.96 | $111.57 |
| 217-10 | ELEC/COMM SP/STRG PF#1 | TWENTYNINE PALMS CALIF | 1.32 | 2591 | 88/03/25 | 32,522 | SF | $42.06 | $39.19 |
| 217-10 | ELEC/COMM MAINT SHOP 1OF3 | CAMP LEJEUNE N C | 0.86 | 2496 | 86/08/12 | 29,363 | SF | $58.58 | $86.98 |
| 217-10 | ELECT. COMM. MAINT. SHOP | CAMP LEJEUNE N C | 0.90 | 2195 | 82/04/16 | 24,893 | SF | $48.93 | $78.12 |
| 217-10 | ELECT/COMM MAINT SHOP | SAN DIEGO CALIFORNIA | 1.28 | 2348 | 83/02/25 | 21,850 | SF | $88.25 | $92.60 |
| 217-10 | ELEC/COMM MAINT SHOP | TWENTYNINE PALMS CALIF | 1.32 | 2613 | 89/02/03 | 21,000 | SF | $73.97 | $67.64 |
| 217-10 | COMM ELECT MAINT FAC | MIRAMAR | 1.11 | 2493 | 86/06/27 | 13,666 | SF | $78.48 | $83.37 |
| 217-10 | OPERATIONS & MAINT. FAC. | CHERRY POINT NC | 0.90 | 2311 | 83/01/28 | 10,400 | SF | $64.09 | $86.38 |
| 217-10 | COMM ELEC MAINT FAC | EL TORO CALIFORNIA | 1.19 | 2526 | 87/06/22 | 10,176 | SF | $145.42 | $135.62 |
| 217-10 | ECM POD SHOP/STORAGE FAC | BARKSDALE SHREVEPORT, LA | 1.01 | 2064 | 81/04/20 | 6,800 | SF | $58.64 | $75.37 |
| 217-10 | ELECT/COMM MAIN SHOP 2OF3 | CAMP LEJEUNE N C | 0.86 | 2496 | 86/08/12 | 5,375 | SF | $100.52 | $123.29 |
| 217-10 | ELECTRONIC/COMM MAINT SHO | NAS CHASE FIELD, TEXAS | 0.95 | 2447 | 85/08/27 | 4,964 | SF | $70.71 | $79.39 |
| 217-10 | ELEC/COMM MAIN SHOPS 1OF3 | CAMP LEJEUNE N C | 0.86 | 2496 | 86/08/12 | 4,750 | SF | $102.58 | $124.73 |
| 217-10 | ELECTRONCS COMM MAIN SHOP | CAMP LEJEUNE N C | 0.90 | 2430 | 84/09/04 | 3,551 | SF | $83.51 | $97.98 |
| 217-10 | ELEC/COMM MAINT SHOP | CAMP PENDLETON CALIFORNIA | 1.14 | 2581 | 88/02/12 | 2,000 | SF | $114.74 | $97.58 |
| | | AVERAGE OF ADJUSTED UNIT COST | $92.25 | | | | | | |
| | | AVERAGE FACILITY SIZE | 17679 | SF | | | | | |
| 217-77 | ELECTRONIC ASSEM CHECK FA | KEESLER AFB,BILOXI,MS | 0.86 | 2516 | 87/03/31 | 15,600 | SF | $73.33 | $106.89 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 217-77 | TACTICAL CONTROL FLIGHT F | MYRTLE BEACH AFB, SC | 0.95 | 2424 | 85/01/30 | 10,255 | SF | $89.58 | $115.47 |
| | AVERAGE OF ADJUSTED UNIT COST | | $111.18 | | | | | | |
| | AVERAGE FACILITY SIZE | | 12927 | SF | | | | | |
| 218-20 | WEIGHT HDL/CONS MAIN 1-2 | CNSYD, CHARLESTON, SC | 0.93 | 2430 | 84/09/14 | 64,739 | SF | $62.09 | $88.49 |
| 218-20 | CONST BATL EQUIP MAIN FAC | ROOSEVELT ROADS RQ | 1.10 | 2565 | 87/09/23 | 33,930 | SF | $61.40 | $67.92 |
| 218-20 | AUTO/MATER HDL MAINT--2/2 | CNSYD CHARLESTON, SC | 0.93 | 2430 | 84/09/14 | 32,828 | SF | $59.01 | $81.50 |
| 218-20 | CNST/WGHT HDL EQ SH 1-2 | MCAS BEAUFORT SC | 0.94 | 2438 | 85/06/13 | 18,720 | SF | $51.79 | $63.35 |
| 218-20 | CED WELDING/METAL SHOP | PORT HUENEME CALIFORNIA | 1.20 | 2579 | 88/01/29 | 9,600 | SF | $47.22 | $39.82 |
| | AVERAGE OF ADJUSTED UNIT COST | | $68.21 | | | | | | |
| | AVERAGE FACILITY SIZE | | 31963 | SF | | | | | |
| 218-45 | PRECISION MEASURE EQIP LA | KEESLER AFB, BILOXI, MS | 0.98 | 2195 | 82/04/26 | 15,517 | SF | $60.55 | $87.86 |
| 218-45 | INSTRUMNT CALIBRATN SHOP | SAN DIEGO CA | 1.28 | 2413 | 84/03/29 | 11,934 | SF | $55.89 | $54.78 |
| | AVERAGE OF ADJUSTED UNIT COST | | $71.32 | | | | | | |
| | AVERAGE FACILITY SIZE | | 13725 | SF | | | | | |
| 218-60 | GSE MAINT-AIMD SHOP 1OF4 | NORFOLK VIRGINIA | 0.95 | 2493 | 86/06/30 | 28,338 | SF | $53.20 | $71.58 |
| 218-60 | GROUND SPRT EQUIP FAC PF1 | YUMA ARIZONA | 1.25 | 2076 | 81/05/20 | 15,232 | SF | $76.30 | $91.77 |
| 218-60 | GROUND SUPPORT EQUIP FAC | JACKSONVILLE NC | 0.84 | 2526 | 87/06/12 | 13,018 | SF | $69.39 | $99.01 |
| 218-60 | GROUND SUPPORT EQPT SHOP | CHERRY POINT NC | 0.90 | 2430 | 83/09/16 | 12,725 | SF | $62.12 | $85.14 |
| 218-60 | GROUND SUPPORT EQPT SHOP | CHERRY POINT NC | 0.90 | 2414 | 83/07/06 | 12,725 | SF | $50.01 | $69.00 |
| 218-60 | GSE MAINT-CNAL SHOP 3OF4 | NORFOLK VIRGINIA | 0.95 | 2493 | 86/06/30 | 12,040 | SF | $52.10 | $65.29 |
| 218-60 | GROUND SUPRT EQUIPMNT FAC | MCAS TUSTIN, CA | 1.20 | 2311 | 83/01/31 | 9,073 | SF | $72.94 | $74.42 |
| | AVERAGE OF ADJUSTED UNIT COST | | $79.45 | | | | | | |
| | AVERAGE FACILITY SIZE | | 14735 | SF | | | | | |
| 218-61 | GSE MAINT-AIMD SHED 2OF4 | NORFOLK VIRGINIA | 0.95 | 2493 | 86/06/30 | 9,038 | SF | $18.57 | $24.98 |
| 218-61 | GSE MAINT-CNAL SHED 4OF4 | NORFOLK VIRGINIA | 0.95 | 2493 | 86/06/30 | 7,897 | SF | $14.72 | $19.60 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 218-61 | GROUND SUPPORT EQUIP SHED | NAS NEW ORLEANS, LA | 0.95 | 2565 | 87/09/25 | 7,150 | SF | $16.96 | $21.94 |
| 218-61 | GSE COVRD STRGE SHED PF3 | YUMA ARIZONA | 1.25 | 2076 | 81/05/20 | 5,200 | SF | $24.57 | $28.95 |
| 218-61 | GRD SUPPT EQPT HOLDG SHED | KEFLAVIK ICELAND | 3.00 | 2419 | 84/05/21 | 4,500 | SF | $102.92 | $42.09 |
| 218-61 | GSE COVRD STRGE SHED | YUMA ARIZONA | 1.25 | 2076 | 81/05/20 | 2,000 | SF | $30.57 | $31.28 |
| | AVERAGE OF ADJUSTED UNIT COST | | $28.14 | | | | | | |
| | AVERAGE FACILITY SIZE | | 5687 | SF | | | | | |
| 218-62 | SUPPORT EQUIPMENT SHOP | CHERRY POINT NC | 0.90 | 2406 | 83/12/16 | 57,784 | SF | $68.46 | $95.72 |
| | AVERAGE OF ADJUSTED UNIT COST | | $95.72 | | | | | | |
| | AVERAGE FACILITY SIZE | | 57784 | SF | | | | | |
| 218-80 | FIELD MAINTENANCE SHOP | CAMP LEJEUNE N C | 0.90 | 2195 | 82/04/20 | 40,993 | SF | $40.27 | $61.71 |
| | AVERAGE OF ADJUSTED UNIT COST | | $61.71 | | | | | | |
| | AVERAGE FACILITY SIZE | | 40993 | SF | | | | | |
| 219-10 | BASE CIVIL ENGINEERING FA | SHAW AFB,SC | 0.68 | 2406 | 83/12/22 | 76,897 | SF | $43.94 | $89.35 |
| 219-10 | PUBLIC WORKS FACILITY | ANNAPOLIS MARYLAND | 1.04 | 2513 | 87/01/30 | 29,950 | SF | $53.69 | $64.78 |
| 219-10 | PUBLIC WORKS SHOP | NAS KINGSVILLE, TEXAS | 0.91 | 2432 | 85/02/07 | 21,000 | SF | $48.06 | $66.41 |
| 219-10 | BASE CIVIL ENGR MAINT FAC | POINT MUGU CALIFORNIA | 1.18 | 2616 | 88/11/09 | 16,900 | SF | $70.88 | $67.49 |
| 219-10 | MAINTENANCE SHOP PF-1 | YUMA ARIZONA | 1.25 | 2194 | 82/01/19 | 14,130 | SF | $52.08 | $53.72 |
| 219-10 | PW BLDG | CAMP LEJEUNE N C | 0.90 | 2347 | 83/04/25 | 11,775 | SF | $53.72 | $70.64 |
| 219-10 | PUBLIC WORKS FACILITY | LAJES AZORES | 1.25 | 2595 | 88/06/07 | 6,617 | SF | $85.71 | $68.97 |
| 219-10 | PUBLIC WORKS SHOP | NTTC PENSACOLA, FLORIDA | 0.85 | 2419 | 83/11/22 | 3,543 | SF | $46.42 | $56.95 |
| | AVERAGE OF ADJUSTED UNIT COST | | $67.28 | | | | | | |
| | AVERAGE FACILITY SIZE | | 22601 | SF | | | | | |
| 219-77 | ENG COMPLEX-SHOP/STOR 2-2 | KEESLER AFB, MISSISSIPPI | 0.98 | 2249 | 82/09/17 | 61,527 | SF | $29.00 | $41.92 |
| 219-77 | MAINT. STORAGE FACILIY | NORFOLK VIRGINIA | 0.95 | 2526 | 87/06/01 | 54,720 | SF | $20.47 | $27.18 |
| 219-77 | WAREHOUSE PF-3 | YUMA ARIZONA | 1.25 | 2194 | 82/01/19 | 14,960 | SF | $27.37 | $27.21 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 219-77 | PEST CONTROL SHOP | NWS, CHARLESTON, SC | 0.93 | 1981 | 80/09/30 | 1,815 | SF | $37.84 | $51.38 |
| | AVERAGE OF ADJUSTED UNIT COST | | $36.92 | | | | | | |
| | AVERAGE FACILITY SIZE | | 33255 | SF | | | | | |
| 310-17 | ELECTRO OPTICS LAB | NRL WASHINGTON, DC | 1.08 | 2432 | 85/02/25 | 37,912 | SF | $217.52 | $250.75 |
| | AVERAGE OF ADJUSTED UNIT COST | | $250.75 | | | | | | |
| | AVERAGE FACILITY SIZE | | 37912 | SF | | | | | |
| 310-23 | APPLIED RESEARCH LAB | NSWC DAHLGREN,VA. | 1.08 | 1750 | 79/03/05 | 35,000 | SF | $62.92 | $100.78 |
| | AVERAGE OF ADJUSTED UNIT COST | | $100.78 | | | | | | |
| | AVERAGE FACILITY SIZE | | 35000 | SF | | | | | |
| 310-29 | SURVEILLANCE SECURITY LAB | MCAS, KANEOHE BAY, HI | 1.34 | 1554 | 77/08/09 | 1,230 | SF | $57.38 | $83.43 |
| | AVERAGE OF ADJUSTED UNIT COST | | $83.43 | | | | | | |
| | AVERAGE FACILITY SIZE | | 1230 | SF | | | | | |
| 310-37 | OCEANOGRAPH RESEARCH LAB | NSTL BAY ST LOUIS, MS | 0.98 | 2233 | 82/07/16 | 56,000 | SF | $71.98 | $104.83 |
| 310-37 | NAVAL OCEANOGRAPHY PRG BL | NSTL BAY ST LOUIS, MS | 0.86 | 2565 | 87/09/15 | 7,475 | SF | $82.09 | $96.30 |
| | AVERAGE OF ADJUSTED UNIT COST | | $100.56 | | | | | | |
| | AVERAGE FACILITY SIZE | | 31737 | SF | | | | | |
| 311-10 | AIRCRAFT T & E FACILITY | NATC PATUXENT RIVER,MD | 1.05 | 1756 | 79/05/11 | 12,825 | SF | $316.61 | $519.95 |
| | AVERAGE OF ADJUSTED UNIT COST | | $519.95 | | | | | | |
| | AVERAGE FACILITY SIZE | | 12825 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 312-10 | AMRAAM ENVRNMTL TEST CELL | POINT MUGU CALIFORNIA | 1.32 | 2413 | 84/03/14 | 1,235 | SF | $501.45 | $476.69 |
| | AVERAGE OF ADJUSTED UNIT COST | | $476.69 | | | | | | |
| | AVERAGE FACILITY SIZE | | 1235 | SF | | | | | |
| 315-20 | MINE WARFARE SYSTEMS LAB | YORKTOWN VIRGINIA | 0.95 | 2504 | 86/09/04 | 47,564 | SF | $80.81 | $109.42 |
| 315-20 | MINE ENGINEERING LAB | YORKTOWN VIRGINIA | 0.98 | 2430 | 83/09/30 | 35,097 | SF | $65.47 | $87.62 |
| 315-20 | LAND BASED TEST FAC | NSCS PANAMA CITY, FL | 0.87 | 2509 | 86/10/03 | 11,102 | SF | $73.92 | $94.07 |
| 315-20 | SYS TEST/CONTROL LAB1OF2 | NCSC PANAMA CITY, FLORIDA | 0.92 | 2418 | 84/12/14 | 7,969 | SF | $154.82 | $186.48 |
| 315-20 | MAGNETIC ENVIRJN FAC | NCSC PANAMA CITY, FL | 0.92 | 2418 | 84/12/14 | 3,000 | SF | $131.95 | $149.65 |
| | AVERAGE OF ADJUSTED UNIT COST | | $125.44 | | | | | | |
| | AVERAGE FACILITY SIZE | | 20946 | SF | | | | | |
| 315-30 | AEGIS COMBAT FACILITY | NSWC DAHLGREN,VA | 1.08 | 2109 | 81/07/23 | 10,000 | SF | $112.39 | $149.40 |
| | AVERAGE OF ADJUSTED UNIT COST | | $149.40 | | | | | | |
| | AVERAGE FACILITY SIZE | | 10000 | SF | | | | | |
| 317-15 | DETECTION SYS LAB PF #1 | CHINA LAKE CALIFORNIA | 1.18 | 2619 | 89/01/19 | 16,445 | SF | $125.86 | $132.58 |
| 317-15 | ECM DETECT SYS LAB | CHINA LAKE CA NWC | 1.26 | 2509 | 86/11/28 | 2,050 | SF | $242.58 | $202.03 |
| 317-15 | DETECTION SYS LAB PF #2 | CHINA LAKE CALIFORNIA | 1.18 | 2619 | 89/01/19 | 782 | SF | $279.37 | $226.21 |
| | AVERAGE OF ADJUSTED UNIT COST | | $186.94 | | | | | | |
| | AVERAGE FACILITY SIZE | | 6425 | SF | | | | | |
| 317-20 | ELEC/ELECT TEST LAB | POINT MUGU CALIFORNIA | 1.20 | 2438 | 85/06/11 | 79,242 | SF | $106.49 | $116.01 |
| 317-20 | COMBAT SYSTEMS FACILITY | NSCW DAHLGREN, VA | 1.08 | 2219 | 82/06/25 | 39,353 | SF | $73.26 | $94.44 |
| 317-20 | MIDWAY RESEARCH CENTER | MCDEC, QUANTICO, VA. | 0.96 | 2565 | 87/09/11 | 5,156 | SF | $151.80 | $154.26 |
| | AVERAGE OF ADJUSTED UNIT COST | | $121.57 | | | | | | |
| | AVERAGE FACILITY SIZE | | 41250 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 317-25 | MISSION OPER. SUPP CENTER | NRL WASHINGTON, DC | 1.08 | 2432 | 85/02/28 | 123,000 | SF | $114.53 | $138.97 |
| 317-25 | ELECTRONIC SYS EVAL FAC | ST GEORGES PARISH BERMUDA | 0.93 | 2516 | 87/03/18 | 7,380 | SF | $109.71 | $117.32 |
| | | AVERAGE OF ADJUSTED UNIT COST | $128.14 | | | | | | |
| | | AVERAGE FACILITY SIZE | 65190 | SF | | | | | |
| 320-10 | HYPERBARIC TEST FAC | NCSC PANAMA CTY, FLORIDA | 0.87 | 2565 | 87/09/30 | 5,973 | SF | $88.46 | $123.74 |
| 320-10 | UNDERWATER EQUIP LAB | NCSC PANAMA CITY, FLORIDA | 0.87 | 2557 | 87/08/05 | 5,000 | SF | $101.32 | $139.29 |
| | | AVERAGE OF ADJUSTED UNIT COST | $131.51 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5486 | SF | | | | | |
| 371-12 | TECHNICAL OPS FAC--1 OF 2 | NOTU, CAPE CANAVERAL, FL | 0.96 | 2402 | 84/01/13 | 34,662 | SF | $83.46 | $109.58 |
| | | AVERAGE OF ADJUSTED UNIT COST | $109.58 | | | | | | |
| | | AVERAGE FACILITY SIZE | 34662 | SF | | | | | |
| 411-20 | EMBARK FAC (FUEL) 4/6 | CHERRY POINT NC | 0.87 | 2528 | 87/07/24 | 4,211 | SF | $16.17 | $22.25 |
| | | AVERAGE OF ADJUSTED UNIT COST | $22.25 | | | | | | |
| | | AVERAGE FACILITY SIZE | 4211 | SF | | | | | |
| 411-50 | SOUTH TANK FARM-POL FAC | LAJES AZORES | 1.38 | 2440 | 85/09/30 | 1,530,000 | BBL | $9.82 | $9.39 |
| 411-50 | CONSTRUCT 600 MBBL TANK | DFSP, ANDERSEN AFB, GUAM | 2.15 | 2430 | 83/09/02 | 600,000 | BBL | $22.66 | $12.99 |
| 411-50 | FUEL STORAGE-BULK | ROOSEVELT ROADS RQ | 1.05 | 2440 | 85/09/15 | 500,000 | BBL | $11.15 | $12.67 |
| 411-50 | FUEL STORAGE TANK | NSC, PEARL HARBOR, HI | 1.34 | 2295 | 82/12/06 | 150,000 | BBL | $10.92 | $9.10 |
| | | AVERAGE OF ADJUSTED UNIT COST | $11.03 | | | | | | |
| | | AVERAGE FACILITY SIZE | 695000 | BBL | | | | | |
| 421-12 | FUSE & DETONATOR MAGAZINE | TWENTYNINE PALMS CALIF | 1.22 | 2427 | 85/04/26 | 1,500 | SF | $121.41 | $124.15 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | AVERAGE OF ADJUSTED UNIT COST | | $124.15 | | | | | | |
| | AVERAGE FACILITY SIZE | | 1500 | SF | | | | | |
| 421-22 | HIGH EXPLOSIVE MAGAZINE | YORKTOWN VIRGINIA | 0.98 | 2418 | 84/12/13 | 11,263 | SF | $83.53 | $112.35 |
| 421-22 | HIGH EXPLOSIVE MAGAZINE | NWS CHARLESTON, SC | 0.94 | 2581 | 88/02/03 | 9,000 | SF | $92.77 | $120.60 |
| 421-22 | LCACC MAGAZINE RELOCATION | NORFOLK VIRGINIA | 0.98 | 2424 | 85/01/31 | 8,288 | SF | $100.93 | $134.01 |
| 421-22 | HIGH EXPLOSIVE MAGAZINE | TWENTYNINE PALMS CALIF | 1.22 | 2427 | 85/04/26 | 8,000 | SF | $78.19 | $82.43 |
| 421-22 | BOX-TYPE HIGH EXPL MAGZN | EL TORO CALIFORNIA | 1.15 | 2438 | 85/06/06 | 6,267 | SF | $134.10 | $146.28 |
| 421-22 | SEVEN MAGAZINES | DAM NECK V BEACH VA | 0.98 | 2424 | 85/01/24 | 4,784 | SF | $104.30 | $126.61 |
| 421-22 | ARCH-TYPE HIGH EXP MAGZNE | EL TORO CALIFORNIA | 1.15 | 2438 | 85/06/06 | 3,750 | SF | $146.36 | $145.01 |
| 421-22 | HIGH EXPLOSIVE MAGAZINES | JACKSONVILLE NC | 0.90 | 2430 | 83/09/01 | 3,384 | SF | $125.62 | $158.10 |
| | AVERAGE OF ADJUSTED UNIT COST | | $128.17 | | | | | | |
| | AVERAGE FACILITY SIZE | | 6842 | SF | | | | | |
| 421-32 | INERT STORAGE BLDG | POMPLANT, CHARLESTON, SC | 0.93 | 1974 | 80/08/20 | 31,143 | SF | $36.50 | $63.36 |
| 421-32 | INERT STORAGE WAREHOUSE | NWS CHARLESTON, SC | 0.89 | 2616 | 88/11/22 | 11,430 | SF | $21.68 | $26.59 |
| 421-32 | ROCKET CHKOUT/ASEM STORAG | NAS NEW ORLEANS, LA | 1.08 | 2184 | 81/12/21 | 10,055 | SF | $54.83 | $65.16 |
| | AVERAGE OF ADJUSTED UNIT COST | | $51.70 | | | | | | |
| | AVERAGE FACILITY SIZE | | 17542 | SF | | | | | |
| 421-35 | READY SERVICE MAGAZINE | TWENTYNINE PALMS CALIF | 1.22 | 2427 | 85/04/26 | 128 | SF | $121.56 | $124.30 |
| | AVERAGE OF ADJUSTED UNIT COST | | $124.30 | | | | | | |
| | AVERAGE FACILITY SIZE | | 128 | SF | | | | | |
| 421-52 | SMOKELESS POWDER MAGAZINE | TWENTYNINE PALMS CALIF | 1.22 | 2427 | 85/04/26 | 21,560 | SF | $74.88 | $76.56 |
| | AVERAGE OF ADJUSTED UNIT COST | | $76.56 | | | | | | |
| | AVERAGE FACILITY SIZE | | 21560 | SF | | | | | |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 421-72 | MISSILE MAGAZINES | YORKTOWN VIRGINIA | 0.93 | 2617 | 88/12/21 | 70,466 | SF | $94.60 | $129.33 |
| 421-72 | VLS STD MISSILE MAGS | YORKTOWN VIRGINIA | 0.93 | 2617 | 88/12/13 | 46,410 | SF | $103.99 | $140.62 |
| 421-72 | MISSILE MAGAZINES PART II | SEAL BEACH CALIF | 1.18 | 2591 | 88/03/02 | 26,565 | SF | $131.62 | $137.21 |
| 421-72 | TYPE D MAGAZINE | YORKTOWN VIRGINIA | 0.95 | 2565 | 87/09/03 | 16,478 | SF | $70.79 | $89.75 |
| 421-72 | TOMAHAWK ORDNANCE FAC | SAN DIEGO CA | 1.21 | 2509 | 87/02/18 | 16,100 | SF | $149.57 | $152.22 |
| 421-72 | MAGAZINES, MISSILE | POMFLANT, CHARLESTON,SC | 0.93 | 2195 | 82/04/14 | 15,960 | SF | $104.97 | $158.87 |
| 421-72 | VERT LAUNCH ASROC MAG | YORKTOWN VIRGINIA | 0.93 | 2598 | 88/07/18 | 11,630 | SF | $90.08 | $107.50 |
| 421-72 | MISSILE MAGAZINES | SAN DIEGO CA | 1.23 | 2596 | 88/04/13 | 10,827 | SF | $122.16 | $109.28 |
| 421-72 | TYPE C MAGAZINE | YORKTOWN VIRGINIA | 0.95 | 2565 | 87/09/03 | 10,077 | SF | $65.60 | $76.17 |
| 421-72 | HARPOON MISSILE MAG PF #1 | CONCORD CALIFORNIA | 1.21 | 2595 | 88/06/30 | 9,000 | SF | $101.97 | $90.20 |
| 421-72 | HARPOON MISSILE MAG PF #2 | CONCORD CALIFORNIA | 1.21 | 2595 | 88/06/30 | 9,000 | SF | $102.02 | $90.25 |
| 421-72 | MISSILE MAGAZINE PF #1 | KEYPORT WA | 1.14 | 2581 | 88/02/05 | 8,170 | SF | $67.84 | $63.45 |
| 421-72 | MISSILE MAGAZINE PF #3 | KEYPORT WA | 1.14 | 2581 | 88/02/05 | 8,170 | SF | $72.40 | $67.72 |
| 421-72 | MISSILE MAGAZINE PF #4 | KEYPORT WA | 1.14 | 2581 | 88/02/05 | 8,170 | SF | $72.97 | $68.25 |
| 421-72 | MISSILE MAGAZINE PF #5 | KEYPORT WA | 1.14 | 2581 | 88/02/05 | 8,170 | SF | $66.92 | $62.60 |
| 421-72 | MISSILE MAGAZINE | SEAL BEACH CALIF | 1.19 | 2616 | 89/03/31 | 5,750 | SF | $311.61 | $265.86 |
| 421-72 | MULTICUBICLE MAGAZINE | SHAW AFB SUMTER, SC | 0.78 | 2596 | 88/04/04 | 4,148 | SF | $85.78 | $109.63 |
| | AVERAGE OF ADJUSTED UNIT COST | | $112.87 | | | | | | |
| | AVERAGE FACILITY SIZE | | 16770 | SF | | | | | |
| 431-10 | COLD STORAGE WAREHOUSE | NSC PEARL HARBOR, HI | 1.34 | 2581 | 88/02/03 | 49,260 | SF | $100.49 | $96.67 |
| 431-10 | COLD STORAGE WAREHOUSE | TWENTYNINE PALMS CALIF | 1.20 | 2406 | 83/12/27 | 9,200 | SF | $68.73 | $68.63 |
| 431-10 | COLD STORAGE WAREHOUSE | NAS MEMPHIS MILLINGTON,TN | 1.00 | 2388 | 83/06/08 | 8,360 | SF | $53.10 | $63.51 |
| 431-10 | COLD STORAGE WAREHOUSE | SIGONELLA ITALY | 1.19 | 2295 | 82/12/23 | 4,838 | SF | $162.15 | $157.69 |
| 431-10 | COLD STRGE WAREHOUSE | YUMA ARIZONA | 1.25 | 2418 | 84/12/11 | 3,755 | SF | $124.68 | $107.67 |
| 431-10 | COLD STORAGE WAREHOUSE | NAS CORPUS CH, TX | 0.91 | 2443 | 86/02/11 | 3,580 | SF | $106.43 | $124.96 |
| | AVERAGE OF ADJUSTED UNIT COST | | $103.18 | | | | | | |
| | AVERAGE FACILITY SIZE | | 13165 | SF | | | | | |
| 441-10 | WAR RESERVES WAREHOUSE | NCBC GULFPORT, MISSISSIPP | 0.91 | 2424 | 85/01/11 | 110,640 | SF | $20.09 | $30.30 |
| 441-10 | AVIA SUPPORT WAREHOUSE | CHERRY POINT NC | 0.97 | 2528 | 87/07/10 | 97,392 | SF | $35.56 | $48.24 |
| 441-10 | GENERAL WAREHOUSE | NS MAYPORT,FLORIDA | 0.90 | 2406 | 84/02/01 | 62,953 | SF | $47.50 | $70.65 |
| 441-10 | GENERAL WAREHOUSE | SAN DIEGO CALIFORNIA | 1.28 | 2295 | 82/12/23 | 60,000 | SF | $27.46 | $30.10 |
| 441-10 | STORAGE FACILITY | NSC JACKSONVILLE, FL | 0.87 | 2616 | 88/11/16 | 54,944 | SF | $61.33 | $85.88 |
| 441-10 | BASE SUPPLY WAREHOUSE | NAPLES ITALY | 1.19 | 2406 | 83/12/31 | 49,713 | SF | $18.96 | $21.10 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD CUST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 441-10 | BASE SUPPLY COMPLEX | POINT MUGU CALIFORNIA | 1.18 | 2616 | 88/11/09 | 44,200 | SF | $67.30 | $68.76 |
| 441-10 | GENERAL WAREHOUSE | PORT HUENEME CALIFORNIA | 1.18 | 2616 | 89/03/31 | 44,105 | SF | $30.40 | $31.05 |
| 441-10 | STORAGE FACILITIES DPDO | SELFRIDGE ANGB MT CLM,MI | 1.05 | 1981 | 80/09/01 | 42,000 | SF | $21.16 | $32.08 |
| 441-10 | AVIATION SUPPLY WAREHOUSE | YUMA ARIZONA | 1.19 | 2591 | 88/03/30 | 41,503 | SF | $42.28 | $43.24 |
| 441-10 | WAREHSE FAC-LARGE WAREHSE | CHERRY POINT NC | 0.90 | 2351 | 83/05/16 | 41,160 | SF | $18.74 | $27.92 |
| 441-10 | GENERAL WAREHOUSE | NAS CECIL FIELD, FLORIDA | 0.90 | 2406 | 83/12/23 | 37,848 | SF | $41.34 | $60.20 |
| 441-10 | SUPPLY SUPPORT FAC | BANGOR WASHINGTON | 1.30 | 2194 | 82/01/18 | 32,813 | SF | $55.46 | $60.69 |
| 441-10 | BASE SUPPLY & EQUIP WRHSE | TORREJON A.B, SPAIN | 0.92 | 2433 | 85/12/26 | 30,304 | SF | $22.21 | $30.96 |
| 441-10 | TACT VEH MAINT FAC PF #2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/23 | 28,433 | SF | $35.58 | $37.49 |
| 441-10 | SUPPLY WAREHOUSE | FALLON NEVADA | 1.34 | 2619 | 89/01/19 | 25,600 | SF | $57.96 | $49.50 |
| 441-10 | WAREHOUSE | TUSTIN CALIFORNIA | 1.20 | 2200 | 82/02/01 | 23,712 | SF | $33.62 | $37.79 |
| 441-10 | STOCKAGE WAREHOUSE | TORREJON AIR BASE SPAIN | 0.92 | 2424 | 85/01/25 | 19,993 | SF | $17.32 | $22.38 |
| 441-10 | PET OIL LUBE STORAGE FAC | BREMERTON WASHINGTON | 1.15 | 2443 | 86/02/07 | 16,750 | SF | $58.16 | $58.03 |
| 441-10 | MARINE WAREHOUSE | NAS, WILLOW GROVE,PA | 1.01 | 2295 | 82/12/27 | 16,700 | SF | $34.78 | $42.06 |
| 441-10 | MAG-41 LOGISTICS BLDG | NAS DALLAS, TEXAS | 0.94 | 2440 | 85/09/10 | 10,787 | SF | $43.70 | $50.60 |
| 441-10 | VEH STRGE/MAINT WRHSE | ADAK ALASKA | 3.19 | 2428 | 83/08/08 | 10,000 | SF | $59.95 | $20.37 |
| 441-10 | BASE SUPPLY WAREHOUSE | SIGONELLA ITALY | 1.00 | 2428 | 85/03/29 | 9,900 | SF | $31.63 | $34.29 |
| 441-10 | GENERAL WAREHOUSE | CAMP PENDLETON CALIFORNIA | 1.20 | 2430 | 84/09/12 | 9,002 | SF | $56.64 | $51.13 |
| 441-10 | LCAC COMPLEX GEN WRHSE | NAB LCREEK NORFOLK VA | 0.98 | 2438 | 85/06/24 | 9,000 | SF | $42.13 | $46.42 |
| 441-10 | PUBLIC WORKS WAREHOUSE | ADAK ALASKA | 3.19 | 2413 | 84/03/01 | 8,100 | SF | $88.01 | $29.84 |
| 441-10 | STORAGE BUILDING | NORFOLK VIRGINIA | 0.92 | 2616 | 89/03/30 | 7,498 | SF | $49.66 | $53.39 |
| 441-10 | WAREHSE FAC-SMALL ORD WHS | CHERRY POINT NC | 0.90 | 2351 | 83/05/16 | 7,200 | SF | $17.15 | $20.96 |
| 441-10 | SUPPLY FACILITY 2 OF 2 | CHESAPEAKE VIRGINIA | 0.95 | 2496 | 86/08/29 | 7,050 | SF | $45.20 | $49.32 |
| 441-10 | CONTRACTOR LOG SUPT FAC | TRAVIS AFB, TACOMA | 1.22 | 2612 | 88/09/21 | 6,571 | SF | $65.86 | $53.02 |
| 441-10 | ELECT & ANTENNA WAREHSES | ADAK ALASKA | 3.19 | 2413 | 84/03/01 | 5,000 | SF | $84.37 | $27.88 |
| 441-10 | ELECT & ANTENNA WAREHSES | ADAK ALASKA | 3.19 | 2413 | 84/03/01 | 4,000 | SF | $88.87 | $29.12 |
| 441-10 | WAREHOUSE | NORFOLK VIRGINIA | 0.98 | 2249 | 82/09/23 | 3,527 | SF | $17.94 | $20.35 |
| | | AVERAGE OF ADJUSTED UNIT COST | $41.67 | | | | | | |
| | | AVERAGE FACILITY SIZE | 29648 | SF | | | | | |
| 441-11 | AVIA WAREHOUSE, BLDG B | JACKSONVILLE NC | 0.84 | 2581 | 88/02/04 | 51,010 | SF | $35.51 | $51.65 |
| 441-11 | AVIATION WAREHOUSE,BLDG A | JACKSONVILLE NC | 0.84 | 2581 | 88/02/04 | 24,696 | SF | $46.35 | $61.06 |
| | | AVERAGE OF ADJUSTED UNIT COST | $56.35 | | | | | | |
| | | AVERAGE FACILITY SIZE | 37853 | SF | | | | | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 441-12 | AVIATION SUPPLY FACILITY | CAMP PENDLETON CALIFORNIA | 1.12 | 2595 | 88/06/14 | 59,000 | SF | $65.55 | $74.22 |
| 441-12 | AVIATION SUPPLY FACILITY | MCAS KANEOHE BAY, HI | 1.34 | 2493 | 86/06/30 | 31,920 | SF | $28.02 | $26.73 |
| 441-12 | MRN AIR SUPT COMPLX PF 1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/14 | 14,519 | SF | $93.91 | $94.18 |
| 441-12 | EMBARK FAC (CARGO) 3/6 | CHERRY POINT NC | 0.87 | 2528 | 87/07/24 | 11,507 | SF | $25.51 | $32.50 |
| 441-12 | MN AIR SUPT COMPLX PF 2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/14 | 7,638 | SF | $107.75 | $98.49 |
| 441-12 | MN AIR SUPT COMPX PF 2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/14 | 7,638 | SF | $107.75 | $98.49 |
| 441-12 | MN AIR SUPT COMPX PF 4 | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/14 | 3,920 | SF | $134.49 | $117.74 |
| | | AVERAGE OF ADJUSTED UNIT COST | $77.47 | | | | | | |
| | | AVERAGE FACILITY SIZE | 19448 SF | | | | | | |
| 441-13 | SECURITY WAREHOUSE | BARSTOW CALIFORNIA | 1.22 | 2418 | 84/12/31 | 90,617 | SF | $51.80 | $53.15 |
| | | AVERAGE OF ADJUSTED UNIT COST | $53.15 | | | | | | |
| | | AVERAGE FACILITY SIZE | 90617 SF | | | | | | |
| 441-20 | CONTROL HUMIDITY WHSE | CBC GULFPORT, MS | 0.86 | 2509 | 87/02/20 | 306,000 | SF | $38.72 | $57.79 |
| 441-20 | CONTROLLED HUMIDITY WAHS | NCBC GULFPORT, MS | 0.85 | 2612 | 88/09/23 | 147,545 | SF | $23.78 | $33.43 |
| 441-20 | CONTROLLED HUMIDITY WRHSE | NSC CHARLESTON, SC | 0.89 | 2595 | 88/06/14 | 60,300 | SF | $58.80 | $68.82 |
| 441-20 | CONTROLLED HUMIDITY WHSE | NTTC PENSACOLA, FL | 0.84 | 2526 | 87/06/26 | 29,490 | SF | $35.91 | $43.41 |
| | | AVERAGE OF ADJUSTED UNIT COST | $50.86 | | | | | | |
| | | AVERAGE FACILITY SIZE | 135833 SF | | | | | | |
| 441-30 | HAZ/FLAM MAT STORHSE 1-2 | NSC, CHARLESTON, SC | 0.93 | 2194 | 82/01/22 | 44,000 | SF | $56.06 | $91.41 |
| 441-30 | CONFORMING STORAGE FAC | CHASN SC | 0.91 | 2557 | 87/08/20 | 36,000 | SF | $51.22 | $72.44 |
| 441-30 | HAZ FLAM WAREHOUSE | NCBC GULFPORT, MS | 0.85 | 2612 | 88/09/28 | 30,076 | SF | $82.29 | $119.39 |
| 441-30 | HAZ MH STG/HNDLG FACY | NORFOLK VIRGINIA | 0.95 | 2565 | 87/09/03 | 13,383 | SF | $136.91 | $175.38 |
| 441-30 | CONFORMING STORAGE FAC | BARSTOW CALIFORNIA | 1.20 | 2565 | 87/09/10 | 13,060 | SF | $47.71 | $48.37 |
| 441-30 | HAZ FLMBL STORHOUSE(4036) | CHERRY POINT NC | 0.87 | 2565 | 87/09/15 | 12,057 | SF | $138.22 | $189.43 |
| 441-30 | HAZ/FLAMM MAT STOR FAC | PEARL HARBOR NSY | 1.34 | 2479 | 86/05/28 | 12,040 | SF | $144.70 | $133.22 |
| 441-30 | HAZARDOUS MAT'L STRG FAC | MCAS BEAUFORT, SC | 0.94 | 2513 | 87/01/21 | 10,150 | SF | $30.24 | $37.99 |
| 441-30 | HAZ/FLAM STORAGE BUILDING | NAS OCEANA, VA BEACH,VA | 0.95 | 2493 | 86/06/27 | 8,168 | SF | $67.48 | $81.39 |
| 441-30 | HAZ/FLAM STOREHOUSE | NSC PNCLA, FL | 0.84 | 2581 | 88/02/04 | 6,500 | SF | $119.39 | $151.57 |
| 441-30 | HAZ/FLAM STOR BLDG 1 OF 2 | NORFOLK VIRGINIA | 0.95 | 2493 | 86/06/27 | 5,425 | SF | $56.46 | $64.44 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 441-30 | HAZ/FLAM STOR FAC 1 OF 2 | PWC PENSACOLA, FL | 0.84 | 2513 | 87/01/07 | 3,803 | SF | $56.24 | $69.53 |
| 441-30 | HAZ/FLAM STOREHOUSE PF #1 | CAMP PENDLETON CALIFORNIA | 1.14 | 2581 | 88/02/12 | 3,000 | SF | $113.24 | $99.60 |
| 441-30 | HAZ/FLAM STOREHOUSE PF #2 | CAMP PENDLETON CALIFORNIA | 1.14 | 2581 | 88/02/12 | 3,000 | SF | $126.48 | $111.24 |
| 441-30 | CONFORMING STORAGE FAC | MYRTLE BEACH AFB, SC | 0.87 | 2612 | 88/09/30 | 2,440 | SF | $93.94 | $105.18 |
| 441-30 | LCAC COMPLEX FLAM STORAGE | NAB LCREEK NORFOLK VA | 0.98 | 2438 | 85/06/24 | 2,000 | SF | $60.84 | $64.24 |
| | AVERAGE OF ADJUSTED UNIT COST | | $100.92 | | | | | | |
| | AVERAGE FACILITY SIZE | | 12818 | SF | | | | | |
| 441-35 | STORG SHED/ISSUE (1OF4) | NORFOLK VIRGINIA | 0.90 | 2616 | 89/03/16 | 49,491 | SF | $22.52 | $31.13 |
| 441-35 | STOR. SHED/ISSUE (2 OF 4) | NORFOLK VIRGINIA | 0.90 | 2616 | 89/03/16 | 39,974 | SF | $17.25 | $23.60 |
| 441-35 | HAZ/FLAMM STOR SHED 2--2 | NSC CHARLESTON, SC | 0.93 | 2194 | 82/01/22 | 25,620 | SF | $20.21 | $31.23 |
| 441-35 | STOR. SHED/ISSUE (3 OF 4) | NORFOLK VIRGINIA | 0.90 | 2616 | 89/03/16 | 15,438 | SF | $25.09 | $31.32 |
| 441-35 | VEHICLE STORAGE SHED | NORFOLK VIRGINIA | 0.98 | 2419 | 83/11/25 | 5,040 | SF | $25.93 | $28.30 |
| 441-35 | US ARMY RESERVE SHED CTR | ROOSEVELT ROADS PR | 1.10 | 2597 | 88/05/02 | 2,084 | SF | $44.24 | $38.74 |
| 441-35 | STOR. SHED/ISSUE (4 OF 4) | NORFOLK VIRGINIA | 0.90 | 2616 | 89/03/16 | 480 | SF | $81.97 | $87.12 |
| | AVERAGE OF ADJUSTED UNIT COST | | $38.77 | | | | | | |
| | AVERAGE FACILITY SIZE | | 19732 | SF | | | | | |
| 441-71 | SOAP & OUTFITTING BLDG. | SUB BASE NLON CT | 1.13 | 2249 | 82/09/10 | 18,400 | SF | $80.27 | $99.61 |
| 441-71 | MAINT. MAT'L STOR. BLDG. | NORFOLK VIRGINIA | 0.98 | 2220 | 82/05/05 | 9,647 | SF | $59.60 | $79.00 |
| | AVERAGE OF ADJUSTED UNIT COST | | $89.30 | | | | | | |
| | AVERAGE FACILITY SIZE | | 14023 | SF | | | | | |
| 441-72 | SERVMART | SAN DIEGO CALIFORNIA | 1.18 | 2433 | 85/05/15 | 39,600 | SF | $40.97 | $43.21 |
| | AVERAGE OF ADJUSTED UNIT COST | | $43.21 | | | | | | |
| | AVERAGE FACILITY SIZE | | 39600 | SF | | | | | |
| 510-10 | HOSPITAL | TRAVIS AFB, FAIRFIELD, CA | 1.27 | 2438 | 85/06/27 | 773,546 | SF | $146.36 | $150.65 |
| 510-10 | HOSPITAL REPLACEMENT | ROTA SPAIN | 0.92 | 2457 | 85/07/15 | 72,834 | SF | $80.39 | $90.48 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | AVERAGE OF ADJUSTED UNIT COST | | $120.56 | | | | | | |
| | AVERAGE FACILITY SIZE | | 423190 | SF | | | | | |
| 510-77 | MED STORG/HOSP MAINT FAC | CAMP PENDLETON CALIFORNIA | 1.12 | 2617 | 88/12/23 | 73,480 | SF | $25.10 | $27.29 |
| 510-77 | MEDICAL STOR (WRM) FAC | KEESLER AFB, BILOXI, MS | 0.86 | 2516 | 87/03/05 | 10,173 | SF | $44.53 | $53.25 |
| | AVERAGE OF ADJUSTED UNIT COST | | $40.27 | | | | | | |
| | AVERAGE FACILITY SIZE | | 41826 | SF | | | | | |
| 530-50 | ENVIRON MEDICINE FAC | BARKSDALE AFB, LA | 1.01 | 2428 | 85/03/11 | 3,695 | SF | $87.96 | $111.96 |
| 530-50 | MEDICAL FOOD INSP FAC | KEESLER AFB, BILOXI, MS | 0.98 | 2064 | 81/04/27 | 3,302 | SF | $90.50 | $136.83 |
| | AVERAGE OF ADJUSTED UNIT COST | | $124.39 | | | | | | |
| | AVERAGE FACILITY SIZE | | 3498 | SF | | | | | |
| 540-10 | DENTAL CLINIC | TRAVIS AFB, FAIRFIELD, CA | 1.27 | 2438 | 85/06/27 | 23,597 | SF | $206.85 | $202.28 |
| | AVERAGE OF ADJUSTED UNIT COST | | $202.28 | | | | | | |
| | AVERAGE FACILITY SIZE | | 23597 | SF | | | | | |
| 550-10 | MEDICAL/DENTAL CLINIC | CHARLESTON AFB, SC | 0.93 | 2433 | 85/05/31 | 73,231 | SF | $89.37 | $125.88 |
| 550-10 | MEDICAL/DENTAL CLINIC | TREASURE ISLAND | 1.19 | 2616 | 89/03/31 | 55,100 | SF | $139.53 | $141.36 |
| 550-10 | MEDICAL/DENTAL CLINIC | NAS PENSACOLA, FL | 0.85 | 2504 | 86/09/12 | 54,500 | SF | $107.85 | $159.81 |
| 550-10 | NAVAL MED BR CLINIC | NAVREGMEDCLIN PEARL, HI | 1.34 | 2528 | 87/07/10 | 54,260 | SF | $102.20 | $95.15 |
| 550-10 | BRANCH MEDICAL CLINIC | PORT HUENEME CALIFORNIA | 1.32 | 2402 | 84/01/31 | 48,428 | SF | $95.13 | $93.65 |
| 550-10 | MEDICAL/DENTAL CLINIC | MCAS, KANEOHE BAY, HI | 1.34 | 2428 | 84/08/17 | 47,200 | SF | $125.57 | $120.47 |
| 550-10 | MEDICAL CLINIC | LONG BEACH CALIFORNIA | 1.19 | 2510 | 86/12/17 | 43,564 | SF | $95.36 | $99.65 |
| 550-10 | MEDICAL CLINIC | BREMERTON WASHINGTON | 1.30 | 2432 | 85/02/28 | 32,742 | SF | $97.05 | $90.22 |
| 550-10 | MEDICAL/DENTAL CLINIC | CAMP LEJEUNE NO CAROLINA | 0.84 | 2557 | 87/08/27 | 27,400 | SF | $110.36 | $145.39 |
| 550-10 | MEDICAL/DENTAL CLINIC | NSSB KINGS BAY,GEORGIA | 0.92 | 1981 | 80/10/24 | 24,400 | SF | $103.40 | $159.05 |
| 550-10 | MEDICAL/DENTAL CLINIC | MCDEC QUANTICO,VA | 1.08 | 1899 | 79/10/22 | 17,115 | SF | $93.17 | $121.72 |
| | AVERAGE OF ADJUSTED UNIT COST | | $122.94 | | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | AVERAGE FACILITY SIZE | | 43449 | SF | | | | | |
| 610-10 | NATO SACLANT HQ | NORFOLK VIRGINIA | 0.93 | 2596 | 88/04/28 | 103,700 | SF | $75.68 | $104.30 |
| 610-10 | CONSOLIDATED SUPP CTR 2-2 | SHAW AFB SUMTER SC | 0.80 | 2479 | 86/05/23 | 80,020 | SF | $51.93 | $87.12 |
| 610-10 | ADMINISTRATIVE OFFICE | NORFOLK VIRGINIA | 0.95 | 2457 | 85/07/01 | 44,800 | SF | $55.78 | $77.80 |
| 610-10 | SEABEE BATT HDQTRS 3 OF 4 | CBC GULFPORT, MS | 0.87 | 2447 | 85/08/29 | 38,848 | SF | $61.24 | $92.65 |
| 610-10 | WING HEADQUARTERS BLDG | CHARLESTON AFB, CHASN,SC | 0.93 | 2432 | 85/02/06 | 37,600 | SF | $62.45 | $88.93 |
| 610-10 | ENGINEERING SUPPORT FAC | PORT HUENEME CALIFORNIA | 1.18 | 2619 | 89/01/17 | 32,210 | SF | $75.26 | $77.61 |
| 610-10 | BASE ENG COMPLX-ADMIN 1-2 | KEESLER AFB, MISSISSIPPI | 0.98 | 2249 | 82/09/17 | 28,214 | SF | $53.48 | $77.33 |
| 610-10 | SEABEE OPER HQ PF #1 | PORT HUENEME CALIFORNIA | 1.20 | 2521 | 87/04/17 | 27,863 | SF | $71.89 | $75.74 |
| 610-10 | SEABEE REG HDQTRS (2-4) | CBC GULFPORT, MS | 0.87 | 2447 | 85/08/29 | 26,962 | SF | $73.11 | $108.31 |
| 610-10 | S.I.M.A. (ADMIN.) | LONG BEACH CALIFORNIA | 1.20 | 2427 | 85/04/05 | 26,228 | SF | $55.22 | $59.79 |
| 610-10 | WING HDQTRS 1 OF 2 | SHAW AFB SUMTER SC | 0.80 | 2479 | 86/05/23 | 25,484 | SF | $72.59 | $115.44 |
| 610-10 | BCE ADMIN FACILITY | ENGLAND AFB, LA | 0.85 | 2581 | 88/02/25 | 23,000 | SF | $54.89 | $78.90 |
| 610-10 | SEABEE BATTALION HDQTRS | CBC GULFPORT, MS | 0.86 | 2565 | 87/09/22 | 19,424 | SF | $67.57 | $95.60 |
| 610-10 | BATTALION HEADQUARTERS | TWENTYNINE PALMS CALIF | 1.22 | 2427 | 85/04/26 | 17,600 | SF | $76.96 | $81.13 |
| 610-10 | SEABEE OPER HQ PF #2 | PORT HUENEME CALIFORNIA | 1.20 | 2521 | 87/04/17 | 17,234 | SF | $71.64 | $73.91 |
| 610-10 | SEABEE OPER HQ PF #3 | PORT HUENEME CALIFORNIA | 1.20 | 2521 | 87/04/17 | 17,234 | SF | $71.64 | $73.91 |
| 610-10 | ADMIN BLDG | NORFOLK VIRGINIA | 0.95 | 2440 | 85/09/05 | 16,578 | SF | $60.05 | $80.04 |
| 610-10 | A/CRAFT MAINT CONT BLDG | ENGLAND AFB ALEXANDRIA LA | 1.01 | 2195 | 82/04/20 | 16,510 | SF | $46.66 | $65.02 |
| 610-10 | ADM BLDG SUPER OF SHIPBLD | NS MAYPORT, FLORIDA | 0.90 | 2424 | 85/01/22 | 16,400 | SF | $65.28 | $91.51 |
| 610-10 | 110 ADMIN SUPP/AFRTS | SIGONELLA ITALY | 1.10 | 2433 | 85/12/30 | 15,967 | SF | $67.98 | $77.68 |
| 610-10 | ADMINISTRATIVE BLDG | NAS ATLANTA MARIETTA, GA | 0.94 | 2064 | 81/04/30 | 15,300 | SF | $56.52 | $88.19 |
| 610-10 | PASS OFFICE | LITTLE CREEK | 0.98 | 2427 | 85/04/08 | 15,097 | SF | $50.43 | $64.19 |
| 610-10 | PAY & PERSON SUPP OF 4-4 | CBC GULFPORT, MS | 0.87 | 2447 | 85/08/29 | 14,500 | SF | $56.25 | $79.20 |
| 610-10 | ADMIN OFF BLDG | NAS MEMPHIS,MILLINGTON,TN | 0.95 | 2504 | 86/09/05 | 13,900 | SF | $76.88 | $95.93 |
| 610-10 | LCAC COMPLEX ADMIN OFFICE | NAB LCREEK NORFOLK VA | 0.98 | 2438 | 85/06/24 | 13,415 | SF | $58.95 | $72.53 |
| 610-10 | ADMINISTRATION BLDG | MOFFETT FIELD CALIFORNIA | 1.25 | 2295 | 82/12/29 | 13,165 | SF | $48.58 | $49.78 |
| 610-10 | ORDNANCE ADMIN BLDG | NWS CHARLESTON, SC | 0.91 | 2509 | 87/02/02 | 12,865 | SF | $66.30 | $84.54 |
| 610-10 | PAY & PERSONNEL SUP OFF | NSA NEW ORLEANS, LA | 1.08 | 2433 | 85/05/24 | 11,710 | SF | $75.01 | $82.31 |
| 610-10 | PERSONNEL SUPPORT OFFICE | NAS WHITING FLD, FL | 0.84 | 2513 | 87/01/26 | 11,500 | SF | $47.27 | $63.95 |
| 610-10 | PERSONNEL PROP ADMIN FAC | SAN DIEGO CALIFORNIA | 1.21 | 2513 | 87/01/22 | 11,268 | SF | $76.40 | $71.76 |
| 610-10 | PRODUCTION SUPPORT BLDG | CHERRY POINT NC | 0.90 | 2416 | 83/10/13 | 9,455 | SF | $44.35 | $56.64 |
| 610-10 | ADMINISTRATIVE BLDG PF-2 | YUMA ARIZONA | 1.25 | 2194 | 82/01/19 | 8,470 | SF | $62.64 | $62.86 |
| 610-10 | PASS OFFICE BLDG | NAS KINGSVILLE, TEXAS | 0.96 | 2440 | 85/09/30 | 7,470 | SF | $68.00 | $78.47 |
| 610-10 | PUBLIC WORKS ADMIN BLDG | NAS KINGSVILLE, TEXAS | 0.91 | 2253 | 82/08/31 | 6,653 | SF | $43.58 | $56.95 |
| 610-10 | ADMINISTRATION BLDG | MWTC BRIDGEPORT, CA | 1.23 | 2351 | 83/05/27 | 6,100 | SF | $132.23 | $121.45 |
| 610-10 | ORDNANCE TRAINING FAC | NOS INDIAN HEAD, MD | 1.08 | 2200 | 82/02/12 | 5,600 | SF | $71.28 | $78.98 |
| 610-10 | PERSONNEL SUPT DET FAC | CHINA LAKE CALIFORNIA | 1.26 | 2568 | 87/10/02 | 5,383 | SF | $80.92 | $65.84 |
| 610-10 | ADMIN OFFICE BLDG 1206 | NSTL BAY ST LOUIS, MS | 1.00 | 2433 | 85/05/04 | 5,100 | SF | $60.50 | $64.90 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 610-10 | CIVIL ENG TRAIN FAC | BARKSDALE AFB,LOUISIANA | 1.01 | 2016 | 81/02/03 | 5,012 | SF | $45.77 | $58.66 |
| 610-10 | BATTALION H.Q. BLDG 300 | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/12 | 4,800 | SF | $70.06 | $85.14 |
| 610-10 | SUPPLY WAREHOUSE | SKAGGS ISLAND CA | 1.21 | 2455 | 86/04/03 | 4,700 | SF | $48.06 | $42.23 |
| 610-10 | TACT DATA SYSTEM SUPPORT | LONG BEACH CA | 1.20 | 2509 | 87/02/26 | 4,519 | SF | $77.23 | $66.37 |
| 610-10 | ADMIN BLDG-PART 2 OF 2 | ENGLAND AFB ALEXANDRIA LA | 1.01 | 1902 | 80/04/02 | 4,513 | SF | $73.22 | $98.64 |
| 610-10 | CONSTR MGMT OFFICE | MOFFETT FIELD CALIFORNIA | 1.21 | 2616 | 89/03/31 | 4,400 | SF | $109.93 | $89.87 |
| 610-10 | ADMINISTRATIVE OFFICE | NORFOLK VIRGINIA | 0.95 | 2496 | 86/08/20 | 3,844 | SF | $72.76 | $78.73 |
| 610-10 | ADMINISTRATION BLDG | CAMP PENDLETON CALIFORNIA | 1.20 | 2352 | 83/03/24 | 3,120 | SF | $68.54 | $61.78 |
| 610-10 | FLEET DIGITAL COMM CTR | NORFOLK VIRGINIA | 0.95 | 2440 | 85/09/14 | 2,357 | SF | $73.85 | $80.39 |
| 610-10 | FLIGHT SIM ADMIN BLDG | NAS NEW ORLEANS, LA | 1.03 | 2414 | 83/07/20 | 1,595 | SF | $78.30 | $78.79 |
| 610-10 | SUPPORT BLDG PF#2 | KEYPORT WA | 1.14 | 2579 | 88/01/29 | 816 | SF | $85.30 | $72.59 |
| | AVERAGE OF ADJUSTED UNIT COST | | $78.25 | | | | | | |
| | AVERAGE FACILITY SIZE | | 17395 | SF | | | | | |
| 610-20 | AUTO-DATA PROCESSING CTR | NSPCC,MECHANICSBURG,PA. | 0.95 | 2418 | 84/12/28 | 103,000 | SF | $84.39 | $122.23 |
| 610-20 | DATA PROCESSING CENTER | NARDAC JACKSONVILLE,FL | 0.87 | 2565 | 87/09/24 | 91,270 | SF | $81.72 | $120.51 |
| 610-20 | AUTOMATED DATA SYS.-FAC. | MCDEC QUANTICO,VA | 1.08 | 1902 | 80/04/02 | 59,671 | SF | $64.32 | $100.85 |
| 610-20 | DATA PROCESSING CENTER | CAMP PENDLETON CALIFORNIA | 1.20 | 2419 | 84/05/30 | 50,094 | SF | $72.75 | $79.87 |
| 610-20 | DATA PROCCESING FAC PF #1 | PORT HUENEME CBC | 1.18 | 2616 | 89/03/22 | 29,000 | SF | $82.68 | $83.60 |
| 610-20 | ADAL DATA AUTOMATION CNTR | KEESLER AFB, MS | 0.85 | 2617 | 88/12/29 | 21,297 | SF | $65.47 | $85.69 |
| 610-20 | DATA PROCESSING CENTER | BANGOR WASHINGTON | 1.30 | 2406 | 83/12/16 | 8,432 | SF | $115.77 | $96.61 |
| 610-20 | AUTOMATED DATE PROC FAC | CHARLESTON AFB, SC | 0.93 | 2352 | 83/03/10 | 8,400 | SF | $67.81 | $80.91 |
| 610-20 | DATA AUTOMATION FACILITY | ENGLAND AFB ALEXANDRIA LA | 1.01 | 2195 | 82/04/16 | 8,007 | SF | $73.49 | $86.52 |
| 610-20 | DATA PROCESSING PLANT | SHAW AFB, SUMTER, SC | 0.92 | 2295 | 82/12/16 | 7,700 | SF | $62.71 | $76.85 |
| 610-20 | ADP FACILITY | KEFLAVIK ICELAND | 3.00 | 2430 | 83/09/27 | 7,468 | SF | $209.25 | $74.27 |
| 610-20 | DATA PROCESSING CENTER | NWS CHARLESTON, SC | 0.93 | 2194 | 82/01/27 | 5,733 | SF | $74.31 | $92.66 |
| 610-20 | DATA PROCESSING CENTER | CBC GULFPORT, MS | 0.86 | 2565 | 87/09/21 | 5,005 | SF | $93.89 | $108.29 |
| 610-20 | CAD/CAM PUMPUTER CENTER | CHERRY POINT NC | 0.87 | 2596 | 88/04/26 | 2,980 | SF | $76.71 | $84.98 |
| | AVERAGE OF ADJUSTED UNIT COST | | $92.41 | | | | | | |
| | AVERAGE FACILITY SIZE | | 29146 | SF | | | | | |
| 610-72 | BATTALION HQ BLDG FC-500 | CAMP LEJEUNE N C | 0.84 | 2557 | 87/08/12 | 28,100 | SF | $53.97 | $79.24 |
| 610-72 | BATTALION HEADQUARTERS | CAMP PENDLETON CALIFORNIA | 1.14 | 2526 | 87/06/23 | 8,400 | SF | $66.65 | $63.13 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $71.18 | | | | | | |
| | | AVERAGE FACILITY SIZE | 18250 | SF | | | | | |
| 610-73 | COMPANY/BATTERY OPS CTR | MCAS KANEOHE BAY, HI | 1.34 | 2509 | 87/02/16 | 81,145 | SF | $91.43 | $82.34 |
| | | AVERAGE OF ADJUSTED UNIT COST | $82.34 | | | | | | |
| | | AVERAGE FACILITY SIZE | 81145 | SF | | | | | |
| 610-77 | EMBARK FAC (CONTROL) 2/6 | CHERRY POINT NC | 0.87 | 2528 | 87/07/24 | 1,504 | SF | $78.08 | $107.48 |
| | | AVERAGE OF ADJUSTED UNIT COST | $107.48 | | | | | | |
| | | AVERAGE FACILITY SIZE | 1504 | SF | | | | | |
| 711-00 | FBIS HOUSING (TWNHSE) 1-2 | NAS KEY WEST, FLORIDA | 1.07 | 2440 | 85/09/06 | 9,840 | SF | $62.91 | $76.79 |
| 711-00 | FBIS HOUSING (1 UNIT) 2-2 | NAS KEY WEST, FL | 1.07 | 2440 | 85/09/06 | 1,940 | SF | $65.36 | $65.90 |
| | | AVERAGE OF ADJUSTED UNIT COST | $71.34 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5890 | SF | | | | | |
| 711-10 | 232 FAMILY HSG UNITS | YORKTOWN VIRGINIA | 0.98 | 2109 | 81/07/30 | 259,044 | SF | $24.31 | $37.87 |
| 711-10 | FAMILY HOUSING UNITS | NAS CHASE FLD,BEEVILLE,TX | 1.02 | 2249 | 82/09/30 | 115,400 | SF | $25.50 | $33.99 |
| 711-10 | 100 UNITS FAMILY HOUSING | GUANTANAMO BAY CUBA | 1.60 | 2388 | 83/06/07 | 99,172 | SF | $66.34 | $51.53 |
| 711-10 | FAMILY OFFICER HOUSING | NWS CHARLESTON, SC | 0.91 | 2509 | 87/02/10 | 14,890 | SF | $70.00 | $76.71 |
| | | AVERAGE OF ADJUSTED UNIT COST | $50.02 | | | | | | |
| | | AVERAGE FACILITY SIZE | 122126 | SF | | | | | |
| 713-00 | MOBILE HOME PARK | CAMP LEJEUNE N C | 0.84 | 2565 | 87/09/04 | 75 | EA | $10,440.64 | $14,672.90 |
| | | AVERAGE OF ADJUSTED UNIT COST | $14,672.90 | | | | | | |
| | | AVERAGE FACILITY SIZE | 75 | EA | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 714-32 | FAMILY HSG COMMUNITY CT | NAS KINGSVILLE, TEXAS | 0.91 | 2428 | 83/08/25 | 2,986 | SF | $60.98 | $86.15 |
| 714-32 | COMMUNITY BUILDING | NWS CHARLESTON, SC | 0.93 | 2416 | 83/10/26 | 2,750 | SF | $97.08 | $133.49 |
| | AVERAGE OF ADJUSTED UNIT COST | | $109.82 | | | | | | |
| | AVERAGE FACILITY SIZE | | 2868 | SF | | | | | |
| 721-11 | UEPH | CAMP LEJEUNE N C | 0.90 | 2428 | 85/03/01 | 305,244 | SF | $40.08 | $61.02 |
| 721-11 | UEPH | EL TORO CALIFORNIA | 1.20 | 2521 | 87/04/08 | 271,550 | SF | $53.76 | $58.48 |
| 721-11 | BEQ | CHERRY POINT NC | 0.84 | 2509 | 86/11/24 | 246,756 | SF | $49.84 | $77.83 |
| 721-11 | UEPH | CAMP LEJEUNE N C | 0.90 | 2406 | 84/02/14 | 240,480 | SF | $36.72 | $55.21 |
| 721-11 | 4 TYPE I BEQ BLDGS | CAMP LEJEUNE N C | 0.84 | 2526 | 87/06/29 | 211,200 | SF | $41.39 | $63.50 |
| 721-11 | U.E.P.H. | SAN DIEGO CALIFORNIA | 1.20 | 2447 | 85/08/29 | 211,000 | SF | $61.14 | $67.78 |
| 721-11 | CONSTRUCT BEQS | TWENTYNINE PALMS MCAGCC | 1.30 | 2516 | 87/03/31 | 206,457 | SF | $58.47 | $57.57 |
| 721-11 | BEQ | SAN DIEGO CALIFORNIA | 1.23 | 2516 | 87/03/31 | 200,779 | SF | $71.53 | $74.44 |
| 721-11 | UEPH -- PART 1 OF 2 | NS MAYPORT, FLORIDA | 0.90 | 2422 | 84/04/11 | 196,659 | SF | $48.64 | $71.87 |
| 721-11 | UEPH | CAMP LEJEUNE N C | 0.90 | 2295 | 82/12/30 | 185,104 | SF | $34.66 | $54.04 |
| 721-11 | UEPH | CAMP LEJEUNE N C | 0.90 | 2219 | 82/06/14 | 185,030 | SF | $39.97 | $64.46 |
| 721-11 | UEPH | MCAS CHERRY PT | 0.86 | 2441 | 85/10/15 | 180,636 | SF | $46.53 | $71.38 |
| 721-11 | BEQ | CHERRY POINT NC | 0.87 | 2595 | 88/06/24 | 173,843 | SF | $55.21 | $77.93 |
| 721-11 | UEPH | CAMP LEJEUNE N C | 0.86 | 2499 | 86/07/31 | 150,946 | SF | $43.34 | $64.26 |
| 721-11 | BEQ | TWENTYNINE PALMS CALIF | 1.32 | 2596 | 88/04/29 | 148,268 | SF | $60.55 | $56.31 |
| 721-11 | UEPH | NORFOLK VIRGINIA | 0.98 | 2438 | 85/06/10 | 145,960 | SF | $49.77 | $66.38 |
| 721-11 | UEPH | CAMP LEJEUNE N C | 0.90 | 2418 | 84/07/13 | 143,523 | SF | $36.29 | $53.14 |
| 721-11 | UEPH | MCB CAMP PENDLETON CA | 1.20 | 2195 | 82/04/05 | 138,450 | SF | $48.74 | $58.35 |
| 721-11 | 2-TYPE II BEQ'S (1OF3) | CAMP LEJEUNE N C | 0.84 | 2595 | 88/06/27 | 126,936 | SF | $43.53 | $62.98 |
| 721-11 | U.E.P.H. | SAN DIEGO CALIFORNIA | 1.18 | 2428 | 85/03/20 | 123,500 | SF | $71.37 | $78.56 |
| 721-11 | U.E.P.H. | MCRD SAN DIEGO, CA | 1.28 | 2428 | 83/08/29 | 120,357 | SF | $59.82 | $60.70 |
| 721-11 | UEPH | VIRGINIA BEACH VIRGINIA | 0.98 | 2194 | 82/01/25 | 118,277 | SF | $41.50 | $60.87 |
| 721-11 | UEPH | NTC ORLANDO, FLORIDA | 0.86 | 2422 | 84/04/13 | 116,630 | SF | $54.87 | $83.08 |
| 721-11 | UEPH | NSB, PEARL HARBOR, HI | 1.34 | 2432 | 85/02/21 | 115,909 | SF | $84.05 | $81.34 |
| 721-11 | UEPH | KEESLER AFB BILOXI, MS | 0.98 | 2418 | 84/12/07 | 113,202 | SF | $58.44 | $77.77 |
| 721-11 | BEQ | NORFOLK VIRGINIA | 0.93 | 2523 | 87/05/20 | 112,345 | SF | $49.04 | $65.91 |
| 721-11 | BEQ | NAVAL ST,CHARLESTON,SC | 0.91 | 2568 | 87/10/05 | 106,424 | SF | $52.76 | $71.20 |
| 721-11 | U.E.P.H. | TWENTYNINE PALMS CALIF | 1.20 | 2413 | 84/03/02 | 104,168 | SF | $53.06 | $57.19 |
| 721-11 | UEPH | NTC ORLANDO, FLORIDA | 0.86 | 2194 | 82/01/25 | 97,000 | SF | $42.18 | $69.77 |
| 721-11 | U.E.P.H. | SAN DIEGO CALIFORNIA | 1.28 | 2418 | 84/12/31 | 96,755 | SF | $55.08 | $55.55 |
| 721-11 | UEPH | NAS CECIL FIELD, FLORIDA | 0.90 | 2311 | 83/01/05 | 96,650 | SF | $37.78 | $56.69 |
| 721-11 | UEPH NAVAL STATION | NORFOLK VIRGINIA | 0.98 | 2219 | 82/06/04 | 93,632 | SF | $40.39 | $57.96 |
| 721-11 | UEPH | MCAS (H) TUSTIN, CA | 1.20 | 2200 | 82/02/25 | 93,350 | SF | $51.22 | $60.56 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 721-11 | U.E.P.H. (2) | CAMP PENDLETON CALIFORNIA | 1.20 | 2406 | 83/12/30 | 92,956 | SF | $46.82 | $50.61 |
| 721-11 | U.E.P.H. | MCB CAMP PENDLETON, CA. | 1.20 | 2351 | 83/05/31 | 92,034 | SF | $47.44 | $52.48 |
| 721-11 | U.E.P.H. | TWENTYNINE PALMS CALIF | 1.20 | 2118 | 81/08/12 | 87,353 | SF | $66.45 | $80.77 |
| 721-11 | UEPH | NAS MEMPHIS MILLINGTON,TN | 1.00 | 2219 | 82/06/15 | 85,811 | SF | $47.66 | $66.35 |
| 721-11 | UEPH | CBC GULFPORT, MS | 0.87 | 2433 | 85/05/23 | 85,580 | SF | $51.15 | $74.66 |
| 721-11 | BEQ | NAVSTA, GUAM | 2.00 | 2565 | 87/09/11 | 84,336 | SF | $92.27 | $55.56 |
| 721-11 | UEPH | NAS, CUBI POINT, RP | 0.85 | 2248 | 82/10/25 | 82,693 | SF | $49.90 | $79.86 |
| 721-11 | UEPH PRIVATE BATHROOM | DAM NECK V BEACH VA | 0.98 | 2430 | 84/09/15 | 81,929 | SF | $50.62 | $65.00 |
| 721-11 | BEQ | MCAS KANEOHE BAY, HI | 1.34 | 2595 | 88/06/17 | 81,416 | SF | $80.78 | $71.05 |
| 721-11 | UEPH | NAVSTA, PEARL HARBOR, HI | 1.34 | 2388 | 83/06/08 | 78,705 | SF | $71.67 | $67.81 |
| 721-11 | UEPH | MCRD PARRIS ISL, SC | 0.94 | 2427 | 85/04/08 | 76,920 | SF | $56.61 | $75.13 |
| 721-11 | UEPH | NAVSTA, PEARL HARBOR, HI | 1.34 | 2195 | 82/03/01 | 75,516 | SF | $72.96 | $74.35 |
| 721-11 | U.E.P.H. | SAN DIEGO CALIF | 1.18 | 2457 | 85/07/23 | 70,032 | SF | $50.29 | $51.48 |
| 721-11 | BEQ | JACKSONVILLE NC | 0.84 | 2526 | 87/06/22 | 68,482 | SF | $51.25 | $71.00 |
| 721-11 | U.E.P.H. | CASTLE AFB, CA. 95342 | 1.23 | 2402 | 84/01/31 | 68,094 | SF | $70.27 | $69.91 |
| 721-11 | UEPH | PORT HUENEME CBC | 1.20 | 2521 | 87/04/08 | 67,350 | SF | $66.20 | $64.31 |
| 721-11 | SINGLE ENLISTED QUARTERS | KEFLAVIK ICELAND | 3.00 | 2014 | 81/03/24 | 66,928 | SF | $117.96 | $57.38 |
| 721-11 | BEQ | LONG BEACH CALIFORNIA | 1.20 | 2557 | 87/08/31 | 65,145 | SF | $95.05 | $90.18 |
| 721-11 | UEPH PF #2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/13 | 64,476 | SF | $63.35 | $62.87 |
| 721-11 | U.E.P.H. | LEMOORE CALIFORNIA | 1.20 | 2419 | 83/11/29 | 63,227 | SF | $65.52 | $65.71 |
| 721-11 | UEPH LOS PULGAS PF#2 | CAMP PENDLETON CALIFORNIA | 1.12 | 2591 | 88/03/30 | 61,824 | SF | $62.67 | $62.27 |
| 721-11 | UEPH SAN ONOFRE PF#3 | CAMP PENDLETON CALIFORNIA | 1.12 | 2591 | 88/03/30 | 61,824 | SF | $61.64 | $61.24 |
| 721-11 | U.E.P.H. | SAN DIEGO CALIFORNIA | 1.28 | 2352 | 83/03/31 | 60,396 | SF | $42.16 | $40.37 |
| 721-11 | UEPH | JACKSONVILLE NC | 0.90 | 2220 | 82/05/26 | 58,768 | SF | $40.91 | $58.48 |
| 721-11 | UEPH LAS FLORES PF#1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2591 | 88/03/30 | 58,308 | SF | $59.77 | $58.83 |
| 721-11 | BEQ | BANGOR WA NSB | 1.15 | 2479 | 86/05/21 | 57,596 | SF | $72.27 | $72.40 |
| 721-11 | U E P H | MWTC BRIDGEPORT, CA | 1.23 | 2351 | 83/05/27 | 55,540 | SF | $79.49 | $77.78 |
| 721-11 | 1-TYPE I BEQ (20F3) | CAMP LEJEUNE N C | 0.84 | 2595 | 88/06/27 | 54,810 | SF | $43.61 | $56.61 |
| 721-11 | BEQ PF #1 | SAN DIEGO CALIFORNIA | 1.21 | 2509 | 87/02/26 | 53,267 | SF | $87.51 | $81.57 |
| 721-11 | BEQ | TUSTIN CA MCAS | 1.23 | 2526 | 87/06/26 | 53,240 | SF | $67.14 | $61.14 |
| 721-11 | UEPH PF #1 | CAMP PENDLETON CALIFORNIA | 1.12 | 2619 | 89/01/13 | 49,912 | SF | $51.18 | $48.91 |
| 721-11 | UEPH | NS CHARLESTON, SC | 0.93 | 2194 | 82/01/13 | 49,459 | SF | $40.27 | $55.32 |
| 721-11 | UNACC,ENLST,PRSNL,HOUSG,N | NAEC LAKEHURST NJ | 1.10 | 2406 | 83/12/30 | 47,520 | SF | $70.28 | $73.76 |
| 721-11 | UEPH | NSB, PEARL HARBOR, HI | 1.34 | 2195 | 82/03/01 | 47,284 | SF | $65.77 | $62.10 |
| 721-11 | UEPH | NAS DALLAS, TX | 1.02 | 2406 | 83/12/02 | 47,000 | SF | $58.49 | $66.19 |
| 721-11 | U.E.P.H. | CAMP PENDLETON CALIFORNIA | 1.20 | 2406 | 83/12/30 | 46,478 | SF | $45.08 | $43.36 |
| 721-11 | UEPH | SIGONELLA ITALY | 1.19 | 2219 | 82/06/30 | 45,639 | SF | $46.80 | $48.78 |
| 721-11 | UEPH | NCBC GULFPORT, MS | 0.98 | 2428 | 84/08/16 | 42,245 | SF | $57.77 | $66.22 |
| 721-11 | UEPH | NAS, CUBI POINT, RP | 0.85 | 2352 | 83/03/30 | 40,880 | SF | $40.80 | $55.66 |
| 721-11 | BEQ 1 OF 2 | NAS CECIL FLD, FLORIDA | 0.87 | 2510 | 86/12/22 | 40,807 | SF | $56.58 | $70.66 |
| 721-11 | BEQ PF #1 | TUSTIN CALIFORNIA | 1.19 | 2613 | 89/02/06 | 38,368 | SF | $75.19 | $65.36 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED CUST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 721-11 | BEQ PF #2 | TUSTIN CALIFORNIA | 1.19 | 2613 | 89/02/06 | 38,368 | SF | $75.19 | $65.36 |
| 721-11 | U.E.P.H. | CAMP PENDLETON CALIFORNIA | 1.17 | 2427 | 85/04/30 | 38,073 | SF | $65.29 | $62.15 |
| 721-11 | UEPH | KEFLAVIK ICELAND | 3.00 | 2438 | 85/06/13 | 37,038 | SF | $116.39 | $43.01 |
| 721-11 | UEPH | LAJES AZORES | 1.10 | 2457 | 85/07/03 | 37,027 | SF | $41.75 | $41.75 |
| 721-11 | UEPHS (2 IDENTICAL) | BANGOR WASHINGTON | 1.30 | 2406 | 83/12/28 | 35,286 | SF | $64.33 | $55.11 |
| 721-11 | U.E.P.H. | MOFFETT FIELD CALIFORNIA | 1.25 | 2295 | 82/12/29 | 34,776 | SF | $56.30 | $52.57 |
| 721-11 | U.E.P.H. | MOFFETT FIELD CALIFORNIA | 1.25 | 2295 | 82/12/29 | 34,776 | SF | $56.30 | $52.57 |
| 721-11 | UEPH PF #1 | CASTLE AFB | 1.08 | 2611 | 88/08/24 | 31,972 | SF | $65.28 | $61.48 |
| 721-11 | UEPH PF #3 | CASTLE AFB | 1.08 | 2611 | 88/08/24 | 31,972 | SF | $64.28 | $60.53 |
| 721-11 | UEPH PF #2 | CASTLE AFB | 1.08 | 2611 | 88/08/24 | 31,972 | SF | $65.28 | $61.48 |
| 721-11 | BEQ | NAVSTA, GUAM, MI | 2.00 | 2581 | 88/02/01 | 29,200 | SF | $103.42 | $52.74 |
| 721-11 | BEQ | NS CAMP COVINGTON, GUAM | 2.03 | 2595 | 88/06/16 | 28,034 | SF | $109.73 | $54.84 |
| 721-11 | UEPH | NH, ORLANDO, FL | 0.80 | 2440 | 85/09/30 | 26,411 | SF | $59.44 | $79.48 |
| 721-11 | U.E.P.H. | SAN DIEGO CALIF | 1.18 | 2457 | 85/07/23 | 25,264 | SF | $55.26 | $49.75 |
| 721-11 | BEQ | NS CAMP COVINGTON, GUAM | 2.03 | 2595 | 88/06/16 | 23,024 | SF | $106.21 | $52.17 |
| 721-11 | BEQ | CAMP LEJEUNE N C | 0.84 | 2526 | 87/06/29 | 22,960 | SF | $57.76 | $70.44 |
| 721-11 | UEPH | CAMP H. M. SMITH, HI | 1.34 | 2433 | 85/05/03 | 18,180 | SF | $68.62 | $54.00 |
| 721-11 | UEPH | LONDON ENGLAND | 0.97 | 2195 | 82/04/29 | 17,580 | SF | $67.13 | $80.21 |
| 721-11 | DISCIPLINARY BARRACKS | CAMP PENDLETON CALIFORNIA | 1.14 | 2557 | 87/08/06 | 13,800 | SF | $60.49 | $52.35 |
| 721-11 | UEPH PF #4 | CASTLE AFB | 1.08 | 2611 | 88/08/24 | 9,432 | SF | $90.38 | $80.20 |
| 721-11 | UEPH | NRTF ANNAPOLIS, MD | 1.08 | 2432 | 85/02/15 | 8,618 | SF | $77.69 | $74.01 |
| | | AVERAGE OF ADJUSTED UNIT COST | $63.61 | | | | | | |
| | | AVERAGE FACILITY SIZE | 88745 SF | | | | | | |
| 721-12 | UEPH | LONG BEACH CALIFORNIA | 1.20 | 2526 | 87/06/05 | 178,561 | SF | $74.11 | $78.75 |
| 721-12 | UEPH PF #1 | POINT MUGU PMTC | 1.20 | 2513 | 87/01/22 | 113,049 | SF | $60.13 | $62.88 |
| 721-12 | BEQ | PORTSMOUTH VIRGINIA | 0.95 | 2557 | 87/08/29 | 75,890 | SF | $60.98 | $76.00 |
| 721-12 | BEQ PF #1 | CORONADO NAB | 1.23 | 2455 | 86/04/28 | 58,370 | SF | $64.17 | $61.27 |
| 721-12 | UEPH PF #2 | POINT MUGU PMTC | 1.20 | 2513 | 87/01/22 | 4,360 | SF | $61.12 | $50.71 |
| | | AVERAGE OF ADJUSTED UNIT COST | $65.92 | | | | | | |
| | | AVERAGE FACILITY SIZE | 86046 SF | | | | | | |
| 721-13 | UEPH OPEN BAY | DAM NECK V BEACH VA | 0.98 | 2430 | 84/09/15 | 77,775 | SF | $47.01 | $62.91 |
| 721-13 | MARINE BERTHING | BANGOR WASHINGTON | 1.30 | 2406 | 83/12/28 | 14,493 | SF | $62.62 | $52.70 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | AVERAGE OF ADJUSTED UNIT COST | | $57.80 | | | | | | |
| | AVERAGE FACILITY SIZE | | 46134 | SF | | | | | |
| 721-14 | BARRACKS/ALTER BLDG 2077 | NTC ORLANDO, FL | 0.84 | 2616 | 89/03/03 | 233,260 | SF | $63.13 | $91.56 |
| 721-14 | BARRACKS | NTC ORLANDO, FL | 0.79 | 2509 | 87/02/19 | 116,630 | SF | $60.61 | $93.51 |
| 721-14 | BARRACKS "A" SCHOOL | NAS MEMPHIS, TN | 0.95 | 2591 | 88/03/08 | 114,656 | SF | $59.49 | $73.18 |
| 721-14 | BARRACKS | SAN DIEGO CALIFORNIA | 1.23 | 2528 | 87/07/20 | 44,717 | SF | $65.27 | $55.74 |
| | AVERAGE OF ADJUSTED UNIT COST | | $78.49 | | | | | | |
| | AVERAGE FACILITY SIZE | | 127315 | SF | | | | | |
| 722-10 | DINING FACILITY | MWTC BRIDGEPORT, CA. | 1.23 | 2418 | 84/07/31 | 22,640 | SF | $165.65 | $177.52 |
| 722-10 | DINING HALL FACILITY | ANDREWS AFB | 1.08 | 2195 | 82/04/23 | 19,830 | SF | $103.74 | $138.01 |
| 722-10 | DINING FACILITY | MCRD SAN DIEGO | 1.28 | 2428 | 83/08/29 | 17,376 | SF | $98.42 | $99.88 |
| 722-10 | O.C.S. COMPLEX DINING FAC | MCDEC QUANTICO,VA | 1.08 | 2014 | 81/03/10 | 16,970 | SF | $124.37 | $180.34 |
| 722-10 | ENLISTED DINING FACILITY | KEESLER AFB, BILOXI, MS | 0.98 | 2418 | 84/12/07 | 14,902 | SF | $129.65 | $170.78 |
| 722-10 | ENLISTED DINING FACILITY | NAS DALLAS, TEXAS | 1.02 | 2219 | 82/06/08 | 12,975 | SF | $135.40 | $182.96 |
| 722-10 | ENLIS MENS DINING FAC | NAS WHITING FLD, FLORIDA | 0.96 | 2194 | 82/01/13 | 10,125 | SF | $108.76 | $150.33 |
| 722-10 | ENLISTED DINING FACILITY | ROTA SPAIN | 0.92 | 2440 | 85/09/13 | 10,108 | SF | $78.69 | $102.05 |
| 722-10 | DININD FAC | ANTIGUA W I | 1.73 | 2612 | 88/09/27 | 7,080 | SF | $194.76 | $118.63 |
| 722-10 | DINING FAC FOR BEQ COMPLX | CONCORD CALIFORNIA | 1.25 | 2417 | 84/06/13 | 6,476 | SF | $144.17 | $130.16 |
| | AVERAGE OF ADJUSTED UNIT COST | | $145.06 | | | | | | |
| | AVERAGE FACILITY SIZE | | 13848 | SF | | | | | |
| 723-30 | BEQ SUPPORT BUILDING | NORFOLK VIRGINIA | 0.93 | 2523 | 87/05/20 | 5,265 | SF | $40.36 | $52.07 |
| | AVERAGE OF ADJUSTED UNIT COST | | $52.07 | | | | | | |
| | AVERAGE FACILITY SIZE | | 5265 | SF | | | | | |
| 724-11 | BOQ | CORONADO NAB | 1.23 | 2516 | 87/03/31 | 90,250 | SF | $83.48 | $87.81 |
| 724-11 | BACHELOR OFFICER'S QTRS | PORTSMOUTH VIRGINIA | 0.93 | 2523 | 87/05/08 | 54,991 | SF | $52.44 | $71.22 |
| 724-11 | UOPH | NS MAYPORT, FLORIDA | 0.90 | 2406 | 83/12/19 | 51,200 | SF | $48.28 | $70.31 |
| 724-11 | U.O.P.H. | NAS NORTH ISLAND | 1.28 | 2406 | 83/12/30 | 32,871 | SF | $54.21 | $54.38 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 724-11 | B.O.Q. | FALLON NEVADA | 1.28 | 2440 | 85/09/30 | 32,871 | SF | $69.09 | $68.34 |
| 724-11 | UOPH | SIGONELLA ITALY | 1.00 | 2428 | 85/03/06 | 31,200 | SF | $41.95 | $52.84 |
| 724-11 | U.O.P.H | NAS NORTH ISLAND | 1.28 | 2406 | 83/12/30 | 27,204 | SF | $48.71 | $46.94 |
| 724-11 | B.O.Q. | FALLON NEVADA | 1.28 | 2440 | 85/09/30 | 27,204 | SF | $69.25 | $65.82 |
| 724-11 | U.O.P.H. | NAS NORTH ISLAND | 1.28 | 2406 | 83/12/30 | 19,273 | SF | $52.52 | $47.81 |
| 724-11 | B.O.Q. | FALLON NEVADA | 1.28 | 2440 | 85/09/30 | 19,273 | SF | $71.09 | $63.81 |
| 724-11 | U O P H | MWTC BRIDGEPORT, CA | 1.23 | 2351 | 83/05/27 | 12,300 | SF | $90.32 | $82.95 |
| 724-11 | U.O.P.H. | NAS NORTH ISLAND | 1.28 | 2406 | 83/12/30 | 10,957 | SF | $57.98 | $49.56 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $63.48 | | | | | |
| | | AVERAGE FACILITY SIZE | | 34132 | SF | | | | |
| 724-12 | BOQ, BEQ, RENOV 525 & 526 | GUANTANAMO BAY CUBA | 1.60 | 2504 | 86/09/12 | 214,424 | SF | $69.31 | $52.37 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $52.37 | | | | | |
| | | AVERAGE FACILITY SIZE | | 214424 | SF | | | | |
| 724-22 | BACHELOR CIVILIAN QTRS | ANDROS ISL BAHAMAS | 1.50 | 2568 | 87/10/06 | 36,420 | SF | $71.18 | $55.94 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $55.94 | | | | | |
| | | AVERAGE FACILITY SIZE | | 36420 | SF | | | | |
| 730-10 | FIRE STATION FACILITY | NTC ORLANDO, FLORIDA | 0.79 | 2509 | 87/02/23 | 9,990 | SF | $59.87 | $96.27 |
| 730-10 | MANANA FIRE STATION | NAVSTA, PEARL HARBOR, HI | 1.34 | 1908 | 79/12/27 | 5,770 | SF | $68.57 | $83.71 |
| 730-10 | FIRE/CRASH STATION | CAMP PENDLETON CALIFORNIA | 1.20 | 2430 | 84/09/12 | 4,963 | SF | $95.38 | $100.03 |
| 730-10 | FIRE STATION | SAN DIEGO CALIFORNIA | 1.18 | 2418 | 84/12/31 | 4,790 | SF | $105.57 | $112.02 |
| 730-10 | FIRE STATION | SUGAR GROVE WEST VIRGINIA | 0.99 | 2432 | 85/02/25 | 3,700 | SF | $107.01 | $128.16 |
| 730-10 | FIRE STATION | SAN FRANCISCO CALIFORNIA | 1.25 | 2438 | 85/06/14 | 3,600 | SF | $110.14 | $103.23 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $103.90 | | | | | |
| | | AVERAGE FACILITY SIZE | | 5468 | SF | | | | |
| 730-15 | CONSOLIDATED BRIG | NWS CHARLESTON, SC | 0.91 | 2528 | 87/07/13 | 190,000 | SF | $80.70 | $115.45 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 730-15 | CONSOLIDATED BRIG PF #1 | SAN DIEGO CALIFORNIA | 1.21 | 2526 | 87/06/29 | 93,650 | SF | $81.64 | $84.24 |
| 730-15 | CONSOLIDATED BRIG PF #2 | SAN DIEGO CALIFORNIA | 1.21 | 2526 | 87/06/29 | 80,020 | SF | $83.95 | $85.73 |
| 730-15 | BRIG | NAS JACKSONVILLE,FLORIDA | 0.87 | 2565 | 87/09/25 | 28,968 | SF | $86.57 | $104.87 |
| 730-15 | BRIG | NAS MEMPHIS, TENNESSEE | 0.95 | 2565 | 87/09/15 | 28,633 | SF | $94.93 | $105.31 |
| 730-15 | BRIG SHOP | SAN FRANCISCO CALIFORNIA | 1.21 | 2596 | 88/04/21 | 28,000 | SF | $131.48 | $113.15 |
| 730-15 | BRIG | SEATTLE NS | 1.14 | 2528 | 87/07/21 | 26,670 | SF | $92.38 | $85.89 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $99.23 | | | | | |
| | | AVERAGE FACILITY SIZE | | 67991 | SF | | | | |
| 730-20 | SECURITY POLICE OPS FAC | KEESLER AFB, MS | 0.85 | 2619 | 89/01/20 | 18,426 | SF | $62.51 | $90.44 |
| 730-20 | SECURITY POLICE OPS BLDG | ENGLAND AFB, LA | 0.85 | 2504 | 86/09/30 | 10,560 | SF | $78.25 | $114.75 |
| 730-20 | PROV MARSHL/FIRE STN | SAN DIEGO CALIFORNIA | 1.28 | 2194 | 82/01/18 | 7,800 | SF | $85.02 | $91.66 |
| 730-20 | SECURITY OPERATS BLDG | CBC GULFPORT, MS | 0.86 | 2528 | 87/07/08 | 5,245 | SF | $84.69 | $109.21 |
| 730-20 | SECURITY BUILDING | D&M NECK V BEACH VA | 0.93 | 2591 | 88/03/09 | 2,776 | SF | $88.00 | $96.15 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $100.44 | | | | | |
| | | AVERAGE FACILITY SIZE | | 8961 | SF | | | | |
| 730-25 | GATEHOUSE,NAV SUB BASE | NEW LONDON,GROTON | 1.12 | 2432 | 85/02/22 | 1,200 | SF | $127.73 | $141.98 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $141.98 | | | | | |
| | | AVERAGE FACILITY SIZE | | 1200 | SF | | | | |
| 730-60 | ELEMENTARY & HIGH SCHOOL | SIGONELLA ITALY | 1.10 | 2447 | 85/08/15 | 117,607 | SF | $44.36 | $51.97 |
| 730-60 | DEPENDENT HIGH SCHOOL | CAMP LEJEUNE N C | 0.84 | 2579 | 88/01/11 | 116,000 | SF | $55.41 | $80.67 |
| 730-60 | GTMO BAY HIGH SCHOOL | GUANTANAMO BAY CUBA | 1.60 | 2249 | 82/09/30 | 51,768 | SF | $74.05 | $57.15 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $63.26 | | | | | |
| | | AVERAGE FACILITY SIZE | | 95125 | SF | | | | |
| 730-75 | SANITATION BLDGS | CAMP PENDLETON CALIFORNIA | 1.20 | 2352 | 83/03/24 | 2,754 | SF | $85.98 | $92.24 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $92.24 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2754 | SF | | | | | |
| 730-77 | PERSONNEL SUPPORT FAC | NORFOLK VIRGINIA | 0.98 | 2430 | 84/09/15 | 15,795 | SF | $63.06 | $80.17 |
| | | AVERAGE OF ADJUSTED UNIT COST | $80.17 | | | | | | |
| | | AVERAGE FACILITY SIZE | 15795 | SF | | | | | |
| 730-83 | CHAPEL/RELIG ED FAC | NAS MEMPHIS, TENNESSEE | 1.00 | 2195 | 82/03/02 | 20,780 | SF | $65.61 | $95.26 |
| 730-83 | CHAPEL, REL ED/INST CNTR | CAMP PENDLETON CALIFORNIA | 1.18 | 2440 | 85/09/25 | 18,400 | SF | $83.08 | $91.96 |
| 730-83 | CHAPEL/RELIG EDUCTN BLDG | ADAK ALASKA | 2.45 | 2427 | 85/04/11 | 17,345 | SF | $198.89 | $105.49 |
| 730-83 | CHAPEL | PORT HUENEME CALIFORNIA | 1.18 | 2528 | 87/07/15 | 15,600 | SF | $106.55 | $112.65 |
| 730-83 | CHAPEL W/RELIG ED WING | NTTC PENSACOLA, FLORIDA | 0.85 | 2413 | 84/03/14 | 13,538 | SF | $103.68 | $159.43 |
| 730-83 | RECRUIT CHAPEL | MCRD PARRIS ISLAND, SC | 0.94 | 2195 | 82/04/05 | 11,220 | SF | $75.16 | $113.71 |
| 730-83 | CHAPEL | KEFLAVIK ICELAND | 3.00 | 2347 | 83/04/28 | 11,177 | SF | $275.42 | $122.10 |
| 730-83 | CHAPEL & RELIG ED BLDG | NSA, NEW ORLEANS, LA | 1.03 | 2406 | 83/12/12 | 10,206 | SF | $95.34 | $116.48 |
| 730-83 | CHAPEL | DAM NECK - V BEACH VA | 0.93 | 2523 | 87/05/19 | 10,080 | SF | $131.62 | $169.84 |
| 730-83 | CHAPEL | CAMP PENDLETON CALIFORNIA | 1.20 | 2017 | 80/12/17 | 9,596 | SF | $76.94 | $95.29 |
| 730-83 | CHAPEL | NWS, CHARLESTON, SC | 0.93 | 2139 | 81/09/15 | 9,500 | SF | $86.48 | $130.32 |
| 730-83 | CHAPEL & EDUCATION WING | NAS DALLAS, TEXAS | 1.02 | 2418 | 84/07/09 | 9,496 | SF | $137.41 | $167.02 |
| 730-83 | CHAPEL REPLACEMENT | EL TORO CA MCAS | 1.21 | 2597 | 88/05/01 | 7,228 | SF | $107.69 | $97.89 |
| 730-83 | CHAPEL & RELIGIOUS BLDG. | CHESAPEAKE VIRGINIA | 0.98 | 2347 | 83/04/13 | 6,937 | SF | $65.75 | $80.69 |
| 730-83 | CHAPEL | NCEP, WAHIAWA, HI | 1.34 | 2348 | 83/02/10 | 5,630 | SF | $76.92 | $67.29 |
| 730-83 | CHAPEL | SAN JUAN PUERTO RICO | 1.10 | 2509 | 86/11/26 | 3,800 | SF | $120.00 | $114.48 |
| | | AVERAGE OF ADJUSTED UNIT COST | $115.00 | | | | | | |
| | | AVERAGE FACILITY SIZE | 11283 | SF | | | | | |
| 730-84 | RELIGIOUS ED & ACAD INSTR | NAVCAMS, WESTPAC, GUAM | 2.15 | 2438 | 85/06/23 | 7,735 | SF | $92.95 | $55.92 |
| 730-84 | RELIGIOUS ED FAC | NAS JACKSONVILLE, FL | 0.85 | 2440 | 85/09/11 | 7,000 | SF | $84.44 | $127.08 |
| 730-84 | RELIGIOUS ED CENTER | NWS CHARLESTON, SC | 0.93 | 2249 | 82/09/14 | 4,100 | SF | $71.18 | $97.20 |
| | | AVERAGE OF ADJUSTED UNIT COST | $93.40 | | | | | | |
| | | AVERAGE FACILITY SIZE | 6278 | SF | | | | | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 740-01 | NAVY EXCHANGE - PART A | NAS JACKSONVILLE, FL | 0.87 | 2565 | 87/09/29 | 86,887 | SF | $49.91 | $74.41 |
| 740-01 | NAVY EXCH 1 OF 2 | PORTSMOUTH VIRGINIA | 0.93 | 2565 | 87/09/29 | 47,422 | SF | $44.57 | $59.54 |
| 740-01 | EXCHANGE RETAIL STORE | NPGS MONTEREY, CA | 1.33 | 2428 | 83/08/31 | 32,429 | SF | $46.73 | $45.63 |
| 740-01 | MAIN EXCHANGE COMPLEX | NORFOLK VIRGINIA | 0.98 | 2348 | 83/02/01 | 22,900 | SF | $37.25 | $48.52 |
| 740-01 | NAVY EXCHANGE | NAS WHITING FIELD, FL | 0.84 | 2589 | 87/12/17 | 18,135 | SF | $61.18 | $61.12 |
| 740-01 | EXCHANGE/COMMISSARY-(1-2) | NAS CHASE FLD,BEEVILLE,TX | 0.97 | 2440 | 85/09/30 | 16,000 | SF | $57.20 | $68.39 |
| 740-01 | NAVY EXCHANGE | NAS KINGSVILLE, TEXAS | 0.96 | 2504 | 86/09/29 | 15,922 | SF | $53.77 | $63.29 |
| 740-01 | NAVY EXCHANGE RETAIL STOR | NSCS ATHENS, GEORGIA | 0.94 | 2432 | 85/02/14 | 12,057 | SF | $47.59 | $56.78 |
| 740-01 | NAVY EXCHANGE | NCSC PANAMA CITY,FL | 0.92 | 2440 | 85/09/26 | 12,000 | SF | $48.10 | $58.45 |
| 740-01 | PACKAGE STORE | PORTSMOUTH VIRGINIA | 0.93 | 2565 | 87/09/29 | 3,200 | SF | $49.46 | $51.88 |
| | AVERAGE OF ADJUSTED UNIT COST | | $60.80 | | | | | | |
| | AVERAGE FACILITY SIZE | | 26695 | SF | | | | | |
| 740-02 | EXCHANGE LOCATION STORE | SAN DIEGO CALIFORNIA | 1.28 | 2352 | 83/03/08 | 8,587 | SF | $52.09 | $54.57 |
| 740-02 | LOCATION EXCHANGE | MCB CP PENDLETON, CA | 1.20 | 2194 | 82/01/28 | 7,194 | SF | $42.35 | $50.73 |
| 740-02 | CONVENIENCE STORE | NORFOLK VIRGINIA | 0.98 | 2417 | 84/06/13 | 5,044 | SF | $46.64 | $59.62 |
| 740-02 | LOCATION EXCHANGE | CAMP PENDLETON CALIFORNIA | 1.20 | 2233 | 82/07/02 | 4,260 | SF | $51.50 | $55.94 |
| 740-02 | LOCATION EXCHANGE | CHERRY POINT NC | 0.90 | 2248 | 82/10/10 | 4,062 | SF | $37.27 | $53.11 |
| | AVERAGE OF ADJUSTED UNIT COST | | $54.79 | | | | | | |
| | AVERAGE FACILITY SIZE | | 5829 | SF | | | | | |
| 740-03 | EXCHANGE | CAMP LEJEUNE N C | 0.90 | 2419 | 84/05/31 | 7,200 | SF | $54.33 | $75.55 |
| | AVERAGE OF ADJUSTED UNIT COST | | $75.55 | | | | | | |
| | AVERAGE FACILITY SIZE | | 7200 | SF | | | | | |
| 740-04 | FAST FOOD FACILITY | NORFOLK VIRGINIA | 0.98 | 2195 | 82/03/10 | 3,130 | SF | $96.41 | $135.70 |
| | AVERAGE OF ADJUSTED UNIT COST | | $135.70 | | | | | | |
| | AVERAGE FACILITY SIZE | | 3130 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 740-07 | AUTO TIRE CENTER | NAS PENSACOLA, FLORIDA | 0.84 | 2509 | 86/10/17 | 3,220 | SF | $88.07 | $126.52 |
| | | AVERAGE OF ADJUSTED UNIT COST | $126.52 | | | | | | |
| | | AVERAGE FACILITY SIZE | 3220 | SF | | | | | |
| 740-20 | TEMPORARY LODGING FAC | CAMP PENDLETON CALIFORNIA | 1.20 | 2417 | 84/06/18 | 39,715 | SF | $53.85 | $58.55 |
| 740-20 | TEMPORARY LODGING FACILIT | NAS JACKSONVILLE, FL | 0.91 | 2260 | 82/11/19 | 27,806 | SF | $35.35 | $53.64 |
| 740-20 | TEMPORARY LODGING FAC. | BELLEVUE HOUSING, WASH DC | 1.08 | 2388 | 83/06/15 | 27,743 | SF | $44.73 | $54.13 |
| 740-20 | TEMPORARY LODGING FAC | MOFFETT FIELD CALIFORNIA | 1.25 | 2417 | 84/06/29 | 27,307 | SF | $65.78 | $67.96 |
| 740-20 | TEMP LODGING FACILITY | LONG BEACH CALIFORNIA | 1.20 | 2422 | 84/04/12 | 27,307 | SF | $59.40 | $63.79 |
| 740-20 | TEMP. LODGING FACILITY | GUANTANAMO BAY CUBA | 1.60 | 2219 | 82/06/24 | 16,051 | SF | $75.62 | $60.83 |
| 740-20 | TEMPORARY LODGING | TWENTYNINE PALMS CALIF | 1.20 | 2413 | 84/03/19 | 11,849 | SF | $73.09 | $68.85 |
| | | AVERAGE OF ADJUSTED UNIT COST | $61.10 | | | | | | |
| | | AVERAGE FACILITY SIZE | 25396 | SF | | | | | |
| 740-23 | NAVY EXCHANGE | GUANTANAMO BAY CUBA | 1.60 | 2595 | 88/06/28 | 105,873 | SF | $41.92 | $32.17 |
| 740-23 | COMMISSARY STORE | SAN DIEGO CA | 1.18 | 2427 | 85/04/18 | 76,171 | SF | $39.53 | $43.52 |
| 740-23 | COMMISSARY STORE REPLACE | NAS MEMPHIS, TENNESSEE | 1.00 | 2430 | 83/09/14 | 66,000 | SF | $38.98 | $50.06 |
| 740-23 | COMMISSARY STORE REPLACE | NAS PENSACOLA, FLORIDA | 0.85 | 2194 | 82/01/11 | 52,415 | SF | $32.70 | $52.55 |
| 740-23 | COMMISSARY STORE | NORFOLK VIRGINIA | 0.95 | 2496 | 86/08/13 | 52,226 | SF | $75.49 | $95.43 |
| 740-23 | COMMISSARY STORE 2 OF 2 | NAS CHASE FLD,BEEVILLE,TX | 0.97 | 2440 | 85/09/30 | 13,500 | SF | $60.04 | $65.08 |
| | | AVERAGE OF ADJUSTED UNIT COST | $56.46 | | | | | | |
| | | AVERAGE FACILITY SIZE | 61030 | SF | | | | | |
| 740-25 | FAMILY SERVICE CENTER | BANGOR WASHINGTON | 1.30 | 2406 | 83/12/23 | 7,218 | SF | $75.07 | $75.70 |
| 740-25 | FAMILY SERVICE CENTER | GUANTANAMO BAY CUBA | 1.60 | 2402 | 84/01/05 | 7,129 | SF | $96.43 | $79.12 |
| 740-25 | FAMILY SERVICES CENTER | NAS MERIDIAN, MS | 0.98 | 2424 | 84/10/17 | 6,300 | SF | $74.06 | $98.33 |
| 740-25 | FAMILY SERVICE CENTER | NS MAYPORT, FLORIDA | 0.90 | 2428 | 84/08/09 | 6,029 | SF | $87.03 | $125.60 |
| 740-25 | FAMILY SERVICE CENTER | NTC ORLANDO, FLORIDA | 0.86 | 2428 | 83/08/25 | 5,962 | SF | $77.46 | $117.00 |
| 740-25 | FAMILY SERVICE CENTER | NSA NEW ORLEANS, LA | 0.94 | 2504 | 86/09/10 | 5,064 | SF | $71.59 | $94.93 |
| 740-25 | FAMILY SERVICE CENTER | NAS KINGSVILLE,TX | 0.99 | 2440 | 85/09/12 | 4,800 | SF | $69.83 | $90.23 |
| 740-25 | FAMILY SERVICES CENTER | NAS CORPUS CHRISTI, TEXAS | 1.02 | 2438 | 85/06/10 | 4,500 | SF | $76.15 | $94.61 |
| 740-25 | FAMILY SERVICES CENTER | CHASE FIELD,BEEVILLE,TX | 1.02 | 2428 | 85/03/29 | 4,211 | SF | $77.11 | $94.26 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 740-25 | FAMILY SERVICE CENTER | NAS, BARBERS PT, HI | 1.34 | 2406 | 84/02/17 | 4,200 | SF | $93.40 | $87.71 |
| 740-25 | FAMILY SERVICES CENTER | KEFLAVIK ICELAND | 3.00 | 2347 | 83/04/20 | 4,185 | SF | $189.85 | $81.64 |
| 740-25 | FAMILY SERVICES CENTER | NAS WHITING FIELD, FL | 0.96 | 2417 | 84/06/28 | 4,144 | SF | $60.36 | $78.76 |
| 740-25 | FAMILY SERVICES CENTER | NAS CECIL FIELD, FLORIDA | 0.90 | 2430 | 84/09/13 | 4,051 | SF | $81.85 | $112.19 |
| 740-25 | FAMILY SERVICE CENTER | ST GEORGES PARISH BERMUDA | 1.60 | 2418 | 84/07/19 | 4,036 | SF | $151.70 | $117.55 |
| 740-25 | FAMILY SERVICE CENTER | MOFFETT FIELD CALIFORNIA | 1.25 | 2352 | 83/03/07 | 4,000 | SF | $60.53 | $69.88 |
| 740-25 | FAMILY SERVICE CENTER | NAS KEY WEST, FLORIDA | 1.07 | 2406 | 83/12/21 | 3,982 | SF | $76.02 | $88.52 |
| 740-25 | FAMILY SERVICES CENTER | VIRGINIA BEACH VIRGINIA | 0.98 | 2417 | 84/06/21 | 3,834 | SF | $74.14 | $92.90 |
| 740-25 | FAMILY SERVICES CENTER | CORPUS CHRISTI TEXAS | 1.25 | 2195 | 82/03/30 | 3,700 | SF | $60.88 | $65.65 |
| 740-25 | FAMILY SERVICES CENTER | NCBC GULFPORT, MISSISSIPP | 0.91 | 2348 | 83/02/10 | 3,600 | SF | $50.69 | $69.74 |
| 740-25 | FAMILY SERVICE CENTER | NWS CHARLESTON, SC | 0.93 | 2414 | 83/07/29 | 3,286 | SF | $87.26 | $112.07 |
| | | AVERAGE OF ADJUSTED UNIT COST | $92.32 | | | | | | |
| | | AVERAGE FACILITY SIZE | 4711 | SF | | | | | |
| 740-26 | INDUST SATELLIT CAFETERIA | NSY, PEARL HARBOR, HI | 1.34 | 1827 | 79/07/16 | 7,000 | SF | $64.90 | $80.26 |
| | | AVERAGE OF ADJUSTED UNIT COST | $80.26 | | | | | | |
| | | AVERAGE FACILITY SIZE | 7000 | SF | | | | | |
| 740-30 | SERVICE STATION 2 OF 2 | NAS CECIL FIELD, FLORIDA | 0.87 | 2510 | 86/12/22 | 7,142 | SF | $69.00 | $98.63 |
| 740-30 | EXCH SERV CTR/AUTO RPR | TWENTYNINE PALMS CALIF | 1.20 | 2422 | 84/04/23 | 5,360 | SF | $54.15 | $55.84 |
| | | AVERAGE OF ADJUSTED UNIT COST | $77.23 | | | | | | |
| | | AVERAGE FACILITY SIZE | 6251 | SF | | | | | |
| 740-36 | ARTS/CRAFTS HOBBY SHOP | NAS MEMPHIS, TN | 0.94 | 2611 | 86/08/29 | 16,500 | SF | $88.57 | $113.81 |
| 740-36 | CRAFT HOBBY SHOP | NTTC PENSACOLA, FLORIDA | 0.85 | 1918 | 80/03/25 | 4,620 | SF | $62.09 | $102.96 |
| | | AVERAGE OF ADJUSTED UNIT COST | $108.38 | | | | | | |
| | | AVERAGE FACILITY SIZE | 10560 | SF | | | | | |
| 740-38 | AUTOMOTIVE HOBBY SHOP | DAM NECK V BEACH VA | 0.98 | 2432 | 85/02/08 | 6,000 | SF | $67.34 | $89.10 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 740-38 | AUTO HOBBY SHOP | NAS, BARBERS PT, HI | 1.34 | 1756 | 79/05/31 | 5,940 | SF | $71.24 | $95.47 |
| 740-38 | AUTO HOBBY SHOP | NAS NEW ORLEANS, LA | 0.94 | 2598 | 88/07/15 | 2,806 | SF | $87.58 | $100.53 |
| | | AVERAGE OF ADJUSTED UNIT COST | $95.03 | | | | | | |
| | | AVERAGE FACILITY SIZE | 4915 SF | | | | | | |
| 740-40 | BOWLING CENTER COMPLEX | NTTC PENSACOLA, FL | 0.82 | 2612 | 88/09/06 | 28,763 | SF | $48.61 | $72.33 |
| 740-40 | BOWLING CENTER | NORFOLK VIRGINIA | 0.91 | 2596 | 88/04/11 | 22,612 | SF | $60.87 | $81.26 |
| 740-40 | 24 LANE BOWLING FACILITY | ROOSEVELT ROADS PO | 1.50 | 2249 | 82/09/30 | 22,356 | SF | $79.90 | $74.69 |
| 740-40 | BOWLING CENTER | CAMP LEJEUNE N C | 0.84 | 2565 | 87/09/30 | 18,458 | SF | $86.70 | $125.60 |
| 740-40 | BOWLING ALLEY | MADRID SPAIN | 1.10 | 2233 | 82/07/28 | 17,691 | SF | $42.05 | $53.42 |
| 740-40 | BOWLING ALLEY | LAJES AZORES | 1.41 | 2496 | 86/08/11 | 14,347 | SF | $93.05 | $80.05 |
| 740-40 | BOWLING ALLEY | LAJES AZORES | 1.30 | 2418 | 84/07/30 | 14,347 | SF | $64.52 | $62.15 |
| 740-40 | BOWLING CENTER | MADRID SPAIN | 1.10 | 2233 | 82/07/28 | 12,270 | SF | $49.57 | $59.32 |
| 740-40 | BOWLING/AMUSEMENT CENTER | NAS DALLAS, TEXAS | 0.93 | 2504 | 86/09/12 | 10,314 | SF | $57.64 | $70.70 |
| 740-40 | DIVING/SALVAGE SUP BLDG | NORFOLK VIRGINIA | 0.93 | 2596 | 88/04/20 | 9,304 | SF | $70.22 | $81.54 |
| 740-40 | BOWLING ALLEY | YORKTOWN VIRGINIA | 0.93 | 2509 | 86/10/15 | 7,500 | SF | $88.68 | $103.66 |
| | | AVERAGE OF ADJUSTED UNIT COST | $78.61 | | | | | | |
| | | AVERAGE FACILITY SIZE | 16178 SF | | | | | | |
| 740-43 | GYMNASIUM | GULFPORT MISSISSIPPI | 0.87 | 2438 | 85/06/14 | 21,608 | SF | $64.55 | $95.00 |
| 740-43 | GYMNASIUM | NTC ORLANDO, FLORIDA | 0.92 | 2428 | 85/03/25 | 20,944 | SF | $62.41 | $87.21 |
| 740-43 | GYMNASIUM | MCAS, KANEOHE BAY, HI | 1.34 | 2194 | 82/01/22 | 20,900 | SF | $83.11 | $88.24 |
| 740-43 | GYMNASIUM | LAJES AZORES | 1.38 | 2457 | 85/07/31 | 20,900 | SF | $75.23 | $69.26 |
| 740-43 | GYMNASIUM | GUANTANAMO BAY CUBA | 1.60 | 2457 | 85/07/15 | 20,860 | SF | $138.35 | $109.85 |
| 740-43 | PHYSICAL FITNESS CENTER | NORFOLK VIRGINIA | 0.98 | 2417 | 84/06/01 | 13,800 | SF | $71.34 | $87.68 |
| 740-43 | GYMNASIUM | CHESAPEAKE VIRGINIA | 0.90 | 2613 | 89/02/27 | 10,620 | SF | $79.07 | $94.25 |
| | | AVERAGE OF ADJUSTED UNIT COST | $90.21 | | | | | | |
| | | AVERAGE FACILITY SIZE | 18547 SF | | | | | | |
| 740-53 | INDOOR SWIMMING POOL | DAM NECK V BEACH VA | 0.98 | 2195 | 82/04/22 | 25,260 | SF | $79.80 | $112.31 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $112.31 | | | | | | |
| | | AVERAGE FACILITY SIZE | 25260 | SF | | | | | |
| 740-54 | RACQUETBALL/FITNESS CTR | NAS ATLANTA, GA | 0.87 | 2565 | 87/09/23 | 5,906 | SF | $104.27 | $145.85 |
| 740-54 | RECREATION BLDG | SAN DIEGO CALIFORNIA | 1.28 | 2352 | 83/03/31 | 5,130 | SF | $56.02 | $58.93 |
| | | AVERAGE OF ADJUSTED UNIT COST | $102.39 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5518 | SF | | | | | |
| 740-55 | YOUTH CENTER | NAS PENSACOLA, FL | 0.82 | 2611 | 88/08/12 | 18,858 | SF | $53.71 | $81.67 |
| 740-55 | YOUTH CENTER | PORT HUENEME CALIFORNIA | 1.20 | 2591 | 88/03/09 | 9,095 | SF | $96.01 | $97.39 |
| 740-55 | YOUTH CENTER | TWENTYNINE PALMS CALIF | 1.32 | 2611 | 88/08/04 | 8,000 | SF | $90.80 | $82.23 |
| 740-55 | YOUTH CENTER | NAS CHASE FIELD, TEXAS | 0.87 | 1894 | 80/02/22 | 5,608 | SF | $73.72 | $132.66 |
| 740-55 | YOUTH CENTER | CAMP PENDLETON CA MCB | 1.11 | 2516 | 87/03/27 | 5,300 | SF | $113.37 | $119.33 |
| 740-55 | YOUTH CENTER | NAS CECIL FIELD, FLORIDA | 0.85 | 2504 | 86/09/12 | 4,620 | SF | $80.46 | $109.01 |
| 740-55 | YOUTH CENTER | NAS MERIDIAN, MS | 0.85 | 2591 | 88/03/30 | 3,481 | SF | $81.66 | $102.05 |
| 740-55 | YOUTH CENTER | NCEP, WAHIAWA, HI | 1.34 | 1732 | 78/11/20 | 2,915 | SF | $88.68 | $103.28 |
| | | AVERAGE OF ADJUSTED UNIT COST | $103.45 | | | | | | |
| | | AVERAGE FACILITY SIZE | 6833 | SF | | | | | |
| 740-63 | EM CLUB 1 OF 2 | DAM NECK V BEACH VA | 0.95 | 2591 | 88/03/25 | 33,016 | SF | $100.54 | $131.56 |
| 740-63 | E M CLUB | JACKSONVILLE NC | 0.90 | 2220 | 82/05/12 | 15,900 | SF | $62.76 | $98.05 |
| 740-63 | E M CLUB | CAMP LEJEUNE N C | 0.90 | 2220 | 82/05/12 | 15,900 | SF | $65.35 | $102.06 |
| 740-63 | ENLISTED MEN'S CLUB | NAVAL STATION ANNAPOLIS | 1.02 | 1752 | 79/04/13 | 15,685 | SF | $73.97 | $129.20 |
| 740-63 | ENLISTED CLUB | CAMP LEJEUNE N C | 0.84 | 2589 | 87/12/15 | 8,276 | SF | $115.98 | $149.51 |
| 740-63 | ENLISTED CLUB | CAMP PENDLETON CALIFORNIA | 1.20 | 2219 | 82/06/25 | 7,974 | SF | $92.44 | $96.43 |
| 740-63 | ENLISTED MEN'S CLUB | ST GEORGES PARISH BERMUDA | 1.60 | 2565 | 87/09/29 | 6,538 | SF | $189.11 | $124.57 |
| | | AVERAGE OF ADJUSTED UNIT COST | $118.76 | | | | | | |
| | | AVERAGE FACILITY SIZE | 14755 | SF | | | | | |
| 740-70 | CPO CLUB | NAS MEMPHIS, TN | 0.94 | 2612 | 88/09/16 | 19,184 | SF | $93.17 | $114.89 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | | AVERAGE OF ADJUSTED UNIT COST | $114.89 | | | | | | |
| | | AVERAGE FACILITY SIZE | 19184 | SF | | | | | |
| 740-71 | CONSOLIDATED PACKAGE STRE | MCAS, KANEOHE BAY, HI | 1.34 | 2388 | 83/06/06 | 12,630 | SF | $57.43 | $54.33 |
| | | AVERAGE OF ADJUSTED UNIT COST | $54.33 | | | | | | |
| | | AVERAGE FACILITY SIZE | 12630 | SF | | | | | |
| 740-74 | CHILD CARE CENTER | NORFOLK VIRGINIA | 0.98 | 2195 | 82/03/05 | 22,128 | SF | $46.24 | $69.23 |
| 740-74 | CHILD CARE CENTER PF-1 | CAMP PENDLETON CALIFORNIA | 1.18 | 2440 | 85/09/25 | 19,000 | SF | $69.81 | $77.27 |
| 740-74 | CHILD CARE CENTER | CHERRY POINT NC | 0.92 | 2616 | 88/11/30 | 17,500 | SF | $75.14 | $99.50 |
| 740-74 | CHILD CARE CENTER | NAS PENSACOLA, FL | 0.84 | 2433 | 86/01/24 | 15,467 | SF | $38.40 | $59.25 |
| 740-74 | CHILD CARE CENTER | NS CHARLESTON SC | 0.93 | 2430 | 83/09/21 | 13,660 | SF | $50.97 | $71.13 |
| 740-74 | CHILD CARE CENTER | TWENTYNINE PALMS CALIF | 1.32 | 2616 | 89/03/31 | 13,480 | SF | $95.11 | $86.86 |
| 740-74 | CHILD CARE CENTER | NAS MEMPHIS MILLINGTON,TN | 1.00 | 2249 | 82/09/03 | 12,960 | SF | $56.38 | $79.05 |
| 740-74 | CHILD CARE CENTER | NAS ALAMEDA, CA | 1.25 | 2388 | 83/06/29 | 12,430 | SF | $62.50 | $66.03 |
| 740-74 | CHILD CARE CENTER | NWS, CHARLESTON, SC | 0.93 | 2422 | 84/04/17 | 12,000 | SF | $66.19 | $91.72 |
| 740-74 | CHILD CARE CENTER | NAS JACKSONVILLE, FL | 0.91 | 2253 | 82/08/27 | 11,600 | SF | $47.75 | $72.69 |
| 740-74 | CHILD CARE CENTER | SAN FRANCISCO CALIFORNIA | 1.35 | 2430 | 83/09/23 | 10,123 | SF | $93.95 | $89.39 |
| 740-74 | CHILD CARE CENTER | NSB BANGOR, WA | 1.30 | 2195 | 82/03/30 | 9,730 | SF | $99.90 | $108.16 |
| 740-74 | CHILD CARE CENTER | VALLEJO CALIFORNIA | 1.25 | 2195 | 82/04/16 | 9,450 | SF | $100.34 | $111.84 |
| 740-74 | CHILD CARE CENTER | NAS WHIDBEY ISLAND, WA | 1.30 | 2352 | 83/03/04 | 8,270 | SF | $72.46 | $70.34 |
| 740-74 | CHILD CARE CENTER | KEFLAVIK ICELAND | 3.00 | 2195 | 82/03/01 | 8,175 | SF | $204.45 | $92.16 |
| 740-74 | CHILD CARE CENTER | CAMP LEJEUNE N C | 0.92 | 2616 | 89/03/31 | 7,614 | SF | $83.58 | $102.09 |
| 740-74 | CHILD CARE CENTER | NAS CORPUS CHRISTI, TX | 0.90 | 2565 | 87/09/29 | 7,007 | SF | $74.46 | $93.01 |
| 740-74 | CHILD CARE CENTER | ADAK ALASKA | 3.19 | 2430 | 83/09/30 | 6,700 | SF | $203.94 | $75.15 |
| 740-74 | CHILD CARE CENTER | LAJES AZORES | 1.41 | 2509 | 86/10/31 | 5,973 | SF | $77.10 | $61.10 |
| 740-74 | CHILD CARE CENTER | SUBASE, PEARL HARBOR, HI | 1.34 | 2406 | 83/12/30 | 5,720 | SF | $98.77 | $85.88 |
| 740-74 | CHILD CARE CENTER | NCBC GULFPORT,MISSISSIPPI | 0.91 | 2233 | 82/07/20 | 5,040 | SF | $59.73 | $80.91 |
| 740-74 | CHILD CARE CENTER | PORTSMOUTH VIRGINIA | 0.98 | 2430 | 84/09/14 | 4,661 | SF | $82.31 | $94.27 |
| 740-74 | CHILD CARE CENTER | NAS CHASE FIELD, TX | 0.97 | 2440 | 85/09/30 | 4,300 | SF | $94.38 | $107.80 |
| 740-74 | CHILD CARE CENTER | NSA NEW ORLEANS, LA | 1.03 | 2253 | 82/08/27 | 4,000 | SF | $86.35 | $99.71 |
| 740-74 | CHILD CARE CENTER | NAS MERIDIAN, MS | 0.98 | 2249 | 82/09/03 | 3,182 | SF | $65.70 | $78.48 |
| | | AVERAGE OF ADJUSTED UNIT COST | $84.92 | | | | | | |
| | | AVERAGE FACILITY SIZE | 10126 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 740-77 | REC SERVICES MAINT FAC | DAM NECK V BEACH VA | 0.98 | 2430 | 83/09/29 | 4,538 | SF | $35.59 | $45.24 |
| | AVERAGE OF ADJUSTED UNIT COST | | $45.24 | | | | | | |
| | AVERAGE FACILITY SIZE | | 4538 | SF | | | | | |
| 740-80 | GOLF CLUBHOUSE | VIRGINIA BEACH VIRGINIA | 0.95 | 2612 | 88/09/21 | 13,390 | SF | $81.34 | $103.38 |
| 740-80 | GOLF COURSE CLUBHOUSE | SAN DIEGO CALIFORNIA | 1.21 | 2516 | 87/03/04 | 10,980 | SF | $120.28 | $123.32 |
| 740-80 | GOLF CLUB HOUSE | NAS MERIDIAN, MS | 0.98 | 2016 | 81/02/02 | 5,666 | SF | $64.89 | $92.07 |
| | AVERAGE OF ADJUSTED UNIT COST | | $106.25 | | | | | | |
| | AVERAGE FACILITY SIZE | | 10012 | SF | | | | | |
| 740-81 | RECREATION CABINS | NAS PENSACOLA, FL | 0.82 | 2612 | 88/09/12 | 6,912 | SF | $62.83 | $93.49 |
| 740-81 | CONSTRUCT CABINS (THREE) | NS (SHORT STAY) CHARL,SC | 0.91 | 2521 | 87/04/03 | 2,550 | SF | $54.33 | $67.64 |
| 740-81 | RECREATION LODGE | ARGENTIA NEWFOUNDLAND | 1.40 | 2388 | 83/06/27 | 2,000 | SF | $44.47 | $36.94 |
| | AVERAGE OF ADJUSTED UNIT COST | | $66.02 | | | | | | |
| | AVERAGE FACILITY SIZE | | 3820 | SF | | | | | |
| 740-84 | INDOOR RACQUETBALL COMPLX | NS, CHARLESTON, SC | 0.93 | 2195 | 82/04/05 | 6,700 | SF | $58.23 | $86.37 |
| | AVERAGE OF ADJUSTED UNIT COST | | $86.37 | | | | | | |
| | AVERAGE FACILITY SIZE | | 6700 | SF | | | | | |
| 740-89 | BATH HOUSE | CAMP LEJEUNE N C | 0.90 | 2352 | 83/03/25 | 3,175 | SF | $45.58 | $67.91 |
| 740-89 | BATHHOUSE 2 OF 2 | DAM NECK V BEACH VA | 0.95 | 2591 | 88/03/25 | 1,985 | SF | $60.74 | $72.53 |
| | AVERAGE OF ADJUSTED UNIT COST | | $70.22 | | | | | | |
| | AVERAGE FACILITY SIZE | | 2580 | SF | | | | | |
| 750-30 | SWIMMING POOL | CAMP LEJEUNE N C | 0.90 | 2352 | 83/03/25 | 8,930 | SF | $38.68 | $58.22 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 750-30 | SWIMMING POOL | SUGAR GROVE WEST VIRGINIA | 1.20 | 2568 | 87/10/26 | 1,250 | SF | $136.20 | $114.37 |
| | | AVERAGE OF ADJUSTED UNIT COST | $86.29 | | | | | | |
| | | AVERAGE FACILITY SIZE | 5090 | SF | | | | | |
| 750-57 | BEACH SNACK BAR | DAM NECK V BEACH VA | 0.98 | 2417 | 84/06/07 | 842 | SF | $104.77 | $133.92 |
| | | AVERAGE OF ADJUSTED UNIT COST | $133.92 | | | | | | |
| | | AVERAGE FACILITY SIZE | 842 | SF | | | | | |
| 811-60 | STAND-BY GENERATOR PLANT | NCEP, LUALUALEI, HI | 1.34 | 2195 | 82/03/08 | 6,500 | KW | $163.32 | $176.97 |
| 811-60 | STAND-BY GENERATOR PLANT | FICPAC, MAKALAPA, HI | 1.34 | 2406 | 83/12/29 | 1,000 | KW | $294.00 | $235.99 |
| | | AVERAGE OF ADJUSTED UNIT COST | $206.48 | | | | | | |
| | | AVERAGE FACILITY SIZE | 3750 | KW | | | | | |
| 813-20 | UTILITY BLDG | FALLON NEVADA | 1.21 | 2195 | 82/03/30 | 2,543 | SF | $119.83 | $136.61 |
| | | AVERAGE OF ADJUSTED UNIT COST | $136.61 | | | | | | |
| | | AVERAGE FACILITY SIZE | 2543 | SF | | | | | |
| 821-50 | STEAM PLANT | PORTSMOUTH VIRGINIA | 0.98 | 2430 | 83/09/29 | 720,000 | PPH | $133.08 | $169.20 |
| | | AVERAGE OF ADJUSTED UNIT COST | $169.20 | | | | | | |
| | | AVERAGE FACILITY SIZE | 720000 | PPH | | | | | |
| 831-14 | HAZ WASTE STORAGE | PWC PENSACOLA, FL | 0.82 | 2591 | 88/03/29 | 9,862 | SF | $54.90 | $78.24 |
| | | AVERAGE OF ADJUSTED UNIT COST | $78.24 | | | | | | |
| | | AVERAGE FACILITY SIZE | 9862 | SF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 831-41 | HAZ WST STORG/TRANSF FAC | LONG BEACH CALIFORNIA | 1.19 | 2565 | 87/09/10 | 8,732 | SF | $70.33 | $73.43 |
| 831-41 | HAZARDOUS WASTE FAC | BANGOR WASHINGTON | 1.15 | 2526 | 87/06/17 | 7,790 | SF | $87.34 | $94.83 |
| 831-41 | HAZARDOUS WASTE ST/TRANS | NSYD CHARLESTON SC | 0.81 | 2441 | 85/11/01 | 6,650 | SF | $56.19 | $89.63 |
| 831-41 | HAZARDOUS WASTE STOR FAC | NAS CECIL FIELD, FLORIDA | 0.90 | 2421 | 84/11/01 | 3,800 | SF | $35.12 | $46.92 |
| 831-41 | HAZ WASTE STORG FAC | PORT HUENEME CALIFORNIA | 1.18 | 2510 | 86/12/09 | 3,600 | SF | $83.32 | $81.11 |
| 831-41 | HAZ WASTE STOR FACILITY | NAS KEY WEST, FLORIDA | 1.07 | 2510 | 86/12/03 | 3,500 | SF | $55.27 | $58.78 |
| 831-41 | HAZARDOUS WASTE STORG FAC | CAMP PENDLETON CA MCB | 1.11 | 2521 | 87/04/29 | 3,350 | SF | $71.14 | $71.93 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $73.80 | | | | | |
| | | AVERAGE FACILITY SIZE | | 5346 | SF | | | | |
| 841-10 | WATER TREATMENT FACILITY | KATO SOULI GREECE | 0.95 | 2406 | 83/12/31 | 60,000 | GPD | $6.91 | $9.62 |
| 841-10 | WATER TREATMENT FACILITY | SIGONELLA ITALY | 1.19 | 2220 | 82/05/26 | 40,000 | GPD | $20.05 | $23.93 |
| 841-10 | WATER TREATMENT FACILITY | OAK HARBOR WA | 1.16 | 2565 | 87/09/29 | 1 | LS | $6,530,000.00 | $5,492,098.55 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $1,830,710.70 | | | | | |
| | | AVERAGE FACILITY SIZE | | 33333 | GPD | | | | |
| 841-30 | ELEV POTAB WATER STOR TK | NAS CHASE FIELD, TEXAS | 0.87 | 2428 | 84/08/03 | 500,000 | GA | $0.85 | $1.20 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $1.20 | | | | | |
| | | AVERAGE FACILITY SIZE | | 500000 | GA | | | | |
| 841-40 | WATER TANK | NWS CHARLESTON, SC | 0.81 | 2457 | 85/07/30 | 750,000 | GAL | $1.23 | $1.86 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $1.86 | | | | | |
| | | AVERAGE FACILITY SIZE | | 750000 | GAL | | | | |
| 843-10 | FIRE PROTECTION PIPELINE | NSB, PEARL HARBOR, HI | 1.34 | 2200 | 82/02/11 | 7,200 | LF | $157.20 | $161.46 |
| | | AVERAGE OF ADJUSTED UNIT COST | | $161.46 | | | | | |
| | | AVERAGE FACILITY SIZE | | 7200 | LF | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| 843-20 | FIRE PUMP HOUSE | FALLON NEVADA | 1.21 | 2195 | 82/03/30 | 12,500 | GPM | $29.78 | $35.35 |
| 843-20 | FIRE PUMP STATION | SAN DIEGO CALIFORNIA | 1.28 | 2348 | 83/02/01 | 10,000 | GPM | $51.68 | $53.67 |
| 843-20 | PUMPHOUSE(ALCM FAC) 2-2 | BARKSDALE AFB, LOUISIANA | 1.01 | 2417 | 84/06/08 | 6,000 | GPM | $61.91 | $72.43 |
| | | AVERAGE OF ADJUSTED UNIT COST | $53.81 | | | | | | |
| | | AVERAGE FACILITY SIZE | 9500 GPM | | | | | | |
| 843-30 | FIRE WATER STORAGE TANK | PUMPLANT CHARLESTON, SC | 0.81 | 2433 | 86/01/29 | 750,000 | GAL | $1.10 | $1.68 |
| | | AVERAGE OF ADJUSTED UNIT COST | $1.68 | | | | | | |
| | | AVERAGE FACILITY SIZE | 750000 GAL | | | | | | |
| 851-10 | EMBARK FAC (ROADS) 5/6 | CHERRY POINT NC | 0.87 | 2528 | 87/07/24 | 28,132 | SY | $22.96 | $32.57 |
| 851-10 | ARTERIAL HIGHWAY | NS MAYPORT, FLORIDA | 0.90 | 2200 | 82/02/19 | 22,000 | SY | $15.40 | $23.54 |
| | | AVERAGE OF ADJUSTED UNIT COST | $28.05 | | | | | | |
| | | AVERAGE FACILITY SIZE | 25066 SY | | | | | | |
| 851-20 | VEHICULAR BRIDGE | NAS PENSACOLA, FLORIDA | 0.85 | 2249 | 82/09/30 | 172,000 | SF | $24.38 | $41.07 |
| 851-20 | REPLMT SLOCUM CRK BRIDGE | CHERRY POINT NC | 0.90 | 2249 | 82/09/30 | 30,571 | SF | $49.17 | $65.66 |
| 851-20 | RPL DORSEY CREEK BRIDGE | USNA ANNAPOLIS, MD | 1.02 | 2311 | 83/01/20 | 19,413 | SF | $42.65 | $46.81 |
| | | AVERAGE OF ADJUSTED UNIT COST | $51.18 | | | | | | |
| | | AVERAGE FACILITY SIZE | 73994 SF | | | | | | |
| 852-10 | PIER 10 PARKING LOTS | NORFOLK VIRGINIA | 0.98 | 2496 | 86/08/29 | 202,136 | SY | $14.87 | $18.40 |
| | | AVERAGE OF ADJUSTED UNIT COST | $18.40 | | | | | | |
| | | AVERAGE FACILITY SIZE | 202136 SY | | | | | | |
| 852-30 | PEDESTRIAN BRIDGE | MCDEC QUANTICO,VA | 1.08 | 2200 | 82/02/10 | 372 | LF | $1,503.53 | $1,916.10 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-93
ENR BCI PROJECTED: 3028
DATE PRODUCED: 08AUG89

| NAVY CAT CODE | DESCRIPTION | LOCATION | ACF | AWARD COST INDEX | DATE | QUANTITY | U/M | PRIMARY AWARD COST/UNIT | PRIMARY ADJUSTED COST/UNIT |
|---|---|---|---|---|---|---|---|---|---|
| | AVERAGE OF ADJUSTED UNIT COST | | $1,916.10 | | | | | | |
| | AVERAGE FACILITY SIZE | | 372 | LF | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# REFERENCES

NOTE: Unless otherwise specified in the text, users of this handbook should utilize the latest revisions of the documents cited herein.

FEDERAL/MILITARY SPECIFICATIONS, STANDARDS, BULLETINS, HANDBOOKS, DESIGN MANUALS, AND NAVFAC GUIDE SPECIFICATIONS:

The following specifications, standards, bulletins and handbooks form a part o this document to the extent specified herein. Unless otherwise indicated, copies are available from Commanding Officer, Naval Publications and Forms Center, ATTENTION: NPODS, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

HANDBOOKS

| | |
|---|---|
| MIL-HDBK-1006/3 | Policy and Procedures for Engineering and Design Criteria Manual Preparation |
| MIL-HDBK-1195 | Radio Frequency Shielded Enclosures |
| MIL-HDBK-1190 | Facility Planning and Design Guide |

NAVY MANUALS, P-PUBLICATIONS, AND MAINTENANCE OPERATING MANUALS:

Available from Commanding Officer, Naval Publications and Forms Center, (NPFC) 5801 Tabor Avenue, Philadelphia, PA 19120-5099. To order these documents: Government agencies must use the Military Standard Requisitioning and Issue Procedure (MILSTRIP); the private sector must write to NPFC, ATTENTION: Cash Sales, Code 1051, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

DESIGN MANUALS

| | |
|---|---|
| DM-13.02 | Commercial Intrusion Detection Systems (IDS) |
| P-72 | Department of the Navy Facility Category Cod |

OTHER GOVERNMENT DOCUMENTS AND PUBLICATIONS:

The following Government documents and publications for a part of this documen to the extent specified herein.

DEPARTMENT OF DEFENSE (DOD)

| | |
|---|---|
| DODINST 4165.3 | DOD Facility Classes and Construction Categories |

(DODINST 4165.3 is available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120; private organizations may purchase DODINST 4165.3 from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)



Source: https://assist.dla.mil -- Downloaded: 202610-26T13:54Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY, CHIEF OF NAVAL OPERATIONS

| | |
|---|---|
| OPNAVINST 11000.16 | Command Responsibility for Shore Activity La and Facilities |

(Available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.)

U.S. NAVY

| | |
|---|---|
| Form DD-1391 | Facility Study Cost Development |
| NAVFACNOTE 11010 | Shore Activities Land and Facilities Plannin |
| NAVFACINST 11010.44 | Shore Facilities Planning Manual |

(Available from NPFC, ATTENTION: Code 3015, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

FEDERAL ACQUISITION REGULATION (FAR):

Available from Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.

CUSTODIAN
NAVY - YD

PREPARING ACTIVITY
NAVY - YD

PROJECT NO.
FACR-0606



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions - Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-HDBK-1010 | COST ENGINEERING: POLICY AND PROCEDURES |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION (Mark one) |
|---|---|
| | ☐ VENDOR ☐ EFD/PWO ☐ AE ☐ USER ☐ CONTRACTOR ☐ MANUFACTURER ☐ OICC/ROICC ☐ OTHER (Specify): _____ |
| b. ADDRESS (Street, City, State, ZIP Code) | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER (Last, First, MI) - Optional | b. WORK TELEPHONE NUMBER (Include Area Code) - Optional |
|---|---|
| c. MAILNG ADDRESS (Street, City, State, ZIP Code) - Optional | 8. DATE OF SUBMISSION (YYMMDD) |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NAVFAC Overprint

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.