INCH-POUND

MIL-D-48435A (AR)
16 May 1990
SUPERSEDING
MIL-R-48435 (MU)
24 February 1977

MILITARY SPECIFICATION

DISTRIBUTION BOX: 10548533

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the distribution box, a part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel Manufacture and Inspection, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC1285
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from Military Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10548533 - Distribution Box

PACKAGING DATA SHEET

PS10548533 - Packaging of Distribution Box

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3.REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10548533, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the distribution box shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The distribution box shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ±10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ±10%.

3.3.2 Shock. The distribution box shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ±10%, 11 milliseconds ±10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The distribution box shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The distribution box shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The distribution box shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 degrees F and +155 degrees F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.3.4.2 Non-operating (storage). The distribution box shall not suffer permanent damage when subjected to the constant temperature extremes of -60 degrees F for a period of 24 hours and +160 degrees F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The distribution box shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the wire runs list (10548465) of the distribution box.

3.4.1 Spare Pins. The following connector pins shall remain as spares:

J1 - A and B
J2 - A through C and N through T
J3 - C through F and P through T
J4 - B through F, J through R, T through V, and Z
J5 - B, C, J through L, and T through V

3.5 Performance.

3.5.1. DC Input Voltage Isolation. When +24 ± 0.3 Vdc is applied to connector pin J3-c and the distribution box MODE switch (S1) set to NORMAL and the MAIN switch (S4) set to ON, the +24 Vdc shall not be present at connector pin J3-p (ref. to 24 V ret.)

When +24 ± 0.3 Vdc is applied to connector pin J3-p and the distribution box is in the maintenance mode, the +24 Vdc shall not be present at connector pin J3-c (ref. to 24 V ret.).

3.5.2. Normal Mode. When +24.3 ± 0.3 Vdc is applied to connector pins J3-p, 24 V return on pin J3-t, and MODE switch (S1) set to NORMAL and the MAIN switch (S4) set to OFF, the following voltage will be present at the prescribed connector pins of the distribution box:

MEASUREMENT		
24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.5.2. Normal Mode. When +24.3 ± 0.3 Vdc is applied to connector pins J3-p, 24 V return on pin J3-t, and MODE switch (S1) set to NORMAL and the MAIN switch (S4) set to OFF, the following voltage will be present at the prescribed connector pins of the distribution box:

MEASUREMENT		
24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control
J3-V	J5-a	Elevation Servo Control

NO VOLTAGE	REFERENCE	FUNCTION
J3-d	J5-a	Stow Right
J3-U	J5-a	Stow Up

There shall be no continuity between connector pins J3-G and J3-t of the distribution box (NORMAL/STOW SELECT)).

3.5.3 Maintenance Mode. When +24.3 ± 0.3 Vdc is applied to connector pin J3-c, 24 V return to pin J3-t, and the MODE switch (S1) set to NORMAL, MAIN switch (S4) set to ON, the following voltage will be present at the prescribed connector pins of the distribution box:

MEASUREMENT		
24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control
J3-V	J5-a	Elevation Servo Control

NO VOLTAGE	REFERENCE	FUNCTION
J3-d	J5-a	Stow Right
J3-U	J5-a	Stow Up

There shall be no continuity between connector pins J3-G and J3-t of the distribution box (NORMAL/STOW SELECT)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.5.4 Stow Mode. When +24 ± 0.3 Vdc is applied to connector pin J3-c 24 V return on pin J3-t, and the MODE switch (S1) set to STOW, MAIN switch (S4) set to ON, the following voltage will be present at the prescribed connector pins of the distribution box for the specified switch positions:

SWITCH	POSITION	+24±0.3 Vdc	24V RETURN (-)
TRAVERSE STOW (S2)	RIGHT	J3-H	J3-G
TRAVERSE STOW (S2)	RIGHT	J3-H	J3-d
TRAVERSE STOW (S2)	LEFT	J3-H	J3-G
ELEVATION STOW (S3)	UP	J3-V	J3-G
ELEVATION STOW (S3)	UP	J3-V	J3-U
ELEVATION STOW (S3)	DOWN	J3-V	J3-G

SWITCH	POSITION	NO VOLTAGE	REFERENCE
TRAVERSE STOW (S2)	LEFT	J3-H	J3-d
ELEVATION STOW (S3)	DOWN	J3-V	J3-U

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7. Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 First article submission. The requirement for first article and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract and the applicable drawing. The sample for the first article tests shall consist of three distribution boxes using the same materials, equipment, processes, and procedures as in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.3.1.1. Government testing. When the Government is responsible for conducting first article tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and the applicable drawings. The contractor shall submit a record of this inspection with the sample including a certified test report (CTR) or a certificate of conformance (COC) for the materials.

4.3.1.2 Contractor testing. When the Contractor is responsible for conducting first article tests, the sample shall be inspected by the contractor for all the requirements of the contract, all of the examinations and tests specified in Table I (Functional test) and Table II (Special sampling) herein and to all requirements of the applicable drawings. The sample and a record of this inspection, including a CRT/COC, shall be submitted for the Government approval. The Government reserves the right to witness the Contractor's inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.3.2 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

TABLE I. Functional tests
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3.4	4.7.2
102.	Performance	3.5	4.7.3
Minor:		None	N/A

4.5 Special sampling. One distribution box out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table II. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
103.	Vibration	3.3.1	4.7.1.1
104.	Shock	3.3.2	4.7.1.2
105.	Altitude	3.3.3	4.7.1.3
106.	Temperature	3.3.4	4.7.1.4
107.	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table III shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE III. Test equipment list

ITEM NUMBER	DESCRIPTION
1. Power Supply	+24.0 ± 0.3 Vdc, .500 milliamps
2. Digital Voltmeter (DVM)	Range: 0-30 Vdc Accuracy: ±0.1% of input ±1 Digit of range. Input impedence: 10 megohms.
3. Ohmmeter (VOM)	Triplett Model 630 PL or equivalent.
4. Adapter Cable (3 ea)	Banana Plug to #16 Socket Contact, MS3192-16A.
5. Adapter Cable (2 ea)	Banana Plug to #20 PIN Contact, MS3192-20A.
6. Adapter Cable (2 ea)	Banana Plug to #20 Socket Contact, MS3192-20A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The distribution box shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the distribution box shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the distribution box shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500.2 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501.2 of MIL-STD-810 with constant temperature extremes as specified 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507.2 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring test equipment (SMTE) and visual examination for compliance with 3.4. Verify that the connector pins as specified in paragraph 3.4.1 are retained as spare pins.

4.7.3 Performance. The selected distribution box shall be tested as follows:

4.7.3.1. DC Input Voltage Isolation. Set the MODE switch (S1) to NORMAL and MAIN switch (S4) to ON. Connect the positive lead of the ohmmeter, item 3 of Table III, to pin J3-p and the negative lead to pin J3-V. Set the ohmmeter to the X 100 K scale. Note the ohmmeter reading. Connect the positive lead to pin J3-c and note the ohmmeter reading.

Reverse the meter leads, positive lead on pin J3-V and negative lead on pin J3-c. The ohmmeter shall have a reading 200 times greater than the first reading (front to back ratio greater than 200). Connect the negative lead to pin J3-p. The ohmmeter shall have a reading 200 times greater than the first reading.

4.7.3.2 Normal Mode. Adjust the power supply (Table III, item 1) for +24.3 ± 0.3 Vdc and connect the positive (+) terminal to J3-p, negative (-) terminal to J3-t (refer to Figure 1). Set the MODE switch (S1) to NORMAL and the MAINTENANCE switch (S4) to OFF. Connect the DVM (Table III, item 2) to the following points and measure the indicated voltage:

DVM Pos. (+)	DVM Neg. (-)	Voltage	Function
J4-n	J4-a	+24V ± 0.3 Vdc	Traverse Brake Control
J5-n	J5-a	+24V ± 0.3 Vdc	Elevation Brake
J3-H	J5-a	+24V ± 0.3 Vdc	Traverse Servo Control
J3-V	J5-a	+24V ± 0.3 Vdc	Elevation Servo
J3-d	J5-a	0V	Stow Right
J3-U	J5-a	0V	Stow Up

Using the VOM, measure for no continuity between pins J3-G and J3-t of the distribution box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7.3.3 Maintenance Mode. Connect the power supply positive (+) terminal to J3-c, negative (-) terminal to J3-t. Set the MAIN switch (S4) to ON. Connect the DVM to the following points and measure the indicated voltage:

DVM Pos. (+)	DVM Neg. (-)	Voltage	Function
J4-n	J4-a	+24V ± 0.3 Vdc	Traverse Brake Control
J5-n	J5-a	+24V ± 0.3 Vdc	Elevation Brake Control
J3-H	J5-a	+24V ± 0.3 Vdc	Traverse Servo Control
J3-V	J5-a	+24V ± 0.3 Vdc	Elevation Servo Control
J3-d	J5-a	0V	Stow Right
J3-U	J5-a	0V	Stow Up

Using the ohmmeter (Table III, item 3), measure for no continuity between connector pins J3-G and J3-t of the distribution box (NORMAL/STOW SELECT).

4.7.3.4 Stow Mode. With the power supply connected as in 4.7.3.3 and adjusted for +24V ± 0.3 Vdc, set MODE switch (S1) to STOW. Connect the DVM to the following points and measure the indicated voltage only when the indicated switch is depressed: (Note: TRANSVERSE STOW and ELEVATION STOW switches are spring loaded center-off type).

DVM Pos. (+)	DVM Neg. (-)	Switch	Position	Voltage
J3-H	J3-d	Traverse Stow	Right	+24V± 0.3 Vdc
J3-H	J3-d	Traverse Stow	Left	0V
J3-H	J3-G	Traverse Stow	Right	+24V ± 0.3 Vdc
J3-H	J3-G	Traverse Stow	Left	+24V ± 0.3 Vdc
J3-V	J3-U	Elevation Stow	Up	+24V ± 0.3 Vdc
J3-V	J3-U	Elevation Stow	Down	0V
J3-V	J3-G	Elevation Stow	Up	+24V ± 0.3 Vdc
J3-V	J3-G	Elevation Stow	Down	+24V ± 0.3 Vdc

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

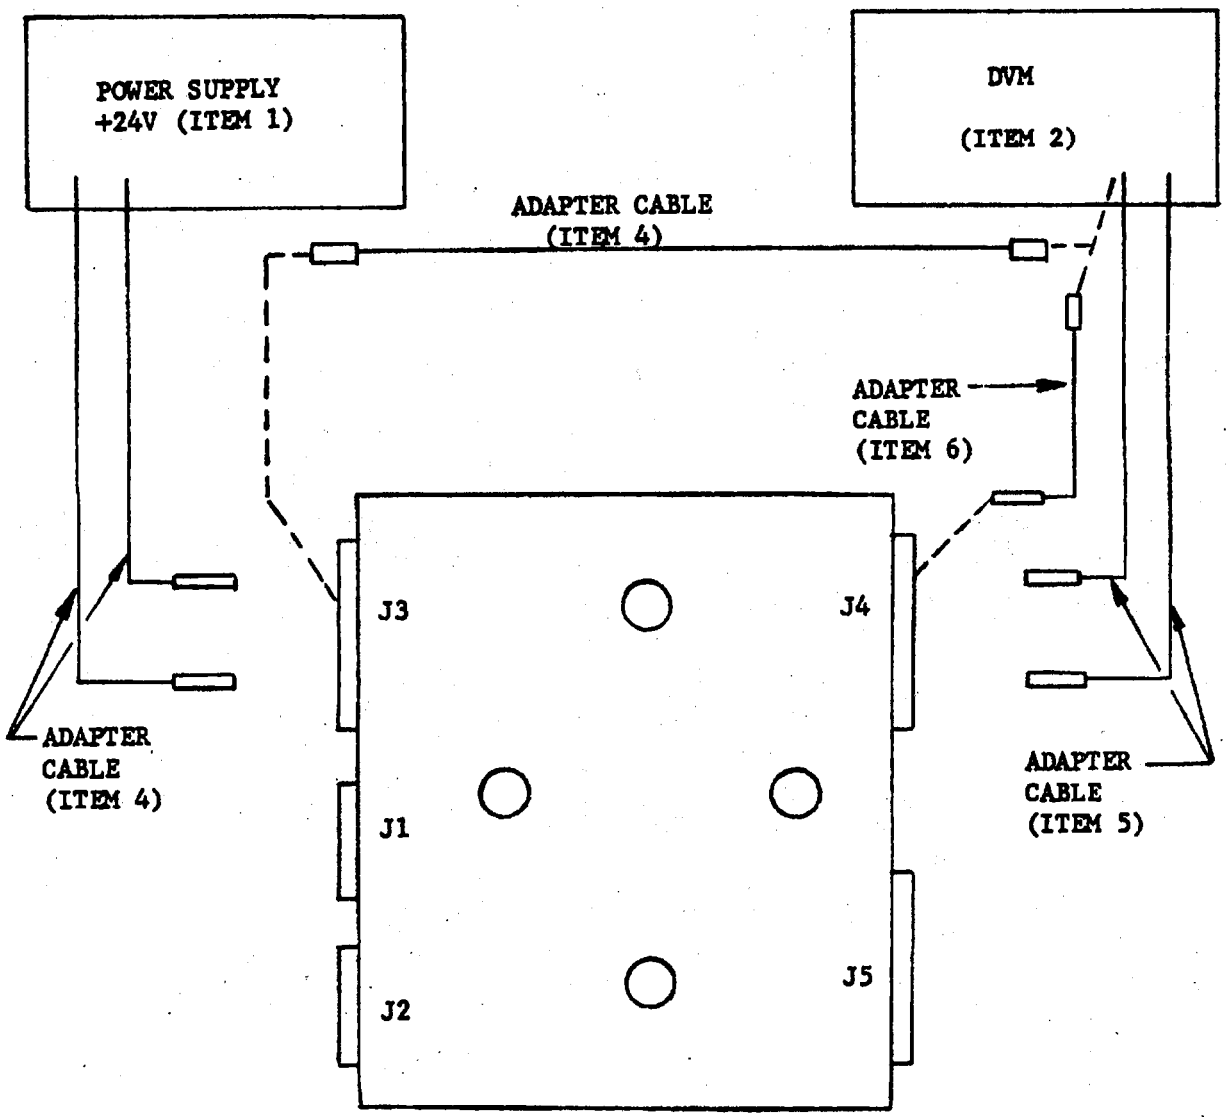


FIGURE 1. Distribution box test set-up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS10548533.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.

6.1 Intended use. The distribution box provides a point to interface the Power Supply PP-4812/VPS-2, Antenna AS-2049/VPS-2 and sight current generator into the antenna servo loop configuration. Motor and control voltages from the power supply are routed through the distribution box to the traverse and elevation drive assemblies of the antenna. Feedback information to the power supply and positioning information to the sight current generator, from the antenna, are also routed through the distribution box. In addition, the distribution box provides four switches which are used to position the antenna during maintenance and stow operations.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First Article Sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

6.5 Subject term (Key word) listing.

Distribution box
Radar Set, AN/VPS-2

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A717)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.