INCH-POUND

MIL-B-48433A (AR)
30 April 1990
SUPERSEDING
MIL-B-48433 (MU)
24 February 1977

MILITARY SPECIFICATION

BOARD ASSEMBLY, GENERATOR: 10548611

This specification is approved for use within the U. S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the Generator Board Assembly, hereinafter referred to as the generator board, a part of the Digital Generator, 10548613. The digital generator has two applications: a subassembly of Range Computer CP-888/VPS-2, part of Radar Set AN/VPS-2 and a subassembly of MX-8048/TPM-22, a part of Radar Test Set AN/TPM-22 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-22T10:26Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Military Specifications and Standards Bldg. 4D 700 Robbins Avenue Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.4)

U. S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10548611 - Board Assembly
10548613 - Generator, Digital
10548614 - Schematic, Master Clock

PACKAGING DATA SHEET

PS10548611 - Packaging of Board Assembly

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10548611, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the generator board assembly shall meet the requirements of MIL-F-13926 as follows.

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The generator board assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The generator board assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The generator board assembly shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.3.3.2 Non-operating. The generator board assembly shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The generator board assembly shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between the constant temperature extremes of -40 deg. F and +155 deg. F.

3.3.4.2 Non-operating (storage). The generator board assembly shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg. F for a period of 24 hours and +160 deg. F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The generator board assembly shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the generator board.

3.5 Performance. When supplied with the inputs specified in Table I, the generator board shall yield the output specified in Table I.

TABLE I. Input and output characteristics.

REQUIREMENT	CHARACTERISTIC	TERMINALS
Input voltage	+5.0 ± 0.5 Vdc; less than 200 mA.	Junction of C1 and R11(+) board ground (return).
Input signal	2.12 ± 0.37 V pk-pk (into 50 ohms) 60 ± .5 MHz.	Junction of R2 and R3 (thru a 16 ohm ±5% resistor).
Output signal	Square wave; amplitude: 1.8V pk-pk minimum, 4.5V pk-pk maximum into a load of 100 ± 5 ohms; frequency, exactly one eighth (1/8) of the input frequency.	Junction of Z2A pin L and Z2B pin K, reference to ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Workmanship. The workmanship requirements of MIL-F-13926 shall apply, except for soldering.

3.8 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task)F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5 and all applicable drawings. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 °F to +90 °F
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg

4.3 First article inspection.

4.3.1 First article submission. The requirement for first article and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract and the applicable drawing. The sample for the first article tests shall consist of three board assemblies manufactured in the same manner, using the same materials, equipment, processes and procedure as in regular production. All parts and materials, including packaging and packing shall be obtained from the same source of supply as used in regular production.

4.3.1.1 Government testing. When the Government is responsible for conducting first article tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and the applicable drawings. The contractor shall submit a record of this inspection with the sample including certified test report (CTR) or certificate of conformance (COC) for the materials.

4.3.1.2 Contractor testing. When the Contractor is responsible for conducting first article tests, the sample shall be inspected by the contractor for all the requirements of the contract, all of the examinations and tests specified in Table II (Functional Test) and Table III (Special Sampling) herein and to all requirements of the applicable drawings. The sample and a record of this inspection, including CTR/COC, shall be submitted for the Government approval. The Government reserves the right to witness the Contractor's inspection.

4.3.2 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon failure of any assembly, component or test specimen to comply with any of the stated requirements.

Source: https://assist.dla.mil Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and the same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examination and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies, and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

TABLE II. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

4.5 Special sampling. One generator board assembly out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table II and shall then meet the requirements and tests of Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

TABLE IV. Test equipment list.

ITEM NUMBER		DESCRIPTION
1.	RF signal generator	Frequency: 60 ± 0.5 MHz. Output: 2.12 V pk-pk (into 50 ohms).
2.	Oscilloscope, dual channel (with X10 probe) shunted by 15 pF.	Bandwidth: DC to 85 MHz. Deflection factor: 10 mV to 5 V/ division. Time base: 20 ns to 5 s/division. Input resistance: 1 megohm Rise time: Better than 10 ns.
3.	Power supply	Output voltage: 0-5 Vdc. Output current: 300 mA. Ripple voltage: Less than 10 mV rms.
4.	Frequency counter	Range: 0-100 MHz. Gate time: 1 us to 10 s. Accuracy: ±1 count ± time base accuracy.
5.	Digital voltmeter	Range: 0-10 Vdc. Accuracy: ±0.1%.
6.	Termination	50 ohms with a VSWR ≤ 1.15:1.
7.	R1	Resistor, 16 ohm ±5%, 1/8 watt.
8.	R2	Resistor, 100 ohm ±5%, 1/8 watt.
9.	C1	Capacitor, 10 uF ± 10%, 15 Vdc.

Note: Wire, cable, adapters, as required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I, only steps 4 through 8 of paragraph II-2.1 apply. The generator board shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the generator board assembly shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 Hertz.

After the application of all the shock impulses, the generator board shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500.2 of MIL-STD-810. The operational checkout shall be as specified in 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507.2 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. Connect the generator board as shown in Figure 1.

4.7.3.1 Input voltage. Adjust the power supply (item 3, Table IV) for +5.0 ± 0.1 Vdc at the input terminal of the generator board using the DVM (item 5, Table IV) (refer to Figure 1).

4.7.3.2 Input signal. Adjust the rf signal generator (item 1, Table IV) for: 60.00 MHz with an output level of 2.12 V peak-to-peak into 50 ohms (item 6, Table IV); using a 16-ohm (item 7, Table IV) resistor in series, connect the rf signal generator to the input terminal of the generator board (refer to Figure 1).


4.7.3.3 Output signal. Synchronize the oscilloscope (item 2, Table IV) to display the input 60 MHz signal on channel 1. With the output loaded with 100 ohms, verify that the frequency displayed on channel 2 is exactly one eighth (eight periods to one) of the input frequency on channel 1. Verify that the output is a square wave with an amplitude of 1.8 to 4.5 V peak-to-peak.

4.7.3.4 Input voltage variation. Vary the input voltage from +4.5 ± 0.1 Vdc to +5.5 ± 0.1 Vdc while observing the output. Verify that the output meets the requirements of 4.7.3.3.

4.7.3.5 Input signal frequency variation. Vary the input frequency from 59.90 to 60.10 MHz while observing the output. Verify that the output meets the requirements of 4.7.3.3. With the input frequency set to 60 MHz, reduce the 60 MHz input level to 1.75 ± 0.05 V peak-to-peak. Verify that the output meets the requirements of 4.7.3.3.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

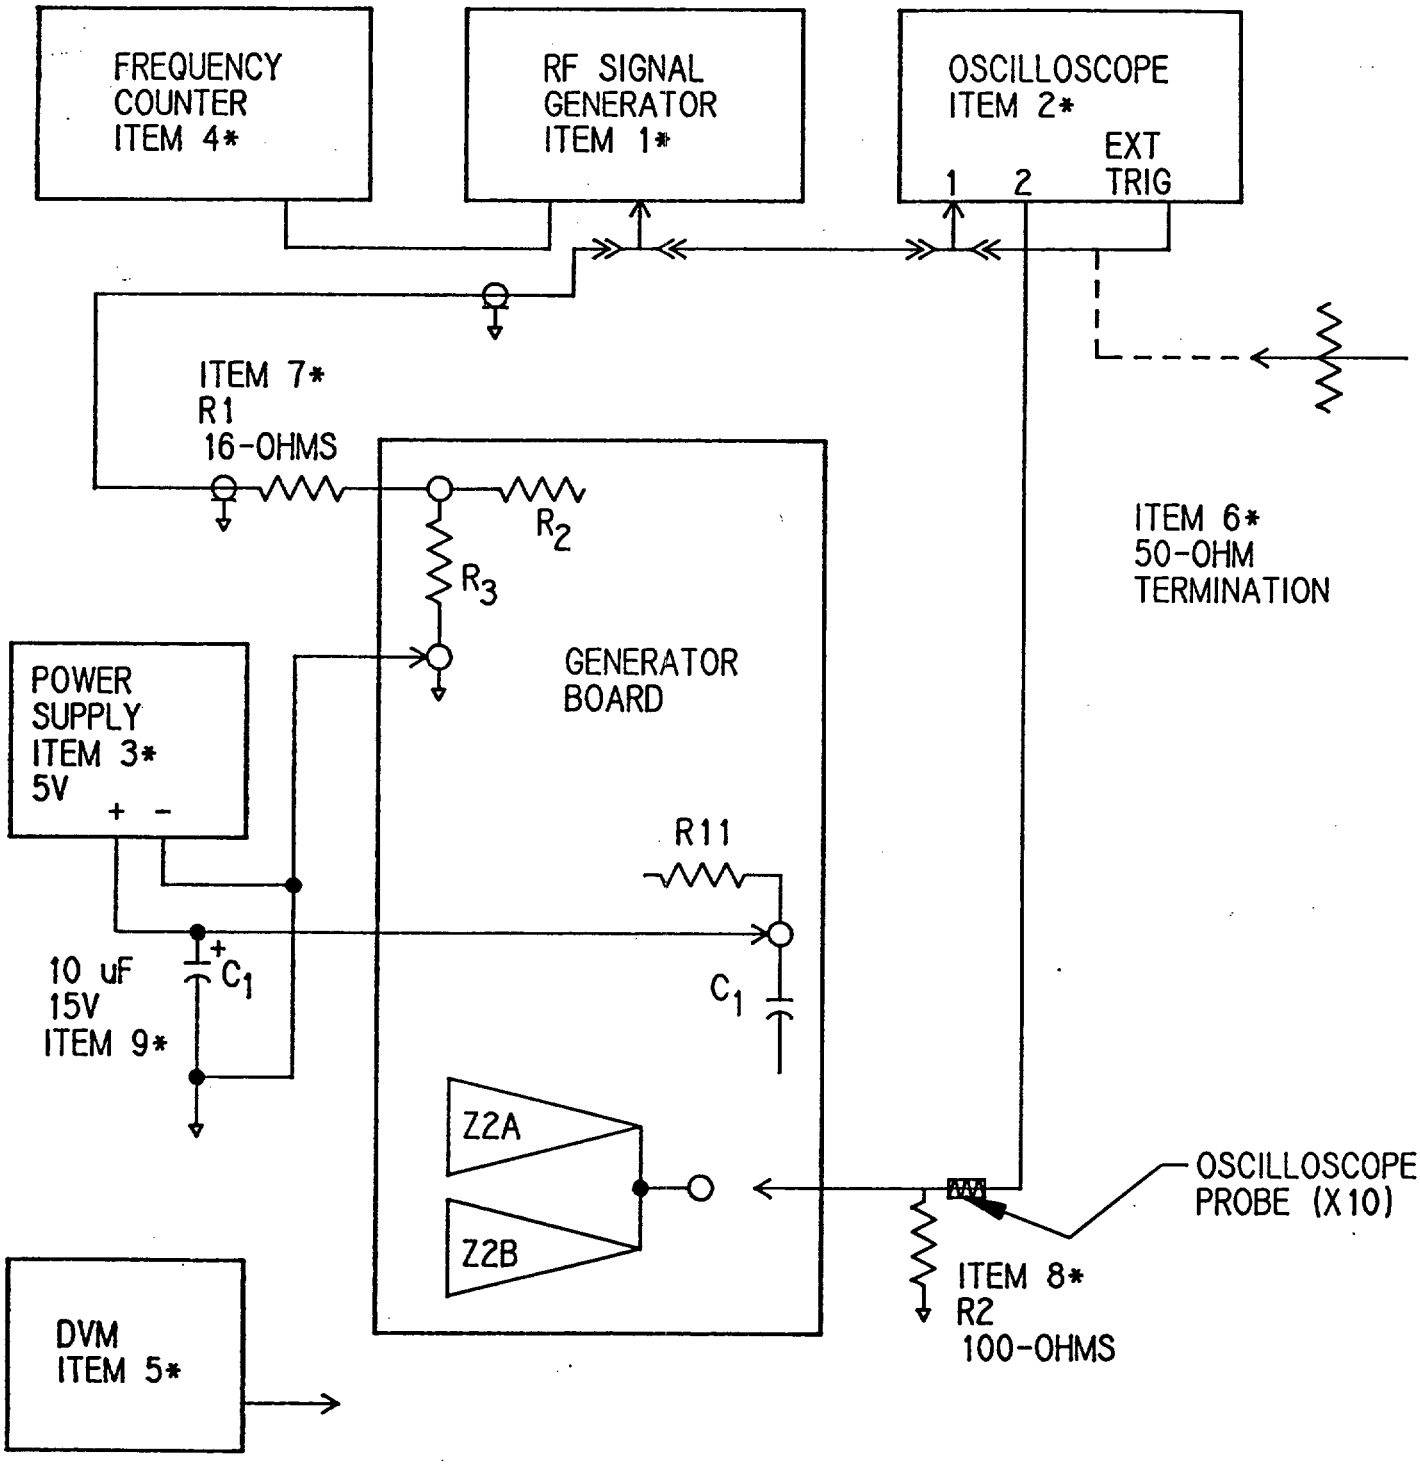

*Refer to 4.6.2.3

FIGURE 1. Test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Packaging Data Sheet PS10548611. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The generator board is used in the Digital Generator, 10548613. The digital generator is used in the Radar Set, AN/VPS-2 to count down the 59.936 MHz intermediate frequency (i-f) from the STALO (stabilized local oscillator) to approximately 7.5 MHz. The 7.5 MHz output is used in the Computer, CP-888/VPS-2 to initiate timing signals necessary for computation of the range and range rate analog information outputs.

The digital generator is used in radar test set, subassembly MX-8048/TPM-22 to produce similar VPS-2 radar signal and test signals for testing of a Receiver, R-1475/VPS-2.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First article sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot of shipment or product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

6.5 Subject term (Key word) listing.

Digital generator
Fire control system
Generator board
Radar Set AN/VPS-2
Radar Test Set AN/TPM-22
Range Computer CP-888/VPS-2
Vulcan Air Defense Systerm (VADS)

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-B-48433A (AR)	30 April 1990

3. DOCUMENT TITLE

BOARD ASSEMBLY, GENERATOR: 10548611

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US Army ARDEC Standardization & Specification Office	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S/Bldg 6 Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.