MILITARY SPECIFICATION

RING ASSEMBLY, ELECTRICAL CONTACT 7665497

1. SCOPE

1.1 Scope. - This specification covers an Electrical Contact Ring Assembly which is a component of Wiring Set MIOAIEl, a part of Local Control-System M16AlEl, used with Gun, Twin 40 MM, Self-Propelled, M42 .

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Military

MIL-G-3278	Grease, Aircraft and Instrument for Low and High Temperature
MIL -F -13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL -F-14619	Fire Control Parts, Equipment and Tools; Packaging of
MIL-F45133	Fire Control Components and Subassemblies

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

DRAWINGS

Ordnance Corps

F7665497	Ring Assembly, Slip
D7665752	Schematic, Wiring Diagram

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

(Copies specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. - Materials shall be in accordance with drawings, material specifications and general specifications forming a part of this specification.

3. 1.1 Grease. - Grease to be used for bearings shall be in accordance with Specification MIL-G-3278.

3.2 Design and construction. - The slip ring assembly shall be manufactured in accordance with Drawing F7665497 and drawings pertaining thereto. The requirements of this specification are detailed only to the extent considered necessary to obtain the desired mechanical and electrical characteristics, performance and permanence to insure inherent quality and performance capabilities prior to final acceptance by the Government.

3.3 General specifications. - The slip ring assembly shall meet the following requirements of Specifications MIL-F -13926 and MIL-F-451 33.

3.3.1 MIL-F-45133

a. Tolerances
b. Functional or performance r equipments
c. Incomparability of requirements

3.3.2 MIL-F-13926

a. Interchangeability (with exception to "Special Accuracy")
b. Workmanship
c. Cleaning
d. Controls

3.4 Environmental.

3.4.1 Storage temperature. - The slip ring assembly shall show no evidence of physical failure and shall~ meet all performance requirements of this specification at room temperature (60 to 90 degrees fahrenheit) after having been exposed and thermally stabilized at ambient temperatures of plus 160 degrees Fahrenheit (plus 71 degrees centigrade and minus 80 degrees Fahrenheit minus 62 degrees centigrade).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

specified in Section 4, the slip ring assembly shall meet the following requirements.

3.6.1 Power circuits. - The power circuits shall be capable of carrying a current of 150 amperes for a period of not less than one minute, with a maximum drop of 175 millivolts.

3. 6.2 Data circuits: - The data circuits shall be capable of carrying a current of one ampere for a period of not less than one minute, with a maximum drop of 50 millivolts.

3.6.2.1 Cross talk. - In shielded circuits, the cross talk coupling to an adja - cent channel shall be less than minus 40 decibels (db) at a frequency of 400 cps.

3. 6.3 Radio frequency- (R. F.) circuits. - The R. F. circuits shall be capable of carrying continuously a current of one ampere for a period of not less than one minute, with a maximum drop of 150 millivolts.

3. 6.3.1 Voltage standing wave ratio (V.S .W. R.)e - The V. S. W. R. shall not exceed 3:1 at 30 megacycles (me).

3. 6.3.2 Cross talk. - The cross talk coupling to an adjacent channel shall be less than minus 40 db at a frequency of 30 mc.

3. 6.4 Torque. - Torque required to rotate the slip ring assembly shall no: exceed 13 foot pounds (ft. lbs.).

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4. 1.1 Contractor inspection. - Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.2 Contractor quality assurance system. - The contractor shall provide and maintain an effective quality assurance system acceptable to the Government cover - ing the supplies under this contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by the specification and other documents referenced

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

3.4.2 operating temperatures. The slip ring assembly shall meet all the performance requirements of this specification while exposed and thermally stabiliz - ed at ambient temperatures of plus 150 degrees Fahrenheit (plus 65 degrees centi- grade) and minus 40 degrees Fahrenheit (minus 40 degrees centigrade).

3.4.3 Humidity.- The slip ring assembly shall not suffer damage and shall meet all the performance requirements of this specification immediately after ex - posure to ten cycles of the humidity cycle shown on figure 1.

3.4.4 Vibration. - The slip ring assembly shall not be damaged or adversely affected and shall meet all the requirements of this specification after exposure to two vibratory cycles of 15 minute durations over the frequency range of 5 to 500 cycles per second. The slip ring assembly shall also be capable of withstanding a **constant acceleration of 2.5 gravitational units when vibrated for 3 minutes of each of the four most severe resonant frequencies as determined by proper instruments- tion.**

3.4.5 Shock. - The slip ring assembly shall show no evidence of damage and shall meet all the performance requirements of this specification after exposure to an appropriate sinusoidal shock impulse of 20 ± 2 g's for a time duration of 11 ± 1 **milliseconds.**

3.4.6 Watertightness. - The slip ring assembly shall show no evidence of leakage or damage when completely submerged in water with 2 to 3 pounds per square inch (psi) internal air pressure for a period of 3 minutes.

3.5 Electrical. .

3.5.1 Continuity. - All of the circuits of the slip ring assembly shall maintain continuity during 360 degrees of rotation in accordance with Drawing D7665752.

3.5.2 Dielectric strength. - There shall be no puncture of insulations no sparkover, or decrease in dielectric strength when the insulated areas of the slip ring assembly are subjected to an alternating current (at) root mean square (rms) potential of 1000 volts plus twice the rated voltage at a frequency of 60 cycles per second (cps) for *a* period of not more than 30 seconds nor less than 5 seconds.

3.5.3 Insulation resistance. - Unless otherwise specified on applicable Govern- ment specifications and drawings ± all insulation between ungrounded circuits and ground, and between isolated circuits, shall have a minimum resistance of 50 megohms with 500 volts direct current (de) applied.

3.6 Performance. - When set -up in accordance with pretest information,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

in this specification. The contractor will not be restricted to the inspection station, or to the method of inspection listed provided that the substitute procedures will provide, as a minimum, the quality assurance required in the contractual documents. In cases of dispute as to whether certain procedures of the system provide equal assur - ante, the comparable procedure of this specification shall be used. The contractor shall notify the Government of, and obtain approval for S any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced therein.

4. 1.3 Government verification. - All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being proper - ly applied, and Government product inspection to measure quality product offered for acceptance. Deviation from the prescribed or agreed upon procedures, or in- stances of poor practices which might have an affect upon the quality of the contrac - tor. Failure of the contractor to promptly correct deficiencies discovered will be cause for suspension of acceptance until correction has been made, or until conform- ance of product to prescribed criteria has been demonstrated. To avoid interfer - ence with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Lot formation. - Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL -STD -105.

4,2.1 Examination. - The classification of defects in the following tables shall constitute the minimum inspection requirements to be performed prior to ac - ceptance.

4. 2.1.1 All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the cor - r ected action taken, the lot shall be resubmitted for acceptance inspection as outlined in Standard MIL-STD -105.

TABLE I - CLASSIFICATION OF DEFECTS

(Normal Inspection Level L6, and Sampling Plan Table IV-A of Standard MIL -STD -1 05)

(Reduced Inspection Level L4, and Sampling Plan Table IV-A of Standard MIL-STD -105)

(AQL Values are expressed in percent defective)

Major	AQL '4. O	Req. Par.	Q.A Par.	Test Method
1.	Storage temperature	3.4.1	4.3. 1.1	SME
2.	Operating temperature	3.4.2	4.3. 1.2	SME
3.	Humidity	3.4.3	4.3.1.3	SME

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS (Cent 'd)

Major	AQL 4.0	Req. Par.	Q.A. Par.	Test Method
4.	Vibration	3.4.4	4.3. 1.4	SME
5,	Shock	3.4.5	4,3.1.5	DST
6.	Watertightness	3.4.6	4.3.1.6	SME

TABLE II - CLASSIFICATION OF DEFECTS
(Normal Inspection Level II, and Sampling Plan Table IV-A of Standard MIL-STD -1 05)
(Reduced Inspection Level L7, and Sampling Plan Table IV --A of Standard MIL-STD -1 05)
(AQL Values are expressed in percent defective)

Major	AQL 1.0	Req. Par.	Q.A. Par.	Test Method
1.	Continuity	3.5.1	4.3.2.1	SME
2.	Dielectric strength	3.5.2	4,3.2.2	SME
3.	Insulation resistance	3.5.3	4.3.2.3	SME
4.	Power circuits	3.6.1	4.3.3.1	SME
5.	Data circuits	3.6.2	4.3.3.2	SME
6.	Cross talk	3.6.2.1	4,3.3.3	SME
7 s	Radio frequency (R. F.) circuits	3.6.3	4.3.3.4	SME
8 ,	Voltage standing wave ratio (V. S.W. RJ	3.6.3.1	4.3.3.5	SME
9.	Cross talk	3.6.3.2	4.3.3.6	SME
10.	Tcsrque	3.6.4	4.3.3.7	DST

4.3 Test methods and procedures.

4.3.1 Environmental. - The test equipment to be utilized when performing the temperature, humidity, and watertightness tests shall be such that the equipment under test shall not exceed fifty percent of the internal volume of the test chamber, and no portion shall be c1os er than six inches from any surface of the chamber. The equipment being tested shall be installed in the chamber in a manner similar to its normal operating position. When electrical connections are not utilized, the connections normally protected in service shall be adequately covered.

4.3.1.1 Storage temperature. - The slip ring assembly to be tested shall be placed in a medium that shall permit positioning the unit in its normal operating position in the test chamber. The test shall be conducted in accordance with Procedure 11 of Specification MIL-F-l 3926 to the conditions specified in 3. 4.1 to determine conformance with require ments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

4. 3.1.2 Operating temperature. - The test shall be conducted in accordance with Procedure I of Specification MIL-F -13926 to the conditions specified in 3.4.2, Upon completion of the exposures specified, the unit under test shall be inspected as specified herein to determine conformance with the requirements of 3.4.2.

4.3, 1.3 Humidity. - A test chamber, capable of being sealed and with the heat source capable of being arranged in such a manner that the radiant heat will not fall upon the slip ring assembly to be tested. shall be used. Distilled or demineralized water having a PH value between 6.5 and 7.5 at 25° C (77" F') may be used to maintain the desired humidity.

4. 3.1.3.1 The slip ring assembly shall be placed in the test chamber and set up to simulate installed conditions. The humidity of the chamber shall be adjusted to 95 percent ± 5 percent and maintain at that value throughout the cycle, ex - cept where otherwise noted on figure 1. The unit shall be subjected to the condi - titms graphically illustrated on figure 1, and remain under the conditions for the period prescribed thereon. During the transitional period, the rate of change during that period shall be uniform.

4. 3.1.3.2 The illustrated cycle on figure 1 shall be repeated ten times.

4. 3.1.3.3 Upon completion of the test, the unit shall be inspected as specified herein, to determine conformance with the requirements of 3.4.3.

4, 3. 1.4 Vibration. - The slip ring assembly to be tested shall be mounted on a vibrating machine capable of producing a motion at a constant frequency within the frequency range specified in 3.4.4. The testing machine shall be equipped with a medium to assure that mounting is free from resonances over the test frequency range. The medium shall hold the unit under test rigidly in its normal operating position. The measuring instruments of the testing equipment shall be capable of measuring the frequency within ± 2 percent.

4. 3.1.4.1 The unit under test shall be *vibrated* successively along each of its three mutually perpendicular axes that are respectively parallel to the edges of the unit with the acceleration, duration , and frequency conforming to the conditions speci - fied in 3.4.4.

4.3. 1.4.2 Resonant frequencies of the unit under test shall be determined by varying the frequency of applied vibration through the specified frequency range at the vibratory acceleration specified in 3.4,4. In no instance shall the unit under test be vibrated at any resonant mode for periods less or more than specified in 3.4.4.

4. 3.1.4.3 Upon completion of the test, the unit under test shall be inspected as specified herein, to determine conformance -with the requirements of 3.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

4.3.1.5 Shock. - The shock test shall be performed on the slip ring assembly in accordance Procedure II of Specification MIL-F-1 3926, with the exception that the unit under test be exposed to the shock and the time duration specified in 3.4.5. Upon completion of the test, the slip ring shall be inspected as specified herein, to determine conformance with the requirements of 3.4.5.

4.3,1.6 Watertightness. - A slip ring rotor housing cover may be improvised to receive a standard air pressure fitting. The air fitting should be sealed in the improvised rotor housing. The three radio frequency receptacles located oxt the top and bottom of the slip ring assembly shall be covered. A pressurized system shall be utilized using clean, dry air, or nitrogen having a dew point of at least -320 C (-25°F) to pressurize the slip ring assembly to the internal pressure specified in 3.4.6.

4.3.1 .6.1 Submerge the unit to be tested in a suitable container of test liquid. With the unit immersed for the period of time specified in 3.4.6, and by visual examination, any bubbles coming from within any portion of the unit shall be considered as leakage. A small amount of leakage may escape from the receptacle inserts; this leakage may not be considered cause for rejection. Excessive or continued flow of bubbles coming from any portion of the unit shall be rejected for non-conformance of the requirements in 3.4.6.

4.3.2 Electrical. - Unless otherwise specified, tests conducted to determine conformance with the requirements herein will be accomplished utilizing test equip - ment equivalent to the accuracies of the equipment listed in Table III,

TABLE III

Item No.	Des cription	
1.	Motor Generator Set:	O to 30 volts dc. 200 amps.
	Accuracy:	* 2~0 on instruments.
2.	Jhnmeter: Current Range:	O to 30 amps.
	Accuracy:	* 270
3.	Mini -Voltmeter:	0 to 500 millivolts.
	Accuracy:	* 2qo
4.	Audio Signal Generator:	Alternate 115 volts. 400 cycles per second, single phase.
	Current Rating:	20 amps.
5.	Resistor:	600 ohm 25 watt* 5% (two (2) required).
6.	Voltmeter a. c.: Vacuum tube:	O to 1.5 volt full scale. * 5%
		O to 150 volt full scale. * 570
	Jnput Impedance:	0.5 megohms *5% shunted by 30 rnicromicrofarads * 570.

8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

TABLE III (Cent'd)

item No.	Description	
7.	Radio Frequency Signal Generator:	
	Accuracy:	a 570 of indicated frequency. A 10~0 input voltage. A 270 output impedance.
8.	R. F'. Impedance Bridge:	400 kc, 60 mc.
	Accuracy:	5%
9.	Field Strength Meter:	
	Accuracy:	A 10% of indicated field intensity.
10.	93 ohm terminating load Resistor Assembly:	may be made from UG-88 /U connector and two deposited film carbon resistors 1 Yo connected in parallel, Use MIL values 100 ohms and 1330 ohms~ 1 /2 watt rating.
11.	93 ohm terminating Resistor Assemblies:	may be made from two (2) UG-88/U connectors and four (4) deposited film carbon 170 resistors in parallel. Use MIL values of 100 ohms and 1330 ohms 1/2 watt rating.
12.	Ohmmeter:	
	Range Accuracy:	* 3 to 12700
13.	High Pot ential Tester:	0-1500 volts ac. (rms) 60 cycles, accuracy less than 5%.
14.	Insulation Resistance Tester:	
	Accuracy:	3% equivalent.
15.	Torque Wrench Accuracy:	within 5%, of actual applied torque.

4. 3.2.1 Continuity. - A continuity check of the slip ring assembly shall be made utilizing an ohmmeter, item 12. With the ohmmeter selector knob set to the low resistance test position, connect one test lead to base housing receptacle socket pin. Connect the other test lead to corresponding rotating housing signal receptacle socket pin. Rotate the slip ring assembly through 360 degrees of rotation, Continuity shall be maintained throughout this test. Repeat this test on all circuits of the signal, data, power, and radio frequency slip rings.

4. 3.2.2 Dielectric strength. - The dielectric strength test shall be performed utilizing a high potential tester, item 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

4. 3.2.2.1 All circuits, excepting the one under test, shall be at ground potential.. Signal receptacle socket "N" and data receptacle socket l'U1'.are already at ground potential shield and are not subject to this test. With the dielectric strength test lead of the tester connected to the one ungrounded conductor, the ground test lead shall be connected to the frame of the slip ring under test. Rotate the voltage control bob to "OFF" position. Operate the tester power switch to "ON" position. Operate the control knob to the potential specified in 3.5.2 by observing the output meter needle. This potential shall be applied to the circuit under test for the period of time specified in 3.5.2 to determine conformance with the requirements specified therein. Repeat this test or all circuits of the signal, data, power, and rad~o frequency slip rings.

4. 3.2.3 Insulation resistance. -Immediately after satisfactorily withstanding the dielectric strength test the insulation resistance test shall be performed on the slip ring under test utilizing na insulation resistance capable of measuring 50 megohms at 500 volts dc.

4. 3.2.3.1 With all circuits, except the one under test a: ground potential, connect the positive test lead of the tester. item 14 to the one ungrounded conductor in the slip ring under test and connect the negative test lead of the tester to the slip ring frame. After a calibration check of tester is made, and with the test potential specified in 3.5.3 applied actuate the push button. switch and read the resistance in megohms. Any reading in excess of the minimum requirement specified in 3.503 constitutes satisfactory performance. Repeat this test on all circuits of the signals data, power, and radio frequency slip rings.

4. 3,3 Performance.

4. 3.3.1 Power circuits. - Connect the output leads of a motor generator set item 1, to the input receptacle pin and output receptacle socket of the slip ring assembly to be tested. With an ammeter, item 2 , connected between motor generator and input receptacle pins start motor genenerator and adjust field control to provide the current flow specified in 3.6.1. Observe reading on a multi-range voltmeter , item 3, when connected between input receptacle pin *and* output receptacle socket. The maximum reading shall not exceed the value specified in 3.6.1. This test shall be for a period of not less than one minute.

4.3.3.2 Data circuits. - With the same test equipment, and connected to the slip ring as in 4.3.3.1, start motor generator and adjust field control to provide the current flow specified in 3.6.2. Observe reading on the voltmeter connected between input receptacle pin and output receptacle socket. The maximum reading shall not exceed the value specified in 3.6.2. This test shall be for a period of not less than one minute. Repeat this test for all data circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

4.3. 3.3 Cross talk. - Input connections shall be made from an audio signal generator, item 4, through shielded leads to the slip ring assembly to be tested. Terminating resistors, item 5, must be connected to opposite ends of adjacent cir - cuits to be tested. Connect a voltmeter, item 6, to adjacent channel circuit of the slip ring assembly. Adjust input voltage, 115 volts ± 5%. Read cross talk voltage on the voltmeter, item 6. The reading shall not be more than 1.15 volts which cor - responds to -40 decibel level.

4. 3.3.4 Radio frequency (R. F.) circuits. - With the same test equipment and connected to the slip ring as in 4. 3.3. 1 ,start motor generator and adjust field con- trol to provide the current flow specified in 3, 6,3Observe reading on voltmeter, item 3, when connected between input receptacle pin and output receptacle socket. The maximum reading shall not exceed the value specified in 3.6.3. This test shall be for a period of not less than one minute. Repeat this test for all R. F. circuits.

4.3.3.5 Voltage standing wave ratio (V. S. w. R.). - InpuT connecttions shall be made from an R. F. si gnal generator, item 7, capable of producing a 30 mega - cycle signal of 1.0 volt minimum into an impedance of 93 ohms to an R. F. imped - ante bridge, item 8) capable of. providing an impedance of 93 ohms at a frequer.cy of 30 mc. The control of the bridge shall be set to zero. Connect a 93 ohm cable between the R. F. impedance bridge and unit under test which is terminated with a 93 ohm shunt resistor. Connect a voltmeter, item 6, to the GND and NULL jacks of the R. F. impedance bridge. Adjust the R. F. signal generator, item 7, to obtain O. 5 volts at the NULL jack. (This is the first NULL reading). Measure the volt - age at the SIG ADJ jack of the R. F. impedance bridge with the voltmeter item 6. Make a note of this reading. Set the control on the R. F. impedance bridge to 93 ohms impedance. Connect the R. F. *circuit to* be measured in the slip ring assembly to the LOAD connector on the R. F. impedance bridge . Terminate the oPPosite end of this circuit with a 93 ohm terminating resistor, item 10. Adjust the R. F. signal generator to obtain the voltage measured at the SIG ADJ jack as noted in 4.2.6.4. Read the voltage at the NULL jack. (This is the second NULL reading).

4.3. 3.5.1 Determine the ratio of this second NULL reading relative tn the fir st NULL reading obtained. With a NULL reading of not more than 0.25 volts, this provides a voltage standing wave ratio of 3:1 as determined from chart figure-2. by ratio less than 3:1 constitutes satisfactory performance.

Corr e spending circuits between base housing and rotating housing:

P-461O	-	P-4615
P-4611	-	P-461 7
P-4612	-	P-4616

4.3.3.6 Cross talk. - Input connections shall be made from an R. F. signal generator, item 7, to the slip ring assemby. Feed R. F. signal into connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

P-461 6 of slip ring assembly under test. Terminate this circuit at opposite end of slip ring assembly connector P-4612 with a 93 ohm terminating resistor, item 11. Connect field strength meter to connector P-461 O of the slip ring assembly. Terminate this circuit at opposite end of slip ring assembly connector P-4615 with a 93 ohm terminating resistor, item 11. Set R. F. signal generator to a frequency of 30 megacycles and adjust voltage output to 0.5 volts as indicated on R. F. output meter and decade switches. Read cross talk voltage in adjacent channel circuit. The reading shall not be more than O. 005 volts which corresponds to -40 decibel (db) level

$$N_{db} = 20 \log_{10}\left(\frac{E_1}{E_2}\right)$$

4.3.3.6. J The above test shall be duplicated by applying R. F. voltage to circuits in accordance with the test conditions listed below:

Signal Generator	93 Ohm Terminating Resistor	Field Strength Meter	93 Ohm Terminating Resistor
P-4615	P-461 O	P-461 1	P-4617
P-4617	P-461 1	P-4612	P-4616

4.3.3.7 Torque. - A torque wrench capable of measuring 13 foot pounds, item 15 ,with suitable adapter shall be utilized. Attach adapter to the mounting bolt holes on the base housing of the slip ring assembly under test.

4. 3.3.7.1 Anchor the rotating housing portion of the slip ring assembly so that the axis of the assembly is in a vertical plane.

4. 3.3.7.2 Rotate the slip ring assembly by means of the torque wrench. Read the required force to rotate the slip ring on the torque wrench dial mechanism. Any running torque value of less than the value specified in 3. 6.4 constitutes sabis - factory performance.

5. PREPAIUTION FOR DELIVERY

5.1 Packaging and packing. - Packaging and packing shall be in accordance with the applicable level of protection as specified in Specification MIL-F -14619-P2359.

6. NOTES

6.1 Intended use. - The purpose of the slip ring assembly is to transmit elec - trical power and signal data from the moving turret to the hull,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. - Procurement documents should specify the following:

a, Title, number, and date of this specification.
b, Selection of applicable levels of preservation, packaging, and packing.
c. Applicable stock number.

6.3 Definitions.

6.3.1 Device special testing (DST). - Special testing devices are designed to check function of an assembled unit.

6.3.2 Standard measuring equipment (SME), - Standard measuring equipment (SME) includes the common hand type measuring devices which are usually stocked by commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensional inspection of items under procure - ment. This category also includes commercial testing equipment.

6.4 Design information. - Design information regarding specific equipment not covered or referenced by this specfiication may be obtained from the procuring activity upon the specific request of the contractor.

NOT ICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procure - ment operations the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated furnished, or in any way supplied the said drawings, specifications, or other data. is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any invention that may in any way be related thereto.

Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

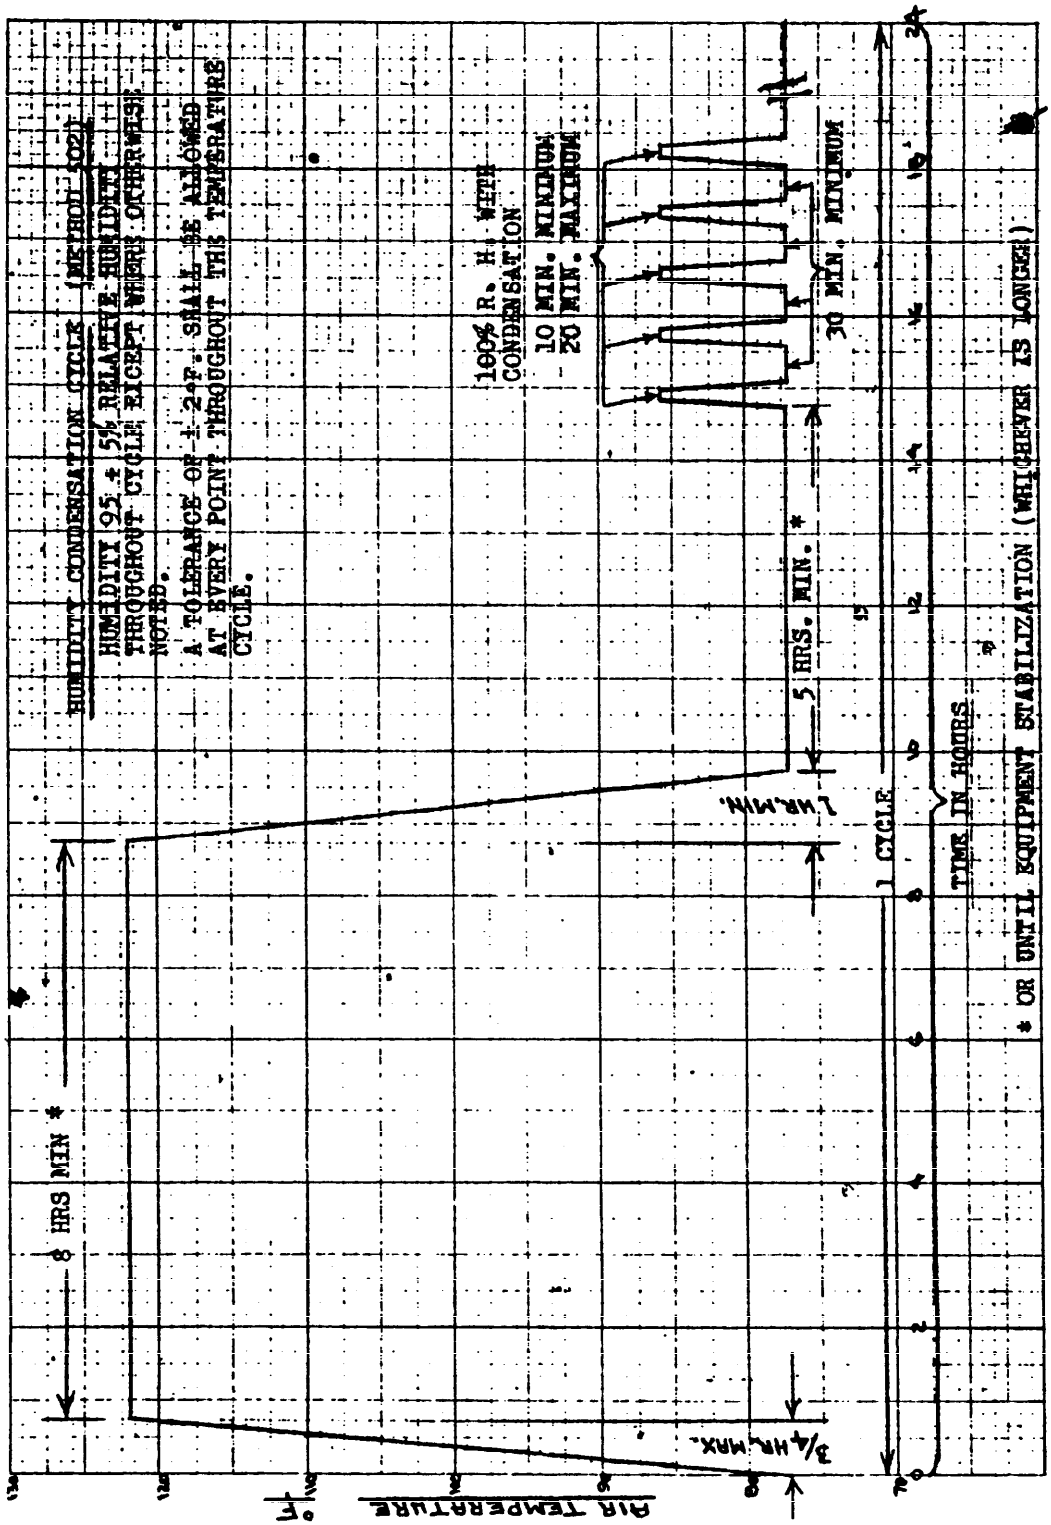


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.

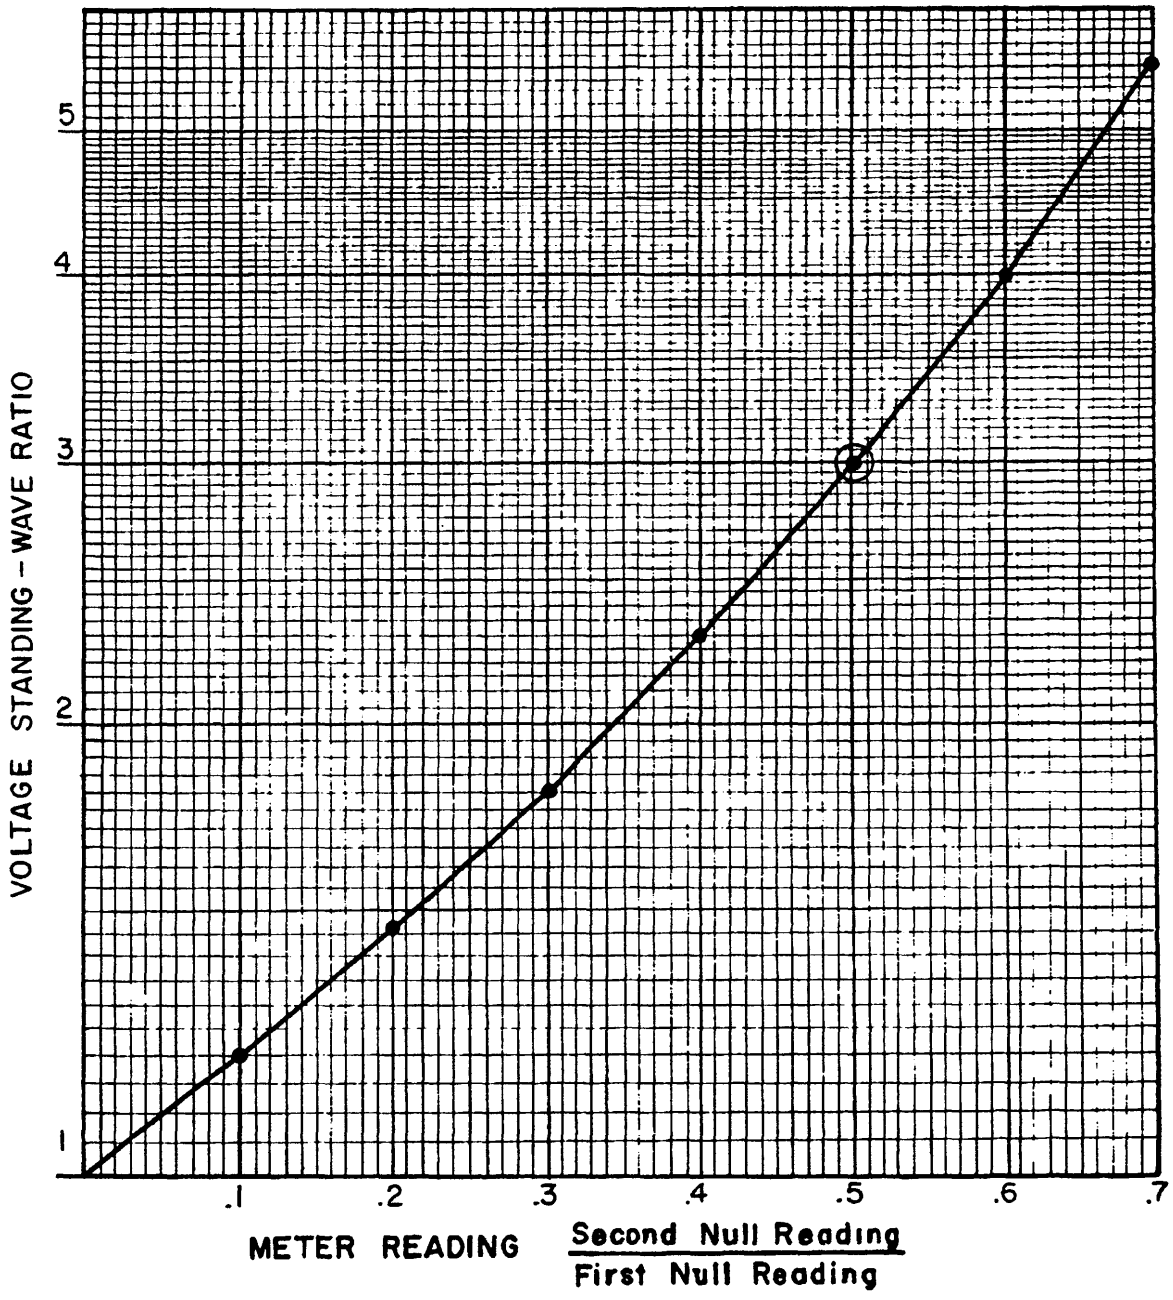


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:36Z
Check the source to verify that this is the current version before use.