MIL-R-49209A(CR)
AMENDMENT-1
29 December 1986

MILITARY SPECIFICATION
RADIO TERMINAL SET
AN/TRC-173

This amendment forms a part of military specification MIL-R-49209A, dated 8 February 1985, and is approved for use within the Communications-Electronics Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

STANDARDS - Add "MIL-STD- 462 Electromagnetic Interference Characteristic, measurement of"

PAGE 13

Table III Group C Inspection, under subgroup I Add "System safety Engineering 3.24 -- 4.20"

PAGE 22

Paragraph 4.7 - Add "with all operational equipment install in their respective rack locations and all cable assemblies connected thereto, perform the following interoperability tests. Note - testing shall be performed with COMSEC equipment or COMSEC equipment simulators installed unless otherwise indicated."

Paragraph 4.7.1 - Delete in its entirety and substitute "Radio/Cable Terminal System, RMC-GM Deployment.

a. Interconnect equipment as shown in Figure 1. Testing shall be performed at a super group rate of 1152 kb/s.

b. Operate all equipment in use according to their respective technical manuals.

c. Verify analog voice orderwire (AVOW) operation.

d. Verify digital voice orderwire (DVOW) operation.

e. Verify data orderwire (DOW) operation.

AMSC N/A FSC 5820

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:56Z
Check the source to verify that this is the current version before use.

f. Group traffic transmission shall meet the requirements of 3.4.

g. Verify display of faults from all equipment by the alarm status indicator.

h. Perform testing of paragraph f with TED bypass switch on.

i. Replace the radio modem and radios with LSCDMs (fig 2) and perform testing of paragraphs c thru g."

PAGE 23

Paragraph 4.7.1.1 - Delete

Paragraph 4.7.2 - Delete in its entirety and substitute "Radio Terminal System, RLGM/CD Deployment.

a. Interconnect equipment as shown in Fig 3. Testing shall be performed at a super group rate of 288 kb/s.

b. Operate all equipment in use according to their respective technical manuals.

c. Verify analog voice orderwire (AVOW) operation.

d. Group traffic transmission shall meet the requirement of 3.4.

e. Verify display of faults from the RLGM/CD by the alarm status indicator."

Paragraph 4.7.2.1 - Delete

PAGE 24

Paragraph 4.7.2.2 - Delete

PAGE 26

Paragraph 4.12 Humidity Test - After the first sentence insert "Hardware items which requires welding shall have their finishes completed before testing".

PAGE 30

Add "4.20 System Safety Engineering - using SEL form 1183, verify that requirments of 3.24 are met."

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:56Z
Check the source to verify that this is the currentversion before use.

PAGE 34

Figure 1 - Delete and substitute attach figure 1.

PAGE 35

Figure 2 - Delete and substitute attach figure 2.

PAGE 36

Figure 3 - Delete and substitute attach figure 3.

PAGE 37

Figure 4 - Deleted

PAGE 38

Figure 5 - Deleted

PAGE 39


Figure 6 - Deleted

CUSTODIAN
ARMY-CR

PREPARING ACTIVITY
ARMY-CR


Project No. 5820-A803

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:56Z
Check the source to verify that this is the current version before use.

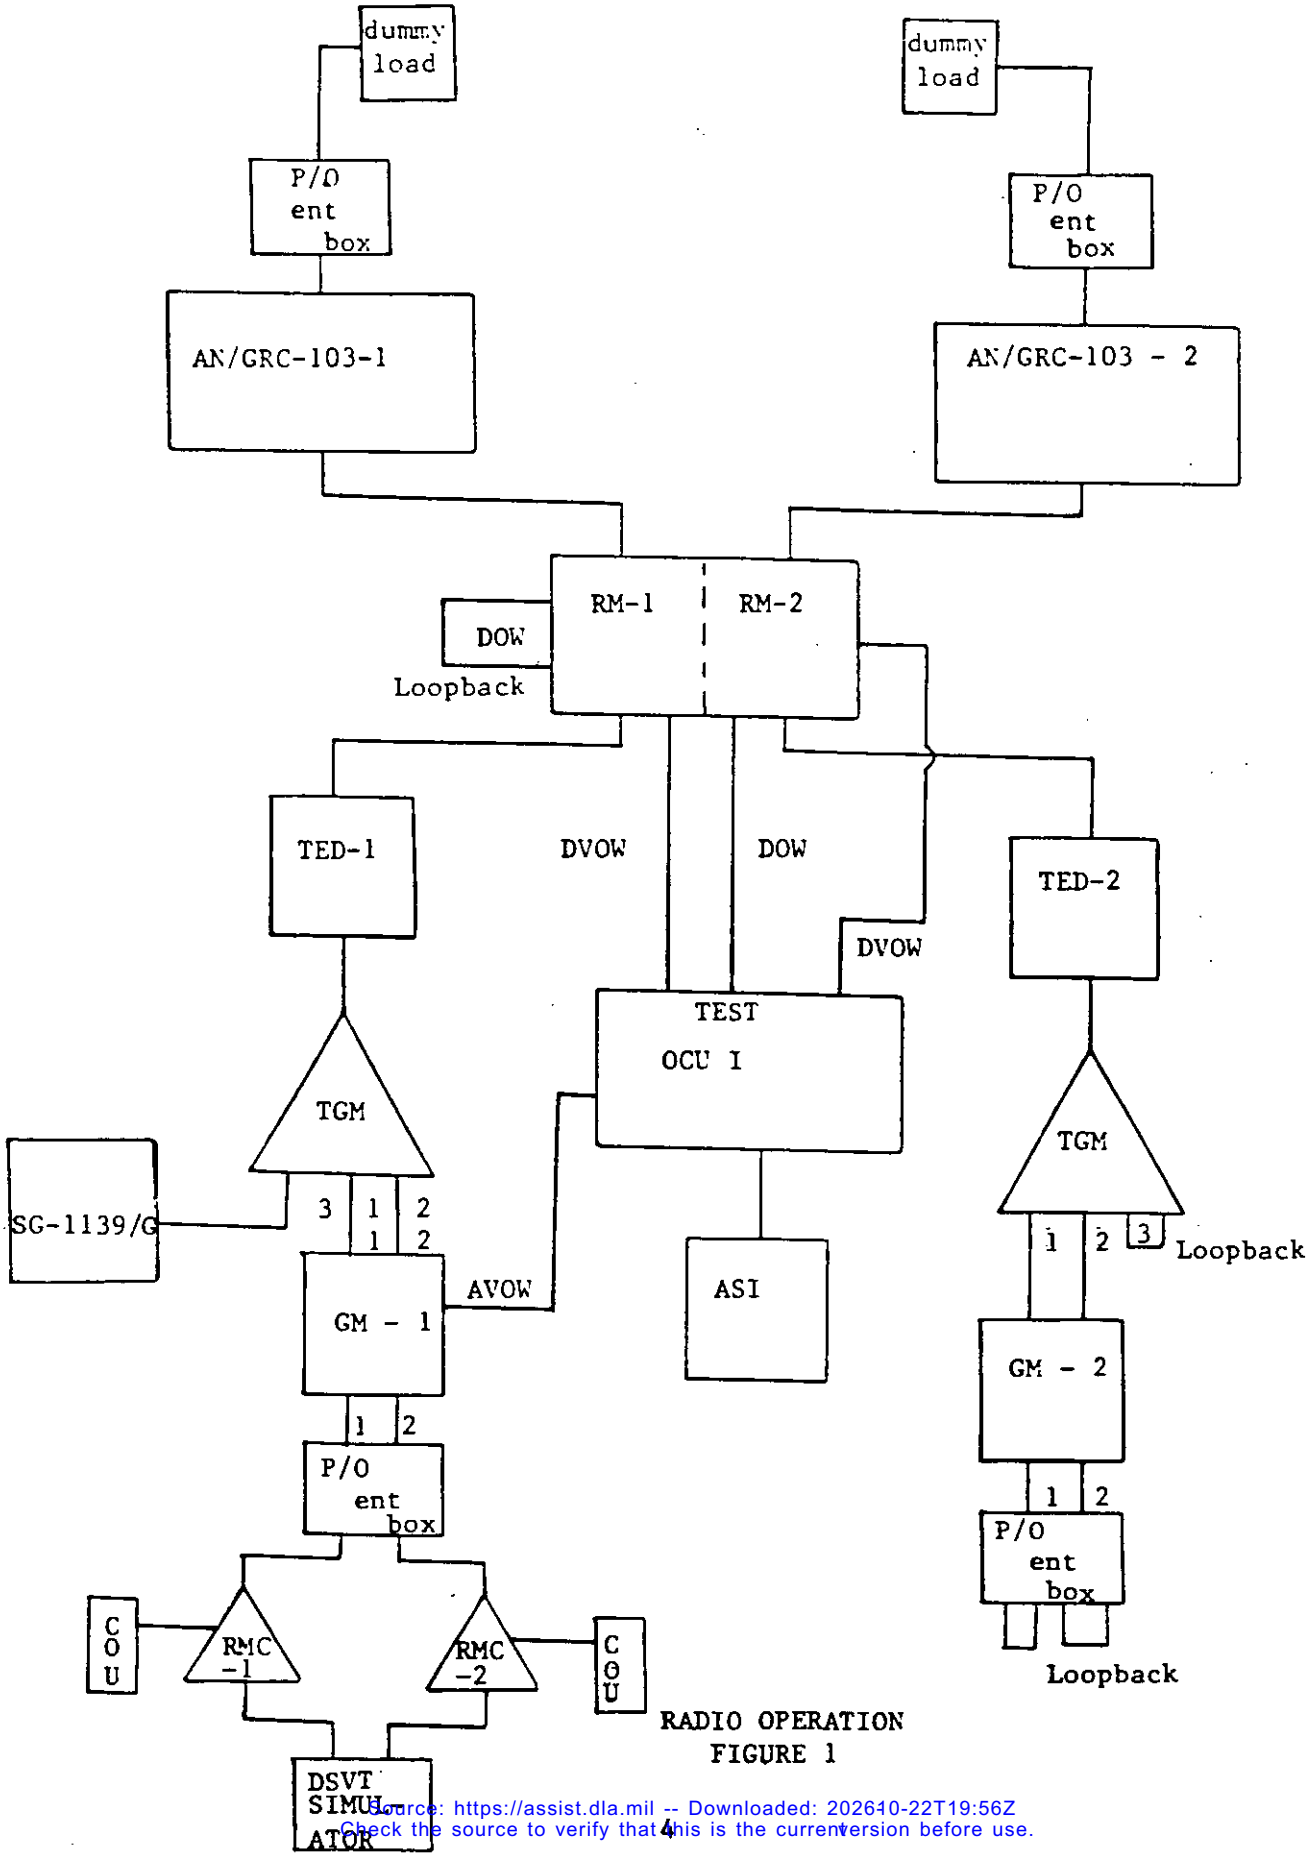


RADIO OPERATION
FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:56Z
Check the source to verify that this is the current version before use.

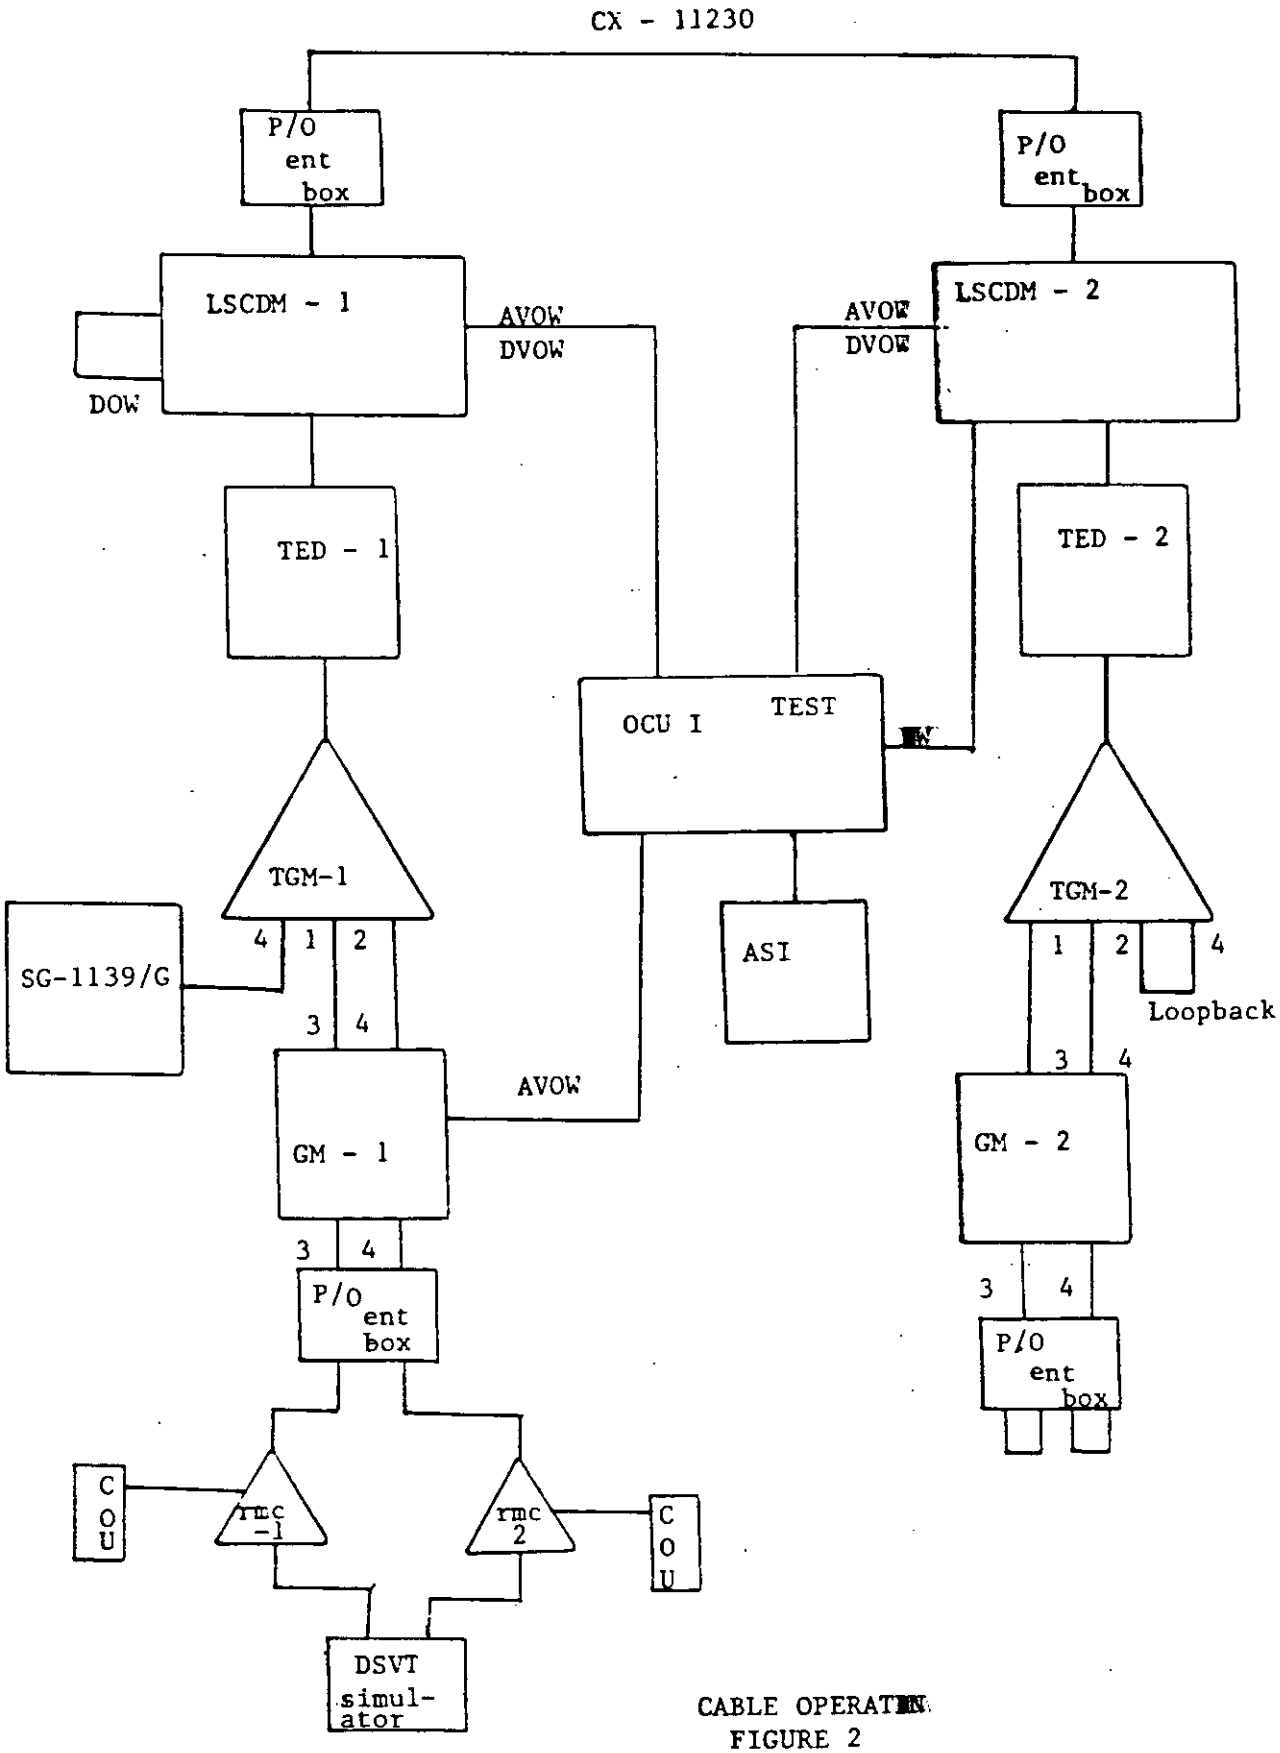

CABLE OPERATION
FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:56Z
Check the source to verify that this is the current version before use.

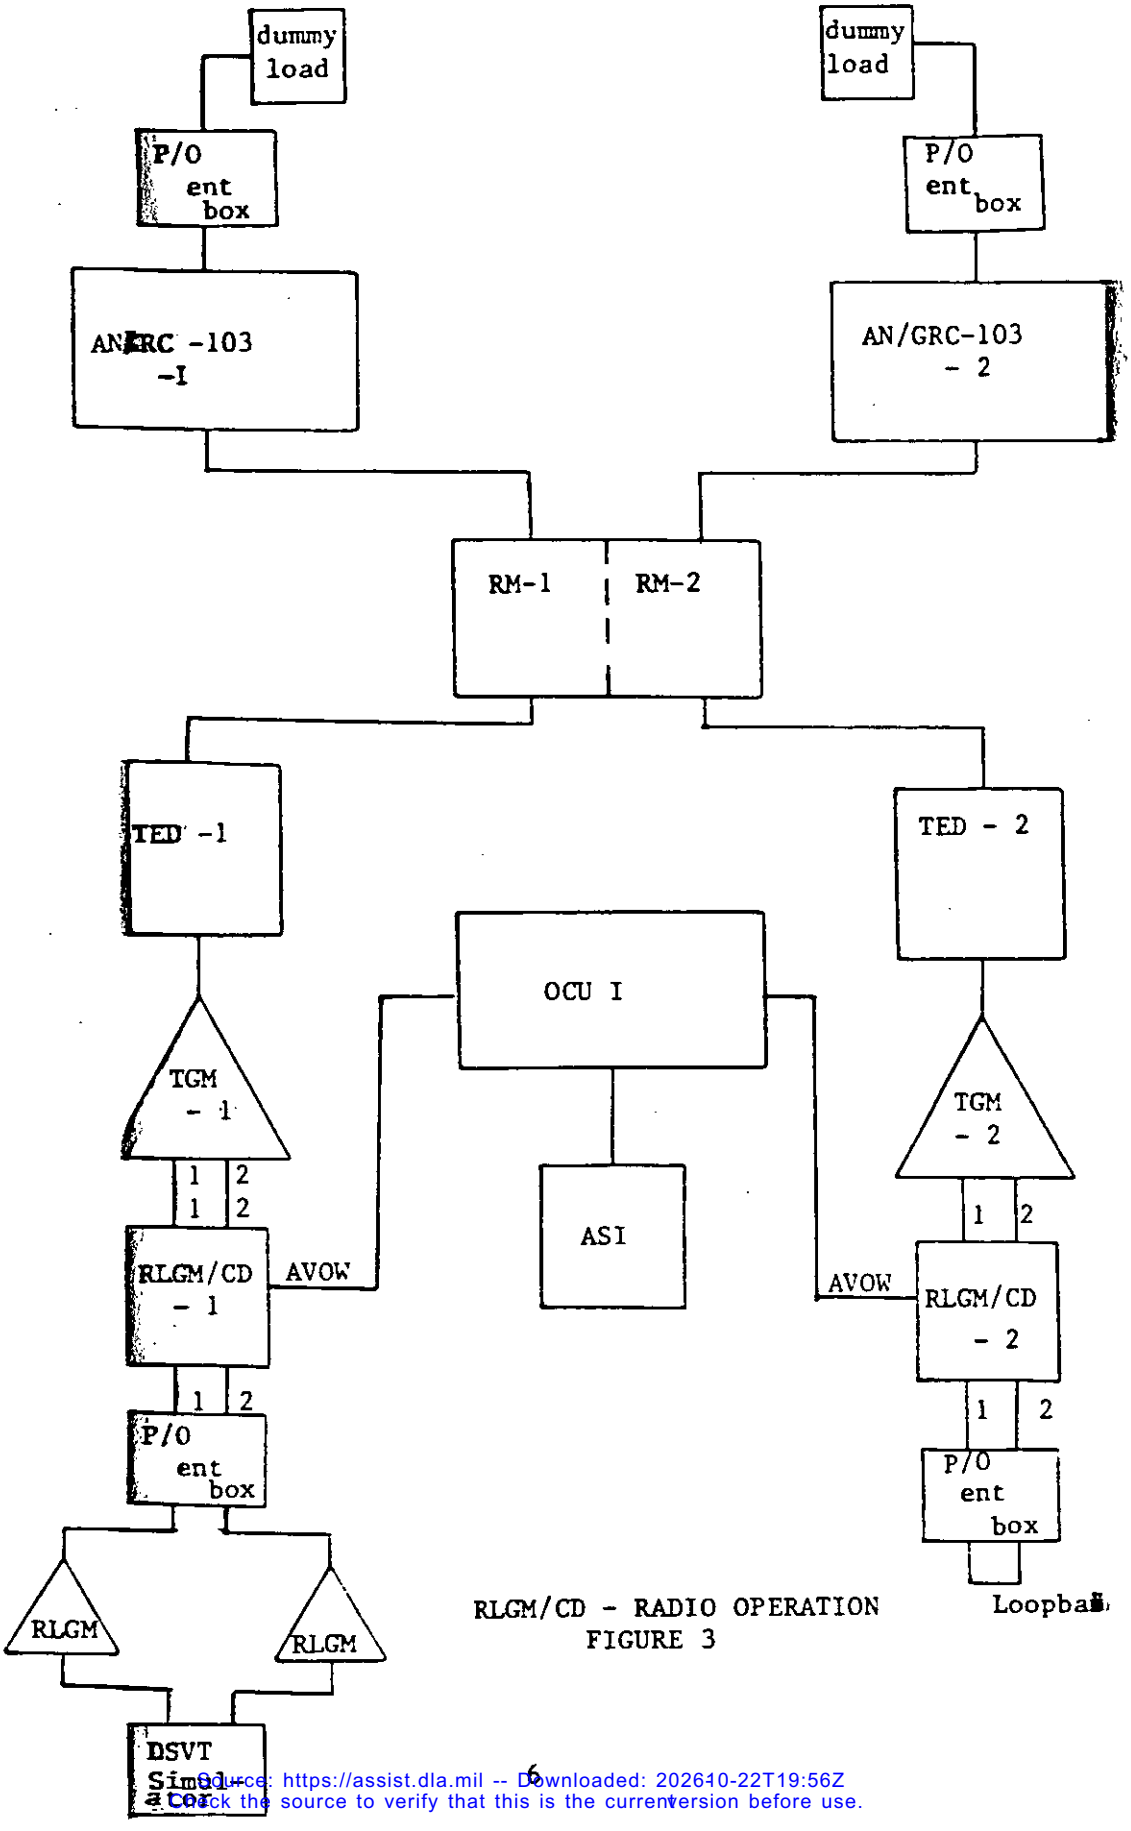

RLGM/CD - RADIO OPERATION
FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:56Z
Check the source to verify that this is the current version before use.