Department of the Navy


PALLETIZING
DOMESTIC UNIT LOAD

SENSING ELEMENT, IMPACT-INERT
(FOR BOMB FUZING SYSTEM MK 1 MOD 0)
(IN WOOD BOX)


UNIT LOAD DATA

NUMBER OF ELEMENTS PER CONTAINER		741
GROSS WEIGHT OF ONE CONTAINER	(Lbs.)	70
NUMBER OF CONTAINERS PER UNIT LOAD		24
NUMBER OF ELEMENTS PER UNIT LOAD		17,784
WEIGHT OF PALLET	(Lbs.)	94
WEIGHT OF UNIT LOAD (ESTIMATED)	(Lbs.)	1786
CUBE	(Cu. Ft.)	48.8

DO NOT STACK MORE THAN 4 UNIT LOADS HIGH IN STORAGE



CONTAINER
DWG 10001-2427356

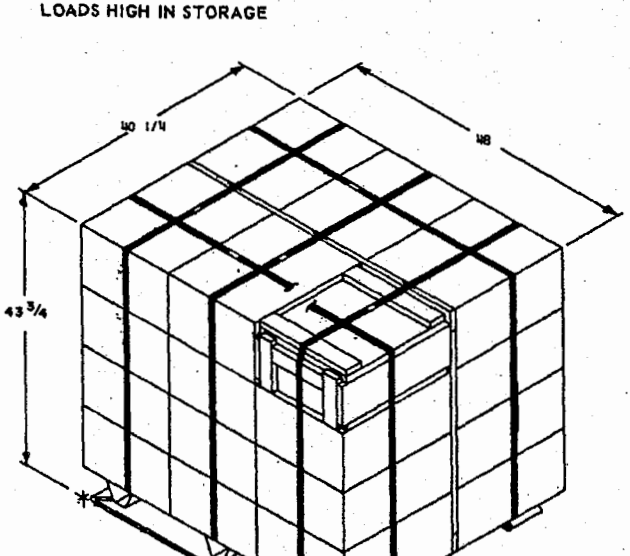

NOTES:
1. FOR GENERAL PALLETIZING REQUIREMENTS SEE MIL-STD-1322(NAVY).
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

MIL-STD NUMBER	ASSOCIATED PROCESS
1320-	TRUCKLOADING
1325-	CARLOADING

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

Document is available at dla.mil. Downloaded: 2026-10-23T23:3
Check the source to verify that this is the current version before

PALLETIZING PROCEDURE

(a) THREAD STRAPPING, PC. 2, BETWEEN DECK WIRES OF PALLET, PC. 1, AS SHOWN IN DETAIL A.

(b) CONSTRUCT SPACER FRAME, PCS. 5 AND 6, AS SHOWN IN DETAIL B.


(c) POSITION CONTAINERS AND SPACER FRAME ON PALLET AS SHOWN.


(d) TENSION STRAPPING, PC. 2, AND DOUBLE CRIMP SEAL, PC. 4.


(e) POSITION STRAPPING, PC. 3, UNDER PALLET DECK WIRES AND AROUND UNIT LOAD, TENSION AND DOUBLE CRIMP SEAL.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

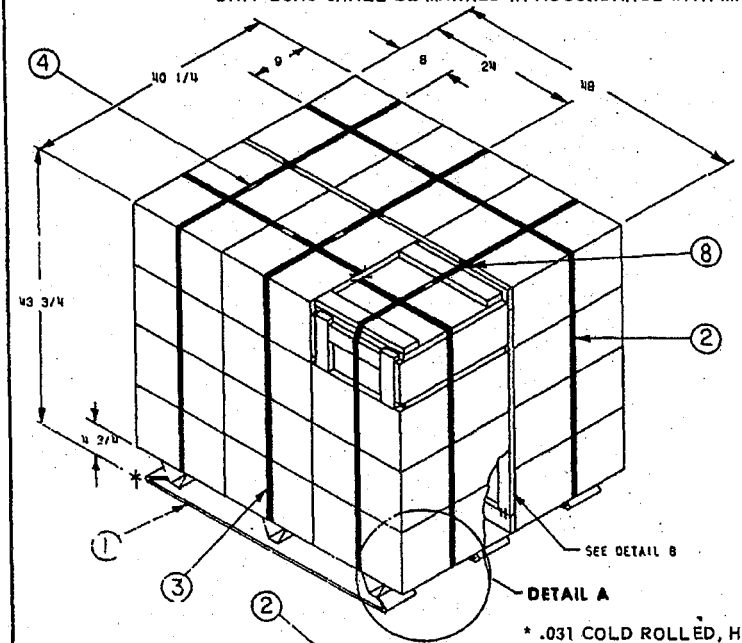

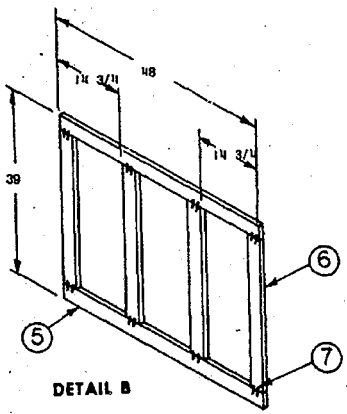


DETAIL A

* .031 COLD ROLLED, HEAT TREATED MAY BE SUBSTITUDED.

3	8	STAPLES	STEEL	COM'L.	3/4
16	7	FASTENERS	STEEL	FF-F-133 TY. II	5/8
4	6	UPRIGHT	WOOD, DRESSED	MM-L-751	1 X 3 X 33-3/4
2	5	CROSS MEMBER	WOOD, DRESSED	MM-L-751	1 X 3 X 48
5	4	SEAL	STEEL, COATED	COM'L.	3/4 X 22 GA. MIN.
3	3	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * 14 FT. 6
2	2	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * 15 FT. 6
1	1	PALLET, MK 3 MOD 0	STEEL	564200	40 X 48
REQ.	ITEM	DESCRIPTION	MATL.	SPEC.	DIMENSIONS

LIST OF MATERIALS

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING, PCS. 2 AND 3.

(b) REMOVE CONTAINERS AND SPACER FRAME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T23:54:12
Check the source to verify that this is the current version before use.