MILITARY SPECIFICATION

COVER, BEDDING, FLAMEPROOF

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and one size flameproof bedding cover.

2. APPLICABLE DOCUMENTS

* 2.1 Issue of documents The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-F-106	- Fasteners, Slide Interlocking
V-T-276	- Thread, Cotton
DDD-L-20	- Label, For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-C-15104	- Cloth, Coated, Fire Resistant, Berth and Bedding Cover

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7210

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Colors
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

NAVY CLOTHING AND TEXTILE RESEARCH UNIT

16-1-432 - Cover, Bedding, Flameproof

(Figure 1 is a miniature reproduction of the referenced drawing and is attached for information purposes only)

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

2.2 Other publications The following documents form a part of this specification to the extent specified herein Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC. AGENT
National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.2).

3.3 Materials.

*3.3.1 Basic material. The basic material for the bedding cover shall be vinyl coated conforming to class 1, of MIL-C-15104, except that the base cloth used for the coating shall be of a woven or knitted cotton material. The finished coating shall be pigmented to approximate color chip Green 24449, of FED-STD-595, except that the finish may be gloss, semi-gloss, or lusterless.

3.3.2 Fasteners, slide. The slide fasteners to be used in the construction of the bedding cover, shall be made of aluminum and conform to type I, style 2, size MHS, of V-F-106 The tape portion of slide fastener shall be water-resistant and mildew-resistant treated, and shall be dyed to approximate the shade of the basic material specified in 3.3.1.

3 3.3 Thread The thread used in the construction of the bedding cover shall be cotton, conforming to type IA3, ticket no. 12, 4-ply, of V-T-276 The thread shall be dyed to approximate the shade of the basic material specified in 3 3.1, and shall be water-resistant and mildew-resistant treated (see 4.3.1)

3 4 Label Each bedding cover shall have an identification label conforming to type III or IV, class 8, of DDD-L-20, except that the inscription shall be as shown below and fastness to printing shall not apply The label inscription shall be positioned on inside bottom half of bedding cover, adjacent to the zippered side and centered

COVER, BEDDING, FLAMEPROOF
CONTRACT NO DLA100-00-0-0000 (Example)
STOCK NO. 7210-00-000-0000 (Example)
NAME OF CONTRACTOR

3.5 Construction The construction assembly of the bedding cover with finished dimensions shall be in accordance with Navy Drawing No 16-1-432

3.5.1 Stitches, seams, and stitching. Stitch, seam, and stitching types shall conform to FED-STD-751. Unless otherwise specified, 301 stitch type shall be used for all stitchings. All thread ends shall be trimmed to 1/4 inch maximum length and all loose threads removed.

3.5.2 Stitches per inch. The stitches per inch shall be not less than 6 nor more than 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

*3.5.3 Thread breaks and ends of seams Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be securely tacked or backstitched not less than 1/4 inch. Thread tension shall be maintained so there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

*3.5.3.1 Repairs of type 301 stitching Repairs of type 301 stitching shall be as follows.

a When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching.

b Thread breaks, two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item), shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched

3.6 Workmanship The finished bedding cover shall conform to the quality established by this specification The occurrence of defects shall not exceed the applicable acceptable quality levels.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and service conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.3 Inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. A certificate of compliance shall be submitted for the water-resistant and mildew-resistant treatment required for the cotton thread (see 3.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

4.3.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The lot size shall be expressed in units of bedding covers. The sample unit shall be one completely fabricated bedding cover.

4.3.2.1 Visual examination.

Defect	Classification Major	Minor
Material Defect(s) or Damage(s)		
a. Hole, cut, tear, needle chew, or exposed drill hole	X	
b. Any weakening defect such as a smash, float, mend, or loose slub.	X	
c. Any evidence of coating delamination.	X	
d. Any pinhole, blister, pick off or uncoated area.	X	
e. Coating soft, i.e., not fully cured.		X
f. Abraded or scuffed, resulting in a weak place or coating removal	X	
g. Any brittle area, i.e., coating cracks when bent.	X	
h. Area of excessive coating, i.e., ridge or lump.		X
Cleanness		
a. Any permanent spot or stain on outside portion of bedding cover.		
- up to 1/2 inch inclusive, in diameter or length		X
- 1/2 inch or more in diameter or length	X	
b Thread ends not trimmed to less than 1/4 inch or loose thread not removed, five or more.		X
Components and assembly		
a. Any component part or operation omitted.	X	
b. Any required operation not as specified.		X
c Any component part not as specified (type, size, color, etc.)	X	
Seams and stitching		
a Accuracy of seaming		
1 Any seam twisted, puckered, or pleated.		X
2. Any part of bedding cover caught in an unrelated operation.	X	
3. Ends of seams or stitching, when not caught in other seams or stitching, tacked or backtacked less than 1/2 inch.		X
4 Thread breaks not secured or stitching back of the break less than 1/2 inch.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Seams and stitching (cont'd)		
b. Open seam		
1. Up to 1/2 inch, inclusive		X
2. More than 1/2 inch.	X	
NOTE The seam shall be classified as open when one or more stitches joining the seam are broken or runoff or when two or more continuous skipped stitches occur.		
c Raw edge		
1 1/4 inch up to and include 1 inch.		X
2 More than 1 inch.	X	
NOTE A raw edge is any edge not finished as specified, including any protruding raw edge on outside of bedding cover		
d Seam and stitch types		
1 Not specified seam or stitch type.	X	
2 Any required line of stitching omitted.	X	
3 Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
e. Stitch tension		
1 Loose tension resulting in a loose seam	X	
2 Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
f Stitches per inch (score only when condition exists on more than 1/2 the length of seam)		
1 One stitch less than the minimum specified		X
2 Two or more stitches less than the minimum specified.	X	
3 More than specified maximum number of stitches per inch, resulting in damage to assembly.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Slide fastener		
a. Omitted, malformed, or damaged.	X	
b. Cut, tear, or hole in slide fastener tape.	X	
c Fastener is not type or style specified.		X
d. Color of tape not approximating the color of the basic material.		X
Label		
a. Missing, incorrect, or illegible.		X
b. Misplaced		X

4 3.2.2 Dimensional examination. The bedding covers shall be examined for dimensional defects in accordance with Navy Drawing No. 16-1-432 Any measurement deviating from the dimension and tolerance specified, shall be scored as a size measurement defect

4.3 2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows

	Inspection level	AQL's Major	Total
For defects applicable to 4 3 2 1	II	2 5	6 5
For defects applicable to 4 3 2 2	S-2	-	2 5

*4.3 3 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking comply with the Section 5 requirements of this specification Defects shall be scored in accordance with the list below The sample unit shall be one shipping container fully packaged, except that it need not be closed. Examination for closure defects listed below, shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not a specified
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadquate stapling, bulging or distortion of containter, open and non-continuous heat sealed seams of polyethylene bag, or incorrectly fabricated bag.
Content	Number of bedding covers per shipping container is more of less than specified 1/

1/ For this defect, one shipping container in the sample shall be examined

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

*5 1.1 Level A. Each bedding cover with the slide fastener closed, shall be neatly folded to measure approximately 19 1/2 inches in length by 13 3/4 inches in width. Each mattress bedding cover shall then be inserted into a snug-fitting, clear polyethylene film bag, of 0.00125 inch thickness (± 25 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film tubing or sheeting. The final closure of the bag shall be heat sealed, with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap in which a heat seal closure and corner hole are not required.

5 1.2 Commercial packaging. Bedding covers shall be preserved-packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirements

5 2 Packing Packing shall be level A, B, or Commercial as specified (see 6.2).

*5.2.1 Level A Six (6) bedding covers, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s, of PPP-B-636 The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat and alternately reversed, six (6) in depth within the shipping container Inside dimensions of the shipping container shall approximate 20 inches in length, 14 1/4 inches in width, and 12 1/4 inches in depth. Approximate dimensions are furnished as a guide only Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.3.3

*5 2.2 Level B Six (6) bedding covers, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to RSC-L, type CF (variety SW) or SF, class domestic, grade 200, of PPP-B-636 The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, minimum grade 200, of PPP-B-636 Level A packages shall be packed flat and alternately reversed, six (6) in depth within the shipping container. Inside dimensions of the shipping container shall approximate 20 inches in length, 14 1/4 inches in width, and 12 1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4 3.3

*5.2.3 Commercial packing. Bedding covers, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the U S Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by contract or order, shipping containers shall be marked in accordance with MIL-STD-129

*5 3.1 Polyethylene bagged packaged Polyethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

COVER, BEDDING, FLAMEPROOF
STOCK NO
QUANTITY·

6. NOTES

6.1 Intended use The cover is intended for encasing the bedding (mattress, blankets, and pillows), used on submarine bunks

6 2 Ordering data. Procurement documents should specify the following

a Title, number, and date of this specification
b First article requirements (see 3 2)
c Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
d When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5 2 2 1)

6 3 Samples For access to samples, address the procuring office issuing the invitation for bids

6 4 Changes from previous issue The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian·
Navy - NU

Preparing activity
Navy - NU

Review activity.
Navy - SH

Project No. 7210-N218

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

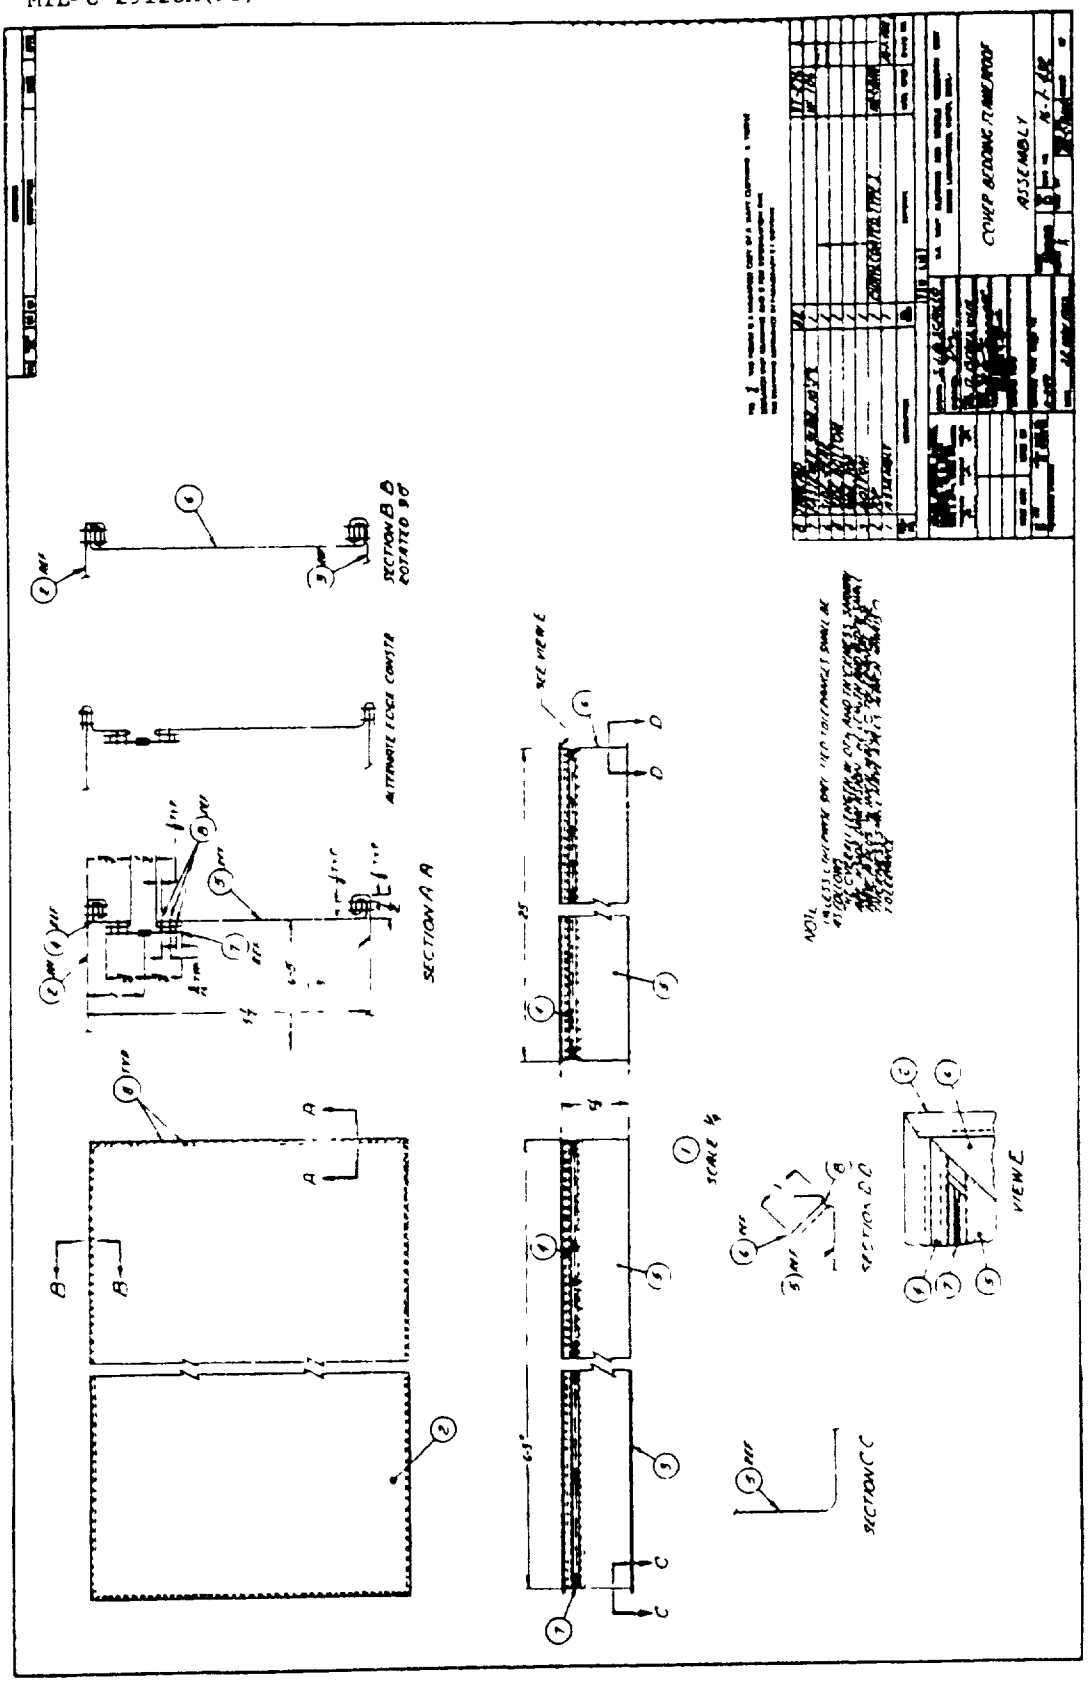

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-29126A(NU) COVER, BEDDING, FLAMEPROOF

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address – Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102 LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:37Z
Check the source to verify that this is the current version before use.