MILITARY SPECIFICATION

CONTROL PANEL: 10526300

1. SCOPE

1.1 This specification covers one type of control panel that controls the internal instructions to the Computer, Gun Direction: M18, for field artillery applications.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel: Packaging of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46357	Computer, Gun Direction: M18; Manufacturing Processes and Inspection of

STANDARDS

Military

MIL-STD-105	Sampling Procedure and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts

DRAWINGS

U.S. Army Munitions Command

F10526300	Control Panel

PACKAGING DATA SHEET

MIL-P-14232/P10526300	Packaging of Control Panel

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and packaging data sheets, required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The following subassemblies of the control panel shall be fabricated in accordance with their respective drawings and shall have met the requirements of their detail specifications previous to installation on the panel.

3.1.1 Tape Reader: 10526192.- The tape reader shall be in accordance with MIL-T-60171.

3.1.2 Manual keyboard: 10526191.- The manual keyboard shall be in accordance with MIL-M-60172.

3.1.3 Input Display Matrix: 10526190.- The input display matrix shall be in accordance with MIL-I-60173.

3.2 Connector assembly, indicator board.- The connector assembly shall, previous to its installation, meet the requirements of the applicable documents.

3.3 General specifications.- The control panel shall meet the following requirements of MIL-F-13926 and MIL-C-46357:

3.3.1 MIL-F-13926

(a) Order of precedence
(b) Dimensions and tolerances
(c) Inorganic protective surface finishes
(d) Workmanship
(e) Soldering electrical connections

3.3.2 MIL-C-46357

(a) Wiring
(b) Threaded fasteners
(c) Marking
(d) Finishes
(e) Handling

3.4 Environmental service conditions.

3.4.1 Vibration.- The control panel shall be subjected to a simple harmonic motion having an amplitude of 0.015 inch (0.030 inch total excursion). The frequency shall be varied uniformly from 10 to 55 cycles per second (cps) and return to 10 cycles. This cycle shall be traversed in 1 minute $\pm$ 15 seconds. The motion shall be applied to the control panel for a period of 10 minutes in each direction of the 3 mutually perpendicular axes (total of 30 minutes), relative to its normal operational position. Subsequent to vibration, the control panel shall not be damaged or adversely affected and shall meet the requirements of 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

3.4.2 Shock.- The control panel shall withstand 3 shock impulses in each of 3 mutually perpendicular directions. The acceleration of the shock impulses shall be 5 gravity units (G's). Pulse duration of each impulse shall be 11 ± 1 milliseconds. Subsequent to shock the item shall not have been damaged or adversely affected and shall meet the requirements of 3.5.

3.4.3 Temperatures.

3.4.3.1 Operating.- The control panel shall meet the requirements of 3.5.2 thru 3.5.8 while exposed to temperatures of -40°F and +135°F.

3.4.3.2 Storage.- The control panel shall meet the requirements of 3.5 at a temperature of between 60°F and 90°F after having been exposed to each temperature of -80°F and +160°F.

3.4.4 Humidity.

3.4.4.1 Operating.- The control panel shall meet the requirements of 3.5.2 thru 3.5.8 while exposed to an atmosphere with a relative humidity (RH) up to 97% at a temperature of 135°F.

3.4.4.2 Non-operating.- The control panel shall meet the requirements of 3.5 after exposure to (and when thoroughly dried) an atmosphere with a RH of 100 percent including condensation, for a period of 4 hours.

3.4.5 Fungus resistance.- The control panel shall show no evidence of damage and shall meet the requirements of 3.5, after being inoculated with the composite spore suspension specified in Specification MIL-F-13926 and incubated at an ambient temperature of between 77°F and 84°F with a RH of 97 ± 2%.

3.5 Performance.- Unless otherwise specified the control panel shall meet the performance requirements of this specification at ambient temperatures of between 60° and 90°F; a barometric pressure of 28 to 32 inches of mercury; and a RH up to 90%.

3.5.1 Wiring.- Wiring and connections shall be in accordance with Drawing F10526224.

3.5.2 Neon indicator lamps.- After final assembly into the control panel, neon indicator lamps shall light when energized by a 143 ± 5 volt, direct current (Vdc), 5 milliamperes (ma) source.

3.5.3 Night-lighting switch and lamps.- After final assembly into the control panel, the lamps shall be controlled by the night-lighting switch.

3.5.4 Elapsed time indicator.- After final assembly into the control panel, a visual indication of operation shall be observed when a 115 volt, alternating current (Vac), voltage is applied.

3.5.5 Indicator assembly display.- After final assembly into the control panel, each element of each indicator assembly shall display a visual indication of performance when energized by a 125 ± 5 Vdc, 10 ma source.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

3.5.6 Input display matrix.- After final assembly into the control panel, the input display matrix shall provide output signals and shall provide visual indications of the selected parameter.

3.5.7 Manual keyboard.- After final assembly into the control panel, the manual keyboard shall provide output signals as various keys are actuated.

3.5.8 Tape reader.- After final assembly into the control panel, the mechanical reader shall provide output signals as each channel is selected.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 Inspection provisions.

4.2.1 Submission of Product.- Unless otherwise specified herein, or by the contracting officer, inspection lot size, lot formation and presentation of logs shall be in accordance with "Submission of Product" as specified in MIL-STD-105.

4.2.2 Examinations and tests.- Except where otherwise specified herein, components and sub-assemblies shall be inspected in accordance with the "Inspection provisions for components and sub-assemblies" and the Sampling Plan Tables contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed in accordance with Tables I, II and III and the test methods and procedures in 4.5. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein.

4.2.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.2.4 Functional tests.- The requirements and tests in Table I shall be inspected on a 100% basis. All examinations and tests shall be conducted at the standard ambient temperature (60° to 90°F).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

TABLE I
(100 percent inspection)

Characteristics	Requirements	Test Procedures
101. Wiring	3.5.1	4.5.2.1
102. Neon indicator lamps	3.5.2	4.5.2.2
103. Night-lighting switch and lamps	3.5.3	4.5.2.3
104. Elapsed time indicator	3.5.4	4.5.2.4
105. Indicator assembly display	3.5.5	4.5.2.5
106. Input display matrix	3.5.6	4.5.2.6
107. Manual keyboard	3.5.7	4.5.2.7
108. Tape reader	3.5.8	4.5.2.8

4.3 Standard sampling.

4.3.1 General.- One panel shall be selected at random by a Government representative as a standard sample from each 100 produced. The sample shall meet the requirements and tests in Table II.

TABLE II

Characteristics	Requirements	Test Procedures
301. Fabrication	3.1	Applicable Dwgs. & Specs
302. Connector assembly, indicator board	3.2	Applicable Dwgs. & Specs
303. General specification	3.3	MIL-F-13926 and MIL-C-46357

4.3.2 Environmental.- Three units shall be selected at random by a Government representative as a standard sample from each 100 produced or from each month's production, whichever occurs first. The samples shall have met the requirements and tests in Table I and shall then meet the requirements and tests in Table III.

TABLE III

Characteristics	Requirements	Test Procedures
303. Vibration	3.4.1	4.5.1.1
304. Shock	3.4.2	4.5.1.2
305. Humidity-Operating	3.4.4.1, 3.5.2 to 3.5.8 incl.	4.5.1.3.2, 4.5.2.2 to 4.5.2.8 incl.
306. Humidity-Non-operating	3.4.4.2	4.5.1.3.1
307. Operating temperature	3.4.3.1, 3.5.2 to 3.5.8 incl.	4.5.1.4, 4.5.2.2 to 4.5.2.8 incl.
308. Storage temperature	3.4.3.2	4.5.1.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

4.3.3 Failure of sample.- Should any one item of a standard sampling fail to meet the specified test requirements, acceptance of the represented inspection lot will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved.

4.4 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply equipment in accordance with the applicable requirements of MIL-I-45607. The Government reserves the right to use the test equipment for its own independent inspections to the extent that such use will not unduly interfere with the contractor's delivery schedule.

4.4.1 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.5 and with the "Component Inspection" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.4.1.1 Test equipment.- In conjunction with 4.4.1, the following test equipment shall be utilized in the performance of the applicable tests as specified in 4.5:

1.	Power supply	Variable +138 to +150 vdc, 50 milliamperes
2.	Power supply	Variable +120 to +130 vdc, 50 milliamperes
3.	Power supply	Variable -120 to -130 vdc, 50 milliamperes
4.	Power supply	0 to -40 vdc range, 3 amperes
5.	Power supply (2)	0 to-20 vdc range, 300 milliamperes
6.	Power supply	0 to +20 vdc range, 50 milliamperes
7.	Power supply	115 ± 5 vac, 400 ± 30 cps
8.	Power supply	6.3 ± 0.5 vac, 0.5 ampere
9.	Voltmeter	Dc, 0-150 volt range, input impedance 1 megohm or greater
10.	Oscilloscope	Sweep rate of 1 micro second per centimeter or greater, input resistance greater than 8 megohms, input capacitance less than 25 pico farads
11.	Tape	Paper, 8 level, code pattern (Figure 2) per EIA "Final proposal of standard one inch perforated tape"
12.	Resistor	47K ohms ± 5%, 1/2 watt
13.	Resistor	27K ohms ± 5%, 1/2 watt
14.	Resistor	20K ohms ± 5%, 1/2 watt

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

4.5 Test methods and procedures.

4.5.1 Environmental.

4.5.1.1 Vibration.- The vibration test shall be made on a device with means provided for measuring and controlling the direction of vibration and adjusting the amplitudes and frequencies to keep them within the specified limits of 3.4.1. The measuring instruments of the testing device shall be capable of measuring the vibration amplitude within plus or minus 5 percent, and capable of measuring the frequency within plus or minus 2 percent. The test shall be performed in accordance with the requirements specified in 3.4.1 with the panel rigidly mounted in its normal operating position. Subsequent to the vibration test, the unit shall show no damage or defect resulting from the test when examined by visual and tactile means. The unit shall then be inspected as specified in 4.5.1.2 prior to determining compliance with requirements specified under 3.5 as specified in 3.4.1.

4.5.1.2 Shock.- This test shall be conducted in accordance with Procedure II of the shock test defined in MIL-F-13926 except that impact shocks shall not exceed 5G's. The panel shall be subsequently inspected for physical damage or defects in compliance with 3.4.2. The unit shall then be inspected as specified in 4.5.1.3 prior to determining compliance with the requirements of 3.5 as required by 3.4.2.

4.5.1.3 Humidity.

4.5.1.3.1 Non-operating.- This test shall be conducted in accordance with the humidity test defined in Procedure I of MIL-F-13926 except that the 4-1/2 hour period shall be reduced to 2 hours, the 6 hour period reduced to 2 hours, and the test period shall not exceed 5.5 hours per cycle. The unit shall then be thoroughly dried and then subjected to the test in 4.5.1.3.2 prior to meeting the specified requirements of 3.5 as required by 3.4.4.2.

4.5.1.3.2 Operating.- This test shall be conducted in accordance with the humidity test defined in Procedure III of MIL-F-13926 except that the humidity shall be maintained at 95 $\pm$ 5 percent for the 24 hour period, and the test shall cease at the end of that period (Method 106 of MIL-STD-202 shall be excluded). Throughout the test the unit shall be operated in accordance with paragraphs 4.5.2.2 through 4.5.2.8 of this specification, and shall meet the specified requirements of 3.4.4.1.

4.5.1.4 Temperature (Operating and storage).- After being subjected to all environmental tests specified above, the panel shall be subjected to Test Procedure I specified in MIL-F-13926, except the temperatures specified in 3.4.3 shall apply. While at the operating temperatures of 3.4.3.1, the unit shall be tested in accordance with 4.5.2.2 and 4.5.2.8 inclusive to determine compliance with the requirements of 3.5.2 to 3.5.5 as specified in 3.4.3.1. The temperature shall then be returned to standard temperature (60° to 90°F) and the unit shall be tested in accordance with 4.5.2 to 4.5.2.8 inclusive to determine compliance with 3.4.3.2.

4.5.1.5 Fungus.- One of the first 5 panels produced shall be submitted for testing in accordance with the fungus test defined in MIL-F-13926. After approval, subsequent acceptance for fungus requirements may be by certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

4.5.2 Performance.- The control panel shall be tested as specified herein for compliance with 3.5.

4.5.2.1 Wiring.- To determine compliance with 3.5.1, each wire and each connection in the Control Panel main frame shall be subjected to a continuity test prior to insertion of the mechanical reader, keyboard, input display matrix, lamps and indicator assemblies. Continuity test for all switches shall be performed in both the depressed and normal positions. Discontinuity shall be tested by a complete visual examination, or by use of a device which positively measures discontinuity between terminals. Continuity and discontinuity between all terminals shall be corrected as required prior to insertion of sub-assemblies. (reference schematic 10526224, and wiring diagram 10526225).

4.5.2.2 Neon indicator lamps.- All neon indicator lamps shall be subjected to the following test to determine compliance with 3.5.2:

(a) Apply +143 ± 5 vdc to connector P01 pin 1.
(b) Connect each neon output listed in Table IV to a 27K ohm ± 5 percent 1/2 watt resistor.
(c) Apply circuit ground to each neon output through its load resistor. As each neon output is grounded it shall light, and all other neons shall not light.
(d) Neon lamps when lighted shall not noticably flicker.

4.5.2.3 Night lighting switch and lamps.- The night lighting switch and lamps shall be subjected to the following test to determine compliance with 3.5.3:

(a) Connect a source of 6.3 ± 0.5 vac capable of supplying 0.5 amperes, to pins 13 and 15 of connector P01, other side of supply to connector P01-14.
(b) Place the night light switch in the "off" position, the lamps shall not be lighted.
(c) Place the night light switch in the "on" position, the lamps shall be lighted.

4.5.2.4 Elapsed time indicator.- The elapsed time indicator shall be subjected to the following conditions to determine compliance with 3.5.4.

(a) Connect a source of 115 ± 5 vac at 400 ± 30 cps between pins 35 and 36 of P01.
(b) Visually observe that a small dot located in the lower centered area of the elapsed time indicator dial is rotating.

4.5.2.5 Indicator assembly display.- The indicator assembly display shall be subjected to the following conditions to determine compliance with 3.5.5:

(a) Pins 2, 3, 4, 5, and 6 of connector P05 shall have a 20K ohm ± 5 percent 1/2 watt resistor connected to a +125 ± 5 vdc source.
(b) Each indicator assembly in turn, shall have +125 ± 5 vdc applied to the connection specified in Tables V and VI, Column 1.
(c) A display shall appear from one or more indicator assemblies as specified in Tables V and VI, Column 2 each time -125 vdc is applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

(d) A visual test shall be made of each display and compared with Tables V and VI. Determine that each element selected shall not noticably flicker and the entire element shall be illuminated.

4.5.2.6 Input display matrix.- Measure switch signals from the input display matrix in accordance with the following procedure to determine compliance with 3.5.6:

(a) Apply +15 ± 1 vdc to connector P05-42, other side of supply to connector P05-01.
(b) Apply -10 ± 1 vdc to connector P05-41.
(c) Selection of a parameter by the actuation of a push button on the input display matrix, shall result in a visual indication by illuminating the matrix window of the selected parameter. Simultaneously measure 10 ± 1 volt from the indicated pins of P05 to the positive terminal of the supply as specified in Table VII.
(d) Depress each pushbutton listed in the right hand column of the input display matrix and measure 10 ± 1 volt from the indicated pin of P02 to the positive terminal of the supply as specified in Table VIII.

4.5.2.7 Manual keyboard.- Measure switch signals from the keyboard in accordance with the following procedure to determine compliance with 3.5.7:

(a) Apply -31 ± 7 vdc 1.2 ampere supply to connector P02-12, other side of supply to connector P02-33.
(b) Apply -10 ± 1.0 vdc to connector P02-10, other side of supply to connector P02-33.
(c) Apply -18 ± 1.8 vdc to connector P02-4, other side of supply to connector P02-33.
(d) Connect a 47 .K ± 5% 1/2 watt resistor to each of the following pins 14, 15, 18, 19, 20, 21, 22, 23, 24, 25, 26, 28, 31 and 32 on connector P02. Return other side of above resistors to P02-33.
(e) Connect a jumper wire from P02-30 to P02-33.
(f) After the "SM" or "Recall" key is actuated and held in the activated position, a -10 ± 3.0 vdc level shall be measured across the resistor load at the pin of P02 indicated in Table IX.
(g) The remaining keys listed in Table IX when individually actuated will generate a electrical pulse across the corresponding resistor loads. This electrical pulse will have the characteristics as shown in Figure 1.
(h) With the keys not actuated, a -10 ± 3.0 vdc level shall be measured across the resistor loads at pins 15, 28 and 32 of P02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

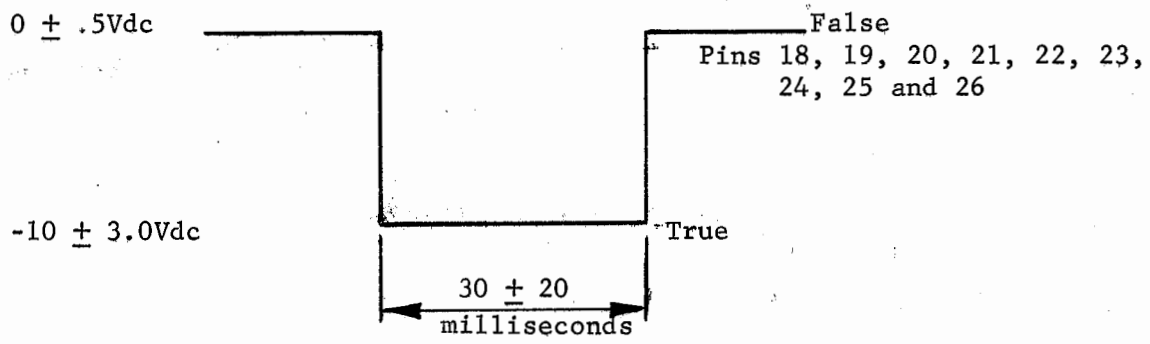


FIGURE 1

True = Indicates a closed circuit condition at the corresponding pin numbers when a key is actuated.

False = Indicates a open circuit condition at the corresponding pin numbers when a key is not actuated.

4.5.2.8 Tape reader.- Measure switch signals from the mechanical reader in accordance with the following procedure to determine compliance with 3.5.8.

(a) Apply -10 ± 1 vdc to connector P02-11.
(b) Insert an eight level tape into the mechanical reader with a code pattern as shown in Figure 2.
(c) Apply -31 ± 7 vdc 2.3 ampere supply to connector P02-13, other side of supply to connector P02-29. Mechanical reader solenoid shall energize.
(d) Measure 10 ± 1 volt to the positive terminal of the supply at the pin of P02 indicated in Table X. Between each measurement momentarily disconnect the 31 ± 7 volt supply.

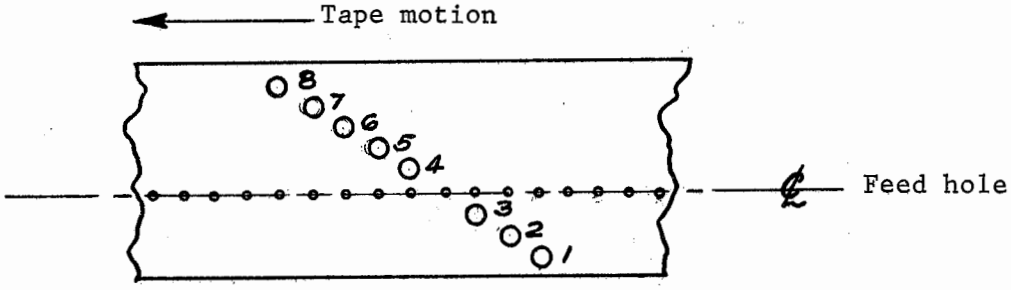


FIGURE 2

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Packaging, packing and marking shall be in accordance with MIL-P-14232 and Packaging Data Sheet MIL-P-14232/P10526300. The level of protection shall be as specified in the procurement document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use.- The function of the control panel is to enter problem data into a protion of the computer memory, initiate computation, and visually display problem solutions. The control panel provides visual indications of computer modes, environmental and computational troubles, and elapsed operating time.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Selection of applicable level of preservation, packaging and packing.
(c) Applicable stock number
(d) Applicable packaging data sheet (see 5.1)
(e) A block of serial numbers to identify each control panel

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A213Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

TABLE IV

Neon Lamp	Output Connection
Compute	P01- 2
In/Out	P01- 3
Keyboard	P01- 4
PWR Ready	P01- 5
Trans	P01- 6
Temp	P01- 7
No. Solution	P01- 8
Parity	P01- 9
Error	P01-10

TABLE V

1 Connector P05 Pin	2 Indicator Assembly Location	3 Element Selected
7	J01	A
8	J01	B
9	J01	C
10	J01	D
11	J01	E
12	J02	-
13	J02	+

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

TABLE VI

1 Connector P06 Pin	2 Indicator Assembly Location				3 Element Selected for each Indicator Assembly
1	J03	J08	J11	J16	
2	J06	J07	J14	J15	
3	J05	J10	J13	J18	
4	J04	J09	J12	J17	
5	J03	J08	J11	J16	0
6	J03	J08	J11	J16	1
7	J03	J08	J11	J16	2
8	J03	J08	J11	J16	3
9	J03	J08	J11	J16	4
10	J03	J08	J11	J16	5
11	J03	J08	J11	J16	6
12	J03	J08	J11	J16	7
13	J03	J08	J11	J16	8
14	J03	J08	J11	J16	9
15	J06	J07	J14	J15	0
16	J06	J07	J14	J15	1
17	J06	J07	J14	J15	2
18	J06	J07	J14	J15	3
19	J06	J07	J14	J15	4
20	J06	J07	J14	J15	5
21	J06	J07	J14	J15	6
22	J06	J07	J14	J15	7
23	J06	J07	J14	J15	8
24	J06	J07	J14	J15	9
25	J05	J10	J13	J18	0
26	J05	J10	J13	J18	1
27	J05	J10	J13	J18	2
28	J05	J10	J13	J18	3
29	J05	J10	J13	J18	4
30	J05	J10	J13	J18	5
31	J05	J10	J13	J18	6
32	J05	J10	J13	J18	7
33	J05	J10	J13	J18	8
34	J05	J10	J13	J18	9
35	J04	J09	J12	J17	0
36	J04	J09	J12	J17	1
37	J04	J09	J12	J17	2
38	J04	J09	J12	J17	3
39	J04	J09	J12	J17	4
40	J04	J09	J12	J17	5
41	J04	J09	J12	J17	6
42	J04	J09	J12	J17	7
43	J04	J09	J12	J17	8
44	J04	J09	J12	J17	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

TABLE VII

Parameter Selected					
Type I Matrix Pushbutton Actuated	Type II Matrix Pushbuttons Actuated		10 ± 1. vdc on Connector P05 Pins		Selected Matrix Window
1	H	1	32	33	1
2	H	2	32	34	2
3	H	3	32	35	3
4	H	4	32	36	4
5	H	5	32	37	5
6	H	6	32	38	6
7	H	7	32	39	7
8	H	8	32	40	8
16	G	8	31	40	16
24	F	8	30	40	24
32	E	8	29	40	32
40	D	8	28	40	40
48	C	8	27	40	48
56	B	8	26	40	56
64	A	8	25	40	64

TABLE VIII

Pushbutton Actuated	10 ± 1. vdc on Connector P05 Pins
1	14
2	(not used)
A	15, 24
B	16, 17
C	19, 18
D	20, 21
E	22, 23

14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.

TABLE IX

Key Actuated	Connector P02 Pins
SM	31
RECALL	14
Enter	20, 24
0	22, 23
3	18, 19
8	21, 25, 26

TABLE X

Channel Selected by Tape	10 ± 1. vdc on Connector P02 Pins
1	18
2	19
3	20
4	21
5	22
6	23
7	24
8	25, 26
(31 ± 7V Removed)	27

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:18Z
Check the source to verify that this is the current version before use.