MIL-B-11886K
13 October 1972
SUPERSEDING
MIL-B-11886J
27 August 1968

MILITARY SPECIFICATION

BOXES, METAL, SHIPPING: REUSABLE, TRANSPORTER,

STEEL, MAXIMUM LOAD 9,000 LBS.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers noncollapsible, reusable, steel shipping boxes of 9,000 pound maximum load capacity.

1.2 Classification. Boxes shall be of the following types as specified:

Type I - 135 cubic feet capacity.
Type II - 295 cubic feet capacity.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

VV-G-671 - Grease, Graphite.

FSC 8115

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:05Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1235	- Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes.

DRAWINGS

ME

TA13215E0407	- Box, Metal, Shipping: Reusable, Transporter, Steel, Type II, Cap. 295 Cu. Ft., Max. Load 9,000 Lbs.
TA13215E0408	- Box, Metal, Shipping: Reusable, Transporter, Steel, Type I, Cap. 135 Cu. Ft., Max. Load 9,000 Lbs.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The box shall be in accordance with **Top Assembly TA13215E0407 or Top Assembly TA13215E0408 as applicable and as specified herein.**

3.1.1 Drawings. The drawings forming a part of this specification **are end product drawings. No deviation from the prescribed dimensions** or tolerances is permissible without prior approval of the contracting officer. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the supplier or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.2 First article (first-produced box). The supplier shall furnish one or more boxes for examination and testing within the time frame specified, to prove prior to starting production that his production methods will produce boxes that comply with the requirements of this specification. Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

3.3 Materials. Material shall be as specified herein and as shown on the applicable drawings. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.4 Water resistance. The box interior shall remain dry when tested as specified in 4.5.2.2.

3.5 Lifting attachments. Each lifting lug shall withstand a minimum pull of 20,000 pounds without rupture or damage to any welds or deformation of any part of the box when tested as specified in 4.5.2.3.

3.6 Lubrication. All moving parts of the locking mechanism and door hinges shall be lubricated with graphite grease conforming to VV-G-671, grade optional.

3.7 Weight. The tare weight stamped on the box nameplate shall be the average weight of the first 30 production units. The tare weight of production boxes shall be within plus or minus 35 pounds of the stamped weight.

3.8 Identification markings. Identification markings shall consist of nameplate and markings as specified on applicable drawings. Serial numbers shall be as specified. Each box shall be identified by only one serial number.

3.9 Type I, 135 cubic feet. Type I box shall conform to Top Assembly TA13215B0408, and shall be as specified herein. Figure 1 is an illustration of a type I box (see 6.4).

3.10 Type II, 295 cubic feet. Type II box shall conform to Top Assembly TA13215B0407, and shall be as specified herein. Figure 2 is an illustration of a type II box (see 6.4).

3.11 Workmanship.

3.11.1 Castings and forgings. All parts, components, and assemblies of the box, which include castings and forgings, shall be clean of harmful extraneous material such as sand, dirt, pits, sprues, scale, and flux. Rework shall be limited to procedures which do not reduce strength or affect function.

3.11.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square

Source: https://assist.dla.mil -- Downloaded: 202640-17T22:05Z
Check the source to verify that this is the current version before use.

and true. Flame cutting, using tips suitable for the thickness of the steel may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Acceptability criteria. Boxes which conform to all requirements in sections 3 and 5 of this specification and pass all applicable examinations and tests in section 4 of this specification will be considered acceptable by the Government.

4.1.2 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) First-produced inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 First-produced inspection.

4.3.1 Examination. The first-produced box shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first-produced box shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be as specified for continuous sampling plan CSP-1, inspection level II, MIL-STD-1235.

4.4.2 Examination.

4.4.2.1 Individual. Each box shall be examined for correct identification by serial number on the nameplate and as specified on the drawings. Presence of an incorrect serial number shall be cause for rejection.

4.4.2.2 Samples. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective for major defects and 10 percent defective for minor defects.

4.4.3 Tests. Each box shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The boxes shall be examined for the following defects:

Major

101. Dimensions not as specified. Each incorrect dimension shall be a defect.
102. Components missing or not as specified. Each missing or incorrect component shall be a defect.
103. Assembly incomplete or not as specified.
104. Material not as specified.
105. Welds not as specified.
106. Doors do not open, close or latch without tools, by one man.
107. Identification markings, other than serial numbers, not as specified.
108. Cleaning, treatment or painting not as specified.

Minor

201. Door hinges and latches not lubricated as specified.
202. Weight of box not within specified limits.
203. Workmanship not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

4.5.2 Tests.

4.5.2.1 Test conditions. The box shall be tested prior to application of primer and finish paint to inner or outer surfaces.

4.5.2.2 Water resistance. With the box level, doors shall be closed and latched. For a period of not less than 2 minutes, water spray shall be directed simultaneously onto the roof and doors through sprinkler or shower heads arranged and located as shown on figure 3 or 4, as applicable. Total flow of water through each head shall not be less than 18 gallons per minute. Sprinkler or shower heads shall distribute water evenly in the shape of a cone. Angle of cone at apex shall be not less than 55 or more than 65 degrees. Immediately after water is shut off, doors of box shall be opened and interior of box examined. The presence of water which has entered the box at any location except below the floor level shall constitute failure of this test.

4.5.2.3 Lift. With the box restrained at the top of the sled adjacent to each corner post, apply a minimum pull of 20,000 pounds to each lifting lug independently. Any evidence of rupture or damage to welds or deformation of any section shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a box prepared for shipment shall constitute a unit of product.

4.6.1.2 Examination. Each box shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

109. Number and location of markings for shipment not as specified.
110. Stencil ink or paint not as specified.
111. Markings missing, illegible, or incorrect.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging and packing. Not applicable.

5.2 Marking for shipment. Markings for shipment shall be in accordance with MIL-STD-129 and as specified and shall be stenciled on address plates using water-resistant white stencil ink or stencil paint. Unless otherwise specified, markings shall be applied to front and rear address plates only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The reusable metal shipping box is intended for transporting high density military and quasi-military cargo when security and pilferage are paramount considerations. The box can be handled by overhead hoist; from front, back, or side by forklift truck; and by skidding or shunting.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type box required (see 1.2).
(c) Time frame required for submission of first-produced box (see 3.2).
(d) Serial number for each box (see 3.8).
(e) Markings required for shipment (see 5.2).
(f) Number and location of markings for shipment if other than as specified in 5.2.

6.3 First-produced box. Any changes or deviations of production boxes from the approved first-produced box during production will be subject to the approval of the contracting officer. Approval of the first-produced box will not relieve the supplier of his obligation to furnish boxes conforming to this specification.

6.4 Information figures. Figures 1 and 2, showing type I and type II boxes, respectively (see 3.9 and 3.10), are included for illustration only and are not intended to preclude the furnishing of boxes which otherwise conform to this specification. Figures 3 and 4 show arrangement and location of sprinkler or shower heads used for the water resistance test for type I and type II boxes, respectively.

Custodians:

Army - ME
Air Force - 69

Review activities:

Air Force - 84

User activities:

Army - AT, AV, SM
Navy - MC
Air Force - 70

Preparing activity:

Army - ME

Project No. 8115-0295

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

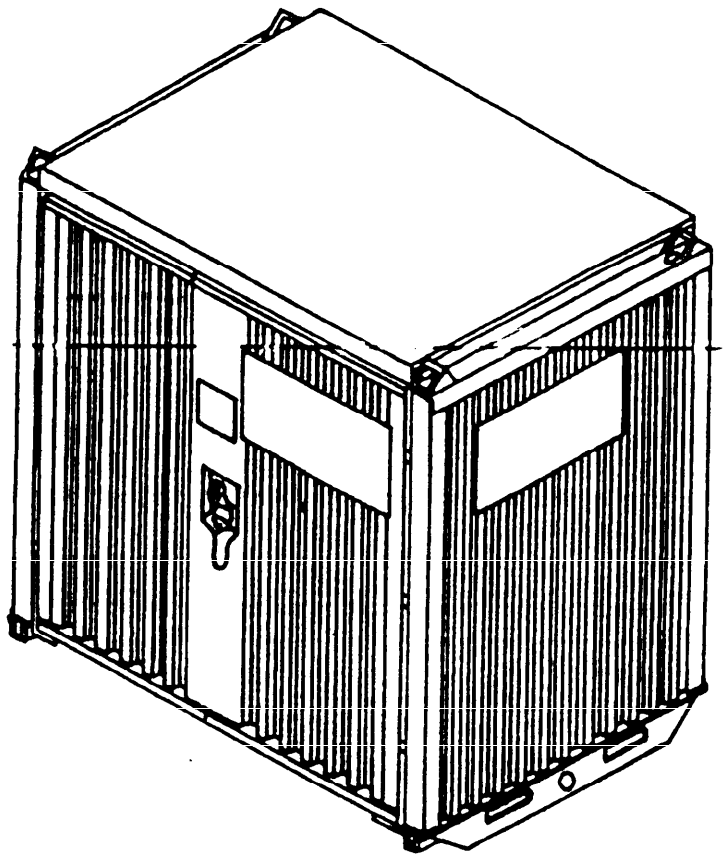


FIGURE 1. ISOMETRIC VIEW OF TYPE I BOX, METAL, SHIPPING: REUSABLE, TRANSPORTER, STEEL, CAP. 135 CU. FT., MAX. LOAD 9,000 LBS.

X-1698

Source: https://assist.dla.mil -- Downloaded: 20261O-17T22:05Z
Check the source to verify that this is the current version before use.

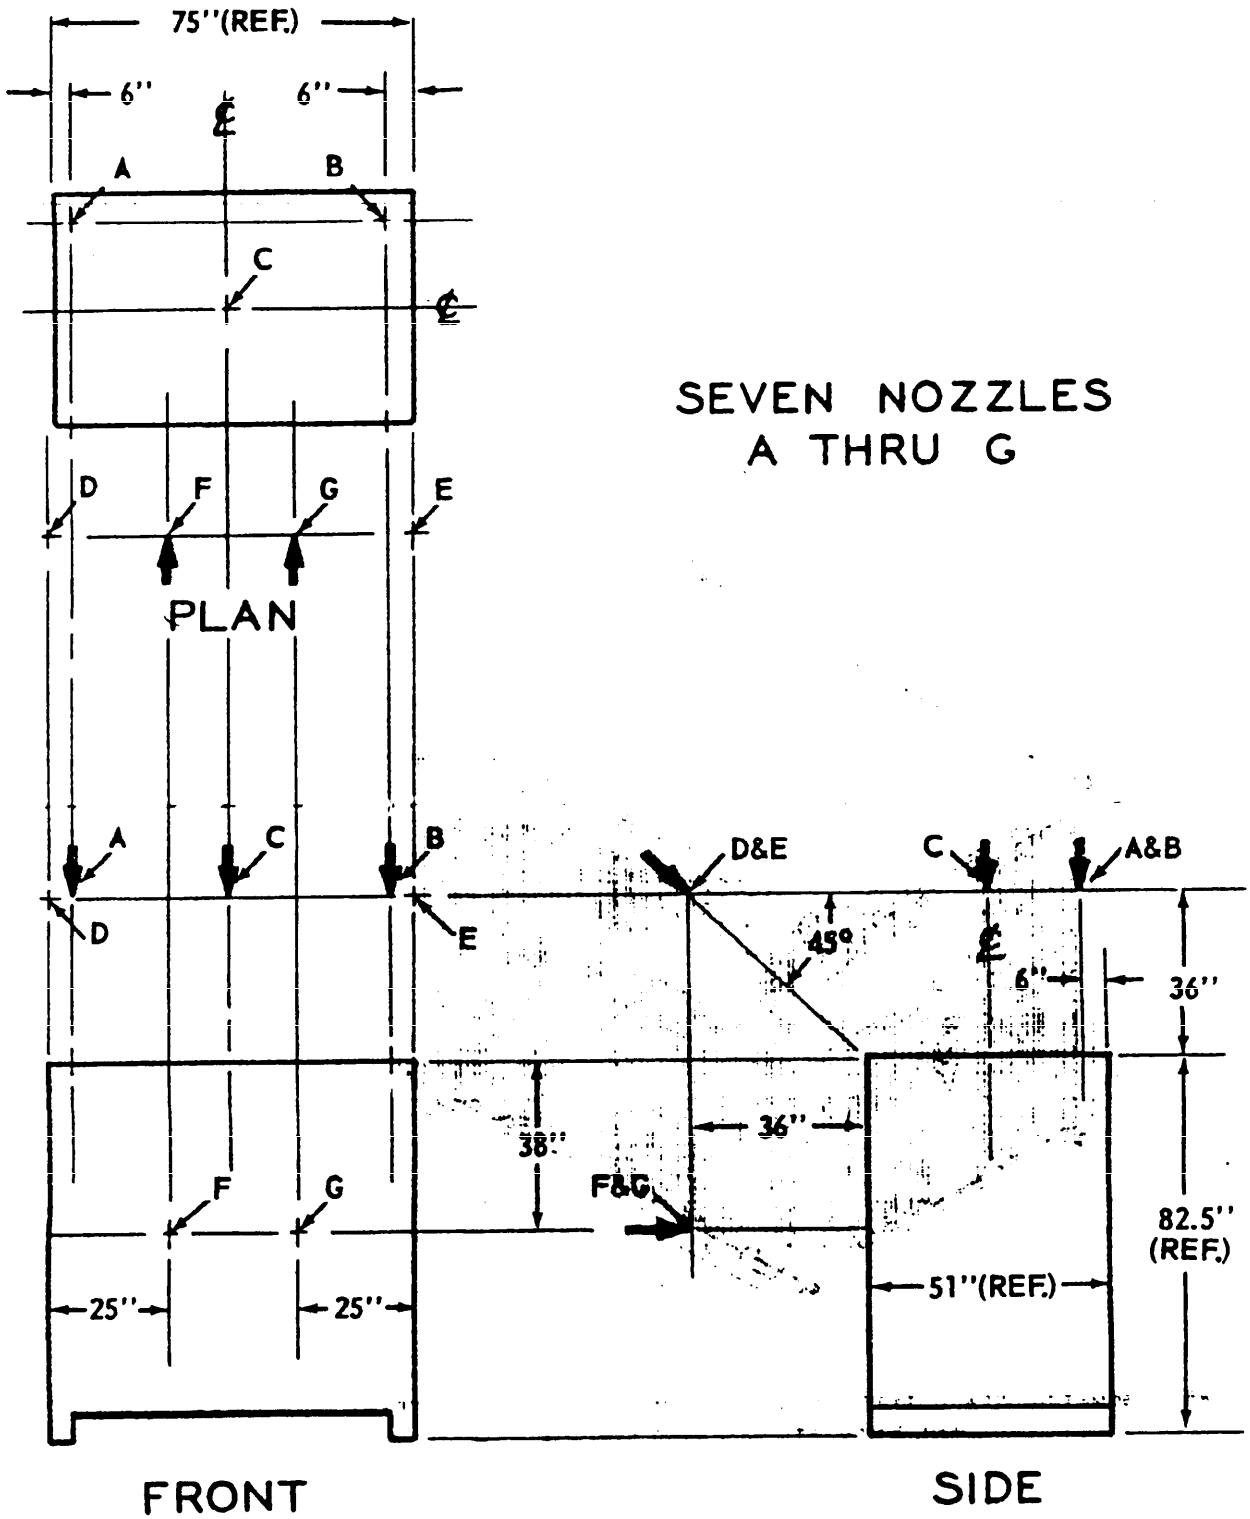


Figure 3. Placement of Nozzles for Water Resistance Test for Type I Box. X-1700

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:05Z
Check the source to verify that this is the current version before use.

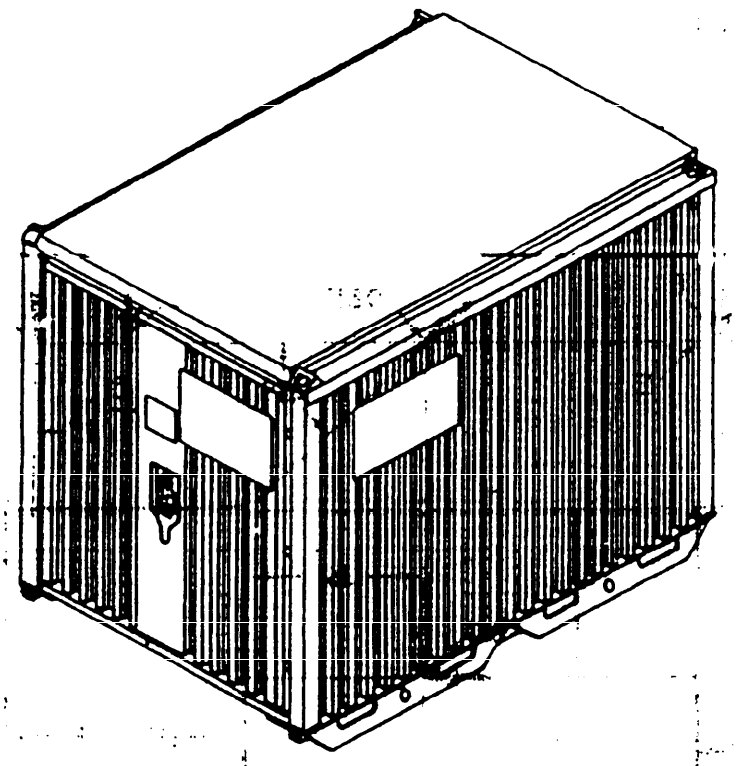


FIGURE 2. ISOMETRIC VIEW OF TYPE II BOX, METAL, SHIPPING: REUSABLE, TRANSPORTER, STEEL, CAP. 288 CU. FT., MAX. LOAD 9,000 LBS.

X-1699

Source: https://assist.dla.mil -- Downloaded: 20261O-17T22:05Z
Check the source to verify that this is the current version before use.

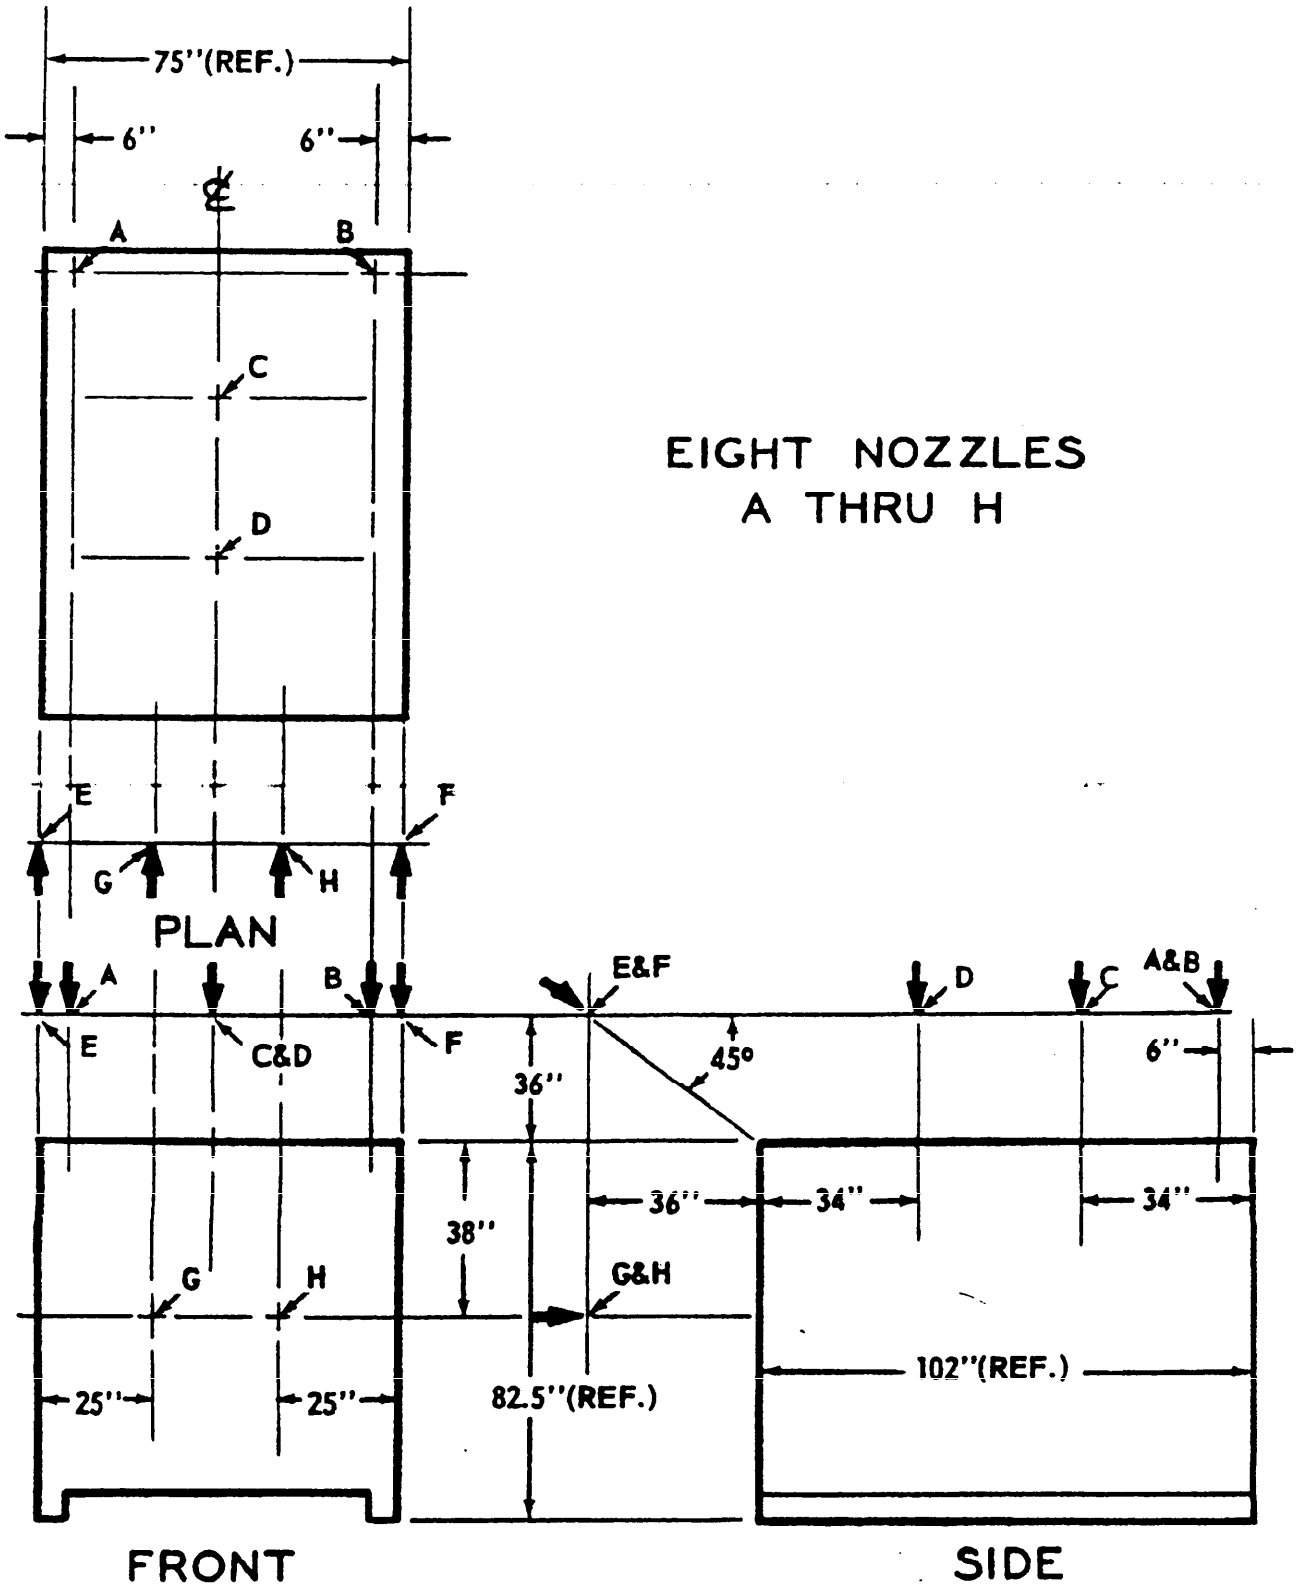


Figure 4. Placement of Nozzles for Water Resistance Test for Type II Box. X-1701

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R256

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-B-11886K Boxes, Metal, Shipping: Reusable, Transporter, Steel, Miximum Load 9,000 Lbs.

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO (If "yes", in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity - Optional)

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 62 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:05Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZD
FORT BELVOIR, VIRGINIA 22060

FOLD

D—34,435—Ft Belvoir

FOLD

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZD
FORT BELVOIR, VIRGINIA 22060

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:05Z
Check the source to verify that this is the current version before use.