INCH-POUND

MIL-DTL-11891J(AT)
19 July 2022
SUPERSEDING
MIL-DTL-11891H(AT)
23 March 2020

DETAIL SPECIFICATION

TRACK SHOE SETS, TRACK SHOE ASSEMBLIES, TRACK SHOE PADS AND TRACK SHOE BUSHINGS, VEHICULAR: ELASTOMERIZED



Comments, suggestions, or questions on this document should be addressed to U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 2530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

CONTENTS

PARAGRAPH		PAGE
1.	SCOPE	1
1.1	Scope	1
1.2	Classification	1
1.3	Track systems	1
2.	APPLICABLE DOCUMENTS	2
2.1	General	2
2.2	Government drawings	2
2.3	Non-Government publications	2
2.4	Order of precedence	3
3.	REQUIREMENTS	3
3.1	Qualification	3
3.1.1	Control plan	4
3.1.2	Materials	4
3.1.3	Recycled, recovered, environmentally preferable, or biobased materials	4
3.1.4	Qualified products list	4
3.1.5	Approval for the rebuild/overhaul of track components	4
3.2	Phase I, plant/facilities inspection	4
3.3	Phase II, establishment of contractor's control plan and compound characteristics	5
3.3.1	Qualification hardware fabrication	6
3.3.2	Test records and compound identification	7
3.3.3	Track bushing characteristic tests	7
3.3.4	Track roadwheel path and ground pad performance tests	10
3.4	Phase III endurance tests	15
3.4.1	Bushing endurance	15
3.4.2	Replaceable pad track system qualification	15
3.4.3	Integral pad track system qualification	16
3.5	Production requirements	16
3.5.1	First article	17
3.5.2	Workmanship	17
3.5.3	GC mass spec	17
3.5.4	Pin/bushing design and construction	17
4.	VERIFICATION	18
4.1	Classification of inspection	18
4.2	Inspection conditions	18
4.3	Qualification inspection	18
4.3.1	Sampling for qualification inspection	18
4.3.2	On-vehicle-testing	22
4.3.3	Qualification approval	22
4.3.4	Retention of qualification	22
4.4	First article inspection	22
4.4.1	First article sample	23

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

4.4.2 First article sample approval 23
4.4.3 Failure 23
4.5 Product and process control 23
4.5.1 Control plan 23
4.5.2 In-process inspection 24
4.5.3 Conformance inspection (CI) 26
4.6 Control tests 30
4.6.1 Control test samples 30
4.6.2 Control test failure 30
4.6.3 Additional specimens 30
4.7 Methods of inspection 30
4.7.1 Bushings 30
4.7.2 Track roadwheel path and ground pad 34

5. PACKAGING 35
5.1 Packaging 35

6. NOTES 35
6.1 Intended use 35
6.2 Acquisition requirements 35
6.3 Definitions 36
6.3.1 Definition of types 36
6.3.2 Definition of defects 37
6.3.3 Definitions for process control 37
6.3.4 Definitions for rubber products 38
6.4 Code numbers 38
6.5 Illustrations 38
6.6 Testing agencies 38
6.6.1 Subject term (key word) listing 38
6.7 Qualification 38
6.7.1 Extension of qualification 39
6.8 Track cross reference 39
6.9 Changes from previous issue 40
6.10 First article 40

APPENDIX A BUSHING ENDURANCE TEST PLAN 48

A.1 SCOPE 48
A.1.1 Scope 48

A.2 APPLICABLE DOCUMENTS 48
A.2.1 General 48
A.2.2 Government documents 48
A.2.2.1 Other Government documents, drawings and publications 48

A.3 REQUIREMENTS 48

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

A.3.1 Test site 48
A.3.2 Hardware requirements 48
A.3.3 Test procedures 48
A.3.3.1 Notification 48
A.3.3.2 Inspection of samples 49
A.3.3.3 Bushing sample insertion 49
A.3.3.4 Bushing sample aging 49
A.3.3.5 Thermogravimetric analysis 49
A.3.3.6 Bushing test machines 49
A.3.3.7 Load profile 49
A.3.3.8 Cyclic compression 50
A.3.3.9 Cyclic torsional deflection load 50
A.3.3.10 Testing duration 50
A.3.3.11 Test machine failure 50
A.3.3.12 Qualification requirements 50
A.3.3.13 Test completion 50
A.3.3.14 Sample disposition 50
A.3.4 Monitoring and certification 50

APPENDIX B T154 TRACK ON-VEHICLE TEST PLAN 52

B.1 SCOPE 52
B.1.1 Scope 52

B.2 APPLICABLE DOCUMENTS 52
B.2.1 General 52
B.2.2 Government documents 52
B.2.2.1 Other Government documents, drawings and publications 52

B.3 REQUIREMENTS 52
B.3.1 Test program review 52
B.3.2 Test site access 52
B.3.3 Test program scope 53
B.3.4 T154 track design characteristics 53
B.3.5 Test course 53
B.3.6 Operational mode summary 53
B.3.6.1 Climatological conditions 53
B.3.7 Track delivery and storage 54
B.3.8 Contractor hardware requirements 54
B.3.8.1 Sample size 54
B.3.9 Initial inspection/preparation for test 54
B.3.9.1 Inspection of track samples 54
B.3.10 Track identification 54
B.3.10.1 Track assembly marking 54
B.3.10.2 Serial pad marking 55
B.3.10.3 Pad installation and coding 55

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

B.3.11 Track shoe installation pattern 55
B.3.12 Load condition 55
B.3.13 Pivoting of vehicles 55
B.3.14 Track tension adjustments 55
B.3.15 Track component replacement 55
B.3.15.1 Hardware torque 56
B.3.16 Torque values 56
B.3.17 Break-In run 56
B.3.17.1 Vehicle operation 56
B.3.17.2 Track cooling 56
B.3.17.3 Visual inspection of track 56
B.3.17.4 Track or pad failures 57
B.3.17.5 Spare track 57
B.3.18 Test procedure 57
B.3.18.1 Fifty mile scenario 57
B.3.18.2 Track switching 57
B.3.19 Inspection and replacement criteria 57
B.3.20 Failure criteria 57
B.3.20.1 Pad sample failure 57
B.3.20.2 Track or pad failures (break-in) 58
B.3.21 Disposition of track test hardware 58
B.3.21.1 Failed track component marking 58
B.3.21.2 Hardware 58
B.3.22 Vehicle disposition 58
B.3.23 Documentation/test reporting/photographic coverage 58
B.3.23.1 Track incidents 59
B.3.24 Final report 59
B.3.25 Photographic coverage 61
B.3.25.1 Applicable information 61
B.3.26 Distribution of reports 61

APPENDIX C T107 TRACK ON-VEHICLE TEST PLAN 66

C.1 SCOPE 66
C.1.1 Scope 66

C.2 APPLICABLE DOCUMENTS 66
C.2.1 General 66
C.2.2 Government documents 66
C.2.2.1 Specifications, standards, and handbooks 66
C.2.2.2 Other Government documents, drawings and publications 66

C.3 REQUIREMENTS 66
C.3.1 Test program review 66
C.3.2 Test site access 67
C.3.3 Test program scope 67

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

C.3.4 T107 Track design characteristics 67
C.3.5 Test course 67
C.3.5.1 Operational mode summary 67
C.3.5.2 Climatological conditions 68
C.3.6 Track delivery and storage 68
C.3.7 Contractor hardware requirements 68
C.3.8 Initial inspection/preparation for test 68
C.3.8.1 Track qualification samples 68
C.3.9 Track identification 68
C.3.9.1 Track assembly marking 69
C.3.10 Track shoe installation pattern 69
C.3.11 Load condition 69
C.3.12 Pivoting of vehicles 69
C.3.13 Track tension adjustments 69
C.3.14 Track component replacement 69
C.3.15 Torque values 69
C.3.16 Break-In run 70
C.3.16.1 Vehicle operation 70
C.3.16.2 Track cooling 70
C.3.16.3 Visual inspection 70
C.3.16.4 Track failures 70
C.3.16.5 Spare track 71
C.3.17 Test procedure 71
C.3.17.1 Mission scenarios 71
C.3.17.2 Track switching 71
C.3.18 Inspection and replacement criteria 71
C.3.19 Failure criteria 71
C.3.19.1 Track failure (break-in) 71
C.3.20 Disposition of track test hardware 71
C.3.20.1 Failed track components 71
C.3.20.2 Hardware (failure analysis) 71
C.3.21 Vehicle disposition 71
C.3.22 Documentation/test reporting/photographic coverage 72
C.3.22.1 Track incidents 72
C.3.23 Final report 72
C.3.24 Photographic coverage 73
C.3.24.1 Applicable information 73
C.3.25 Distribution of reports 73

APPENDIX D T157I PAD ON-VEHICLE TEST PLAN 82

D.1 SCOPE 82
D.1.1 Scope 82

D.2 APPLICABLE DOCUMENTS 82
D.2.1 General 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

D.2.2 Government documents 82
D.2.2.1 Specifications, standards, and handbooks 82
D.2.2.2 Other Government documents, drawings and publications 82

D.3 REQUIREMENTS 82
D.3.1 Test program review 82
D.3.2 Test site access 83
D.3.3 Test program scope 83
D.3.4 T157I design characteristics 83
D.3.5 Test course 83
D.3.6 Operational mode summary 83
D.3.6.1 Fifty mile scenario 84
D.3.7 Climatological conditions 84
D.3.8 Pad delivery and storage 84
D.3.9 Contractor hardware requirements 84
D.3.10 Initial inspection/preparation for test 84
D.3.10.1 Qualification sample inspection 84
D.3.11 Serial marking 84
D.3.12 Pad installation (qualification) 84
D.3.13 Load condition of the vehicle 85
D.3.14 Pivoting of vehicle 85
D.3.15 Track tension adjustments 85
D.3.16 Track component replacement 85
D.3.17 New hardware 85
D.3.17.1 Torque values 85
D.3.18 Break-In run 85
D.3.18.1 Vehicle operation 86
D.3.18.2 Track cooling (break-in) 86
D.3.18.3 Visual inspection (break-in) 86
D.3.18.4 Track pad failure (break-in) 86
D.3.18.5 Spare pads 86
D.3.19 Test procedure 86
D.3.19.1 Track switching 87
D.3.20 Failure criteria 87
D.3.20.1 Pad failure (break-in) 87
D.3.21 Inspection and replacement criteria 88
D.3.21.1 Pad inspection 88
D.3.22 Disposition of pad test hardware 88
D.3.22.1 Failed track pad marking 88
D.3.22.2 Hardware (failure analysis) 88
D.3.23 Vehicle disposition 89
D.3.24 Documentation/test reporting/photographic coverage 89
D.3.24.2 Major track incidents 89
D.3.25 Final report 89
D.3.26 Photographic coverage 90
D.3.26.1 Applicable information 90

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

D.3.27 Distribution of reports 90

APPENDIX E T107 TRACK SHOE ELASTOMER AND COMPONENTS FOR USE ON M88A2 VEHICLES 92

E.1 SCOPE 92
E.1.1 Scope 92
E.1.2 Classification 92

E.2 APPLICABLE DOCUMENTS 92
E.2.1 General 92
E.2.2 Government drawings 92
E.2.3 Non-Government publications 92
E.2.4 Order of precedence 93

E.3 REQUIREMENTS 93
E.3.1 Requirements 93
E.3.2 Phase I, pre-qualification 93
E.3.3 Phase II, plant/facilities inspections 94
E.3.4 Phase III, qualification by on-vehicle endurance testing 94
E.3.5 Phase IV, establishment of contractor's process control plan and rubber compound characteristics and inspections 94
E.3.5.1 Product and process control plan 94
E.3.5.2 Process parameter controls 95
E.3.5.3 Process parameter selection 95
E.3.5.4 Product characteristic controls 95
E.3.5.5 Product characteristic selection 95
E.3.5.6 Baseline characteristics 96

E.4 VERIFICATION 96
E.4.1 Classifications of inspections 96
E.4.2 Test records and compound identification 96
E.4.3 Pre-qualification 96
E.4.4 Baseline characteristics 97
E.4.4.1 Roadwheel path and ground pad samples 97
E.4.4.2 Ground pad tests 97
E.4.4.3 Bushing tests 98
E.4.5 First article inspection 99
E.4.5.1 First article sample approval 101
E.4.5.2 Failure 101
E.4.6 Production quality control 101
E.4.6.1 Reduction of production product test frequency through statistical process control 101
E.4.6.2 Green component testing 102
E.4.6.3 Finished piece inspection 102
E.4.6.4 Rework (workaway) 103
E.4.6.5 Material weight tolerances 103

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

E.4.6.6 Vulcanization time, pressure and temperature 104
E.4.6.7 Failures 104
E.4.7 Conformance inspections 104
E.4.7.1 Sampling for conformance inspection 104
E.4.7.2 Lot formation 105
E.4.7.3 Inspection and defects 105
E.4.7.4 Failures 106
E.4.7.5 Packaging and packing 107

E.5 QUALIFICATION 107
E.5.1 On-vehicle endurance testing 107
E.5.1.1 Drawings 107
E.5.1.2 Test program review 107
E.5.1.3 Test site access 108
E.5.1.4 Test program scope 108
E.5.1.5 Test course 108
E.5.1.6 Operational mode summary 108
E.5.1.7 Break-In run 109
E.5.1.8 Climatological conditions 109
E.5.1.9 Track delivery and storage 109
E.5.1.10 Contractor hardware requirements 110
E.5.1.11 Initial inspection/preparation for test 110
E.5.1.12 Track qualification samples 110
E.5.1.13 Track identification 110
E.5.1.14 Track assembly marking 110
E.5.1.15 Track shoe installation pattern 110
E.5.1.16 Loading condition 110
E.5.1.17 Pivoting of vehicles 111
E.5.1.18 Track tension adjustments 111
E.5.1.19 Track component replacement 111
E.5.1.20 Hardware torque check 111
E.5.1.21 Torque values 111
E.5.1.22 Vehicle operation 111
E.5.1.23 Track cooling 111
E.5.1.24 Track roadwheel path surface 111
E.5.1.25 Speed change cool down 112
E.5.1.26 Visual inspection 112
E.5.1.27 Track failures 112
E.5.1.28 Spare track 112
E.5.1.29 Mission scenarios 112
E.5.1.30 Track switching 112
E.5.1.31 Inspection and replacement criteria 112
E.5.1.32 Track failure during break-in 113
E.5.1.33 Disposition of track test hardware 114
E.5.1.34 Failed track components 114
E.5.1.35 Hardware failure analysis 114

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

E.5.1.36 Vehicle disposition 114
E.5.1.37 Documentation/test reporting/photographic coverage 114
E.5.1.38 Track incidents 115
E.5.1.39 Final report 115
E.5.1.40 Photographic coverage 115
E.5.1.41 Applicable information 115
E.5.1.42 Distribution of reports 115
E.5.1.43 Materials 115
E.5.1.44 Recycled, recovered, environmentally preferable, or biobased materials 115
E.5.1.45 Qualified products list 115
E.5.1.46 Approval for the rebuild/overhaul of track components 116
E.5.2 Inspections and material property characterization 116
E.5.2.1 Disclaimer regarding material property retention after storage or other aging events 116
E.5.2.2 Sample preparation practices 116
E.5.2.3 Hardness, Shore A durometer 116
E.5.2.4 Tensile properties of elastomeric compounds 117
E.5.2.5 Tear resistance of ground pads 117
E.5.2.6 Bushing endurance 117
E.5.2.7 Specific gravity 120
E.5.2.8 After aging tensile properties 120
E.5.2.9 Differential scanning calorimetry 120
E.5.2.10 Thermogravimetric analysis 120
E.5.2.11 Workmanship inspection 120
E.5.2.12 Product marking 121
E.5.2.13 Track pad and roadwheel path adhesion tests 121
E.5.2.14 Ozone resistance testing 122
E.5.2.15 Pin/bushing design and construction inspection 122
E.5.2.16 Bushing adhesion 122
E.5.2.17 Compression set 123
E.5.2.18 Bushing concentricity 123

E.6 NOTES 123
E.6.1 Intended use 123
E.6.2 Acquisition requirements 123
E.6.3 Definitions 124
E.6.3.1 Definition of defects 124
E.6.3.2 Definitions for process control 125
E.6.3.3 Preparing activity 125
E.6.3.4 Definitions for rubber products 125
E.6.4 Code numbers 125
E.6.5 Testing agencies 125
E.6.6 First article 125

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

FIGURE PAGE

1. Style B detachable pad test specimen 41
2. Type II Shoe test specimen 42
3. Physical property test sample locations 43
4. Typical location physical property test samples 44
5. Blow-Out machine. 45
6. T157I detachable pad test specimen 46
7. Thermo gun. 47
A-1. Bushing load profile 51
A-2. Bushing torsional angle 51
B-1. T154 track hardware illustration. 61
B-2. Track shoe marking 62
B-3. "Dead Track Block" bushing check. 63
B-4. Roadwheel path rubber inspection criteria 63
B-5. End connector inspection criteria 64
B-6. Center guide inspection criteria 65
C-1. T107 track hardware illustration. 75
C-2. Track shoe marking 76
C-3. "Hammer Ring" check test. 77
C-4. Track shoe assembly 78
C-5. End connector 79
C-6. Center guide. 80
C-7. Typical stages of rubber wear on T107 track. 81
D-1. T157I track hardware illustration. 91

TABLE PAGE

I. Applicable track systems 2
II. Bushing property tests 6
III. Roadwheel path and ground pad property tests 11
IV. Bushing adhesion. 18
V. Classification of inspection and frequencies (bushings).[1] 20
VI. Classification of inspections and frequencies (roadwheel path and ground pad).[1] 21
VII. Sampling plan for CI.[1, 2] 27
VIII. Classification of defects 28
IX. Extension of qualification. 39
X. Track cross reference. 40
B-I. T154 track break-in run. 56
B-II. T154 track hardware inspection and replacement criteria. 59
C-I. T107 road test 68
C-II. T107 break-in run. 70
C-III. T107 track hardware inspection and replacement criteria. 73
D-I. T157I break-in run. 86
D-II. T157I track hardware inspection and replacement criteria. 87
E-I. Pre-qualification test properties and minimum required values 97
E-II. Final product roadwheel path and ground pad elastomer material property tests 98
E-III. Final product baseline bushing property tests 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE PAGE

E-IV. First-article roadwheel path and ground pad elastomer material property tests..... 99
E-V. First-article bushing property tests..... 100
E-VI. Green component inspections for bushing, roadwheel path and ground pad elastomer..... 102
E-VII. Finished piece inspections for roadwheel path and ground pad elastomer..... 103
E-VIII. Sampling plan for CI..... 104
E-IX. Conformance inspections for roadwheel path and ground pad components..... 105
E-X. Conformance inspections for bushing components..... 105
E-XI. Classification of defects..... 105
E-XII. Individual components..... 107
E-XIII. Road test block..... 109
E-XIV. Break-In requirements..... 109
E- XV. T107 track hardware inspection and corrective actions criteria..... 112

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

This specification is approved for use by U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense (DoD).

1. SCOPE

1.1 Scope. This specification identifies the requirements for qualification and production control of track systems supporting U.S. Military Tracked Vehicles. This specification is intended primarily for the qualification of elastomeric compounds used in the fabrication of track and track components and to ensure that the quality and performance established at qualification is maintained throughout production. The contractor is held fully responsible for the entire assembly/component including all non-elastomeric components and fasteners. The qualified products list (QPL) is divided by individual track components (pads, bushings and roadwheel path/shoe body) listing the contractors qualified to produce the various components, the contractor's address, and compound identification. The QPL also identifies contractors qualified to assemble the various track components into full assemblies/systems. This includes bushing insertion, pad installation and connecting component (end connectors, center guides) assembly. The track shoe assemblies may be acquired either as sets, assemblies or as individual components (pin bushing assemblies or pads) as specified by the acquiring activity (see 6.1).

1.2 Classification. The track shoe assemblies or components to be procured in accordance with this specification are of the following types and styles:

Type I.....Single-pin track shoe
Style A ..... Integral pad
Style B..... Replaceable pad

Type II..... Double-pin track shoe
Style A ..... .Integral pad
Style B..... Replaceable pad

Type III .....Bushing assemblies

1.3 Track systems. Applicable track systems are designated in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE I. Applicable track systems.

Designation	Type/style	Technical data package number
T107 (see note 2)	II / A	8705914
T107 (see note 3)	II / A	12694350
T130E1	I / B	11677988
T132E1	I / B	10934639
T136	II / B	10954051
T138	I / A	10948405
T142 (see note 1)	II / B	11645125
T144	II / A	10892811
T150	II / B	12474844
T154	II / B	12268550
T154M (see note 6)	II / B	12556910
T157I	I / B	12359466
T158LL (see note 4)	II / B	12387880
T161 (see note 5)	II / B	12496800
T164	I / B	12352500

NOTES:

1. The T142 track block elastomer must be produced in accordance with Drawing 11645127 Block, Track and is exempt from the requirements of this specification except where noted on the drawing.
2. For M88A1 legacy applications only, see Appendix C (not for new procurement).
3. For M88A1 and M88A2 new track procurements, see Appendix E.
4. The T158LL track elastomers must be produced in accordance with Drawings 12348368 Pad Track Rubberized, 12387878 Block, Track, Rubberized, and 12348382 Pin, Rubberized and is exempt from the requirements of this specification except where noted on the drawing.
5. The T161 track elastomers must be produced in accordance with Drawings 12496785 Pad Assembly Molded Track, 12496792 Block, Assembly Molded Track, and 12496790 Pin, Assembly Molded Track and is exempt from the requirements of this specification except where noted on the drawing.
6. The T154M track elastomers must be produced in accordance with Drawings 12556915 Pad, Track, and 12556913 T154M Pin, Molded and is exempt from the requirements of this specification except where noted on the drawing.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government drawings. Technical data package (TDP) drawings for the track system or component to be procured will be provided as a part of the invitation for bid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM D395	-	Standard Test Methods for Rubber Property - Compression Set.
ASTM D412	-	Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension.
ASTM D429	-	Standard Test Methods for Rubber Property - Adhesion to Rigid Substrates.
ASTM D573	-	Standard Test Method for Rubber - Deterioration in an Air Oven.
ASTM D792	-	Standard Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement.
ASTM D1149	-	Standard Test Methods for Rubber Deterioration – Cracking in an Ozone Controlled Environment.
ASTM D1566	-	Standard Terminology Relating to Rubber.
ASTM D2084	-	Standard Test Method for Rubber Property - Vulcanization Using Oscillating Disk Cure Meter.
ASTM D2137	-	Standard Test Methods for Rubber Property – Brittleness Point of Flexible Polymers and Coated Fabrics.
ASTM D2240	-	Standard Test Method for Rubber Property – Durometer Hardness.
ASTM D3182	-	Standard Practice for Rubber - Materials, Equipment, and Procedures for Mixing Standard Compounds and Preparing Standard Vulcanized Sheets.
ASTM D3183	-	Standard Practice for Rubber - Preparation of Pieces for Test Purposes from Products.
ASTM E1131	-	Standard Test Method for Compositional Analysis by Thermogravimetry.

(Copies of these documents are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Track shoe assemblies, track shoe pads, and track shoe bushings furnished under this specification shall be products which have been tested and have passed the qualification tests specified herein. The qualification process is divided into three phases as defined in section 3 of this specification: Phase I, Plant/Facilities Inspections; Phase II, Establishment of Contractor's Control Plan and Compound Characteristics; and Phase III, Endurance Tests. The procedures and requirements of these phases must be successfully completed and all requirements met prior to a contractor becoming qualified for listing on the QPL. Section 4 of this specification establishes the quality control requirements based on section 3 as applicable to track all procurement contracts.

3.1.1 Control plan. The contractor shall provide a control plan (see 4.5.1) addressing the requirements of this specification that identifies how the contractor intends to conform to this specification. This plan will require Government approval and will be included as part of the qualification process. This plan shall be submitted to the Quality Assurance Representative (QAR) and Preparing Activity for review and approval. This control plan should be general in nature, identifying the contractor's capability in conforming to the requirements of this specification and should not contain proprietary information. This plan should identify subcontractor control requirements in compliance to this specification as related to rubber.

3.1.2 Materials. The materials used in the production of shoes, pads, bushings and assemblies shall meet the requirements of this specification and be in accordance with the applicable drawings of the track TDPs.

3.1.3 Recycled, recovered, environmentally preferable or biobased materials. Recycled, recovered, environmentally preferable or biobased materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.1.4 Qualified products list. Type I and type II track shoe assemblies, track shoe sets, track shoe pads, and type III bushings furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids. Qualification for all systems/components includes the contractor’s plan, all materials, processes, tests, facilities, and assembly, as applicable, of these systems or components. The contractor is responsible for the entire component/assembly being submitted for qualification and subsequent production including all metal parts and fasteners.

3.1.5 Approval for the rebuild/overhaul of track components. Contractors/military depots which desire to obtain approval for the rebuild of track or track components covered by this specification must utilize this specification in conjunction with the current Depot Maintenance Work Requirement (DMWR) for single pin and double pin track used on military vehicles. This specification should be used to specify requirements for rubber and rubber processing. The DMWR should address the quality of the rebuilt/overhaul metal components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.2 Phase I, plant/facilities inspection. Defense Standardization and Specification Program SD-6, “Provisions Governing Qualification (Qualified Products Lists)” and DOD 4120.24, “Defense Standardization Program Policies and Procedures”, authorizes the preparing activity or its authorized agent to conduct plant/facility inspections prior to the start of any qualification testing. Subcontractors that provide uncured rubber for processing by the contractor requesting qualification shall be subjected to the same inspection and test requirements on that portion of the product/process that is within the subcontractor's purview.

3.3 Phase II, establishment of contractor’s control plan and compound characteristics. Prior to the start of qualification hardware fabrication, the contractor shall establish a Process Fingerprint Plan (see table II and table III, and 4.5.2.4) that describes the entire process used to produce the qualification hardware. This plan shall identify the target values and ranges (limits/tolerances) the contractor expects during qualification hardware fabrication. This plan shall address all the requirements of this specification and adequately describe the process and product supplied for qualification. This plan shall bear the signatures of the Government QAR and an authorized representative of the contractor. This plan shall remain at the contractor's facility but be made available for review by the preparing activity or its authorized agent. This information shall not be disclosed in whole or in part for any purpose other than to evaluate the product submitted for qualification testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE II. Bushing property tests.

Test requirements	ASTM	Specification paragraph	Tolerance(see note 1)
Specified gravity	D792	3.3.3.2	±0.020
Hardness	D2240	3.3.3.3	±5 pts
Tensile strength	D412	3.3.3.4	±16%
Tensile strength (aged)	D573	3.3.3.5	±30% (Change)
Ultimate elongation	D412	3.3.3.4	±15%
Ultimate elongation (aged)	D573	3.3.3.5	±40% (Change)
Tensile stress (modules) @ 200% strain	D412	3.3.3.4	±17%
Thermogravimetric analysis	E1131	3.3.3.6	3.3.3.6
Vulcanization using oscillating disk cure meter	D2084	3.3.3.7	3.3.3.7
Adhesion	D429	3.3.3.8	3.5.4.2
Compression set	D395	3.3.3.9	±0%
Brittleness point of flexible polymers	D2137	3.3.3.10	ACPT/REJ
GC mass spec	None	3.3.3.11	3.5.3

NOTE:

1. The contractor shall provide all test results of all lots of elastomeric materials used in the preparation of all qualification hardware when tested to the requirements of this table. During production, the contractor will be required to maintain the production values within the tolerances specified in this table.

3.3.1 Qualification hardware fabrication. The fabrication of the qualification hardware shall be in accordance with the approved Process Fingerprint Plan (see 3.3). All testing must be conducted in the presence of a government inspector or its authorized agent, signed off for conformance to the requirements and dated. This plan and test data generated during the fabrication of elastomeric components for qualification will be used by the Government as a measure of conformance/performance in future production contracts (see 3.4.1.2) and will remain proprietary to the contractor. All records/test results of all lots of elastomeric materials used in the preparation of all qualification hardware shall be made available to the Government QAR upon request. This information shall not be disclosed in whole or in part for any purpose other than to evaluate the product submitted for qualification testing. The Government reserves the right to conduct these tests at any time to ensure compounds in production are in conformance to the data established during qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.3.2 Test records and compound identification. All test records must contain at a minimum, the compound identification and source, test results, test facility identification, dates of tests, and name of tester. These records must be signed and dated by the Government QAR or authorized agent. The contractor will identify the method to be used during qualification and utilize the same method during subsequent production testing. Compound numbers must be identified to the component being qualified, for example bushing compound xxxxx, ground pad compound yyyyy and roadwheel path compound zzzzz, and fully identified on the applicable test records/data sheets. Any record, data sheet or certification lacking proper identification, or one that does not contain clear and concise information will not be considered in compliance to these requirements and rejected.

3.3.3 Track bushing characteristic tests. Table II has been established in order to identify the compound performance characteristics/properties being provided for qualification for future reference and production control purposes, pending successful qualification. Table II identifies the requirements for establishing the characteristics of the bushing compound(s). These tests will be performed during the fabrication of the T130E1 long bushings (P/N 11678029) required for qualification and in accordance with the requirements established in Appendix A.

3.3.3.1 Specimen preparation. Specimens shall be prepared in accordance with the applicable ASTM and shall be of an equivalent state of cure to that of the bushings submitted for endurance testing. The following tests will be performed on samples taken at the final mixing of the compound (see 4.3.1.1) and be of an equivalent state of cure as bushings submitted for qualification: specific gravity, hardness, tensile strength, elongation, tensile stress, aged properties, brittleness point, cure meter, thermogravimetric analysis (TGA), load deflection, compression set and G/C mass spec. The following tests shall be performed on vulcanized samples: hardness, adhesion, and bushing endurance (see 4.3.1.2).

3.3.3.2 Specific gravity. Specific gravity tests will be performed on the bushing compounds subject to qualification test in accordance with ASTM D792. Specific gravity tests will be performed on 3 samples from each compound submitted for qualification and all results will be provided to the Government. Samples shall be taken from unvulcanized compounds at the final mixing stage (see 4.7.1.1).

3.3.3.3 Hardness – durometer. Hardness tests will be performed on laboratory specimens from bushing compounds subject to qualification in accordance with ASTM D2240. Hardness tests shall be conducted on 3 samples each of the unvulcanized compounds taken from the final mixing stage as well as 3 samples of the vulcanized finished components. All data generated as the results of these two tests shall be reported to the Government. The production tolerance for hardness will be ±5 from the average value established at qualification (see 4.7.1.2).

3.3.3.4 Physical properties of bushing compounds. Physical property tests will be conducted on each compound submitted for bushing qualification in accordance with ASTM D412. All test results will be reported to the Government. For production of qualified bushing compounds, the adjusted value established following qualification tests (3.4.1.2), shall be held to the following tolerances: ±16% for tensile strength, ±15% ultimate elongation, ±17% for 200% modulus (see 4.7.1.3, 4.7.1.5, and 4.7.1.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.3.3.5 Aged physical properties. Aged physical property tests will be performed on specimens taken from bushing compounds in accordance with ASTM D573. Accelerated aging shall be conducted for 166±2 hours at 158±3.6 °F or 70 to 72 hours at 212±3.6 °F. All test results will be reported to the Government. The tolerance for the percent change of unaged tensile strength to aged tensile strength will not exceed 30 percent during production. The tolerance for the percent change of the unaged elongation to the aged elongation will not exceed 40 percent during production (see 4.7.1.4 and 4.7.1.6).

3.3.3.6 Thermogravimetric analysis. This test will be performed in accordance with ASTM E1131 during qualification to establish requirements for future reference during process control. All test results will be reported to the Government. The ranges for TGA are as follows (see 4.7.1.8):

a. Plasticizer + Residue: ±3%

b. Polymer: ±5%

c. Filler: ±5%

3.3.3.7 Vulcanization using oscillating disk cure meter. A curing characteristics curve (trace) shall be obtained as outlined in ASTM D2084 on the bushing compound being submitted for qualification. The traces will be provided to the Government. The following tolerances will be used in production when compared to the charts representing traces of compounds used for fabrication of components for qualification. Parameter definitions shall be according to ASTM D2084. Alternative test methods and parameter may be used but must be identified in the control plan and approved by the Preparing Activity (see 4.7.1.9).

a. Minimum torque (M): ±2 pound-inch (lb-in) [±0.23 Newton-meter (N-m)]

b. Maximum torque (M): ±4 lb-in (±0.45 N-m)

c. Time to 60 percent of M: T(60) ± 0.4 minutes

d. Time to reach 5 lb-in (0.57 N-m) above minimum torque: ±0.4 minutes

3.3.3.8 Bushing adhesion test. Testing apparatus shall conform to ASTM D429, method B. A hub and spindle assembly is required for mounting the bushing insert (P/N 8756519) that shall permit full rotation about a fixed axis. Three complete bushing assemblies (P/N 11678029) shall be selected as the test samples and be of an equivalent state of cure to that of the bushings submitted for endurance test. Testing shall be conducted on the outer rings of the bushing assembly (see 4.7.1.10).

3.3.3.8.1 Sample preparation. The bushings shall be prepared for testing by cutting the rubber rings transversely down to the metal insert and separating circumferentially for a distance

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

sufficient to permit a firm grip by the free end of the power-actuated clamp. Injection molded bushings shall be cut on the sprue side (injection side) to ensure discontinuity (non-knit) of the elastomer is checked.

3.3.3.8.2 Procedure. The bushing shall be mounted on the pin in the hub and spindle assembly with the free end of the rubber firmly gripped by the machine clamp. The machine shall be started and the rubber pulled circumferentially from the sleeve/insert. In the event the elastomer is about to tear off, specimens should be cut back to the metal. Force measurements shall be recorded and observations made throughout the test to determine the minimum load required to separate the rubber from the metal/adhesive interface or from the rubber itself.

3.3.3.8.3 Acceptance. Successful adhesions will be those that result in a separation in the rubber (rubber tear) without evidence of separation in the rubber-to-metal interface. The bond between metal and all bonding agents/cements shall be higher than the bushing rubber so that separation during adhesion occurs only in the rubber. The load required to separate the rings from the pin shall be not less than that shown in 3.5.4.2. For T130El bushing qualification, a minimum of 29 pounds per inch of width is required. The elastomer pulled off the sleeve and that remaining shall be examined for any defects including cracks, blisters, or porosity. Discontinuity (non-knit) of the elastomer resulting in any indication of separation of the elastomer shall be cause for rejection. All test results shall be reported to the Government.

3.3.3.9 Compression set. The bushing laboratory specimen shall be subjected to the compression set test of method B of ASTM D395 for 22±0.5 hours at a temperature of 158±3.6 °F using type 1 specimens. Five specimens shall be tested with the average results reported in accordance with ASTM D395. The compression set shall not exceed 25 percent and all data shall be reported to the Government (see 4.7.1.11).

3.3.3.10 Brittleness point of flexible polymers. The specimens and test method shall be in accordance with ASTM D2137. Specimens shall be type B of method A and tested at a temperature of -40±3.6 °F in accordance with method A of ASTM D2137. Five specimens shall be tested and inspected showing no evidence of cracks, fissures, or pinholes. In the event one specimen fails, an additional five specimens shall be prepared and tested. Failure of two or more of the initial five specimens, or any of the last five specimens, shall be cause for rejection. Test results shall be reported to the Government (see 4.7.1.12).

3.3.3.11 GC mass spec. The Government may perform spot inspections for the purpose of obtaining samples for pyrolysis-gas chromatography/mass spectrometry analysis. Up to five samples may be taken at any time during a production contract. Samples will be taken from end item cured parts. The initial part of the method will thermally desorb the additives, which are then analyzed by gas chromatography/mass spectrometry. Following desorption of the additives, the remaining sample will be pyrolyzed and analyzed by gas chromatography/mass spectrometry. A baseline scan will be performed on the material submitted for qualification. Future results will be compared with the baseline to determine that there are no new peaks appearing, no ingredients missing and no substitutions in subsequent production runs (see 4.7.1.13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.3.4 Track roadwheel path and ground pad performance tests. All material property tests indicated in table III for the track roadwheel path and ground side pads (integral and replaceable) shall be conducted in accordance with the referenced ASTM's, the Process Fingerprint Plan (see 3.3) and in accordance with the requirements of this specification. The following tests will be performed on qualification samples taken on unvulcanized samples at the final mixing of the compound (see 4.3.1.3) and be of an equivalent state of cure as compounds being submitted for qualification: specific gravity, hardness, tensile strength, elongation, tensile stress, aged properties, brittleness point, cure meter; ozone resistance, TGA, GC mass spec. The following tests will be performed on qualification samples taken on vulcanized samples: hardness, tensile strength, elongation, tensile stress, aged properties, ozone resistance, adhesion, and blow-out (see 4.3.1.4).

3.3.4.1 Specific gravity. Specific gravity tests will be performed on the pad (integral and replaceable) and roadwheel path compounds subject to qualification test in accordance with ASTM D792. Specific gravity tests will be performed on a minimum of 3 samples from each compound submitted for qualification and all results provided to the Government. Samples shall be taken from unvulcanized compounds at the final mixing stage (see 4.7.2.1).

3.3.4.2 Hardness – durometer. Hardness tests will be performed on laboratory specimens of pads (integral and replaceable) and roadwheel path compounds subject to qualification in accordance with ASTM D2240. As a minimum, hardness tests shall be conducted on 3 samples each of the unvulcanized compounds taken from the final mixing stage as well as 3 samples of the finished components. The results of all tests shall be provided to the Government (see 4.7.2.2).

3.3.4.3 Physical properties of pad and roadwheel path compounds. Physical property tests, as a minimum, will be conducted on specimens taken from each compound used in the pads (integral and replaceable) and roadwheel path in accordance with ASTM D412, table III, and figure 1 through figure 4. The three specimens for the style B (Tl54) ground pad shall be taken as shown in figure 1. The three specimens for the style B (T154) roadwheel path shall be taken as shown in figure 2. The three specimens for the style A (Tl07) ground pad shall be taken as shown in figure 3. The three specimens for the style A (Tl07) roadwheel path shall be taken as shown in figure 4. The three specimens for the style B (T157I) ground pad shall be taken as shown in figure 6. All test results will be reported to the Government. The production tolerance for the physical property tests based on the average values established during qualification tests will be ±15% for tensile strength, ±15% ultimate elongation, and ±15% for 200% modulus (see 4.7.2.3, 4.7.2.5, and 4.7.2.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE III. Roadwheel path and ground pad property tests.

Test requirement	ASTM test method	Specification paragraph	Tolerance (see note)
Specific gravity	D792	3.3.4.1	±0.020
Hardness	D2240	3.3.4.2	±5 pts
Tensile strength	D412	3.3.4.3	±15%
Tensile strength (aged)	D573	3.3.4.4	±30% (Change)
Ultimate elongation	D412	3.3.4.3	±15%
Ultimate elongation (aged)	D573	3.3.4.4	±40% (Change)
Tensile stress (modulus) @ 200% strain	D412	3.3.4.3	±15%
Thermogravimetric analysis	E1131	3.3.4.5	3.3.4.5
Vulcanization using oscillating disk cure meter	D2084	3.3.4.6	3.3.4.6
Adhesion style A & B ground side pads	D429	3.3.4.7	±0%
Adhesion type I & II (roadwheel path)	D429	3.3.4.7	±0%
Ozone resistance	D1149	3.3.4.8	ACPT/REJ
Ozone resistance	None	3.3.4.9	ACPT/REJ
Brittleness point of flexible polymers	D2137	3.3.4.10	ACPT/REJ
GC mass spec	None	3.3.4.11	3.5.3
Blowout test style A	None	3.3.4.12	ACPT/REJ

NOTE: The contractor shall provide all test results of all lots of elastomeric materials used in the preparation of all qualification hardware when tested to the requirements of this table. During production, the contractor will be required to maintain the production values within the tolerances specified in this table.

3.3.4.4 After age physical properties. Physical property tests, as a minimum, will be conducted on 3 aged specimens taken from each compound used in the pads (integral and replaceable) and roadwheel path in accordance with ASTM D573, table III, and figure 1 through figure 4. Three specimens for each test are required and all results will be reported to the Government. Accelerated aging shall be conducted for 166±2 hours at 158±3.60 °F or 70 to 72 hours at 212±3.60 °F. The production tolerance for the percent change of unaged tensile strength (see 3.3.4.3) to aged tensile strength will not exceed ±30 percent. The tolerance for the percent change of the unaged elongation (see 3.3.4.3) to the aged elongation will not exceed ±40 percent (see 4.7.2.4 and 4.7.2.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.3.4.5 Thermogravimetric analysis. This test will be performed in accordance with ASTM E1131 during qualification to establish requirements for future reference during production. Results of the TGA will be provided to the Government. The ranges for TGA are as follows (see 4.7.2.8):

a. Plasticizer + Residue: ±3%

b. Polymer: ±5%

c. Filler: ±5%

3.3.4.6 Test measurements with oscillating disk cure meter. A curing characteristics curve (trace) shall be obtained as outlined in ASTM D2084 on the compounds used in the pad (integral and replaceable) and roadwheel path of the track being submitted for qualification. The traces will be provided to the Government. The following tolerances will be used in production when compared to the charts representing traces of compounds used for fabrication of components for qualification. Parameter definitions shall be according to ASTM D2084. Alternative test methods and parameters may be used but must be identified in the control plan and approved by the Preparing Activity (see 4.7.2.9).

a. Minimum torque (M): ±2 lb-in (0.23 N-m)

b. Maximum torque (M): ±4 lb-in (0.45 N-m)

c. Time to 60 percent of M: T(60) ±0.4 minutes

d. Time to reach 5 lb-in (0.57 N-m) above minimum torque: ±0.4 minutes

3.3.4.7 Track pad and roadwheel path adhesion test. Adhesion tests will be conducted on the finished products of the track systems being submitted for qualification. As a minimum, two representative samples of the ground pad (integral and replaceable) and two representative samples of the roadwheel path elastomer are required for the adhesion tests. One test specimen from each component shall be prepared for test in accordance with 3.3.4.7.1 using the test apparatus of ASTM D429, method B (see 4.7.2.10).

3.3.4.7.1 Sample preparation. The samples shall be prepared in the location as shown in figure 1 through figure 4. The elastomer shall be cut down to the base metal along two parallel lines, leaving an elastomer strip 1±1/16 inch in width, 1/2 to 1 inch in thickness, with length extending in the direction of maximum adhesive area. The elastomeric thickness shall be as uniform as practical of the thickness shown in the respective figures for the component under test. When necessary, the portion of the elastomer remaining outside of the 1-inch wide section of the cut strip shall be removed from the metal base to avoid any edge constraint during the test. The elastomer shall be stripped from the metal using a sharp knife for a sufficient distance to permit firm gripping of the tab in the grip of the test machine head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.3.4.7.2 Procedure. The metal base of the specimen shall be mounted to one head of the testing machine using care in centering and adjustment so that the tension shall be uniformly distributed across the strip width. The machine shall then be started and, when the applied force causes the elastomer to begin separating from the metal, the recorder shall be started. Force shall continue to be applied and recorded continuously throughout the test. The point of separation of the elastomer from the metal shall be observed carefully throughout the test. In the event that tearing up into the elastomer occurs, the specimen should be cut back to the metal without stopping the machine.

3.3.4.7.3 Acceptance. The roadwheel path adhesion shall not be less than 60 pounds per inch of width and the pad adhesion shall not be less than 120 pounds per inch of width. Successful adhesions will be those that result in a separation in the rubber (rubber tear) without evidence of separation in the rubber-to-metal interface. The bond between metal and all bonding agents/cements shall be higher than the component compound so that separation during adhesion tests occurs only in the rubber. The elastomer pulled off the metal plate/shoe body and that remaining shall be examined for any defects including cracks, blisters, or porosity. Discontinuity (non-knit) of the elastomer resulting in any indication of separation of the elastomer shall be cause for rejection. All data generated during this test will be provided to the Government.

3.3.4.8 Ozone resistance. Prepare specimens in accordance with Method B, Procedure B2 of ASTM D1149. The specimens shall be smoothly finished in accordance with ASTM D3182 and ASTM D3183 and obtained from either of the following (see 4.7.2.11):

a. Three samples each shall be taken from each compound used on the track roadwheel path and ground pad (integral and replaceable) and shall not include any outer surface.

b. Samples may be taken from each uncured compound production molding blanks, prepared in the form of ASTM tensile slabs, and certified as being of an equivalent state of cure as the production molded component (roadwheel path stock and ground pad).

3.3.4.8.1 Procedure. Specimens shall be tested in accordance with ASTM D1149 and mounted in accordance with Method B, Procedure B2 of ASTM D1149, except the length of the clamping strips shall be such as to facilitate placement within the ozone chamber. Specimens shall then be placed in the chamber and exposed for 7 days at a temperature of 104±3.6 °F having a partial pressure of ozone of 50 millipascals. The specimens shall show no evidence of cracks when inspected at seven power magnification. Test results will be reported to the Government.

3.3.4.9 Optional ozone test procedure. As an option, the following procedures may be used in place of the above to accommodate the ozone test requirement (see 4.7.2.11).

3.3.4.9.1 Specimen preparation. The size of the specimens shall be in accordance with Method B, Procedure B2 of ASTM D1149, except the thickness shall be 0.080±0.005 inch. Specimens shall be obtained from either of the following:

a. Three specimens shall be taken from the track block chevron and shall not include any outer surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

b. Three specimens shall be taken from production molding blanks of uncured rubber compounds, being used to rubberize track components, prepared in the form of tensileslabs and certified as being of an equivalent state of cure as the production molding.

3.3.4.9.2 Procedure. The specimen shall be tested in accordance with Method B, Procedure B2 of ASTM D1149, except the length of the clamping strips shall be such as to facilitate placement within the ozone chamber. Specimens shall then be placed in the chamber and exposed for 7 days at a temperature of 100±2 °F in an air-ozone mixture containing 50±5 parts by volume of ozone per hundred million parts of air. The specimen surfaces shall be finished smoothly and of uniform thickness in accordance with part C of ASTM D3182. The rubber materials shall have no evidence of cracks when inspected at 7 power magnification at the end of 7 days.

3.3.4.10 Brittleness point of flexible polymers. The specimens and test method shall be in accordance with ASTM D2137. Specimens shall be type B of method A and tested at a temperature of -40±3.6 °F in accordance with method A of ASTM D2137. Five specimens shall be tested and inspected showing no evidence of cracks, fissures, or pinholes. In the event one specimen fails, an additional five specimens shall be prepared and tested. Failure of two or more of the initial five specimens, or any of the last five specimens, shall be cause for rejection. Test results shall be reported to the Government (see 4.7.2.12).

3.3.4.11 GC mass spec. The Government may perform spot inspections for the purpose of obtaining samples for pyrolysis-gas chromatography/mass spectrometry analysis. Up to five samples may be taken at any time during a production contract. Samples will be taken from end item cured parts. The initial part of the method will thermally desorb the additives, which are then analyzed by gas chromatography/mass spectrometry. Following desorption of the additives the remaining sample will be pyrolyzed and analyzed by gas chromatography/mass spectrometry. A baseline scan will be performed on the material submitted for qualification. Future results will be compared with the baseline to determine that there are no new peaks appearing, no ingredients missing, and no substitutions in subsequent production runs (see 4.7.2.13).

3.3.4.12 Track blowout test. This test is required for compounds being submitted for qualification for integral pad track systems using the T107 track as the candidate qualification design. Testing shall be conducted at the U.S. Army DEVCOM Ground Vehicle Systems Center and arrangements can be made by contacting the Preparing Activity. Testing will be conducted on afatigue test machine (see 4.7.2.14) having a static load and a dynamic (oscillating) load as specifiedin 3.3.4.12 a. below as applicable. Cyclic loading will be at 1800 cycles per minute with automaticload sensing and compensation capability. Fifteen (15) track block samples of each compound being submitted for qualification will be required with 12 being tested. The highest and lowest cycles to failure will not be counted and the results will be the average of the remaining ten (10) track block samples. All test results will be provided to the submitting contractor indicating acceptance or rejection of the samples (see 4.7.2.14).

a. T107 ground side chevron pads are to be subjected to a dynamic load of 1600 pounds and a static load of 1600 pounds for a total load of 3200 pounds. The minimum average fatigue life (blowout) shall not be less than 50 000 cycles with no individual block of the original twelve (12) samples below 45 000 cycles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.3.4.13 Product marking. Unless otherwise specified (see 6.2), each track shoe assembly (roadwheel path elastomer) and track shoe pad (integral and replaceable) shall have the following information permanently and plainly marked on it. Every attempt possible should be made to locate this information in an area that may not get damaged/worn during field use.

a. Manufacturer's name or rubber manufacturer's code number.

b. National stock number of the track shoe assembly and track shoe pad kit as applicable.

c. Week of month and year of manufacture.

d. Compound number and mold number.

3.4 Phase III endurance tests.

3.4.1 Bushing endurance. The bushing qualification/endurance testing will be conducted in accordance with the test requirements of Appendix A and results provided to the Government. Compounds that have passed all qualification test requirements and have documented data supporting compliance to all requirements will be listed on the QPL by number and source for all track bushings with the exception of T158 and T158LL track systems.

3.4.1.1 Endurance test requirements. The bushing endurance test for qualification will be conducted in accordance with the requirements of Appendix A. The minimum acceptance criteria for fatigue life-to-failure for all 9 specimens tested is 110 000 compression load cycles simultaneous with 440 000 torsional cycles without exceeding 0.144 inches of radial deflection at the bushing center line. The minimum average of 8 specimens, dropping the highest bushing test cycles, shall not be less than 130 000 cycles.

3.4.1.2 Process Fingerprint Plan. Following qualification and prior to any production, the contractor’s Process Fingerprint Plan (see 3.3) with the predicted and actual target values and ranges shall be reviewed by the contractor with the Government QAR to determine whether any adjustments are required and the extent of any adjustments. Any and all pertinent and relevant data, historical or otherwise, shall be used as supporting rationale for the establishment of these values. This final plan shall be reviewed by the Government and signed by the QAR and an authorized contractor representative. This plan will then be put in place at the contractor's plant/facilities and subcontractor's plant/facilities and utilized for the production of all subsequent parts/assemblies as described in the plan.

3.4.2 Replaceable pad track system qualification. Contractors submitting compounds for qualification to produce style B, replaceable pad track systems are responsible for the entire track system to include all metal components and fasteners. All requirements of 3.2 must be met prior to qualification approval and the documented results provided to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.4.2.1 Endurance test requirements. Full track assemblies being submitted for qualification must contain a qualified pin/bushing assembly. A report is required containing the information required in 3.3.2 and 3.4.1 as demonstration of bushing qualification. In addition, a report containing the results of 3.3.3 and 3.3.4 of this specification is also required as applicable to replaceable pad track systems. Track system qualification will be conducted in accordance with the requirements established in Appendix B. A minimum of 5000 miles demonstrated track durability at 20% replacement must be achieved for a track system to be considered qualified and a contractor to be listed on the QPL.

3.4.2.2 Track ground pad qualification. Contractors submitting compounds for pads only on style B track will provide the inspection results in accordance with the requirements of 3.2 and provide a report containing the results of applicable requirements of 3.3.4. Excluding the T157I pad, on-vehicle qualification tests will be conducted in accordance with Appendix B as applicable to ground pads only. A minimum of 1000 miles demonstrated track pad durability at 40% replacement must be achieved for a pad compound/contractor to be considered for listing on the QPL for pads. For the T157I pad, on-vehicle qualification tests will be conducted in accordance with Appendix D. A minimum of 800 miles demonstrated track pad durability at 40% replacement must be achieved for a pad compound/contractor to be considered for listing on the QPL for pads.

3.4.3 Integral pad track system qualification. Contractors submitting compounds for qualification to produce style A, integral pad track systems are responsible for the entire track system to include all metal components and fasteners. All requirements of 3.2 must be met prior to qualification approval and the documented results provided to the Government.

3.4.3.1 Endurance test requirements. Full track assemblies being submitted for qualification must contain a qualified pin/bushing assembly. A report containing the information required in 3.3.2 and 3.4.1 is required as demonstration of bushing qualification. In addition, a report on the results of 3.3.3 and 3.3.4 of this specification is also required as applicable for integral pad track systems. Track system qualification will be conducted in accordance with the requirements established in Appendix C. A minimum of 1200 miles demonstrated track durability at 20% replacement must be achieved for a track system to be considered qualified and a contractor to be listed on the QPL.

3.5 Production requirements. Following qualification and prior to any production, the contractor's Process Fingerprint Plan (see 3.3) with the predicted and actual target values and ranges shall be reviewed by the contractor with the Government QAR to determine whether any adjustments are required and the extent of any adjustments. All data generated during the qualification of track bushings, track pads, and full track assemblies as required and in accordance with 3.3 shall be used in the assessment of any changes to the contractor's Process Fingerprint Plan. This final plan shall be approved by the Government, signed by the QAR and an authorized contractor representative, and dated. This plan will then be put in place at the contractor's plant/facilities or subcontractor's plant/facilities and utilized for the production of all subsequent parts/assemblies as described in the plan. During production, the contractor shall maintain values within the tolerances specified in the Process Fingerprint Plan.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

3.5.1 First article. When specified (see 6.2), a sample shall be subjected to first article test/inspection in accordance with 4.4.

3.5.2 Workmanship. Workmanship shall be of such quality as to assure that track pin/bushing assemblies, track shoe pads and track shoe assemblies furnished under this specification are free from defects that compromise, limit, or reduce performance in intended use. The bushing holes of the shoes shall be free from foreign substances that will adversely affect bushing installation and endurance. The shoe shall be free from sharp edges, concave roadwheel path surfaces, or other irregularities which may adversely affect operation. Molded elastomeric components shall be free from blisters, cracks, folds, porosity, backrinding, flash, and non-fill (air check), voids, cuts, foreign material, separation, off-register, undercure, overcure, and improper dimensions. Bushing rubber shall be free from installation cuts and tears. Additional information, guidance, and a listing of unacceptable defects are shown in table VIII. Note that no defects are allowed on bushing assemblies.

3.5.3 GC mass spec. The Government may perform spot inspections for the purpose of obtaining samples for pyrolysis-gas chromatography/mass spectrometry analysis. Up to five samples may be taken at any time during a production contract. Samples will be taken from end item cured parts. The initial part of the method will thermally desorb the additives, which are then analyzed by gas chromatography/mass spectrometry. Following desorption of the additives, the remaining sample will be pyrolyzed and analyzed by gas chromatography/mass spectrometry. A baseline scan will be performed on the material submitted for qualification. Future results will be compared with the baseline to determine that there are no new peaks appearing, no ingredients missing, and no substitutions in subsequent production runs.

3.5.4 Pin/bushing design and construction. Unless otherwise specified (see 6.2), (reference dimensioned bushing drawings) the thickness of the elastomeric sections bonded to the pin shall be such that compression of 35 to 40 percent of the original thickness will result when installed in the intended application. Unless otherwise specified, the width of the sections shall not be less than two and one-half or more than three times their thickness before compression. The contractor shall be responsible for the volume of bushing properly filling the total volume for which it is intended within ±5% (95 to 105% of available volume). The bushing shall not protrude beyond nor be recessed inside the shoe in which it is assembled beyond the limits shown on applicable drawings. Unless otherwise specified, the bushing bore of the track shoe body shall have a surface roughness height between 63 and 250 microinches (see 4.7.1.14).

3.5.4.1 Concentricity. The pin with the elastomer bushing thereon, assembled in the applicable shoe (or simulated bore), shall be concentric with the bore of the shoe (or simulated bore), so that the elastomer thickness is uniform within ±1/64 inch.

3.5.4.2 Bushing adhesion. When tested in accordance with 4.7.1.10, the load required to separate the elastomeric sections from the pin/sleeve shall not be less than the values shown in table IV. The elastomer pulled off and that remaining on the part shall show no evidence of any defects including cracks, blistering, or porosity at the conclusion of the test. Discontinuity (non-knit) of the elastomer resulting in any indication of separation of the elastomer shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE IV. Bushing adhesion.

Diameter of pin (inches)	Minimum load (lbs/inch width)
5/8	23
3/4	25
1	29
1-1/8	31
1-1/4	33
1-5/16	34
2	36

NOTE: When exact size of pin/sleeve is not shown above, use the value of load for the next larger pin/sleeve diameter.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.3).

b. First article inspection (see 4.4).

c. In-process inspections and tests (see 4.5.2).

d. Conformance inspection (CI) (see 4.5.3).

e. Control tests (see 4.6).

4.2 Inspection conditions. All inspections shall be performed in accordance with conditions specified in applicable drawings, specifications, and standards.

4.3 Qualification inspection.

4.3.1 Sampling for qualification inspection. Qualification inspection shall be performed on sample units selected in accordance with table V for bushings and table VI for track roadwheel path and ground pad rubber which were produced with equipment and procedures normally used in production. The test results and other inspection information will be submitted to the Government to be used for the establishment of average values for future production control. Established property and tolerances in table II and table III must be met by qualification specimens subjected to applicable tests. Upon successful fabrication and qualification of all components and tracks, contractors shall not make any compound formulation changes in either the type or the quantity of ingredients without prior Government approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.3.1.1 Bushings (unvulcanized). Samples from unvulcanized bushings shall be taken upon final compound mixing for the performance of the following qualification tests: specific gravity, hardness, tensile strength, elongation, tensile stress, aged properties, brittleness point, cure meter, TGA, compression set, GC mass.

4.3.1.2 Bushings (vulcanized). The following tests will be performed on vulcanized bushings: hardness, adhesions, bushing endurance.

4.3.1.3 Roadwheel path and ground pad (unvulcanized). Samples from unvulcanized roadwheel path and ground pad rubber shall be taken upon final compound mixing for the performance of the following qualification tests: specific gravity, hardness, tensile strength, elongation, tensile stress, aged tensile strength (roadwheel path only), aged elongation (roadwheel path only), brittleness point, cure meter, ozone resistance, TGA, and GC mass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of inspection and frequencies (bushings).[1]

Title	Require -ment	Inspection	Qual	Fist article	In-process inspection	CI	Control test
Specific gravity	3.3.3.2	4.7.1.1	Note 2	Note 2	1/batch[6]		
Hardness	3.3.3.3	4.7.1.2	Note 2	Note 2	1/shift		1/shift
Tensile strength	3.3.3.4	4.7.1.3	Note 2	Note 2	1/shift		
Tensile strength (aged)	3.3.3.5	4.7.1.4	Note 2	Note 2	1/month		
Ultimate elongation	3.3.3.4	4.7.1.5	Note 2	Note 2	1/shift		
Ultimate elongation (aged)	3.3.3.5	4.7.1.6	Note 2	Note 2	1/month		
Tensile stress	3.3.3.4	4.7.1.7	Note 2	Note 2	1/shift		
TGA	3.3.3.6	4.7.1.8	Note 2	Note 2	1/bi-monthly[7]		
Cure meter	3.3.3.7	4.7.1.9	Note 2	Note 2	1/batch[6]		
Adhesion	3.3.3.8	4.7.1.10	Note 2	Note 2			1/shift
Compression set	3.3.3.9	4.7.1.11	Note 2	Note 2	1/month		
Brittleness	3.3.3.10	4.7.1.12	Note 2	Note 2	1/month		
GC mass spec	3.3.3.11	4.7.1.13	Note 2	Note 2			Note 5
Bushing fill	3.5.4	4.7.1.14	1/mold	1/mold			1/new mold
Concentricity	3.5.4.1	4.7.1.15	Note 3	Note 3		Note 3	
Workmanship	3.5.2	4.5.3.1	Note 3	Note 3		Note 3	
Product marking	3.3.5.13	4.5.3.1	Note 3	Note 3		Note 3	
Endurance	3.4.1	4.3.3	Note 2				Note 4

NOTES:

1. Samples shall be selected at the location specified in 4.3.1.1 and 4.3.1.2. For in-process tests, samples are picked right after or while batches are being finalized. Control Tests would normally be performed on finished bushings (vulcanized).
2. Samples shall be taken as specified in section 3. Unless otherwise specified (see 6.2), sample size shall be one.
3. Sample size shall be in accordance with table VII.
4. Bushing endurance shall be run as specified by the Procuring Activity. During the course of any given contract, no more than three (3) tests shall be required. Requirements and sample size shall be in accordance with 3.4.1.
5. The Government may require samples as specified in 3.3.3.11.
6. One batch is identified as a full mixer of rubber compound. “1/batch” indicates one sample per batch.
7. “1/bi-monthly” indicates one sample every other month.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of inspections and frequencies (roadwheel path and ground pad).[1]

Title	Require -ment	Inspection	Quality	Fist article	In-process inspection	CI	Control test
Specific gravity	3.3.4.1	4.7.2.1	Note 2	Note 2	1/batch[6]		
Hardness	3.3.4.2	4.7.2.2	Note 2	Note 2	1/shift		1/shift
Tensile strength	3.3.4.3	4.7.2.3	Note 2	Note 2	1/shift		1/week
Tensile strength (aged)	3.3.4.4	4.7.2.4	Note 2	Note 2	1/month		1/month
Ultimate elongation	3.3.4.3	4.7.2.5	Note 2	Note 2	1/shift		1/week
Ultimate elongation (aged)	3.3.4.4	4.7.2.6	Note 2	Note 2	1/month		1/month
Tensile stress	3.3.4.3	4.7.2.7	Note 2	Note 2	1/shift		1/week
TGA	3.3.4.5	4.7.2.8	Note 2	Note 2	1/bi-monthly[7]		
Cure meter	3.3.4.6	4.7.2.9	Note 2	Note 2	1/batch[6]		
Adhesion	3.3.4.7	4.7.2.10	Note 2	Note 2			1/shift
Ozone Resistance	3.3.4.8 3.3.4.9	4.7.2.11	Note 2	Note 2			1/month
Brittleness	3.3.4.10	4.7.2.12	Note 2	Note 2	1/month		
GC mass spec	3.3.4.11	4.7.2.13	Note 2	Note 2			Note 5
Blowout	3.3.4.12	4.7.2.14	1/mold	1/mold			Note 4
Workmanship	3.5.2	4.5.3.1	Note 3	Note 3		Note 3	
Product marking	3.3.4.13	4.5.3.1	Note 3	Note 3		Note 3	
Road test	3.4.2.1	4.3.2	Note 2				

NOTES:

1. Samples for in-process and control testing shall be selected at the locations as specified in 4.3.1.3 and 4.3.1.4. In-process tests shall normally be performed on finished batches. Control tests shall be performed primarily on finished pads and roadwheel path rubber.
2. Samples shall be taken as specified in section 3. Unless otherwise specified (see 6.2), sample size shall be one.
3. Sample size shall be in accordance with table VII.
4. Samples shall be required by the Government as specified in 3.3.4.12.
5. Samples may be selected by the Government as specified in 3.3.4.11.
6. One batch is identified as a full mixer of rubber compound. "1/batch" indicates one sample per batch.
7. "1/bi-monthly" indicates one sample every other month.

4.3.1.4 Roadwheel path and ground pad (vulcanized). The following qualification tests will be performed on vulcanized track roadwheel path rubber and ground pads: hardness, tensile strength (integral and replaceable pads only), elongation (integral and replaceable pads only), tensile

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

stress (integral and replaceable pads only), aged tensile strength (integral and replaceable pads only), aged elongation (integral and replaceable pads only), ozone resistance, adhesion, and blowout.

4.3.1.5 Samples for on-vehicle road test. On-vehicle road test qualification of replaceable pad track systems (T154) requires 74 complete assemblies plus spares in accordance with Appendix B. Excluding the T157I pads, contractors supplying pads only for qualification are required to provide 74 pads plus spares in accordance with Appendix B. Contractors supplying pads for T157I pad qualification are required to submit 164 samples plus spares in accordance with Appendix D. On-vehicle road test qualification of integral pad track systems (Tl07) requires 50 complete assemblies plus spares in accordance with Appendix C. In addition 15 blocks are required for blow-out testing in accordance with 3.3.4.12. All hardware submitted for on-vehicle qualification shall be sent to the test site. Results of all tests listed in table II and table III shall be on file for the on-vehicle test samples. The samples shall be representative of those produced with equipment and procedures normally used in production.

4.3.1.5.1 Qualification sample size. The Government reserves the right to adjust the qualification sample size specified in 4.3.1.5 based on vehicle availability and the number of contractors attempting qualification.

4.3.2 On-vehicle testing. For the on-vehicle test, replaceable track pad systems shall be qualified on the T154 track configuration mounted on an M109 series vehicles (see Appendix B for the replaceable track pad system test plan). Integral pad track shall be qualified on the T107 track mounted on an M88A1 series vehicle system (see Appendix C for the integral pad track test plan). Extension of qualification to track models other than those directly tested are listed in 6.7.1. The T157I pads shall be qualified on a Bradley Fighting Vehicle (BFV) System (see Appendix D for the T157I pad test plan). Integral pad track shall be qualified on the T107 track mounted on an M88A2 series vehicle system (see Appendix E for the integral pad track test plan).

4.3.3 Qualification approval. Track assemblies shall meet the requirements stated in section 3. Failure to meet minimum requirements specified shall be cause for sample rejection. Failure of any qualification sample to pass the specified inspections may be cause for refusal by the Government to conduct additional inspections until it has been proved, to the satisfaction of the Preparing Activity, that the faults revealed by the inspections have been corrected.

4.3.4 Retention of qualification. The Preparing Activity shall periodically review the contractor's test and inspection data during the life of future production contracts to assure that the results are equal or superior to those obtained during qualification testing. Any test results that continue to fail to match or exceed the data requirements established during qualification testing may be cause for removal of the contractor from the QPL. For those contractors who are on the QPL, but have been out of production for 1 (one) year or more, the Government reserves the right to require a first article inspection (see 4.4).

4.4 First article inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.4.1 First article sample. Unless otherwise specified (see 6.2 and 6.10), the Government shall select bushing and roadwheel path and ground pad samples produced under the production contract for first article inspection. For bushings, first article samples shall be inspected as specified in table V. For track roadwheel path and ground path, first article samples shall be inspected to table VI. Inspection results shall be equal or superior to those obtained during qualification testing.

4.4.2 First article sample approval. Approval of the first article sample by the Government shall not relieve the contractor of his obligation to supply bushings, roadwheel path or ground pad items that are fully representative of those inspected as a first article sample. Any changes or deviations of the production units from the first article sample shall be subject to the approval of the contracting officer.

4.4.3 Failure. Deficiencies occurring during or as a result of first article inspection shall be cause for rejection of the products until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiency. The Government will not accept products until first article inspection is completed to the satisfaction of the Government. Further, the Government reserves the right to remove a contractor's name from the QPL pending successful completion of the first article.

4.5 Product and process control.

4.5.1 Control plan. The control plan is basically an outline of how the contractor verifies fulfillment of the requirements of this specification. The control plan shall summarize the control techniques used from receipt of raw materials to shipment of product. Test/inspection characteristic values shall be identified in the Process Fingerprint Plan (see 3.3). The initial control plan shall be established prior to qualification and shall reflect the product and process controls used to manufacture the qualification hardware. The control plan shall be in chart form and shall reflect the following: supplier name, process or product name or number, plan revision and revision date, operation number or process step, process parameters and product characteristics, method of control (for example gage, test), sample size and frequency, analysis method (for example control chart, lot plot, run chart), and other important control information. The control plan shall address the test methods/equipment used to meet the requirements of this specification. The use of alternative test methods/equipment (state-of-the-art) may be utilized provided the supporting data/rationale is provided to show equivalency to the test/equipment being replaced and the contractor receives Government approval (see 3.3). The plans shall reflect the process parameter controls (see 4.5.1.1) and product characteristic controls (see 4.5.1.2) used to assure the quality of the end product. The control plans are intended to be dynamic and may be changed as process improvements are made. The initial plans shall be delivered to the Government QAR and the Preparing Activity for approval. Any changes to the plans shall be provided to the Government QAR for concurrence, prior to implementation. The contractor shall have data available to support any changes to the control plans.

4.5.1.1 Process parameter controls. The quality of the products produced under this specification shall be controlled through process control techniques, such as statistical process control (SPC). Process controls shall be of a type that will provide adequate control of the process. The type and extent of the control is a function of the significance of the parameter being controlled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.5.1.1.1 Process parameter selection. The process parameters selected for control shall be identified through one of the following process analysis methods: Design of Experiments (DOE), Regression Analysis, Correlation Studies, Failure Mode Effects Analysis (FMEA), or other formal or scientific process analysis technique(s). The results of the process analysis shall be documented. As a minimum, the contractor shall identify how the following parameters are to be controlled or provide data from the process analysis or other evidence/information that justifies why one of the following are not controlled: raw material properties, material weights, mixing and milling conditions (time, temperature, mill banks) stock lay down temperatures, extrusion temperatures, booking temperatures, unvulcanized rubber block weights/dimensions, cleanliness of rubber and metal to be bonded, complete adhesive coverage, injection time, cure time, mold service time, runner temperature, nozzle temperature, mold temperature, and mold pressure. In addition, the contractor may use any additional parameters to assure production of acceptable track components. The selected parameters shall be reflected on the control plan(s).

4.5.1.2 Product characteristic controls. Product characteristics are identified in the technical data package and in this specification. The product characteristics identified shall be controlled by process control techniques. Adequate process controls are necessary for the reduction and elimination of these product characteristic inspections as described in 4.5.1 of this specification.

4.5.1.2.1 Product characteristic selection. As a minimum, the product characteristics to be controlled or tested are identified in Quality Assurance Provisions, drawings, and this specification (see 4.5.3 and 4.7). At its own discretion, the contractor may control or inspect any additional characteristics. However, elimination of the required characteristics shall be supported by adequate inspection process analysis data. The selected characteristics shall be reflected on the control plan.

4.5.2 In-process inspection. In-process inspections listed in table V and table VI shall be performed on unvulcanized bushing, track roadwheel path and ground pad compound batches as soon as possible after they are final (all ingredients are added to the compounds). This effort will minimize production of large quantities of defective compounds which may result in the production of defective track components.

4.5.2.1 Sampling for in-process inspection.

4.5.2.1.1 Bushings. The samples for in-process inspection shall be selected and tested in accordance with table V.

4.5.2.1.2 Roadwheel path and ground path. The samples for in-process inspection shall be selected and tested in accordance with table VI.

4.5.2.2 Rework (workaway). Rubber track compounds that are defective or miscompounded shall not be used for rework (workaway) to fabricate any track components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

Rework will be limited to conforming compounds that are generated during processing. Rework will consist of compounds being reworked into the same compounds using the lowest practical level in order to avoid process, compound and finished product variation. This level shall be established by the contractor and shall not affect the rubber properties or result in processing difficulties. Rubber compounds for rework would normally be limited to the following:

a. Non-defective compounds being worked into themselves at the rate indicated above.

b. Excess rubber left on the mills after extrusion, provided it is sheeted off promptly, identified, and kept clean.

c. Extruded rubber that failed to meet dimensions, provided the extruded rubber is milled, cooled, and identified.

d. Rubber used to warm up the tuber, but has not been contaminated with other rubber compound or scorched material.

4.5.2.3 Material weight tolerances. The ingredients shall be properly weighed on calibrated scales and controlled by inspections to assure compliance to the tolerances and inspection frequencies established by the contractor. The weights of all ingredients for the master batches, remills (if any), and final batches shall be inspected to assure process control.

4.5.2.4 Vulcanization time, pressure, and temperature. The vulcanization time, temperature, pressure, and other cure conditions will be those established by contractors to assure that track components have acceptable properties. These established cure conditions and tolerances will continue to produce components with acceptable properties and will meet the requirements of this specification. The molding pressure will be set and be maintained by the manufacturers to assure production of defect free components that will meet all specification requirements. The values for vulcanization time, pressure, and temperature shall be identified in the Process Fingerprint Plan (see 3.3).

4.5.2.5 Failures. Control failures are indicated by a deficiency discovered at any process control point (process parameter controls), during testing identified in table V and table VI, or during product inspections (product characteristic controls).

4.5.2.5.1 Process control failures. Process control failures are indicated by a deficiency discovered at the process control point during the inspection parameters identified in 4.5.1.1.1. A failure shall require the contractor to take corrective action to eliminate the problem and prevent its recurrence. Contractors shall correct failures or deficiencies to preclude production of defective products.

4.5.2.5.2 Product control failures. Product control failures shall be determined upon performance of inspections/tests listed in table V and table VI. Failures which are discovered in mixed, extruded and vulcanized compounds shall be separated by screening preceding and, if

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

necessary, subsequent runs until all defective materials are found and rejected. Contractors can retest two additional specimens out of the same deficient runs to confirm failure to meet requirements. If these last two specimens pass the test, then that control test is considered to be met. Failure of either of the two additional tests shall result in the rejection of all defective products.

4.5.2.6 Data comparison. Comparative data obtained from both in-process inspections and control tests shall be compared with data submitted in connection with qualification approval. Variations in excess of tolerance (see section 3) shall be evidence of change of materials, formula, or manufacturing procedure, and shall be cause for rejection.

4.5.3 Conformance inspection (CI).

4.5.3.1 Sampling for conformance inspection. The samples for CI examination shall be randomly selected from the inspection lot in accordance with table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE VII. Sampling plan for CI.[1, 2]

CI sampling plan [3]	
Inspection lot size	Sample size
2 to 8	See note 4
9 to 15	13
16 to 25	13
26 to 50	13
51 to 90	13
91 to 150	13
151 to 280	20
281 to 500	29
501 to 1200	34
1201 to 3200	42
3201 to 10,000	50
10,001 to 35,000	60
35,001 to 150,000	74
150,001 to 500,000	90
500,001 and over	102

NOTES:

1. Tightened inspection shall be introduced as soon as 2 out of 5 successive lots have been rejected and shall, as a minimum, impose a 30 percent increase in sample size. Normal inspection sampling may be restored after 5 successive lots have been accepted under tightened inspection.
2. Reduced inspection may be introduced when 10 successive lots have been accepted and shall as a maximum, permit a 30 percent decrease in sample size. Normal inspection sampling shall be restored if a lot is not accepted under reduced inspection.
3. Acceptance number is always zero
4. Indicates entire lot must be inspected (100% inspection).

4.5.3.1.1 Lot formation. Unless otherwise specified (see 6.2), a lot shall consist of all items submitted at one time, of one part number, manufactured under identical conditions from an identifiable production period not to exceed one work shift of a day's production from one manufacturer and from one production facility.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.5.3.2 Defects. The sample selected in 4.5.3.1 shall be inspected to the requirements of table VI for roadwheel path and ground pads and table V for bushings. The defects shall be classified as specified in table VIII. Note that table VIII addresses only the visual and physical measurement inspections of vulcanized components. It does not address defects or failures found upon testing.

4.5.3.3 CI failure. Any item that fails to conform to any specified requirement shall be rejected and any failure (one or more) of the selected sample or test for the appropriate inspection lot size shall constitute a failure of the entire lot. The rejected item(s) may be repaired or corrected and resubmitted for inspection. If the contractor utilizes sampling inspection as an element of his inspection system, rejected inspection lots may be resubmitted for acceptance if the contractor performs 100 percent inspection on the lot for those characteristics which were defective and resulted in rejection of the lot and removes all defective units or obtains procuring activity approval to resample the lot due to the insignificance of the defects. Resubmitted lots shall be kept separate from new lots and shall be clearly identified as resubmitted lots. Blemishes on rubber components which have not been listed in table VIII and are primarily appearance or cosmetic conditions (poor markings, pitting of molds, minor surface contamination) shall be resolved by manufacturers as these conditions arise.

TABLE VIII. Classification of defects.

Classification	Defect	Method of inspection
Blisters	A void or hole in article which causes protrusion on surface when hot, may not show on surface when cold. Blisters are unacceptable in bushings. Allowable tolerance 1/16 inch max length/depth on pads and wheel-side rubber. Same as backflow or back-flash. Distortion at the mold line in the form of wrinkles, folds, tears.	SIE[1]
Back-rinding	Unacceptable on bushings. Allowable tolerance 1/16 inch deep, 1/16 inch wide, 1/2 inch length along the mold line.	SIE
Cracks	Failure of rubber stock to knit together properly. It may be found in any part of the rubber surface and also at the rubber base next to the metal.	Visual
Chipped	Rubber missing due to chipping, usually during removal from mold or during trimming. Unacceptable on bushings. Allowable tolerance 1/8 inch max in depth/ length, provided there is no cutting beyond this dimension.	SIE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE VIII. Classification of defects – Continued.

Classification	Defect	Method of inspection
Cuts/tears	A slit, nick, or gash caused primarily by trimming of vulcanized components. Tear may be caused during removal of items from molds.	Visual
Folds	A crease or pleat, usually appears as overlap of rubber on itself with a relatively weak cohesion.	Visual
Foreign materials	Any extraneous matter such as wood, paper, metal, dirt, penetrating past the rubber surface.	Visual
Wide Flash	Thick spew-out rubber during moldings that results in dimensional noncompliance of the vulcanized component.	SIE
Light/non-fill/air check	Insufficient material to fill mold, leaving voids or non-fill conditions on component. Trapped air, poorly vented molds, excess mold lubricant can also cause this defect. Unacceptable on bushings. Allowable tolerance 1/16 inch max depth and 1/8 inch max length.	SIE
Separation	Separation in the rubber or between the rubber and adhesives or rubber and metals.	Visual
Off-register	Uneven or misaligned molds causing non-conformity to dimensional requirements of the drawing.	SIE
Undercure	Vulcanizing to the point that physical property (hardness, tensile strength) requirements are impaired.	SIE
Dimensional non-compliance	Molding that will result in concaveness, convexity or other dimensional irregularities of the components to meet the dimensional requirements of the drawing or result in adverse performance of the products.	SIE

NOTES:

1. SIE stands for Standard Inspection Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.5.3.4 Packaging and packing.

4.5.3.4.1 Lot formation. A lot shall consist of all packs prepared for shipment in accordance with one level (see 6.2), from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

4.5.3.4.2 Sampling for acceptance examination. Sampling for acceptance examination shall be performed in accordance with table VII.

4.5.3.4.3 Examination inspection for packaging and packing. Samples selected in 4.5.3.4.2 shall be inspected as specified by the procuring activity (see 5.1 and 6.2).

4.5.3.4.4 Sample failure. Failure of the sample to pass any specified inspection may be cause for the Government to refuse to accept the lot until it has been proved to the satisfaction of the Government that the faults revealed have been corrected.

4.6 Control tests.

4.6.1 Control test samples. Control test samples shall be selected in accordance with the schedule shown in table V for bushings and table VI for roadwheel path and ground pad material.

4.6.2 Control test failure. Any deficiency in any control test component shall be presumed to be present in components subsequently produced after selection of the control test component unless evidence satisfactory to the Procuring Activity is presented by the contractor that such components are not similarly defective. Upon determination that said defects do exist, the Government reserves the right to refuse to accept further production until the contractor demonstrates that corrective action has been taken to eliminate the cause of such defects. For material produced after the last successful control test or for material produced prior to control test failure, the contractor shall provide evidence that the material produced met requirements. Evidence can be in the form of sampling inspection.

4.6.3 Additional specimens. In the event of failure of the first selected specimen to pass the test, two additional specimens shall be selected and both shall pass the same test. If these last two specimens pass the test, then that control test is considered to be met. Failure of the first specimen to pass the test, or failure of either the second or third specimens to pass the test, will be cause for the Government to discontinue acceptance and to return units previously accepted which can be identified with the lot corresponding to the failed sample.

4.7 Methods of inspection.

4.7.1 Bushings.

4.7.1.1 Specific gravity. This test shall be performed to the requirements of 3.3.3.2. During production, this test shall be performed as batches of unvulcanized rubber are finalized (all ingredients have been added and mixed in the compound). Each batch of compound will be identified and tested. The results from these tests will meet the tolerances established from data acquired during qualification and the tolerances listed in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.7.1.2 Hardness. This test shall be performed to the requirements of 3.3.3.3. During production, one sample will be taken on unvulcanized and vulcanized rubber on a per shift basis. The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table II.

4.7.1.3 Tensile strength. This test shall be performed to the requirements of 3.3.3.4. During production, one unvulcanized sample will be taken right after mixing. The results from these tests will meet the tolerances established from data acquired during qualification and the tolerances listed in table II.

4.7.1.4 Tensile strength (aged). This test shall be performed to meet the requirements of 3.3.3.5. During production, one unvulcanized sample will be taken right after mixing on a monthly basis.

4.7.1.5 Ultimate elongation. This test shall be performed to the requirements of 3.3.3.4. During production, one unvulcanized sample will be taken on a per shift basis right after mixing. The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table II.

4.7.1.6 Ultimate elongation (aged). This test shall be performed to the requirements of 3.3.3.5. During production, one unvulcanized sample will be taken on a monthly basis right after mixing.

4.7.1.7 Tensile stress (modulus). This test shall be performed to the requirements of 3.3.3.4. During production, one unvulcanized sample will be taken right after mixing on a per shift basis. The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table II.

4.7.1.8 Thermogravimetric analysis. This test shall be performed to the requirements of 3.3.3.6. During production, this test shall be performed on one sample of unvulcanized rubber on a bi-monthly basis. The results will be compared to the established test results obtained at qualification.

4.7.1.9 Vulcanization using oscillating disk cure meter. This test will be performed to the requirements of 3.3.3.7. The test shall be performed as batches of unvulcanized rubber are finalized (all ingredients have been added and mixed in the compound). Each batch of compound will be identified and tested.

4.7.1.10 Adhesion. This test shall be performed to meet the requirements of 3.3.3.8. During production, the test shall be performed on one sample of vulcanized rubber per shift.

4.7.1.11 Compression set. Compression set shall be performed to the requirements of 3.3.3.9. During production, the test shall be performed on unvulcanized rubber sampled at the frequency of one sample monthly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.7.1.12 Brittleness point of flexible polymers. This test shall be performed to the requirements of 3.3.3.10. During production, the test shall be performed on unvulcanized rubber sampled at the frequency of one sample monthly.

4.7.1.13 GC mass spec. This test shall be performed to the requirements of 3.3.3.11. During production, the test shall be performed on unvulcanized rubber sampled at the frequency established by the Government. The results will be compared to the established test results obtained at qualification.

4.7.1.14 Bushing fill. To determine conformance to 3.5.4, the contractor shall test each mold cavity as specified herein. Every time a mold is reworked, or a new mold is produced, each cavity shall be tested. Prior to initiation of production, each mold shall have each bushing cavity tested for minimum and maximum fill by use of the approved compound in the following procedure:

a. Mold one set of bushing to pin or sleeve, without bond (do not use bonding agent) for minimum fill in accordance with 4.7.1.14.1 and maximum fill in accordance with 4.7.1.14.2. Another set of bushings which shall be bonded may be used for maximum fill determination in accordance with 4.7.1.14.3 in lieu of 4.7.1.14.2. Record mold position of each bushing. Record the outside diameter of each pin or sleeve of the unbonded set in inches to three decimal places.

b. Ensure skin coating between or beyond rings and flash is not in excess of 0.031 inch.

c. Record from track shoe drawing the following dimensions in inches:

(1) Maximum and minimum diameter of bore in shoe body.
(2) Average length of bore in shoe body. NOTE: On the boss and bushing sleeve combination where the bushing sleeve is shorter than its mating boss, use the bushing sleeve length as the determining factor.

4.7.1.14.1 Minimum fill determination. Using the unbonded bushing, the following procedure shall be completed:

a. Slide bushing elastomer off pin or sleeve.

b. Immerse elastomer in graduated cylinder of water. Water and bushing shall be at the same temperature of 80±20 °F. Record volume of water displaced in cubic centimeters.

c. Apply data from drawings and recorded bushing sleeve diameter in the following formula:

$$V_{cc} = 12.227 (D_o^2 - D^2) L$$

Where:

D_o = Maximum diameter of bore (inches)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

D_i = Recorded diameter of pin or sleeve (inches)
L = Average length of bore or sleeve (inches)
V_{cc} = Volume of cavity for bushing

The constant 12.227 included factors for conversion of inches to centimeters and to reduce to 95% volume. The calculation for each cavity is to be accomplished for minimum fill by using the maximum diameter and average length.

d. The displaced volume recorded from 4.7.1.14.1b. is to be compared to and be equal to or greater than the calculated volume of 4.7.1.14.1c.

4.7.1.14.2 Maximum fill determination (unbonded). Using the unbonded bushing, the following procedure shall be completed:

a. Perform steps in 4.7.1.14.1a and 4.7.1.14.1b.

b. Apply data from drawings and recorded sleeve diameters in the following formula:

$V_{max} = 13.515 (D_{min}^2 - D_i^2) L$

Where:
D_{min} = Minimum diameter of bore (inches)
D_i = Recorded diameter of pin or sleeve
L = Average length of bore or sleeve (inches)
V_{max} = Volume of cavity for bushing in cubic centimeters.

The constant 13.515 includes factors for conversion of inches to centimeters and to increase to 105% volume.

c. The displaced volume recorded from 4.7.1.14.1b. is to be compared to and be equal to or less than the calculated volumes of 4.7.1.14.1b.

4.7.1.14.3 Maximum fill determination (bonded). Using the bonded bushing, the following procedure shall be completed:

a. Provide one or more tubes, either steel or plastic, with a minimum bore diameter and the length equal to 105% of the average bore length of the shoe body in which the bushing is to be used.

b. Insert the bonded bushing in the tube.

c. One bushing from each cavity shall be tested.

4.7.1.15 Concentricity. Concentricity shall be measured with a depth gage or steel rule to determine conformance with 3.5.4.1. Samples shall be taken in accordance with table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.7.2 Track roadwheel path and ground pad.

4.7.2.1 Specific gravity. This test shall be performed to the requirements of 3.3.4.1. During production, the test shall be performed on unvulcanized rubber sampled at the frequency of one per batch at the final mixing. The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table III.

4.7.2.2 Hardness. This test shall be performed to the requirements of 3.3.4.2. During production, one sample per shift shall be taken from the unvulcanized rubber. In addition, one test shall be performed per shift on a finished component. The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table III.

4.7.2.3 Tensile strength. This test shall be performed to the requirements of 3.3.4.3. During production, one sample per shift shall be taken on unvulcanized rubber after final mixing. In addition, one sample per week shall be taken from the finished component (integral and replaceable pads only). The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table III.

4.7.2.4 Tensile strength (aged). This test shall be performed to the requirements of 3.3.4.4. During production, one sample per month shall be taken from the finished component (integral and replaceable pads only). One sample per month shall be taken from the unvulcanized rubber (roadwheel path only).

4.7.2.5 Ultimate elongation. This test shall be performed to the requirements of 3.3.4.3. During production, one sample per shift shall be taken on unvulcanized rubber after final mixing. In addition, one sample per week shall be taken from the finished component (integral and replaceable pads only). The results from these tests shall meet the tolerances established from data acquired during qualification and the tolerances listed in table III.

4.7.2.6 Ultimate elongation (aged). This test shall be performed to the requirements of 3.3.4.4. During production, one sample per month shall be taken from the finished component (integral and replaceable pads only). One sample per month shall be taken from the unvulcanized rubber (roadwheel path only).

4.7.2.7 Tensile stress (modulus). This test shall be performed to the requirements of 3.3.4.3. During production, one sample per shift shall be taken on the unvulcanized rubber after final mixing. In addition, one sample per week shall be taken from the finished component (integral and replaceable pads only). The results from these tests will meet the tolerances established from data acquired during qualification and the tolerances listed in table III.

4.7.2.8 Thermogravimetric analysis. This test shall be performed to the requirements of 3.3.4.5. During production, this test shall be performed on unvulcanized rubber sampled at the frequency of one sample bi-monthly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

4.7.2.9 Oscillating disk cure meter. This test shall be performed to the requirements of 3.3.4.6. During production, this test shall be performed on unvulcanized rubber sampled at the frequency of one sample per batch.

4.7.2.10 Adhesion. This test shall be performed to the requirements of 3.3.4.7. During production, one sample per shift shall be taken on vulcanized rubber.

4.7.2.11 Ozone resistance. This test shall be performed at the rate of one sample per month in accordance with the requirements of 3.3.4.8 or 3.3.4.9.

4.7.2.12 Brittleness point of flexible polymers. This test shall be performed to the requirements of 3.3.4.10. During production, one sample shall be taken monthly from unvulcanized final mixed compounds.

4.7.2.13 GC mass spec. This test shall be performed to the requirements of 3.3.4.11. During production, samples shall be taken as required by the Government.

4.7.2.14 Blowout test. This test shall be performed to the requirements of 3.3.4.12. Fifteen (15) track block samples of each compound for each configuration being submitted for qualification shall be required. Up to twelve (12) track block samples may be required by the Government during a production contract for the T107 track systems.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The elastomerized track shoe assemblies, track shoe bushings, and track shoe pads covered by this specification and track shoe sets assembled therefrom are intended for use in track systems on tracked military vehicles. These track shoes are military unique because they are used on tracked military vehicles and have a specific formulation which does not have a commercial application.

6.2 Acquisition requirements. Acquisition documents must specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.

b. ASSIST is to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.3).

c. Type and part number of the track shoe, track shoe pad, or track shoe set required.

d. Title, number, and date of applicable drawings.

e. Manufacturer's compound number from QPL.

f. Number of shoes to be assembled in a set.

g. If product marking should be other than as specified (see 3.3.4.13).

h. If first article test/inspection is required (see 3.5.1).

i. If pin/bushing design and construction should be other than as specified (see 3.5.4).

j. If first article sample should be selected other than as specified (see 4.4.1).

k. If CI inspection lot should be other than as specified (see 4.5.3.1.1).

l. If sample size should be other than as specified in table V and table VI.

m. Packaging requirements (see 5.1).

n. Mileage track pads should be removed from vehicle (see D.3.19.1).

o. Distribution of test incident reports and final reports (see D.3.27).

6.3 Definitions.

6.3.1 Definition of types.

6.3.1.1 Type I assembly. The type I track shoe assembly consists of a single-pin track shoe, bushing, and detachable track shoe pad, as applicable, together with attaching components such as bolts, pins, nuts, and washers.

6.3.1.1.1 Type I set. A type I track shoe set consists of a specified number of type I assemblies (see 6.3.1.1) coupled together with all attaching components.

6.3.1.1.2 Style B detachable pad. The detachable pad for the type I or type II track shoe assembly is the rubber pad intended for assembly on the road side of the track shoe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

6.3.1.2 Type II assembly. The type II track shoe assembly consists of a double-pin track shoe and bushings, together with attaching components such as bolts, pins, nuts, washers, connectors, caps, wedges, guides, and detachable pad as applicable.

6.3.1.2.1 Type II set. A type II track shoe set consists of a specified number of type II assemblies (see 6.3.1.2) coupled together with all attaching components.

6.3.1.3 Style. A style A track shoe does not have a detachable pad and the style B incorporates detachable pad.

6.3.2 Definition of defects.

a. Blister. Void or hole in item; causes protrusion on surface when hot; may not show on surface when cold; may be covered or open.

b. Crack. Failure of material to join together properly.

c. Non-fill. Air checks; depressions due to trapping of air at corners and edges.

d. Light stock. Insufficient material to fill mold.

e. Fold. Lapping or doubling of material resulting in a crease or pleat.

f. Backrinding. Distortion at the mold line, usually in the form of wrinkles, folds, tears, or indentations.

g. Flash rubber. Spew-out of material at mold parting line.

h. Porosity. Presence of numerous minute voids in cured material.

i. Non-knit. Weakness where rubber flows together during molding.

6.3.3 Definitions for process control.

a. Process parameter. Process parameters are associated with the process used for the manufacture of material. Typical parameters include time, temperature, feed rate, and pressure.

b. Product characteristic. Product characteristics include hardness, length, diameter, specific gravity, tensile strength, and concentricity.

c. Control techniques. Control techniques are used for either process or product purposes as applicable. Examples of control techniques include Statistical Process Control, first and last

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

piece verifications, temperature monitoring devices with warnings or auto processing stops, and detection inspections.

d. Analysis methods. Analysis methods are used for the identification of process parameters and product characteristics. Typical analysis methods include Design of Experiments, Regression Analysis, Failure Modes Effect Analysis, and Quality Functional Deployment.

e. Process fingerprint. Documented and detailed information that thoroughly describes the entire process used to produce the final product. This documentation includes test, process parameter and product characteristic target values and tolerances, in-process materials and process settings, and all other important and relevant information.

6.3.3.1 Preparing activity. The military activity responsible for the preparation and maintenance of this document and the associated Qualified Products List. The preparing activity is responsible for qualification, and is the qualifying activity and authority.

6.3.4 Definitions for rubber products. Use ASTM D1566 for rubber terminology and definitions.

6.4 Code numbers. Manufacturer's code numbers should conform to those listed in "Federal Supply Code for Manufacturers Cataloging Handbook", identified as "H-4.1, H-4.2, and Supplement".

6.5 Illustrations. The illustrations shown herein (see figure 1 through figure 4) are relevant to the preparation of rubber specimens for testing purposes; they are not intended to represent shoe or pad designs.

6.6 Testing agencies. Contractors may use their own or any other testing agency for performing the tests required under this specification provided it is acceptable to the qualifying activity for qualification tests or the contracting officer for any other testing. On-vehicle testing will be performed by the Government.

6.6.1 Subject term (key word) listing.

Military
Tracked
Vehicles

6.7 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No. 11891 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urgedto arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from the Preparing Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

6.7.1 Extension of qualification. Elastomer compounds used in track models that have been tested and met all qualification requirements of this specification may be extended qualification for use in similar track shoe models as listed in table IX.

TABLE IX. Extension of qualification.

Track model tested		Qualification extended to:
Track assembly	T107	T107, T138, T144, and all type II, style A tracks.
Track assembly	T154	T154, T164, T150, T130E1, T136, T132E1, and all replaceable pad tracks except T158/T158LL. T142 with First Article Blow-out Test required. T157I with First Article or Qualification Test for pad.
Track pads	T154	All style B tracks except T157I, T158/Tl58LL
Bradley track pad	T157I	None
Bushings	T130El	All track systems except T158/TI58LL

6.8 Track cross reference. The following track shoe assemblies in table X have been assigned model numbers for easy reference:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE X. Track cross reference.

Army drawing number	Nomenclature	Model
8705914 (M88A1)	Track, Double Pin	T107
12694350 (M88A2)	Track, Double Pin	T107
11677988	Track, Single Pin	T130El
10934639	Track, Single Pin	T132El
10954051	Track, Double Pin	T136
10948405	Track, Single Pin	T138
11645125	Track, Double Pin	T142
10892811	Track, Double Pin	T144
12474844	Track, Double Pin	T150
12268550	Track, Double Pin	T154
12556910	Track, Double Pin	T154M
12359466	Track, Single Pin	T157I
12387880	Track, Double Pin	T158LL
12496800	Track, Double Pin	T161
12352500	Track, Single Pin	T164

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.10 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.5.1), and the number of items to be tested as specified in 4.4.1. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, finished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

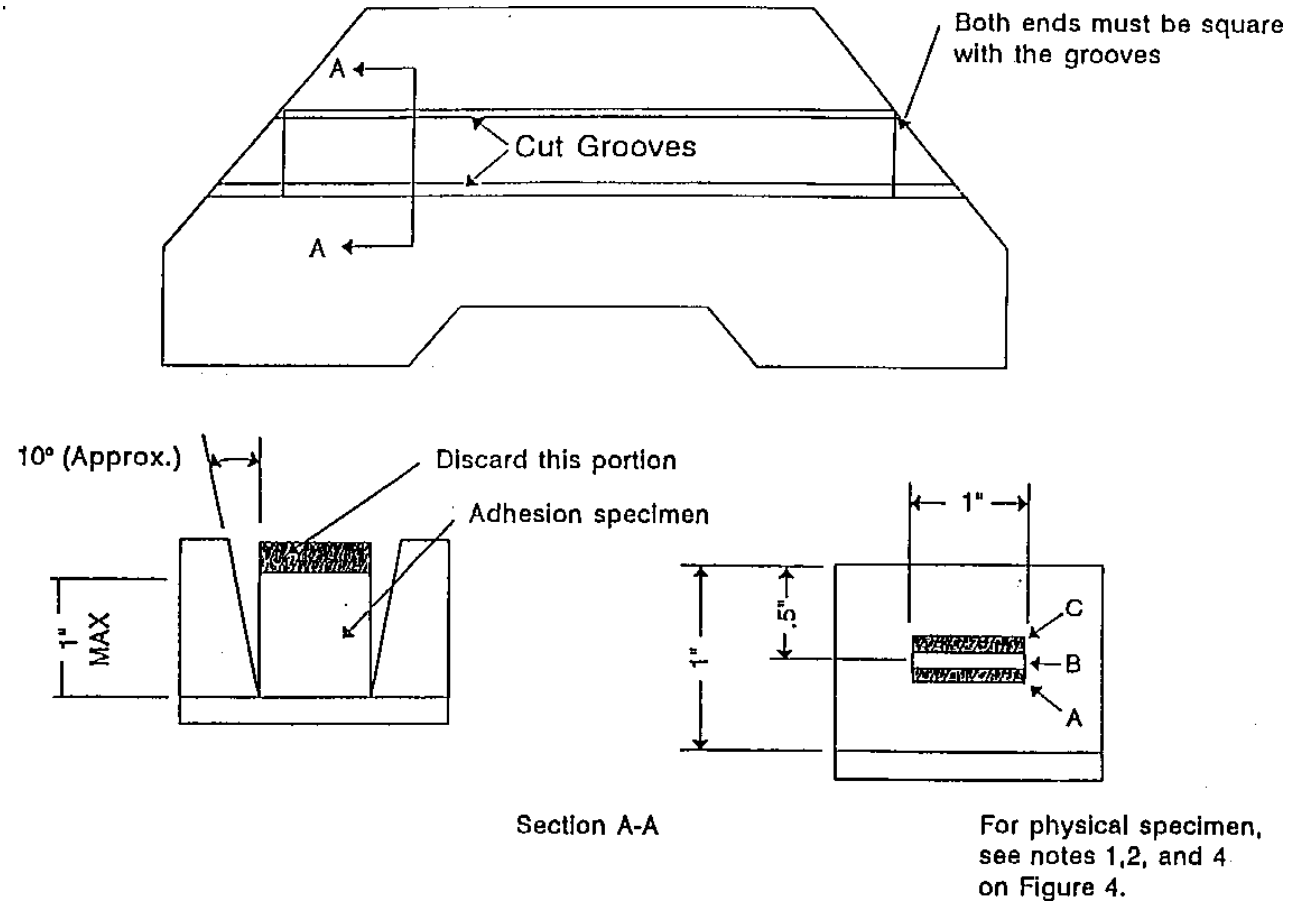


FIGURE 1. Style B detachable pad test specimen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.


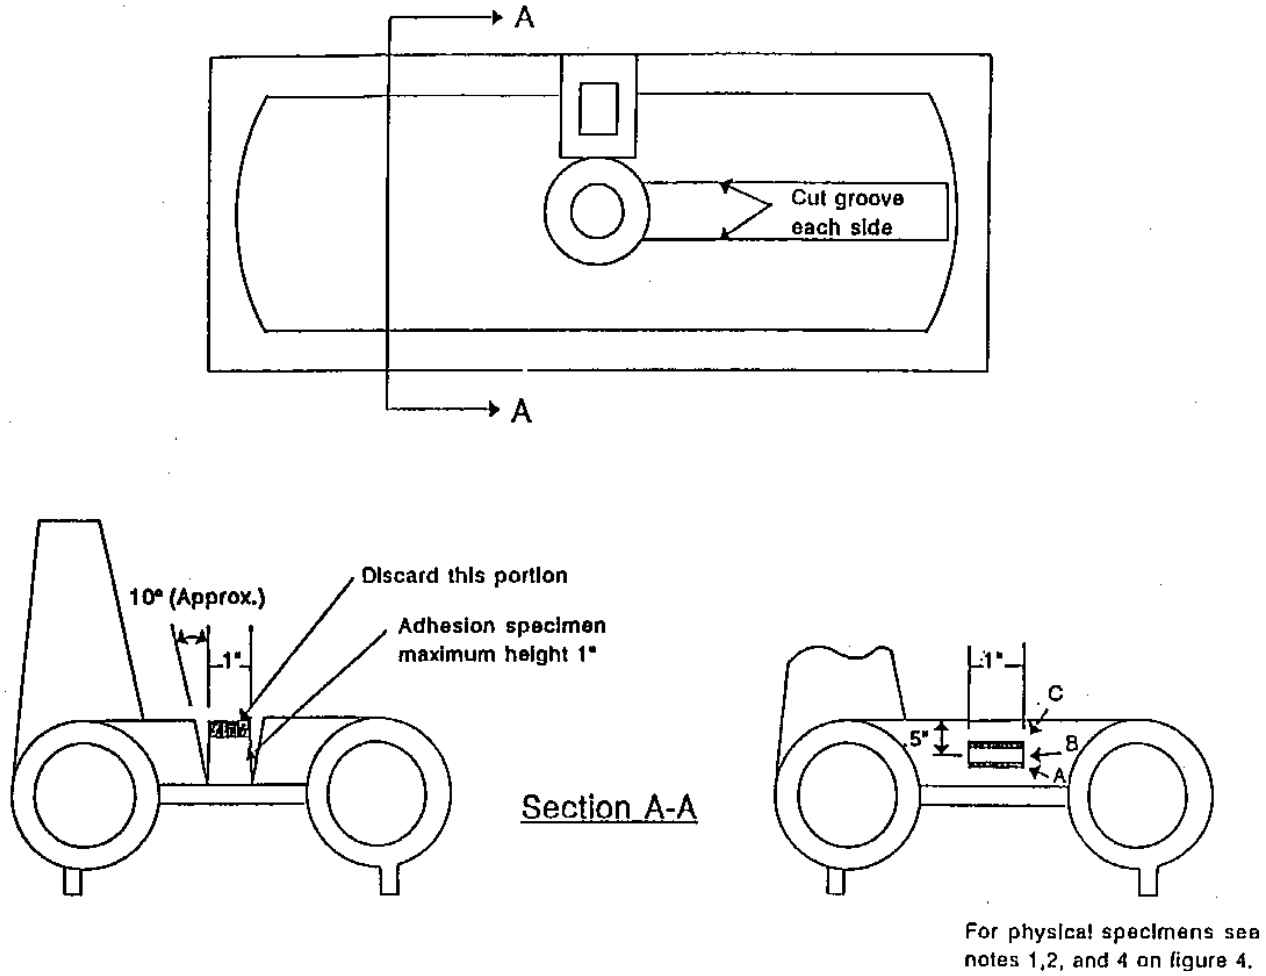


FIGURE 2. Type II shoe test specimen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

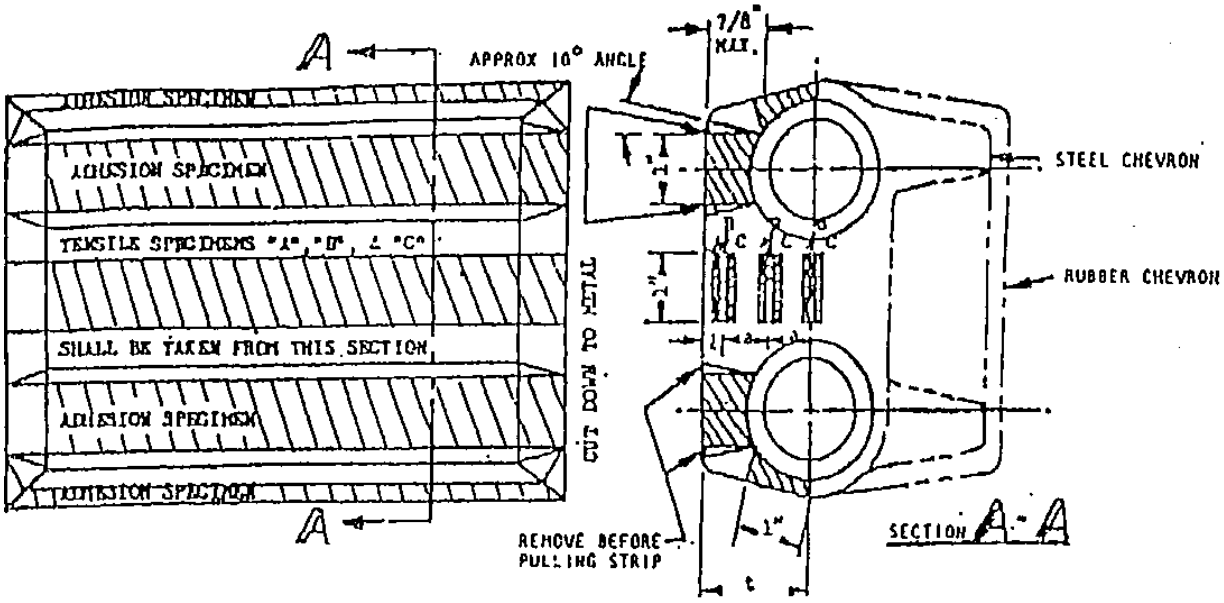

NOTES:

1. SPECIMENS "A" FOR MODULUS, TENSILE, & ELONGATION.
   SPECIMENS "B" FOR AGING.
   SPECIMENS "C" FOR ADDITIONAL SPECIMENS IF DESIRED.
2. THICKNESS OF SPECIMENS APPROXIMATELY 0.10 INCH ± 0.025".
3. a = (t - t) / 2
4. STRIPS SHALL BE CUT TO END OF BLOCK ON BOGIE TIRE SIDE.

FIGURE 3. Physical property test sample locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

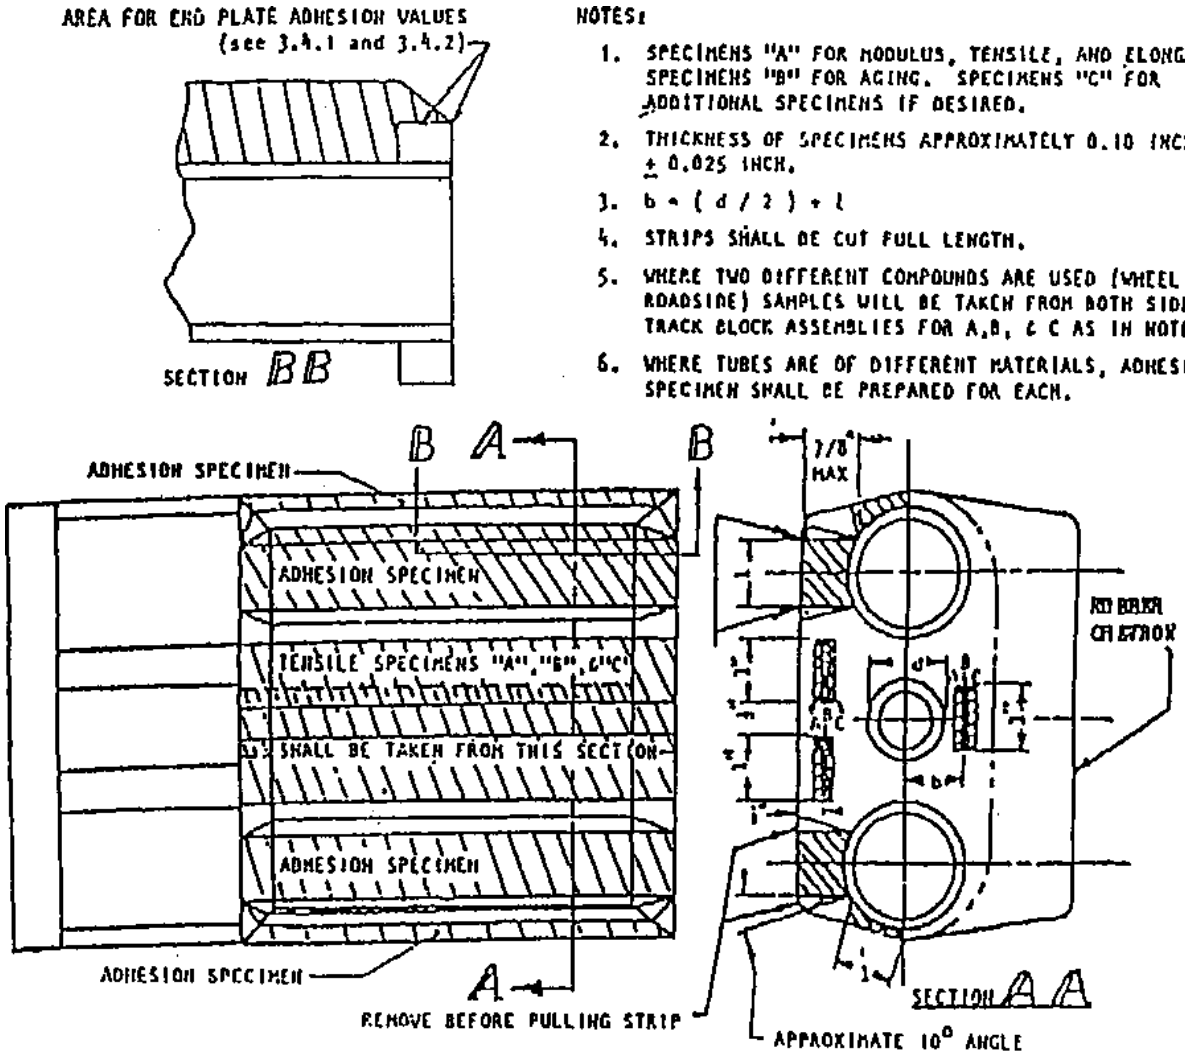


FIGURE 4. Typical location physical property test samples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

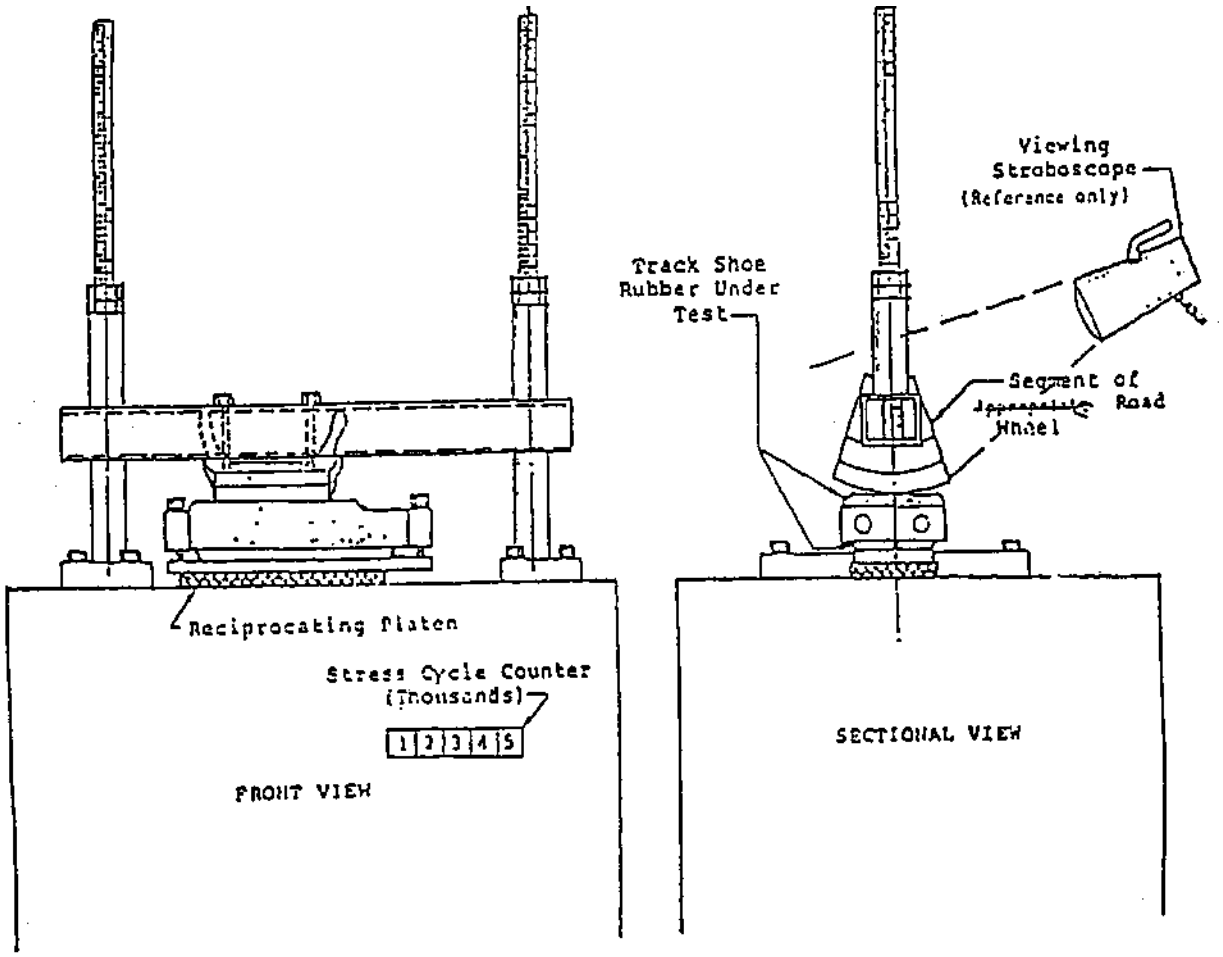


FIGURE 5. Blow-out machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.


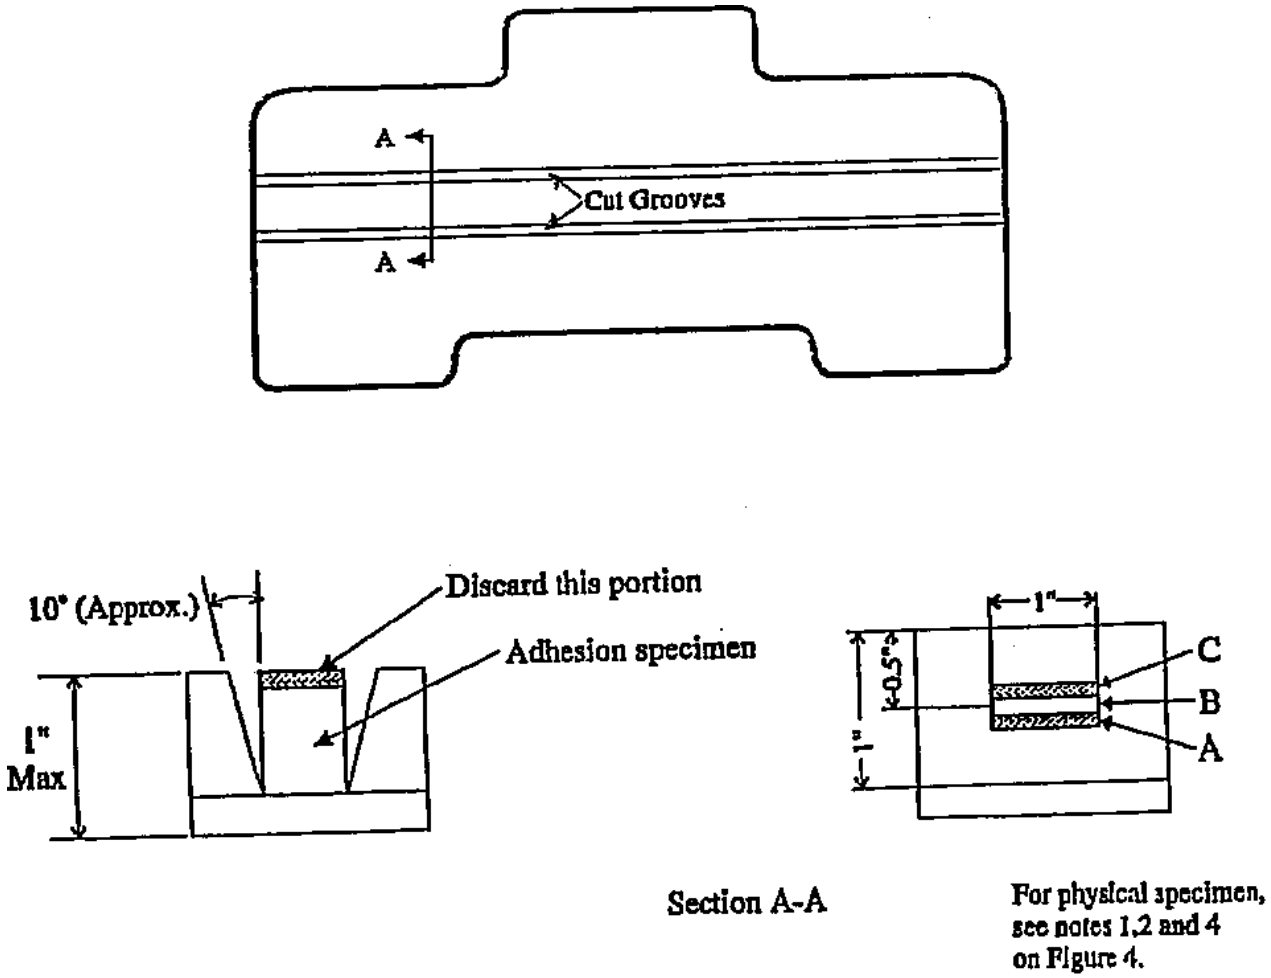


FIGURE 6. T157I detachable pad test specimen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

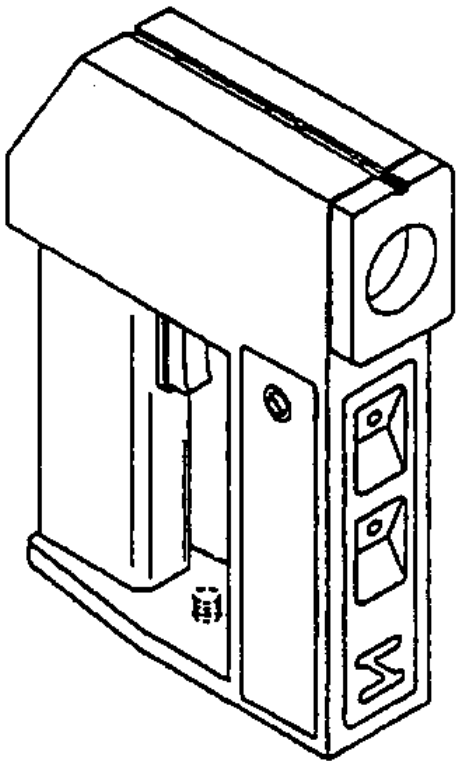

NOTE: Example of a thermo gun that may be used during break-in testing to measure the heat intensity of the rubber.

FIGURE 7. Thermo gun.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

BUSHING ENDURANCE TEST PLAN

A.1 SCOPE

A.1.1 Scope. This appendix details the test procedures for testing contractor supplied T130E1 (P/N 11678029) long bushings for qualification. Those compounds successfully meeting these requirements will be listed on the Qualified Products List (QPL-11891) with the source and address. This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

A.2 APPLICABLE DOCUMENTS

A.2.1 General. The documents listed in this section are specified in Appendix A of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in Appendix A of this specification, whether or not they are listed.

A.2.2 Government documents.

A.2.2.1 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

11678029 - Bushing.

(Copies of this drawing are available from the Contracting Officer, or U.S. Army Ground Vehicle System Center, Attn: FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000.)

A.3 REQUIREMENTS

A.3.1 Test site. Unless otherwise notified, qualification testing will be conducted at the Michigan Technological University, Keweenaw Research Center (KRC), Houghton County Airport, Calumet, Michigan 49913, (906) 487-2750.

A.3.2 Hardware requirements. Contractors submitting bushing samples for qualification in accordance with the following procedures are required to provide fifteen (15) T130El long bushings fabricated in accordance with Drawing Number 11678029. In addition, each contractor, at his option, will supply one (1) quart of the insertion lubricant of their choice to be used by the test facility during insertion of the candidate bushings into the simulated bore described below. If no lubricant is provided, Calight RPO will be used by the test site personnel.

A.3.3 Test procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

A.3.3.1 Notification. Upon receipt of contractor supplied bushing samples intended for qualification testing, test site personnel will notify the Preparing Activity. No qualification testing shall begin until the Preparing Activity provides written authorization for testing to proceed.

A.3.3.2 Inspection of samples. Prior to the start of test, test site personnel will inspect each of the 15 sample bushings to ensure conformance to Drawing Number 11678029 and that no damage has occurred to the samples in shipment. Test site personnel will record the following information:

a. Date received.

b. Source address and code or compound number.

c. Quantity of bushings.

d. Conformance to Drawing Number 11678029.

e. Comments regarding bushing condition.

NOTE: If any nonconformance or unusual condition of the bushings is noted by test site personnel, the information shall be provided to the Qualifying Activity.

A.3.3.3 Bushing sample insertion. Following a determination that all bushing samples meet the requirements established in A.3.3.2, test site personnel shall select and insert nine (9) bushings into simulated bores using the lubricant provided by the contractor or Calight RPO. Insertion shall be accomplished using the MTS 321 machine or equivalent.

A.3.3.4 Bushing sample aging. Following insertion, the nine bushing samples shall be aged for a minimum of 96 hours at an ambient room temperature of 75±10 °F.

A.3.3.5 Thermogravimetric analysis. Test site personnel shall select one (1) bushing sample from the remaining six (6) samples to be submitted to an independent laboratory capable of conducting thermogravimetric analysis (TGA). The results of the TGA must be closely safeguarded and shall be provided with the results of the bushing endurance test for future reference.

A.3.3.6 Bushing test machines. Following the 96 hour aging, the simulated bores shall be placed into the bushing test machine(s). Three test machines are to be used if possible, equally distributing the qualification samples (3 on each machine). The machine(s) will be calibrated and zeroed prior to test initiation.

A.3.3.7 Load profile. The load profile and phase angle relationship of each test machine shall be checked within the first hour of the initial bushing test, to ensure conformance to figure A-1 and figure A-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

A.3.3.8 Cyclic compression. Cyclic compression load shall be from 0 to 5200 pounds minimum at a frequency of 64±1 cycles per minute (cpm). To ensure conformance to the 5200 pound minimum, the test machine shall be set to provide 5300 pounds of compression load.

A.3.3.9 Cyclic torsional deflection load. Simultaneous cyclic torsional deflection load shall be from +15 to -15±l at a frequency of 256±4 cpm (see figure A-2). Cyclic torsional deflection load frequency shall be maintained at four (4) times the cyclic compression load frequency by positive mechanical means.

A.3.3.10 Testing duration. Testing will be continuous (24 hours per day) until bushing failure, defined by the deflection exceeding 0.144 inches (0.145 inches of deflection). Radial load, deflection, ambient temperature, bushing temperature, number of cycles, and time shall be continuously monitored and recorded on a floppy disk using a Daytronic data acquisition system (or equivalent) for future reference as required. A one-time lapse of up to 30 minutes from the requirement of continuous operation of the test machine is permitted.

A.3.3.11 Test machine failure. In the event of a test machine failure, KRC shall discard the bushing undergoing the endurance test and any data pertaining to it, and will randomly select a new bushing specimen for testing.

A.3.3.12 Qualification requirements. Qualification requirements are determined by eliminating the highest bushing test cycle result and averaging the remaining eight (8) bushing test cycles. The average shall be a minimum of 130 000 compression load cycles. No single bushing of the nine (9) tested shall be less than 110 000 cycles. If, at any time during the test, a test sample fails to attain the minimum 110 000 cycles, KRC shall notify the Preparing Activity for disposition and direction.

A.3.3.13 Test completion. Following completion of the test, a report containing all test data shall be provided to the Preparing Activity. This report shall also include the results of the thermogravimetric analysis. All test information and reports will be released by TACOM personnel only. KRC personnel will not release any test informationto manufacturers.

A.3.3.14 Sample disposition. All samples shall be retained by the test site until receipt of official Government approval to release the samples to the contractor. All remaining samples shall then be returned to the contractor supplying parts for qualification.

A.3.4 Monitoring and certification. The test shall be monitored and results certified by the local Government Quality Assurance Representative (QAR). Monitoring will be conducted to ensure proper machine calibration and that the test is conducted in accordance with the established procedures. At a minimum, the QAR will visit KRC at the beginning of the test of a contractor's supplied bushings (at the installation of the first 3 bushings) and near the mid-point of the test (test initiation of bushing # 5). At the conclusion of all bushing tests, the QAR will make a final visit to review test results, certify that the test was conducted in accordance with the test plan, and machine calibration was maintained throughout the test. In addition, TACOM engineers may, at their option, visit the test site to review procedures and results at any time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

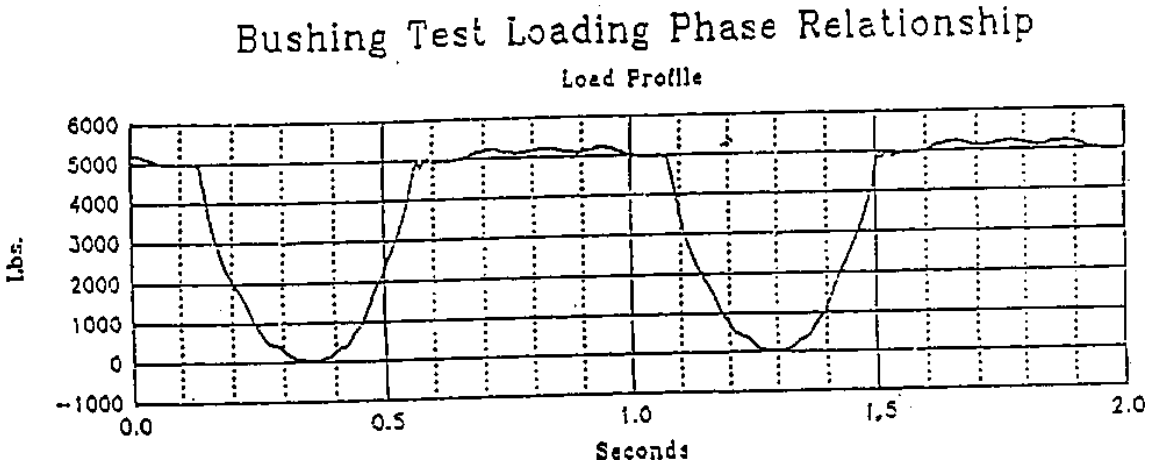


FIGURE A-1. Bushing load profile.

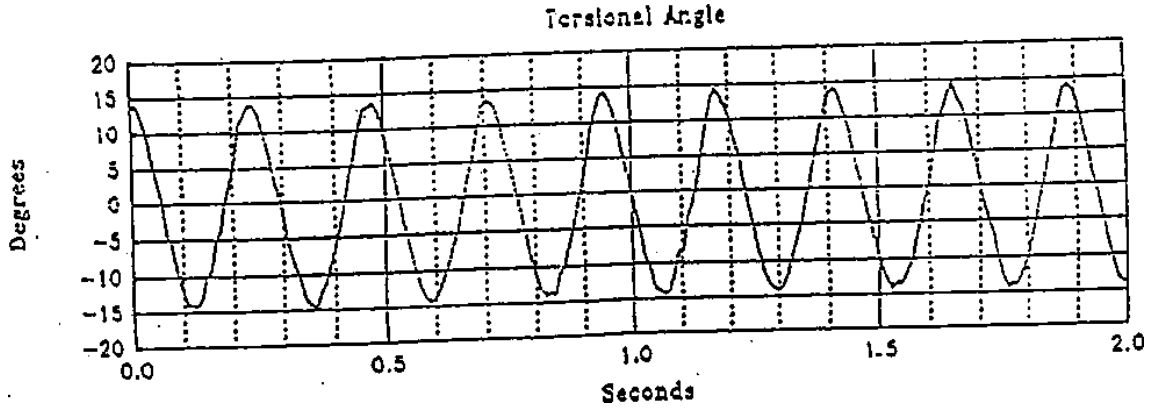


FIGURE A-2. Bushing torsional angle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

T154 TRACK ON-VEHICLE TEST PLAN

B.1 SCOPE

B.1.1 Scope. This appendix defines a set of instructions and requirements to be used for conducting all replaceable pad track vehicle qualification tests. Although this appendix is specific in nature, the Preparing Activity may amend this appendix with a more detailed set of instructions to meet the needs of the particular test. The requirements of this appendix are not to be changed without prior permission from the Preparing Activity. This appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

B.2 APPLICABLE DOCUMENTS

B.2.1 General. The documents listed in this section are specified in Appendix B of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in Appendix B of this specification, whether or not they are listed.

B.2.2 Government documents.

B.2.2.1 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

12268550	-	T-154 Track Shoe Assembly.
12268551	-	End Connector.
12268552	-	Link Assembly.
12268557	-	Molded Pad.
12268561	-	Nut, Plain.
12268563	-	Screw, Cap.

(Copies of these drawings are available from the Contracting Officer, or U.S. Army Ground Vehicle System Center, Attn: FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000.)

B.3 REQUIREMENTS

B.3.1 Test program review. A start of test meeting will be held at the test site on a date and time to be established by the Preparing Activity. Any additional review meetings shall be scheduled only if considered necessary by the Preparing Activity.

B.3.2 Test site access. Access to the test site will be required by TACOM personnel on a continuous basis to conduct their test responsibilities. Contractor personnel shall not be allowed test site access without specific approval from the Preparing Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.3 Test program scope. This test will be accomplished by assembling the manufacturer's T154 track samples on an M-109 series vehicle and operated to the requirements of this appendix.

B.3.4 T154 track design characteristics. The T154 track is a double-pin track with a replaceable track shoe pad. See figure B-1 for a T154 track illustration with an associated parts listing.

B.3.5 Test course. The test course to be used for conducting all on-vehicle qualification tests will be selected by the Preparing Activity. The preferred course is located at the U.S. Army Proving Ground (YPG), Yuma, Arizona. Yuma has been traditionally selected for on-vehicle track testing because of climate, course, and test result consistency. The following standard track laying vehicle (tank and other tracked vehicles) test courses at YPG are designated for testing track for this specification.

a. Paved course. The dynamometer course is a 2-mile, smooth, near-level (0.8 percent grade) 30-foot wide roadway with 500-foot radius turnarounds at each end, surfaced with a high strength asphalt. The course is located at an elevation of approximately 470 feet above sea level and is staked at 0.1-mile intervals throughout its length with accurately surveyed distance markers.

b. Gravel course. The tank gravel course is a 3.6 mile compacted and graded gravel course and is for testing track laying vehicles under conditions simulating a secondary gravel road. The course consists of short straight sections and curves of varying radii with many moderate and sharp turns.

c. Hilly cross-country course. The tank hilly cross-country B course is 2.7 miles long and has short steep grades (35 percent) with a greater proportion of slopes less than 20 percent. This course has surfaces varying from sand and gravel to exposed bedrock. The loose gravel, sharp stones and rocks present a severe cutting and abrasion problem for tracks and roadwheels.

d. Level cross-country course. The tank level cross-country course traverses areas of level, sandy terrain with many bumps that provide a severe test of track laying vehicles. The dust conditions are typical of cross-country operation on dry soil. One lap is 6.7 miles.

B.3.6 Operational mode summary. The operational mode summary for the test shall consist of 25% paved (concrete, asphalt, or macadam); 50% on gravel composed mostly of small stones; and 25% on cross-country (equal amount of hilly and level). During the test, the vehicle shall not traverse more than 50 continuous miles over any single type of terrain. Vehicle direction around the test courses shall be changed periodically to assure approximately equal clockwise and counterclockwise test operation.

B.3.6.1 Climatological conditions. In order to expose the track test samples to the maximum “hot” weather conditions, vehicle road testing shall be scheduled to start no earlier than 1 March and no later than 1 September of the same calendar year.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.7 Track delivery and storage. Track shoe/pad samples are to be delivered to the test site by a date specified by the Preparing Activity. Adequate time must be allowed for test site personnel to inspect, mark, and install the hardware so as not to impact the projected test start date. A secured area must be made available during and after the test for each of the track shoe/pad samples. The samples received will be placed in a shaded area that prevents direct sunlight from shining on the track pads during storage and assembly operations. The reduction of variables such as solar heating of the pads in a stack while other are shaded and, therefore cooler, is mandatory. Any condition that might influence the relative performance of the track shoes/pads are to be held as uniform as possible.

B.3.8 Contractor hardware requirements. For the qualification road test, the contractor test sample shall consist of 74 complete T154 track shoe assemblies (see B.3.11 for strand configuration). In addition, the following spare hardware shall be required: (a) 86 complete T154 track shoe assemblies, to include all pads and connecting components. (b) 70 track shoe pad assemblies (to include pad nut P/N 12268561).

B.3.8.1 Sample size. For a contractor attempting qualification of T154 pad assemblies only, the sample size shall be 74 pads. In addition, the contractor shall be required to provide 76 complete spare pad assemblies to include the pad nut.

B.3.9 Initial inspection/preparation for test. The test site shall perform a receiving inspection of the M109 series vehicle(s) to be used for the test. The basic test vehicle(s) will be visually and functionally checked with specific attention given to suspension, electrical systems, hydraulic systems, and automotive controls and accessories. Any damage or improper operation will be repaired/corrected to ensure the vehicle(s) will be capable of meeting the test requirements defined by this appendix.

B.3.9.1 Inspection of track samples. Contractor supplied track qualification samples will be inspected to ensure no physical damage has occurred in shipment, that the required number of samples and spares have been provided, and that all components are properly identified.

B.3.10 Track identification. To aid in failure and part life tracking, all track shoes including spares, shall be identified to a manufacturer by permanent sequential number/letter codes applied to the metal portion of the shoe body. The test site shall apply the number/letter codes to the test track shoes prior to vehicle installation.

B.3.10.1 Track assembly marking. All 160 contractor supplied track assemblies shall be stamped with a lead designator alpha character only, prior to track break-in (see B.3.17). Following break-in, any failed shoes shall be removed and the remaining shoes shall be sequentially numbered. The track shoes shall be marked on both the inboard and outboard faces, in the recessed area between the track pins as illustrated in figure B-2. An example of the coding system to be used is as follows: X0l, X02.....X160 (X for Contractor ABC and 1, 2, 3 for numeric shoe designation). The test site shall contact the Preparing Activity to request a code letter identification upon receipt of a contractor's supplied hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.10.2 Serial pad marking. Serial marking of pads may be required as specified by the Preparing Activity.

B.3.10.3 Pad installation and coding. Pads supplied for pad qualification only will be installed on Government furnished T154 track assemblies. The Government furnished track shall be coded using the alpha code letter "G" followed by a contractor code letter corresponding to the contractor furnishing the pads for qualification. The code letters shall be located as illustrated in figure B-2.

B.3.11 Track shoe installation pattern. Each vehicle shall have the capacity to test two contractors supplied samples. Each strand will consist of 39 assemblies from each of two contractors and two Government furnished T154 assemblies. The Government furnished assemblies will be removed, as required, to maintain track tension. Two transition shoes (one of each of two different contractors) at the connection points will not be considered in the qualification sample, making the qualification sample size 37 in each of two strands. The track shoe installation pattern on the M109 series vehicle shall be provided to the test site by the Preparing Activity. Track installation shall be accomplished in accordance with the appropriate technical manuals.

B.3.12 Load condition. For the test, the weight of the M109 vehicle shall be adjusted to 58 500 pounds, plus or minus 400 pounds. The load shall be distributed approximately equal on each track when on a level surface.

B.3.13 Pivoting of vehicles. Pivot steering of vehicles during break-in and qualification testing is to be kept at a minimum. Sudden braking action shall also be avoided to the extent possible.

B.3.14 Track tension adjustments. All tension adjustments shall be made prior to the start of the test as well as during test operations. As a minimum, track tension shall be checked on a daily basis. These adjustments shall be made after inspection faults have been corrected. Track tension requirements can be found in the latest technical manuals for the M109 series vehicle. NOTE: Low track tension will cause thrown tracks, broken or bent pins, and broken end connectors and center guides. High track tension shall also be avoided. Track pins will break and tracks will be thrown, the track adjuster or grease gun shall be kept from contacting the track shoe rubber parts. Any grease or oil accidentally contacting the shoe shall be immediately wiped off.

B.3.15 Track component replacement. Track shoe assembly replacements are required based on meeting the failure criteria for any number of component parts (bushing, roadwheel path rubber, center guide, or shoe body damage). The component failure criteria is detailed in the table B-II. The individual shoe replacements shall be made in the same strand location as the respective failed shoes. In addition, if the pads meet the acceptance criteria, the pads from the original track shoe shall be reinstalled on the replacement shoe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.15.1 Hardware torque. When track shoes, pads, or end connectors are replaced, the new hardware must be torqued checked after the first 50 miles of operation.

B.3.16 Torque values. All T154 track hardware shall be torqued to the following values and in accordance with proper maintenance procedures:

a. Clamp type end connector: 400 ±20 wet lb-ft.

b. Track shoe pad nuts: 110 - 150 dry lb-ft.

B.3.17 Break-In run. The purpose of the break-in run procedure is to simulate the natural aging process afforded production/spare track during normal transit/storage periods before actual vehicle use. All test samples (to include spares and all pads provided for qualification) shall be broken-in prior to the road test by having the vehicle on which they are installed, continuously operated for 45 miles on a paved road (concrete, asphalt, or macadam) in accordance with table B-I

TABLE B-I. T154 track break-in run.

Division of Break-in run	Speed m.p.h. (max)	Distance miles (min)
a	10	15
b	15	15
c	20	15

B.3.17.1 Vehicle operation. The vehicle shall be operated in both directions for one-half of the total vehicle distance.

B.3.17.2 Track cooling. During the break-in run, the track shall be allowed to cool between each phase of testing. This cooling of the track can be verified through one of the following two procedures.

B.3.17.2.1 Track roadwheel path surface. The track roadwheel path surface shall be cooled to the point where the palm of the hand can be held to the surface backing in excess of 10 seconds.

B.3.17.2.2 Cool down. Cool down between speed changes shall require the use of a device used to measure the temperature of the rubber pads (see figure 7 for a diagrammed example of this type of device). Measurements should be taken from both the roadwheel side and the road side. A reading of 130 degrees or less should be recorded prior to restart of the break-in.

B.3.17.3 Visual inspection of track. Between each division of the break-in run, a visual inspection shall be made of the track and the component parts. The inspection shall be in accordance with the inspection and replacement criteria found in the table B-II. Hardware shall be re-torqued if noticeably loose. After break-in, all hardware shall be torqued 100% to values specified in B.3.16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.17.4 Track or pad failures. Any track or pad failures which occur during break-in do not count towards the failure criteria. Further, any failures during break-in do not reduce the original sample sizes. Track shoes/pads failed during break-in shall be replaced with spares and noted on a Test Incident Report (TIR). The track shoes comprising a strand after break-in (including the recorded spares inserted for any failures during break-in) shall be denoted as the original strand sample at the start of test. Break-in mileage shall be counted toward the qualification mileage requirement.

B.3.17.5 Spare track. All spare track shall be installed on a vehicle and broken-in before test start up. The break-in shall be performed in accordance with B.3.17. After completion of the break-in run, the track shall be removed from the vehicle and stored for future use during the qualification test.

B.3.18 Test procedure. After completion of the break-in run, the vehicle shall be run to the operational mode summary found in B.3.6 until the track or pads being tested for qualification have met the failure criteria (see B.3.20) or have exceeded the qualification requirements of 5000 miles track life or 1000 miles pad life. Testing may be stopped at any time at the discretion of the test director.

B.3.18.1 Fifty mile scenario. During the test, operators are to run one 50 mile scenario at a time in accordance with the mission profile requirements stated below. A mission profile requirement will consist of the following:

a.	Secondary road	25 miles
b.	Paved road	12.5 miles
c.	Combined X country	12.5 miles

B.3.18.2 Track switching. Upon completion of the first 500 mile mission scenario, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. At 1000 miles, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. Repeat this switching procedure for every 500 miles of testing.

B.3.19 Inspection and replacement criteria. Inspection and replacement criteria during the on-vehicle test shall be in accordance with the table B-II.

B.3.20 Failure criteria. Failure of a contractor's track will be established when 20% of its total shoe samples have reached wearout or need replacement. See table B-II.

B.3.20.1 Pad sample failure. The contractor's pad sample shall be considered failed when 40% of the pads reach wearout or need replacement. See table B-II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.20.2 Track or pad failures (break-in). Any track or pad failures which occur during break-in or are damaged as a result of the following incidents will not be counted against qualification requirements:

a. Mechanical failure of non-track parts resulting in track damage.

b. Sprocket damaged shoes.

B.3.21 Disposition of track test hardware. All track test hardware shall be retained at the test site pending disposal instructions, including failed track components. Track that is defective or has completed testing may be stored outdoors while waiting for disposition instructions. It is essential that each manufacturer's track samples are not commingled with samples from another manufacturer.

B.3.21.1 Failed track component marking. All failed track components shall be tagged and marked so as to identify accumulated test miles and cross reference to daily logs or test reports, as appropriate to provide for traceable component failure history.

B.3.21.2 Hardware. Hardware required for failure analysis shall be provided to the Preparing Activity upon request.

B.3.22 Vehicle disposition. Upon completion of the test and inspections, the vehicle shall be returned to the original pretest condition. Vehicle disposition instructions will be issued by the Preparing Activity.

B.3.23 Documentation/test reporting/photographic coverage. Any test incidents related to track, suspension or drive train components shall be documented on AMC Form 2134, Test Incident Report (TIR) or comparable test reporting document. The test site shall provide these reports to the Preparing Activity as they are generated. Each TIR or other test reporting document shall include as a minimum the following:

a. Description of failed component/part (noun).

b. Mileage track has endured.

c. Code/Serial number identification of failed component and code/serial number of replacement component.

d. Vehicle registration number.

e. Date of incident.

f. Description of incident. Description shall be detailed and include cause, if evident.

g. Test course where incident occurred, if known.

h. Estimated speed of vehicle when incident occurred.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

i. Test environment at time of incident.

j. Disposition of failed part. Hold and tag failed part.

k. Test report number (beginning with number 1, continuing in chronological order.) Supplements to a specific number shall be identified with a letter (for example T0001A).

l. Authorized signature.

B.3.23.1 Track incidents. All track incidents determined to be major (that is, track throws or misguides) shall be immediately reported to TACOM and the Preparing Activity.

B.3.24 Final report. The test site shall prepare a final technical report at the completion of testing. The report shall include as a minimum the following:

a. Data collected. Include copies of TIRs for track related failures.

b. Summary of test findings and conclusions.

c. Photographs, tables, and charts to reflect test findings and conclusions.

d. If more than one contractor is attempting qualification testing at one time, test results shall be grouped by contractor.

TABLE B-II. T154 track hardware inspection and replacement criteria.

Item	Activity	Inspection or action	Reference
Track Strand	Inspect daily	Visual observation of overall condition with specific attention to the road/grouser interface.	
	Replace	When 20% of the original track shoes have been replaced (or now require replacement) due to wearout.	
Track pin	Inspect daily	Visually check for cracked, broken, or bent pins.	
	Replace shoe[1]	When pin broken, bent, or cracked.	
Bushing	Inspect daily	Visually check for dead blocks or extruded bushing.	
	Replace shoe[1]	When dead blocks are found or a bushing is completely extruded (pin to shoe body contact).	Figure B-3
Roadwheel path rubber	Inspect daily	Visually check for (1) cracks, chunks or cuts. (2) Obvious lack of roadwheel support due to blowout, or chunking.	
	Replace shoe[1]	When more than 50% of rubber is lost on one or both sides of the grouser.	Figure B-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE B-II. T154 track hardware inspection and replacement criteria - Continued.

Item	Activity	Inspection or action	Reference
Track shoe body	Inspect daily	Visually check for cracked shoes, crushed binocular tubes, and loose or lost backing rubber.	
	Replace shoe[1]	When shoe body cracked, binocular tube crushed, or pad mounting hole enlarged, or unable to remove defective pad.	
End connector	Inspect daily	Visually check for cracked, broken or missing bolts or connector.	
	Replace shoe[1]	When cracked, broken or worn to less than 3/16 to 1/8 inch thick or retorqued if noticeably loose.	Figure B-5
Center guide	Inspect daily	Visually check for cracked, broken bent, loose or worn center guides.	
	Replace shoe[1]	When missing, cracked, broken, or worn to less than 5/16 inch thick, as measured 1 inch below top of the center guide	Figure B-6
Track pad	Inspect daily	Visually check for loose, missing or damaged pads and pad wear.	
	Replace	(1) Individually, if grouser marks a paved surface. Pad blowout or chunking does not meet criteria for replacement given that grouser is not marking the road. Replace whole assembly if pad mount is damaged or unable to remove pad. Note: Replacement pad height must be within 1/4 inch (plus or minus) of neighboring pads. Either use a worn pad or shave down a spare pad. (2) Strand set replacement considers the overall general condition of all pads on strand. Pad wear should be representative for all the other pads on the strand. When 40% of the original pads have been replaced or require replacement (do not count multiple replacement of the same pad location), then all pads on the strand shall be replaced with new pads. The pad strand set may be replaced before reaching the 40% criteria at the test director's discretion due to local restrictions on road damage.	

*NOTE:
1. Pads from original shoe must be removed and reinstalled on the replacement shoe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

B.3.25 Photographic coverage. The test site shall furnish color photographic coverage of all significant test events to include, as a minimum, track throw or misguide damage (vehicle and track system), broken or bent center guides, sprocket damaged shoes, and broken pins.

B.3.25.1 Applicable information. Together with the photographic coverage, applicable information (manufacturer, serial number, test course, and mileage sustained) shall be recorded and accompany the photographs. This data is to be included in the final report.

B.3.26 Distribution of reports. The distribution of test incident reports and final reports shall be as specified by the Preparing Activity.

T154 Track Shoe Assembly

P/N 12268550-1

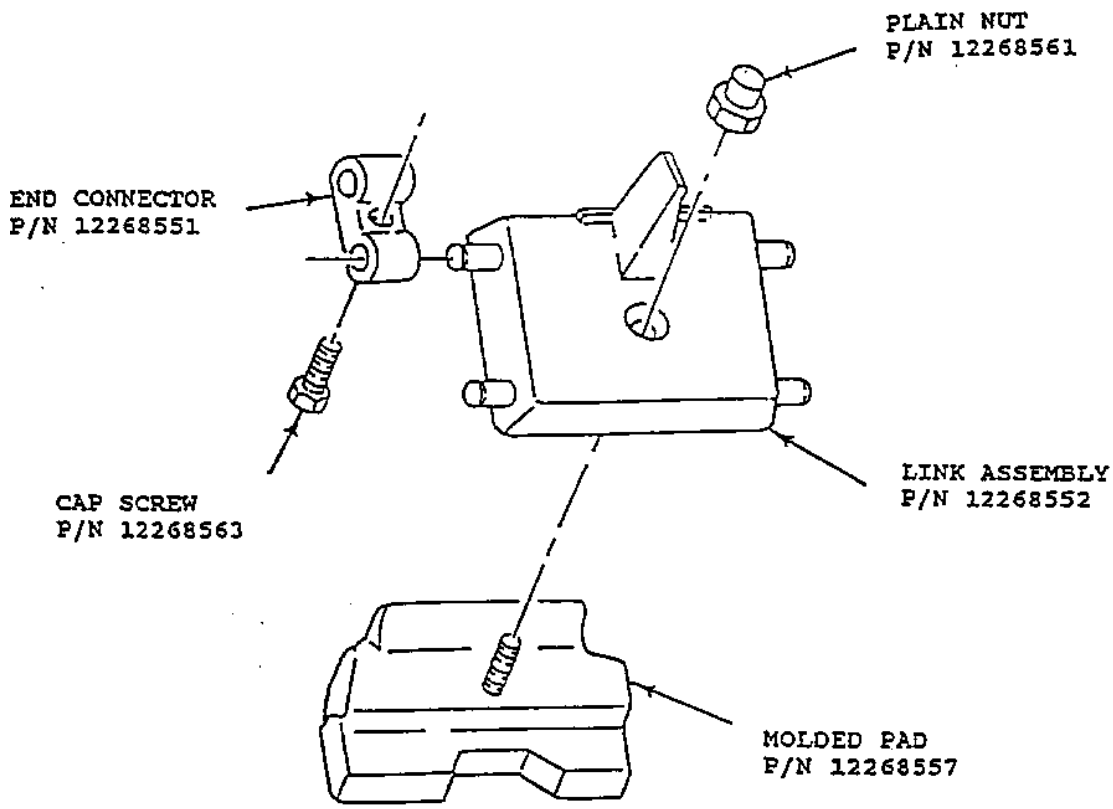


FIGURE B-1. T154 track hardware illustration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

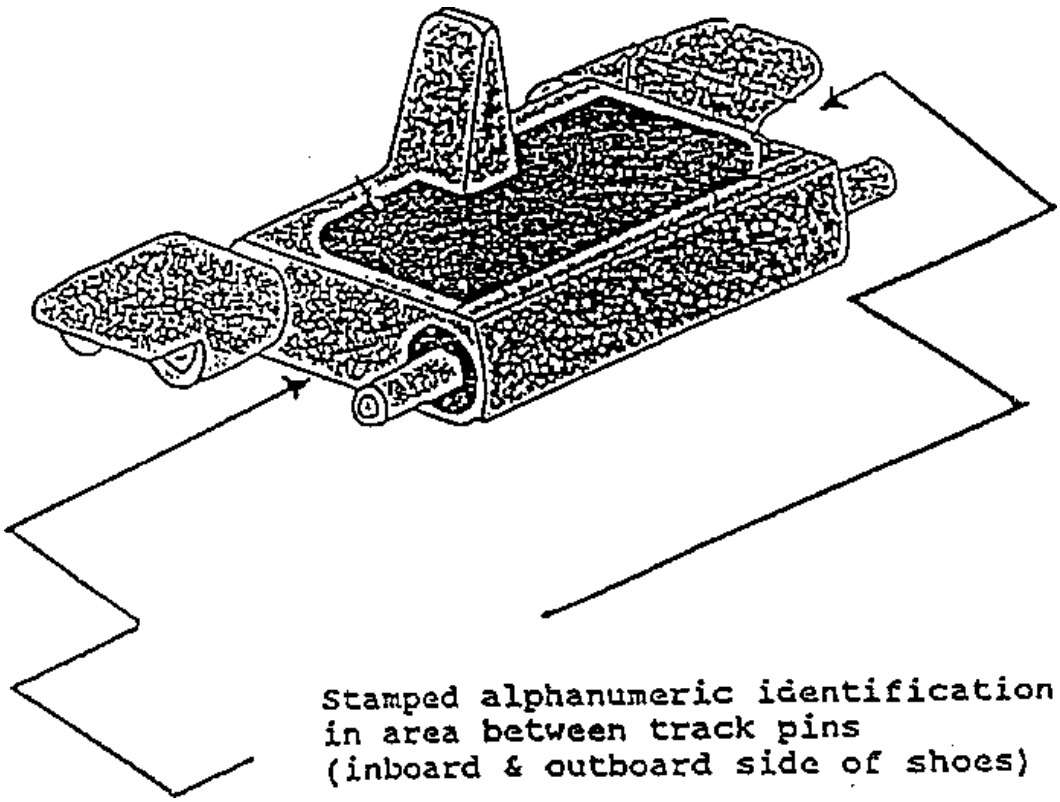


FIGURE B-2. Track shoe marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

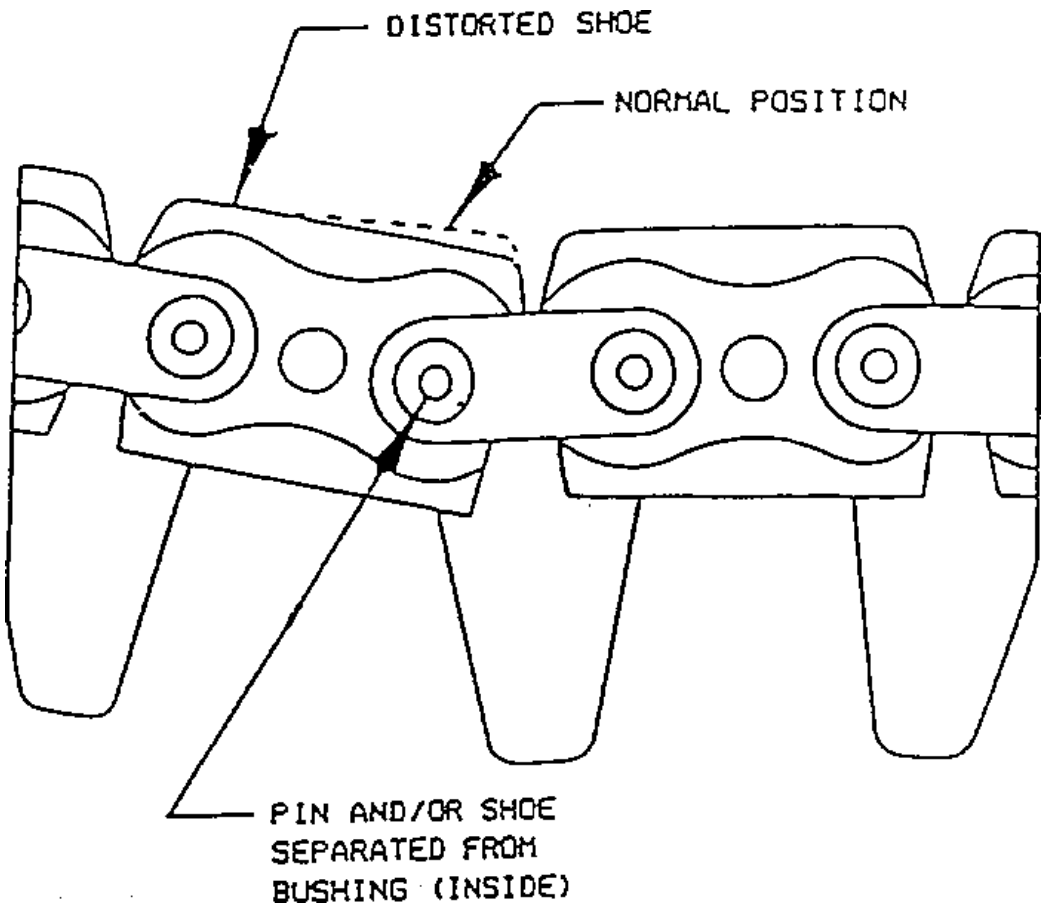


FIGURE B-3. "Dead Track Block" bushing check.

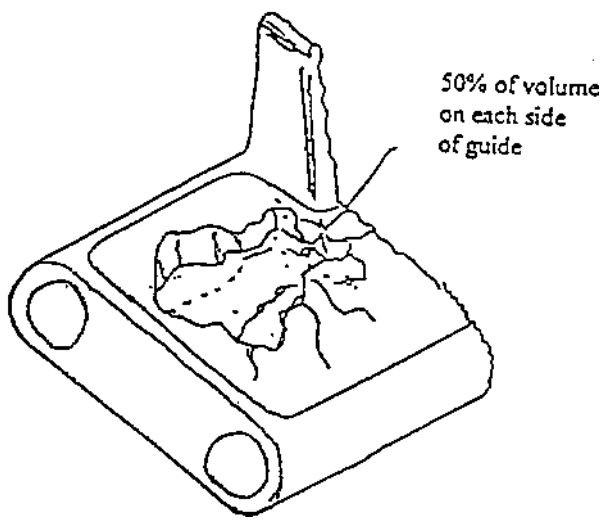


FIGURE B-4. Roadwheel path rubber inspection criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.


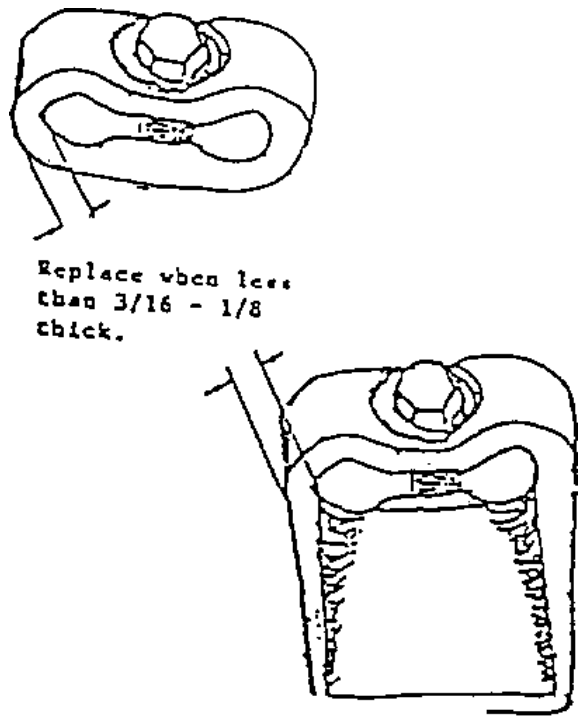


FIGURE B-5. End connector inspection criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

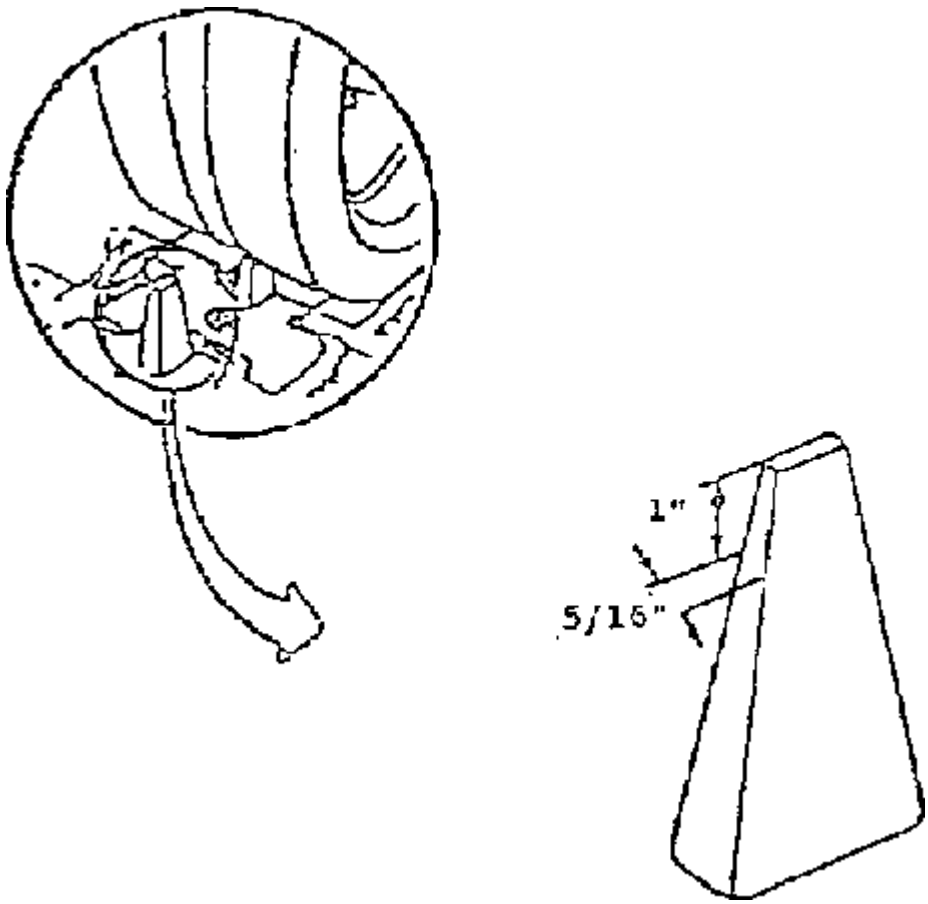

NOTE: Check track center guide thickness on ten track shoes from each side. Measure 1 inch down from top of center guide. At that point, measure center guide thickness. If center guide thickness is less than 5/16 inch thick, or if it is broken, or cracked, replace the track shoe.

FIGURE B-6. Center guide inspection criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

T107 TRACK ON-VEHICLE TEST PLAN

C.1 SCOPE

C.1.1 Scope. This appendix defines a set of instructions and requirements to be used for conducting all integral pad track vehicle qualification tests. Although this appendix is specific in nature, the Preparing Activity may amend this appendix with a more detailed set of instructions to meet the needs of the particular test. The requirements of this appendix are not to be changed without prior permission from the Preparing Activity. This appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

C.2 APPLICABLE DOCUMENTS

C.2.1 General. The documents listed in this section are specified in Appendix C of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in Appendix C of this specification, whether or not they are listed.

C.2.2 Government documents.

C.2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

MIL-DTL-45913	-	Nuts, Self-Locking, Hexagon, Prevailing Torque

(Copies of this document are available online at https://assist.dla.mil.)

C.2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

B1821BH075C250N	-	Bolt
8382359	-	Wedge
8382360	-	Bolt
12544579	-	Cap
12544580	-	Guide
8705899	-	Link Assembly
8705914	-	T107 Track
8705919	-	Connector

(Copies of these drawings are available from the Contracting Officer, or U.S. Army Ground Vehicle System Center, Attn: FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000.)

C.3 REQUIREMENTS

C.3.1 Test program review. A start of test meeting will be held at the test site on a date and time to be established by the Preparing Activity. Any additional review meetings shall be scheduled only if considered necessary by the Preparing Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

C.3.2 Test site access. Access to the test site will be required by Government personnel on a continuous basis to conduct their test responsibilities. Contractor personnel shall not be allowed test site access without specific approval from the Preparing Activity.

C.3.3 Test program scope. This test will be accomplished by assembling the manufacturer's T107 track samples on an M88 series vehicle and operated to the requirements of this appendix.

C.3.4 T107 Track design characteristics. The T107 track is a double-pin track with an integral pad. See figure C-1 for a T107 track illustration with an associated parts listing.

C.3.5 Test course. The test course to be used for conducting all on-vehicle qualification tests will be selected by the Preparing Activity. All test courses shall be operated in both clockwise and counterclockwise directions. The turns shall allow for safe operation when towing a vehicle of equal weight. The preferred course is located at the U.S. Army Proving Ground (YPG), Yuma, Arizona. Yuma has been traditionally selected for on-vehicle track testing because of climate, course, and test result consistency. The following standard track laying vehicle (tank and other tracked vehicles) test courses at YPG are designated for testing track for this specification.

a. Paved course. The dynamometer course is a 2 mile, smooth, near-level (0.8 percent grade) 30 foot wide roadway with 500 foot radius turnarounds at each end, surfaced with a high strength asphalt. The course is located at an elevation of approximately 470 feet above sea level and is staked at 0.1 mile intervals throughout its length with accurately surveyed distance markers.

b. Gravel course. The tank gravel course is a 3.6 mile compacted and graded gravel course and is for testing track laying vehicles under conditions simulating a secondary gravel road. The course consists of short straight sections and curves of varying radii with many moderate and sharp turns.

c. Hilly cross-country course. The tank hilly cross-country B course is 2.7 miles long and has short steep grades (35 percent) with a greater proportion of slopes less than 20 percent. This course has surfaces varying from sand and gravel to exposed bedrock. The loose gravel, sharp stones and rocks present a severe cutting and abrasion problem for tracks and roadwheels.

d. Level cross-country course. The tank level cross-country course traverses areas of level, sandy terrain with many bumps that provide a severe test of track laying vehicles. The dust conditions are typical of cross-country operation on dry soil. One lap is 6.7 miles.

e. Hilly cross-country course (with a vehicle in tow). When towing a vehicle of equal weight, the recommended course is the “Truck Hilly Course”. This course is 2.2 miles long in one complete scenario. One mile of the course is in the form of rolling hills with the second mile a number of steep but controllable hills. The course consists of mostly gravel surfaces with the lower portion having sandy soil.

C.3.5.1 Operational mode summary. The vehicle shall perform to the requirements as specified in table C-I. When towing, towed load shall be a vehicle of equal weight to the test vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE C-I. T107 road test.

Course	Mileage and speeds	Vehicle loading
Hard/gravel surface	240 miles at varying speeds up to maximum	Simulated combat payload towed load for 30% of specified test mileage
Level cross-country	480 miles at varying speeds up to maximum	Simulated combat payload towed load for 35% of specified test mileage.
Hilly cross-country	336 miles at varying speeds up to maximum.	Simulated combat payload.
Hilly cross-country (with a vehicle in tow)	144 miles at varying speeds up to maximum.	Simulated combat payload and towed load.

C.3.5.2 Climatological conditions. In order to expose the track test samples to the maximum "hot" weather conditions, vehicle road testing shall be scheduled to start no earlier than 1 March and no later than 1 September of the same calendar year.

C.3.6 Track delivery and storage. Track shoe/pad samples are to be delivered to the test site by a date specified by the Preparing Activity. Adequate time must be allowed for test site personnel to inspect, mark, and install the hardware so as not to impact the projected test start date. A secured area must be made available during and after the test for each of the track shoe/pad samples. The samples received will be placed in a shaded area that prevents direct sunlight from shining on the track pads during storage and assembly operations. The reduction of variables such as solar heating of the pads in a stack while others are shaded and, therefore cooler, is mandatory. Any condition that might influence the relative performance of the track shoes/pads are to be held as uniform as possible.

C.3.7 Contractor hardware requirements. For the qualification road test, the contractor test sample shall consist of 50 complete T107 track shoe assemblies (see C.3.10 for strand configuration). In addition, the following spare hardware shall be required: (a) 45 complete T107 assemblies, to include all connecting components. (b) The contractor shall ship 15 track blocks for laboratory testing. Interested parties should contact the preparing activity for a specific address for shipment of the 15 track blocks.

C.3.8 Initial inspection/preparation for test. The test site shall perform a receiving inspection of the M88 series vehicle(s) to be used for the test. The basic test vehicle(s) will be visually and functionally checked with specific attention given to suspension, electrical systems, hydraulic systems, and automotive controls and accessories. Any damage or improper operation will be repaired/corrected to ensure the vehicle(s) will be capable of meeting the test requirements defined by this appendix.

C.3.8.1 Track qualification samples. Contractor supplied track qualification samples will be inspected to ensure no physical damage has occurred in shipment, that the required number of samples and spares have been provided, and that all components are properly identified.

C.3.9 Track identification. To aid in failure and part life tracking, all track shoes, including spares, shall be identified to a manufacturer by permanent sequential number/letter codes applied to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

metal portion of the shoe body. The test site shall apply the number/letter codes to the test track shoes prior to vehicle installation.

C.3.9.1 Track assembly marking. All contractor supplied track assemblies shall be stamped with a lead designator alpha character only, prior to track break-in (see C.3.16). Following break-in, any failed shoes shall be removed and the remaining shoes shall be sequentially numbered. The track shoes shall be marked on both the inboard and outboard faces, in the recessed area between the track pins as illustrated in figure C-2. An example of the coding system to be used is as follows: X01, X02, ... , X160 (X for Contractor ABC and 1,2,3 for numeric shoe designation). The test site shall contact the Preparing Activity to request a code letter identification upon receipt of a contractor's supplied hardware.

C.3.10 Track shoe installation pattern. Each vehicle will have the capacity to test three contractors' samples. Each strand will consist of 27 assemblies from up to three contractors and three Government furnished T107 assemblies. The Government furnished assemblies will be removed, as required, to maintain track tension. Two transition shoes at the connection points will not be considered in the qualification sample, making the qualification sample size 25 in each of two strands. The track shoe installation pattern on the M88 series vehicle shall be provided to the test site by the Preparing Activity. Track installation shall be accomplished in accordance with the appropriate technical manuals.

C.3.11 Load condition. For the test, the weight of the M88 vehicle shall be adjusted to 112,000 pounds, plus or minus 400 pounds. The load shall be distributed approximately equal on each track when on a level surface.

C.3.12 Pivoting of vehicles. Pivot steering of vehicles during break-in and qualification testing is to be kept at a minimum. Sudden braking action shall also be avoided to the extent possible.

C.3.13 Track tension adjustments. All tension adjustments shall be made prior to the start of the test as well as during test operations. As a minimum, track tension shall be checked on a daily basis. These adjustments shall be made after inspection faults have been corrected. Track tension requirements can be found in the latest technical manuals for the M88 series vehicle.

NOTE: Low track tension will cause thrown tracks, broken or bent pins, and broken end connectors and center guides. High track tension shall also be avoided. Track pins will break and tracks will be thrown, the track adjuster or grease gun shall be kept from contacting the track shoe rubber parts. Any grease or oil accidentally contacting the shoe shall be immediately wiped off.

C.3.14 Track component replacement. Track shoe assembly replacements are required based on meeting the failure criteria for any number of component parts (bushing, roadwheel path rubber, center guide, or shoe body damage). The component failure criteria is detailed in table C-III. The individual shoe replacements shall be made in the same strand location as the respective failed shoes.

C.3.14.1 Hardware torque check. When track shoes, center guides, or end connectors are replaced, the new hardware must be torqued checked after the first 50 miles of operation.

C.3.15 Torque values. All T107 track hardware shall be torqued to the following values and in accordance with proper maintenance procedures:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

a. Connector wedge bolt: 180 - 200 lb-ft.

b. Center guide fastener: 370 - 400 lb-ft. if single bolt/nut is used on a track pitch
280 - 300 lb-ft. if two screws are used on a track pitch

C.3.16 Break-in run. The purpose of the break-in run procedure is to simulate the natural aging process afforded production/spare track during normal transit/storage periods before actual vehicle use. All test samples (to include spares) shall be broken in prior to the road test by having the vehicle on which they are installed, continuously operated for 45 miles on a paved road (concrete, asphalt, or macadam) in accordance with table C-II.

TABLE C-II. T107 break-in run.

Division of break-in run	Speed mph (max)	Distance miles (min)
a	10	15
b	15	15
c	20	15

C.3.16.1 Vehicle operation. The vehicle shall be operated in both directions for one-half of the total vehicle distance.

C.3.16.2 Track cooling. During the break-in run, the track shall be allowed to cool between each phase of testing. This cooling of the track can be verified through one of the following two procedures.

C.3.16.2.1 Track roadwheel path surface. The track roadwheel path surface shall be cooled to the point where the palm of the hand can be held to the surface in excess of 10 seconds.

C.3.16.2.2 Speed change cool down. Cool down between speed changes shall require the use of a device used to measure the temperature of the rubber pads (see figure 7 for a diagrammed example of this type of device). Measurements shall be taken from both the roadwheel side and the road side. A reading of 130 degrees or less should be recorded prior to restart of the break-in.

C.3.16.3 Visual inspection. Between each division of the break-in run, a visual inspection shall be made of the track and the component parts. The inspection shall be in accordance with the inspection and replacement criteria found in table C-III. Hardware shall be retorqued if noticeably loose. After break-in, all hardware shall be torqued 100% to values specified in C.3.15.

C.3.16.4 Track failures. Any track failures which occur during break-in do not count towards the failure criteria. Further, any failures during break-in do not reduce the original sample sizes. Track shoes failed during break-in shall be replaced with spares and noted on a Test Incident Report (TIR). The track shoes comprising a strand after break-in (including the recorded spares inserted for any failures during break-in) shall be denoted as the original strand sample at the start of test. Break-in mileage shall be counted toward the qualification mileage requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

C.3.16.5 Spare track. All spare track shall be installed on a vehicle and broken in before test start up. The break-in shall be performed in accordance with C.3.16. After completion of the break-in run, the track shall be removed from the vehicle and stored for future use during the qualification test.

C.3.17 Test procedure. After completion of the break-in run, the vehicle shall run to the operational mode summary found in C.3.5.1 until the track being tested for qualification has met the failure criteria (see C.3.19) or the 1200 mile requirement is exceeded. Testing may be stopped at any time at the discretion of the test director.

C.3.17.1 Mission scenarios. During the test, operators are to run mission scenarios as specified by the Preparing Activity.

C.3.17.2 Track switching. Upon completion of the first 500 mile mission scenario, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. At 1000 miles, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. Repeat this switching procedure for every 500 miles of testing.

C.3.18 Inspection and replacement criteria. Inspection and replacement criteria during the on-vehicle test shall be in accordance with table C-III.

C.3.19 Failure criteria. Failure of a contractor's track will be established when 20% of its total shoe samples have reached wear out and/or need replacement (see table C-III).

C.3.19.1 Track failure (break-in). Any track failures which occur during break-in or are damaged as a result of the following incidents will not be counted against qualification requirements:

a. Mechanical failure of non-track parts resulting in track damage.

b. Sprocket damaged shoes.

C.3.20 Disposition of track test hardware. All track test hardware shall be retained at the test site pending disposal instructions, including failed track components. Track that is defective or has completed testing may be stored outdoors while waiting for disposition instructions. It is essential that each manufacturer’s track samples are not commingled with samples from another manufacturer.

C.3.20.1 Failed track components. All failed track components shall be tagged and marked so as to identify accumulated test miles and cross reference to daily logs or test reports, as appropriate to provide for traceable component failure history.

C.3.20.2 Hardware (failure analysis). Hardware required for failure analysis shall be provided to the Preparing Activity upon request.

C.3.21 Vehicle disposition. Upon completion of the test and inspections, the vehicle shall be returned to the original pretest condition. Vehicle disposition instructions will be issued by the Preparing Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

C.3.22 Documentation/test reporting/photographic coverage. Any test incidents related to track, suspension or drive train components shall be documented on AMC Form 2134, Test Incident Report (TIR), or comparable test reporting document. The test site shall provide these reports to the Preparing Activity as they are generated. Each TIR or other test reporting document shall include as a minimum the following:

a. Description of failed component/part (noun).

b. Mileage track has endured.

c. Code/Serial number identification of failed component and code/serial number of replacement component.

d. Vehicle registration number.

e. Date of incident.

f. Description of incident. Description shall be detailed and include cause, if evident.

g. Test course where incident occurred, if known.

h. Estimated speed of vehicle when incident occurred.

i. Test environment at time of incident.

j. Disposition of failed part. Hold and tag failed part.

k. Test report number (beginning with number 1, continuing in chronological order). Supplements to a specific number shall be identified with a letter (example T0001A).

l. Authorized signature.

C.3.22.1 Track incidents. All track incidents determined to be major (that is, track throws or misguides) shall be immediately reported to the Preparing Activity.

C.3.23 Final report. The test site shall prepare a final technical report at the completion of testing. The report shall include as a minimum the following:

a. Data collected. Include copies of TIRs for track related failures.

b. Summary of test findings and conclusions.

c. Photographs, tables, and charts to reflect test findings and conclusions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

d. If more than one contractor is attempting qualification testing at one time, test results shall be grouped by contractor.

C.3.24 Photographic coverage. The test site shall furnish color photographic coverage of all significant test events to include, as a minimum, track throw or misguide damage (vehicle and track system), broken or bent center guides, sprocket damaged shoes, and broken pins.

C.3.24.1 Applicable information. Together with the photographic coverage, applicable information (manufacturer, serial number, test course, mileage sustained) shall be recorded and accompany the photographs. This data is to be included in the final report.

C.3.25 Distribution of reports. The distribution of test incident reports and final reports shall be as specified by the Preparing Activity.

TABLE C-III. T107 track hardware inspection and replacement criteria.

Item	Activity	Inspection or action	Reference
Track strand	Inspect daily	Visual observation of overall condition with specific attention to the road/grouser interface.	
	Replace	When 20% of the original track shoes have been replaced (or now require replacement) due to wear out.	Figure C-4
Track pin	Inspect daily	Visually check for cracked, broken, or bent pins.	
	500 miles	Hammer-Ring check at site discretion.	Figure C-3
	Replace shoe	When pin broken, bent, or cracked.	
Bushing	Inspect daily	Visually check for dead blocks or extruded bushing.	
	Replace shoe	When dead blocks are found or a bushing is completely extruded (pin to shoe body contact).	Figure B-3
Roadwheel path rubber	Inspect daily	Visually check for (1) cracks, chunks, or cuts. (2) Obvious lack of roadwheel support due to blowout, or chunking.	
	Replace shoe	When more than 50% of rubber is lost.	Figure C-4
Track shoe body	Inspect daily	Visually check for cracked shoes, daily crushed binocular tubes, and loose or lost backing rubber.	
	Replace	When shoe body cracked, binocular tube crushed.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE C-III. T107 track hardware inspection and replacement criteria – Continued.

Item	Activity	Inspection or action	Reference
End connector	Inspect daily	Visually check for cracked, broken, or missing bolts or connector.	
	Replace	When checked, broken, or worn to less than 1/8 inch thick.	Figure C-5
Center guide	Inspect daily	Visually check for cracked, broken, bent loose, or worn center guides.	Figure C-6
	Replace	When missing, cracked, broken, or worn to less than 1/2 inch thick as measured 1 inch below top to the center guide.	
Roadside rubber	Inspect daily	Visually check for rubber wear or loss of rubber.	
	Replace	Chevron is less than 1/2 inch[1] or the metal is exposed.	Figure C-4 and figure C-7

NOTE:
1. At the test site discretion, chevron wear can be measured by a “Go/No/-Go” device having one leg sitting on top of one end plate of a block and a second leg sitting on top of the other end plate, the legs joined with a straight strip running parallel to the rubber surface of the ground side of the shoe. If both legs of the measuring device touch, at the same time, the two high points of the end plates, the wear on the ground side will be considered worn out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

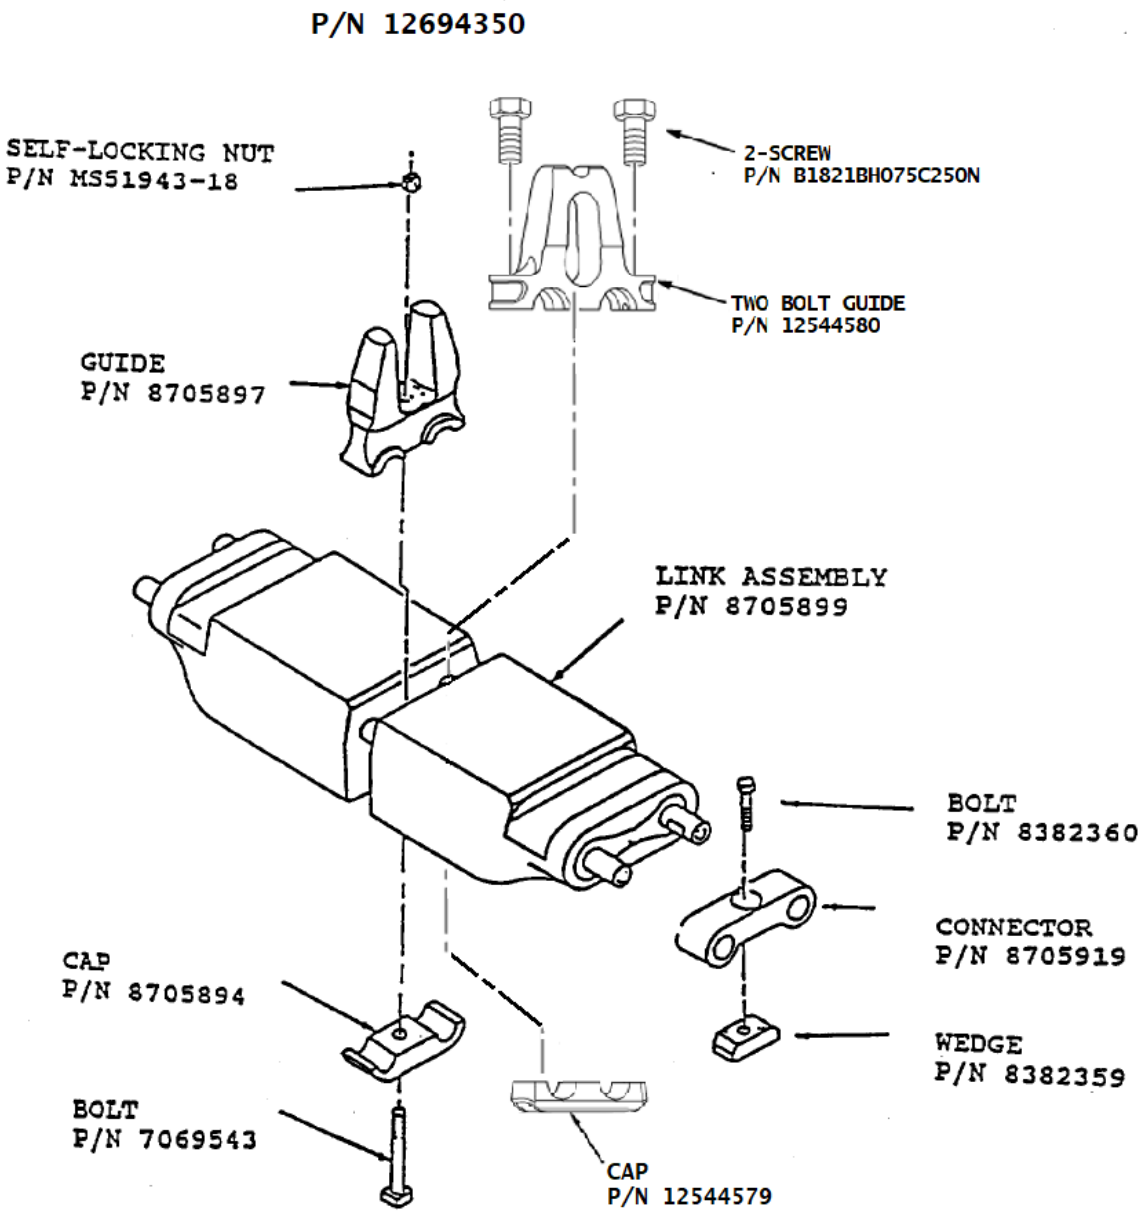


FIGURE C-1. T107 track hardware illustration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

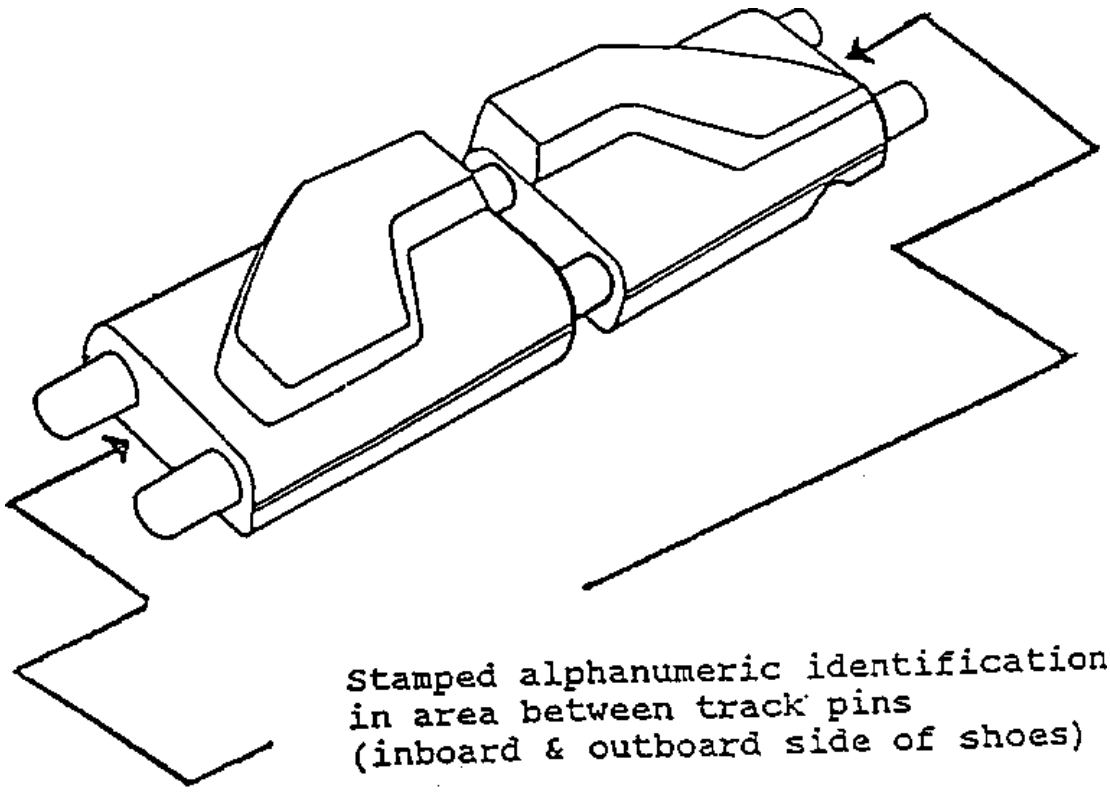



FIGURE C-2. Track shoe marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

STEP 1.

TAP END CONNECTOR WITH BALL PEEN HAMMER:

- IF RING TONE IS HEARD, THE BOLT AND WEDGE IS TIGHT ON BOTH ENDS, AND BOTH TRACK PINS ARE GOOD.
- IF A DULL TONE IS HEARD, TAP THE TWO TRACK PIN ENDS ALTERNATELY WITH THE HAMMER (SEE STEP 2).

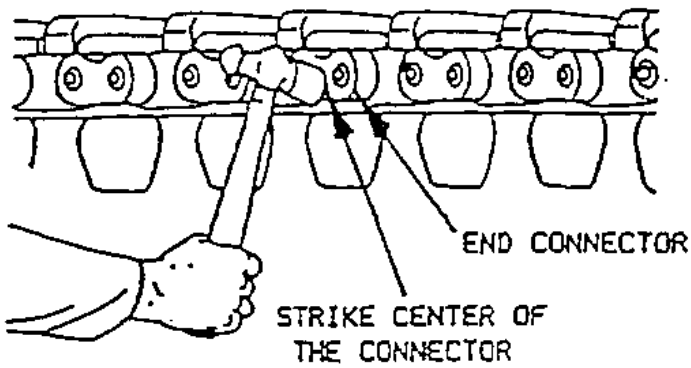

STEP 2.

TAP TRACK PINS WITH BALL PEEN HAMMER:

- A RING TONE MEANS THE PINS ARE GOOD, BUT WEDGE AND BOLTS ARE LOOSE OR END CONNECTOR IS CRACKED.
- A DULL TONE MEANS THE PIN MAY BE CRACKED OR BROKEN.

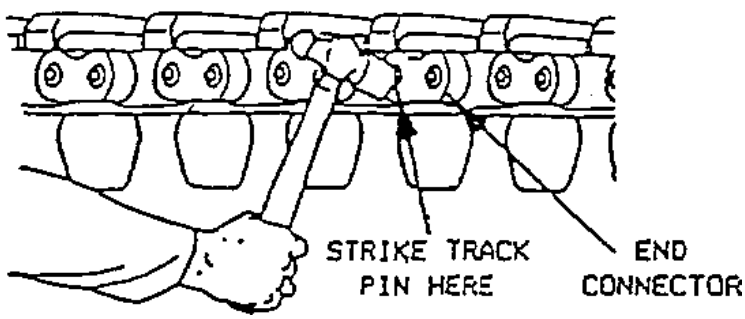


FIGURE C-3. "Hammer Ring" check test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

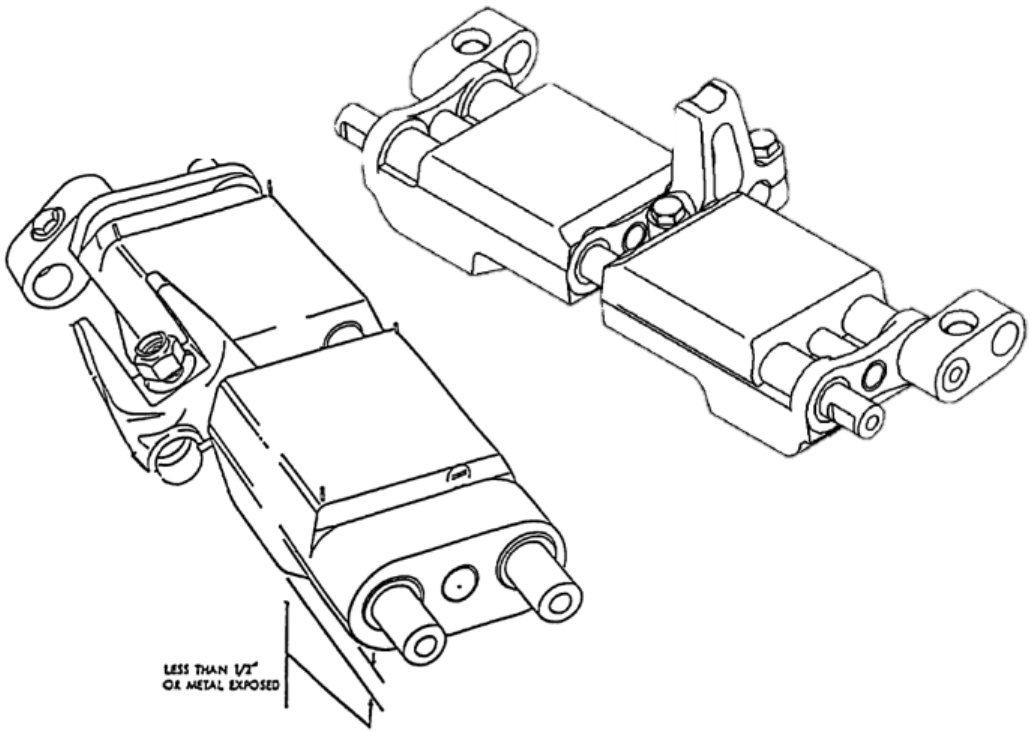


FIGURE C-4. Track shoe assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

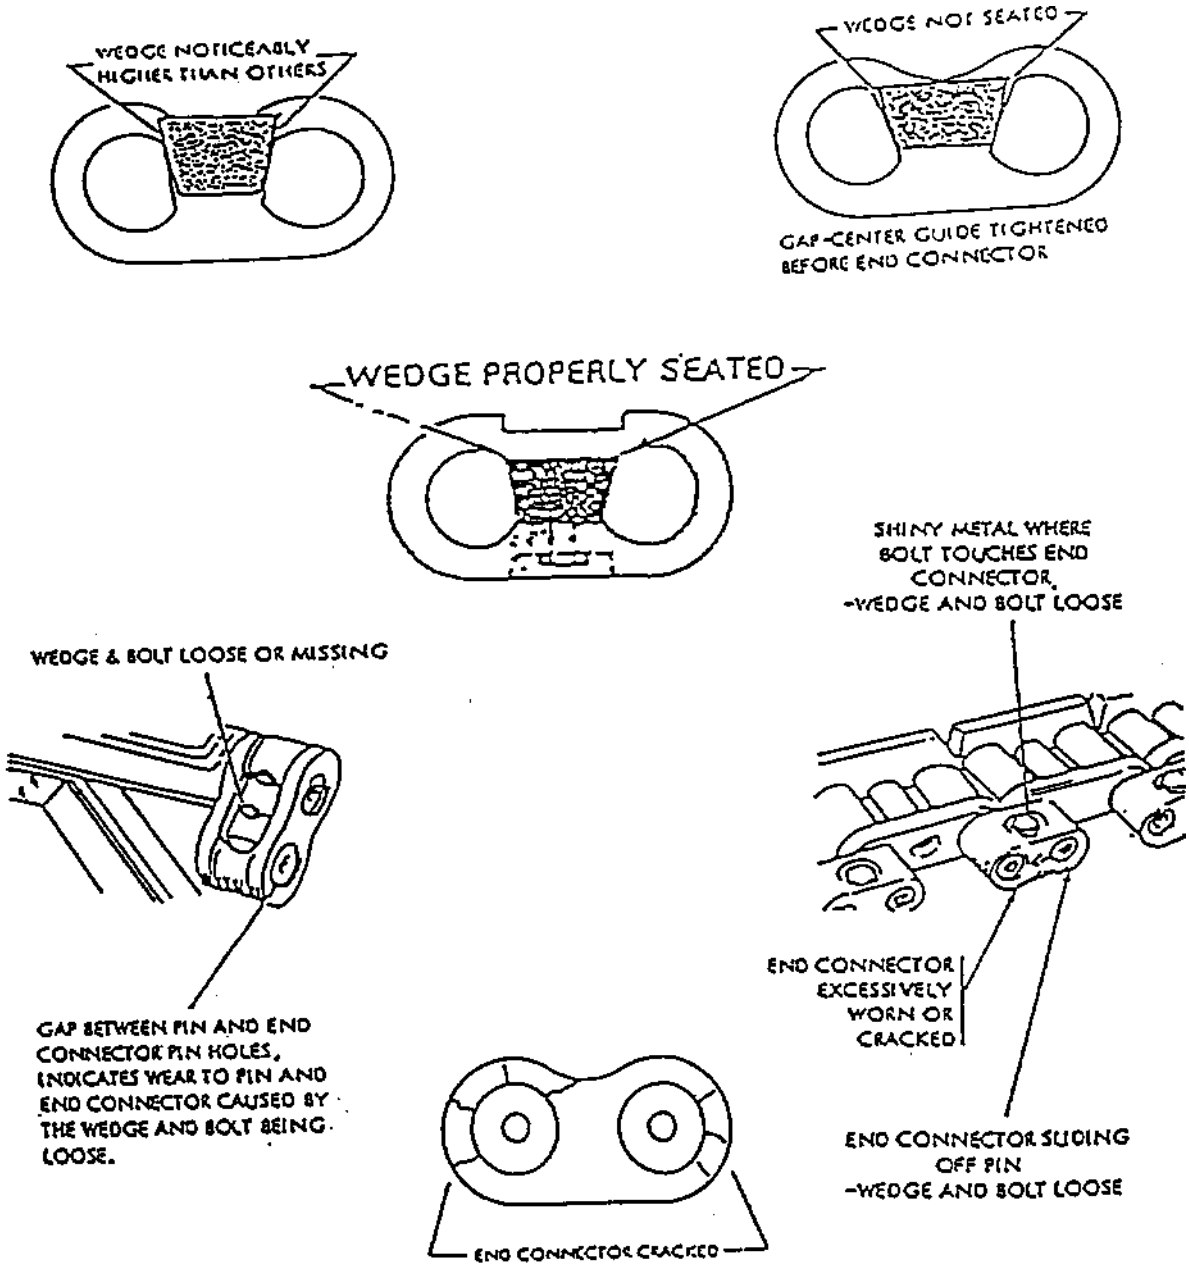


FIGURE C-5. End connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.


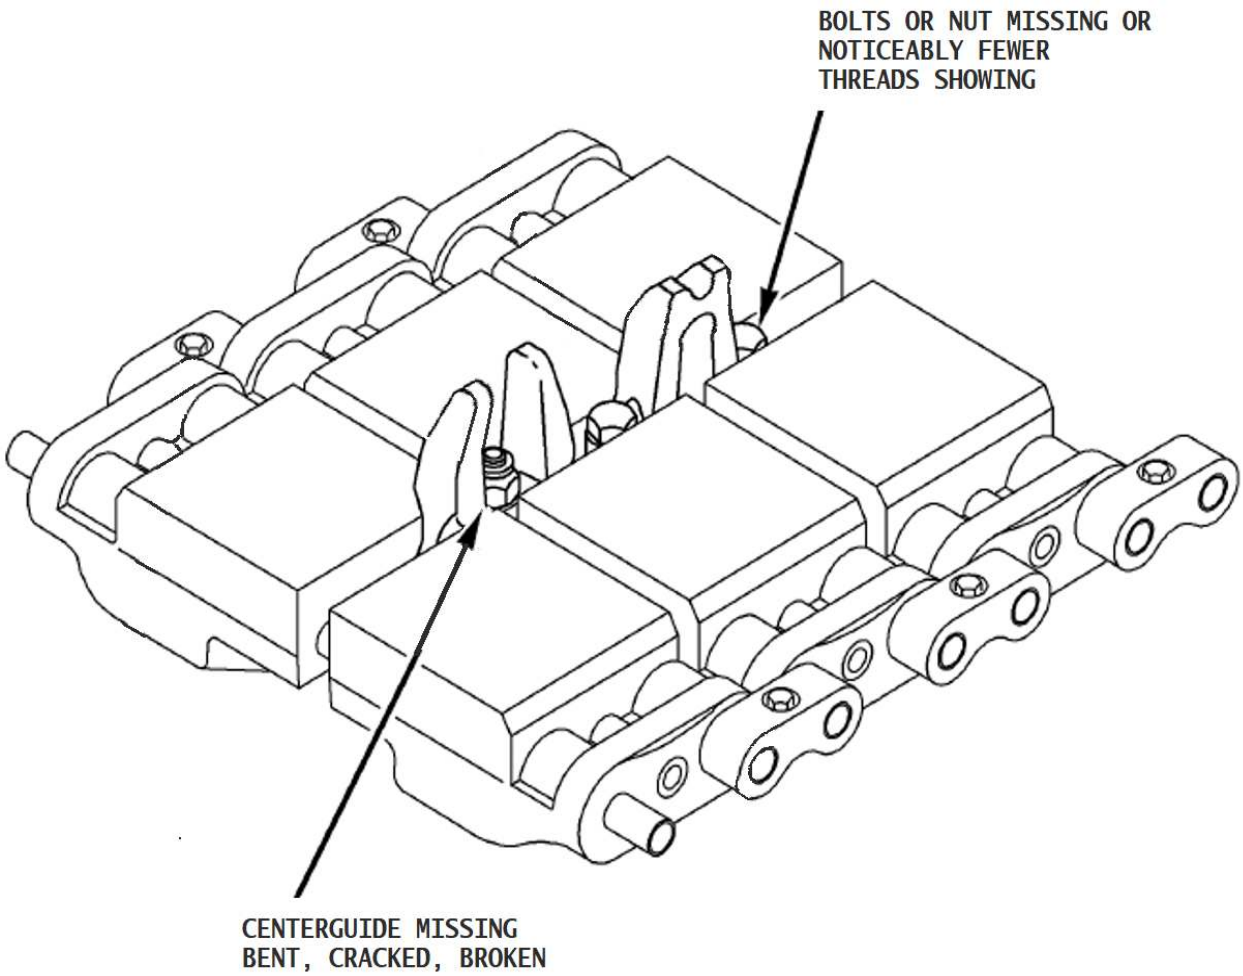


FIGURE C-6. Center guide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

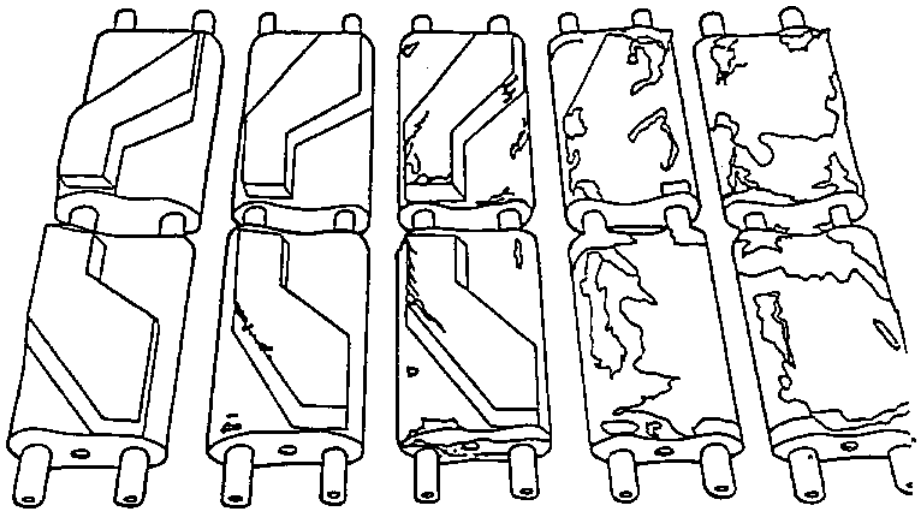

NOTE: Replace shoes that are excessively chunked or cut including rubber on the roadside that has been penetrated to the tube (binoculars).

FIGURE C-7. Typical stages of rubber wear on T107 track.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

T157I PAD ON-VEHICLE TEST PLAN

D.1 SCOPE

D.1.1 Scope. This appendix defines a set of instructions and requirements used for conducting the T157I pad vehicle qualification test. Although this appendix is specific in nature, the Preparing Activity may amend this appendix with a more detailed set of instructions to meet the needs of the particular test. This appendix will not be changed without prior permission from the Preparing Activity. This appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

D.2 APPLICABLE DOCUMENTS

D.2.1 General. The documents listed in this section are specified in Appendix D of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in Appendix D of this specification, whether or not they are listed.

D.2.2 Government documents.

D.2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

MIL-DTL-45913	-	Nuts, Self-Locking, Hexagon, Prevailing Torque

(Copies of this document are available online at https://assist.dla.mil.)

D.2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

12359469	-	Pad, Track Shoe
12359510	-	Parts Kit, Pad, Aluminum Backing Plate
12466485	-	Parts Kit, Pad, Steel Backing Plate

(Copies of these drawings are available from the Contracting Officer, or U.S. Army Ground Vehicle System Center, Attn: FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000.)

D.3 REQUIREMENTS

D.3.1 Test program review. A start of test meeting will be held at the test site on a date and time to be established by the Preparing Activity. Any additional review meetings shall be scheduled only if considered necessary by the Preparing Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

D.3.2 Test site access. Access to the test site will be required by Government personnel on a continuous basis to conduct their test responsibilities. Contractor personnel shall not be allowed test site access without specific approval from the Preparing Activity.

D.3.3 Test program scope. This test will be accomplished by assembling the manufacturer's T157I track pad samples on a Bradley Fighting Vehicle and operated to the requirements of this appendix.

D.3.4 T157I design characteristics. The T157I pad is part of a single pin track. See figure D-1 for a T157I track illustration.

D.3.5 Test course. The Preparing Activity will select the test course for conducting all on-vehicle qualification tests. The preferred course is located at the U.S. Army Yuma Proving Ground (YPG), Yuma, Arizona. Yuma has been traditionally selected for on-vehicle track testing because of climate, course, and test result consistency. The following standard track laying vehicle (tank and other tracked vehicles) test courses at YPG are designated for testing track for this specification.

a. Paved course. The dynamometer course is a 2 mile, smooth, near-level (0.8 percent grade), 30 foot wide roadway with 500 foot radius turnarounds at each end, surfaced with a high strength asphalt. The course is located at an elevation of approximately 470 feet above sea level and is staked at 0.1 mile intervals throughout its length with accurately surveyed distance markers.

b. Gravel course. The tank gravel course is a 3.6 mile compacted and graded gravel course and is for testing track laying vehicles under conditions simulating a secondary gravel road. The course consists of short straight sections and curves of varying radii with many moderate and sharp turns.

c. Hilly cross-country course. The tank hilly cross-country B course is 2.7 miles long and has short steep grades (35 percent) with a greater proportion of slopes less than 20 percent. This course has surfaces varying from sand and gravel to exposed bedrock. The loose gravel, sharp stones, and rocks present a severe cutting and abrasion problem for tracks and roadwheels.

d. Level cross-country course. The tank level cross-country course traverses areas of level, sandy terrain with many bumps that provide a severe test of track laying vehicles. The dust conditions are typical of cross-country operation on dry soil. One lap is 6.7 miles.

D.3.6 Operational mode summary. The operational mode summary for the test shall consist of 21% paved (concrete, asphalt, or macadam), 45% on gravel composed mostly of small stones, and 34% on cross-country (equal amount of hilly and level). During the test, the vehicle shall not traverse more than 50 continuous miles over any type of terrain. Vehicle direction around the test courses shall be changed periodically to assure approximately equal clockwise and counterclockwise test operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

D.3.6.1 Fifty mile scenario. During the test, operators are to run one 50 mile scenario at a time in accordance with the mission profile requirements stated below. A mission profile requirement will consist of the following:

a. Secondary road… ..... 22.5 miles

b. Paved road ..... 10.5 miles

c. Combined X Country.....17 miles

D.3.7 Climatological conditions. In order to expose the track test samples to the maximum "hot" weather conditions, vehicle road testing shall be selected to start no earlier than 1 March and no later than 1 September of the same calendar year.

D.3.8 Pad delivery and storage. Pad samples shall be delivered to the test site by a date as specified by the Preparing Activity. Adequate time must be allowed for test site personnel to inspect, mark, and install the hardware so as not to impact the projected test start date. A secured area must be made available during and after the test for each of the track pad samples. The samples received will be placed in a shaded area that prevents direct sunlight from shining on the track pads during storage and assembly operations. The reduction of variables such as solar heating of the pads in a stack while others are shaded and, therefore cooler, is mandatory. Any condition that might influence the relative performance of the track pads shall be held as uniform as possible.

D.3.9 Contractor hardware requirements. For the qualification road test, the contractor test samples shall consist of 164 complete pad assemblies (to include self-locking nut, P/N MS51943). In addition, 136 spare pads (with self-locking nut, P/N MS51943) shall be required.

D.3.10 Initial inspection/preparation for test. The test site shall perform a receiving inspection of the Bradley series vehicle to be used for the test. The basic test vehicle will be visually and functionally checked with specific attention given to suspension, electrical systems, hydraulic systems, and automotive controls and accessories. Any damage or improper operation will be repaired/corrected to ensure the vehicle will be capable of meeting the test requirements defined by this appendix.

D.3.10.1 Qualification sample inspection. Contractor supplied track pad qualification samples will be inspected to ensure no physical damage has occurred in shipment, that the required number of samples and spares have been provided, and that all components are properly identified.

D.3.11 Serial marking. Serial marking of pads may be required as specified by the Preparing Activity.

D.3.12 Pad installation (qualification). Pads supplied for pad qualification only will be installed on Government furnished T157I track assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

D.3.13 Load condition of the vehicle. For the test, the weight of the Bradley vehicle shall be adjusted to 64 375 pounds, plus or minus 500 pounds. The load shall be distributed approximately equal on each track when on a level surface.

D.3.14 Pivoting of vehicle. Pivot steering of the vehicle during break-in and qualification testing is to be kept at a minimum. Sudden braking action shall also be avoided to the extent possible.

D.3.15 Track tension adjustments. All tension adjustments shall be made prior to the start of the test as well as during test operations. As a minimum, track tension shall be checked on a daily basis. These adjustments shall be made after inspection faults have been corrected. Track tension requirements can be found in the latest technical manuals for the Bradley vehicle.

NOTE: Low track tension will cause thrown tracks, broken or bent pins, and broken end connectors and center guides. High track tension shall also be avoided. Track pins will break and tracks will be thrown. The track adjuster or grease gun shall be kept from contacting the track rubber parts. Any grease or oil accidentally contacting the shoes shall be immediately wiped off.

D.3.16 Track component replacement. Track shoe assembly replacements are required based on meeting the failure criteria for any number of component parts (bushing, roadwheel path rubber, center guide, or shoe body damage). The individual shoe replacements shall be made in the same strand location as the respective failed shoes. In addition, if the pads meet the acceptance criteria, the pads from the original track shoe shall be reinstalled on the replacement shoe.

D.3.17 New hardware. When track shoes and pads are replaced, the new hardware must be torque checked after the first 50 miles of operation.

D.3.17.1 Torque values. All T157I track hardware shall be torqued to the following values and in accordance with proper maintenance procedures:

a. Pad nut - MS51943	135-155 lb-ft.
b. Nut, self-locking - P/N 12308644-1	299-325 lb-ft. (used on track shoe rod, see figure D-1)

D.3.18 Break-in run. The purpose of the break-in run procedure is to simulate the natural aging process afforded production/spare pads during normal transit/storage periods before actual vehicle use. All test samples (to include spares and all pads provided for qualification) shall be broken in prior to the road test by having the vehicle on which they are installed, continuously operated for 45 miles on a paved road (concrete, asphalt, or macadam) in accordance with table D-I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE D-I. T157I break in run.

Division of break-in run	Speed mph (max)	Distance miles (min)
a	10	15
b	15	15
c	20	15

D.3.18.1 Vehicle operation. The vehicle shall be operated in both directions for one-half of the total vehicle distance.

D.3.18.2 Track cooling (break-in). During the break-in run, the track shall be allowed to cool between each phase of testing. The cooling of the track can be verified through one of the following two procedures.

D.3.18.2.1 Track roadwheel cooling. The track roadwheel path surface shall be cooled to the point where the palm of the hand can be held to the surface backing in excess of 10 seconds.

D.3.18.2.2 Cool down between speed changes. Cool down between speed changes shall require the use of a device used to measure the temperature of the rubber pads (see figure 7 for a diagrammed example of this type of device). Measurements should be taken from both the roadwheel side and the roadside. A reading of 130 degrees or less should be recorded prior to restart of the break-in.

D.3.18.3 Visual inspection (break-in). Between each division of the break-in run, a visual inspection shall be made of the track and the component's parts. The inspection shall be in accordance with the inspection and replacement criteria found in table D-II. Hardware shall be retorqued if noticeably loose. After break-in, all hardware shall be torqued 100% to values as specified in D.3.17.1.

D.3.18.4 Track pad failure (break-in). Any track pad failures which occur during break-in do not count towards the failure criteria. Further, any failures during break-in do not reduce the original sample size. Pads failed during break-in shall be replaced with spares and noted on a Test Incident Report (TIR) or similar document. The pad assemblies comprising a strand after break-in shall be denoted as the original strand sample at the start of test. Break-in mileage shall be counted toward the qualification mileage requirement.

D.3.18.5 Spare pads. All spare pads shall be installed on a vehicle and broken in before test start up. The break-in shall be performed in accordance with D.3.18. After completion of the break-in run, the pads shall be removed from the vehicle and stored for future use during the qualification test.

D.3.19 Test procedure. After completion of the break-in run, the vehicle shall be run to the operational mode summary found in D.3.6 until the pads being tested for qualification have met the failure criteria (see D.3.20) or have exceeded the qualification requirement of 800 miles pad life.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

D.3.19.1 Track switching. Upon completion of the first 500 mile mission scenario, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. Unless otherwise specified by the Preparing Activity (see 6.2), the track pads shall be removed from the vehicle at 800 miles.

D.3.20 Failure criteria. Failure of a contractor's pads will be established when 40% of the original pad samples have reached wear out and/or need replacement. For scoring purposes, the test site shall not count multiple replacement of the same pad location.

D.3.20.1 Pad failure (break-in). Any pad failures which occur during break-in or start damaged as a result of the following incidents will not be counted against qualification requirements:

a. Mechanical failure of non-track parts resulting in track pad damage.

b. Sprocket damaged shoes.

TABLE D-II. T157I track hardware inspection and replacement criteria.

Item	Activity	Inspection or action
Track strand	Inspect daily	Visual observation of overall condition with specific attention to the road/grouser interface.
	Replace	When 20% of the original track shoes have been replaced (or now require replacement due to wear out).
Track pin	Inspect daily	Visually check for cracked, broken, or bent pins.
	Replace shoe[1]	When pin broken, bent, or cracked.
Bushing	Inspect daily	Visually check for dead blocks or extruded bushing.
	Replace shoe[1]	When dead blocks are found or a bushing is completely extruded (pin to shoe body contact).
Roadwheel path rubber	Inspect daily	Visually check for (1) cracks, chunks, or cuts. (2) Obvious lack of roadwheel support due to blowout or chunking.
	Replace shoe[1]	When more than 50% of rubber is lost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE D-II. T157I track hardware inspection and replacement criteria – Continued.

Item	Activity	Inspection or action
Track shoe body	Inspect daily	Visually check for cracked shoes, crushed binocular tubes, and loose or lost backing rubber.
	Replace	When shoe body cracked, binocular tube crushed, or pad mounting hole enlarged, or unable to remove defective pad.
Center guide	Inspect daily	Visually check for cracked, broken, bent, loose, or worn center guides.
	Replace shoe[1]	When missing, cracked, broken or worn to less than 3/8 inch thick as measured 1 inch below top to the center guide.
Track pad		See D.3.20 and D.3.21.

NOTE:
1. Pads from original shoe must be removed and reinstalled on the replacement shoe.

D.3.21 Inspection and replacement criteria. The track pad shall be replaced if the grouser marks a paved surface. Pad blowout or chunking does not meet criteria for replacement given that the grouser is not marking the road. The whole assembly shall be replaced if the pad mount is damaged or unable to remove pad. Replacement pad height must be within 1/4 inch (plus or minus) of neighboring pads. The test site shall use either a worn pad or shave down a spare pad.

D.3.21.1 Pad inspection. As a minimum, test site personnel shall inspect the pads on a daily basis or after approximately every 50 miles, whichever occurs first. During break-in, a visual inspection shall be made between each division of the break-in run.

D.3.22 Disposition of pad test hardware. All pad test hardware shall be retained at the test site pending disposal instructions, including failed track pad components. Pads that are defective or have completed testing may be stored outdoors while waiting for disposition instructions. It is essential that each manufacturer's pad samples are not commingled with samples from another manufacturer or other compound sample.

D.3.22.1 Failed track pad marking. All failed track pads shall be tagged and marked so as to identify accumulated test miles and cross reference to daily logs or reports, as appropriate to provide for traceable component failure history.

D.3.22.2 Hardware (failure analysis). Hardware required for failure analysis shall be provided to the Preparing Activity upon request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

D.3.23 Vehicle disposition. Upon completion of the test and inspections, the vehicle shall be returned to the original pretest condition. Vehicle disposition instructions will be issued by the Preparing Activity.

D.3.24 Documentation/test reporting/photographic coverage. Any test incidents related to track, suspension, or drive train components shall be documented on AMC Form 2134, Test Incident Report (TIR), or comparable test reporting document. The test site shall provide these reports to the Preparing Activity as they are generated. Each TIR or other test reporting document shall include as a minimum the following:

a. Description of failed component/part (noun)

b. Mileage pads have endured.

c. Date of incident.

d. Description of incident. Description shall be detailed and shall include cause, if evident.

e. Test course where incident occurred (if known).

f. Estimated vehicle speed when incident occurred.

g. Test environment at time of incident.

h. Disposition of failed part. Hold and tag failed part.

i. Test report number.

j. Vehicle registration number.

k. Code/serial number identification of failed component and code/serial number of replacement component.

l. Authorized signature.

D.3.24.2 Major track incidents. All track incidents determined to be major (that is, track throws or misguides) shall be immediately reported to TACOM and the Preparing Activity.

D.3.25 Final report. The test site shall prepare a final technical report at the completion of testing. The report shall include as a minimum the following:

a. Data collected. Include copies of TIRs for track related failures.

b. Summary of test findings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

c. Photographs, tables, and charts to reflect test findings.

d. If more than one contractor is attempting qualification testing at one time, test results shall be grouped by contractor.

D.3.26 Photographic coverage. The test site shall furnish color photographic coverage of all significant test events to include, as a minimum, track throw or misguide damage (vehicle and track system), broken or bent center guides, sprocket damaged shoes, broken pins, representative sampling of pad failures, and a representative sampling of pads which have not met the failure criteria.

D.3.26.1 Applicable information. Together with the photographic coverage, applicable information (manufacturer, serial number, test course, mileage sustained) shall be recorded and accompany the photographs. This data is to be included in the final report.

D.3.27 Distribution of reports. The distribution of test incident reports and final reports shall be as specified by the Preparing Activity (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

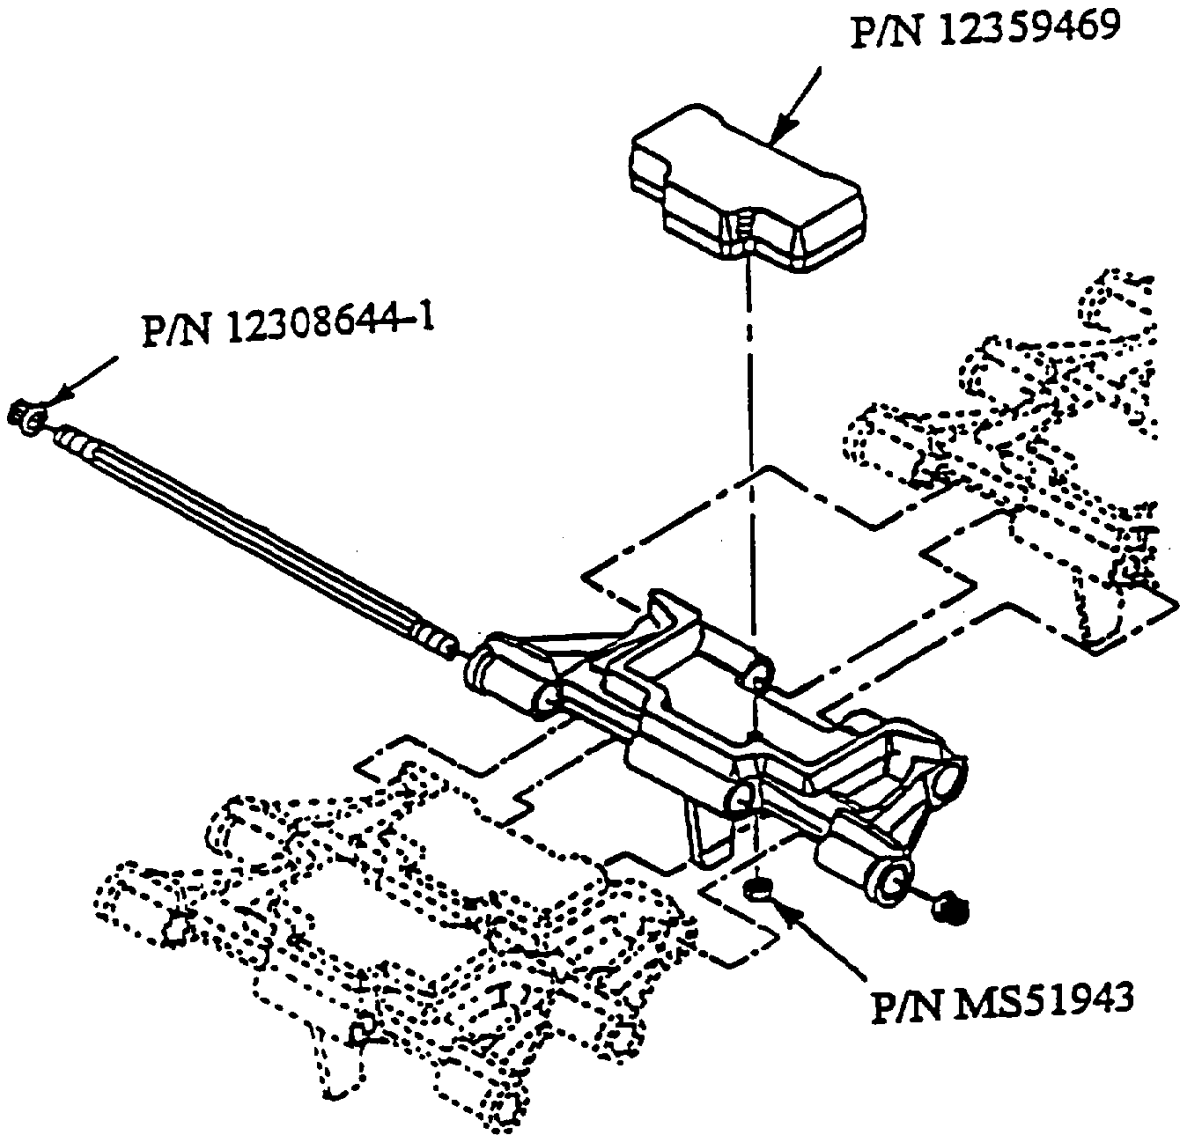


FIGURE D-1. T157I track hardware illustration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

T107 TRACK SHOE ELASTOMER AND COMPONENTS FOR USE ON M88A2 VEHICLES

E.1 SCOPE

E.1.1 Scope. This appendix identifies the requirements for qualification and production control of the T107 track system supporting M88A2 U.S. Military Vehicles. This appendix is intended primarily for the qualification of elastomeric compounds used in the fabrication of track and track components and to ensure that the quality and performance established at qualification is maintained throughout production. The contractor is held fully responsible for the entire assembly/component, including all non-elastomeric components and fasteners. The qualified products list (QPL) is divided by individual track components (pads, bushings and roadwheel path/shoe body) listing the contractors qualified to produce the various components; the contractor's address, and compound identification. The QPL also identifies contractors qualified to assemble the various track components into full assemblies/systems. This includes bushing insertion, pad installation, and connecting component (end connectors, center guides) assembly. The track shoe assemblies may be acquired either as sets, assemblies, or as individual components as specified by the acquiring activity. The specifications in this appendix are not intended for use beyond the scope of qualification and manufacturing control. The tolerances and target values in this document are not to be used to assess the quality of aged or used track components.

E.1.2 Classification. The track shoe assemblies and components to be procured in accordance with this specification are designated T107, TDP no. 12694350 and are of the double-pin type, integral pad style.

E.2 APPLICABLE DOCUMENTS

E.2.1 General. The documents listed in this section are specified in sections E.3, E.4 and E.5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in sections E.3, E.4 and E.5 of this specification, whether or not they are listed.

E.2.2 Government drawings. Technical data package (TDP) drawings for the track system/component to be procured will be provided as part of the invitation for bid.

E.2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted can be found in the Acquisition Streamlining and Standardization Information System (ASSIST) database.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

ASTM INTERNATIONAL

ASTM D624	-	Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers.

(Copies of these documents are available online at www.astm.org.)

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)

ISO 37	-	Rubber, Vulcanized or Thermoplastic – Determination of Tensile Stress-Strain Properties
ISO 188	-	Rubber, Vulcanized or Thermoplastic – Accelerated Ageing and Heat Resistance Tests

(Copies of these documents are available online at www.iso.org.)

E.2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

E.3 REQUIREMENTS

E.3.1 Requirements. The qualification process is divided into four phases: Phase I, Pre-qualification, Phase II, Plant/facilities inspections, Phase III, Qualification by on-vehicle endurance testing and Phase IV, establishment of contractor's process control plan and rubber compound characteristics and inspections. The procedures and requirements of these phases must be successfully completed and all requirements met prior to a contractor becoming qualified for listing on the QPL. E.4 of this specification establishes the minimum quality control requirements to be applied during production and is relevant only after a qualified vendor has been added to the QPL.

E.3.2 Phase I, pre-qualification. Initial laboratory testing will be conducted on samples of elastomeric material representative of the compounds intended for use in road wheel path pads, ground-side pads, and bushings. The purpose of which is to indicate, with reasonable confidence, that the materials are capable of performing during the extensive testing and characterization included in later phases. The results of pre-qualification testing may be cause for refusal by the Government to reject the materials and not allow continuation to the next phase. It is encouraged to provide ASTM-standard 6 inch test slabs road wheel path and ground pad compounds; net-shape parts are not required for pad samples. Net shape parts are required for bushings. Material quantities, tests, and minimum material properties are discussed in E.4.3. Information obtained from the pre-qualification study will be considered proprietary and will not be divulged to representatives outside of named representatives of the preparing activity and the providing vendor. At the request of the vendor, A Non-Disclosure Agreement (NDA) may be prepared prior to delivery of materials to ensure the protection of intellectual property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

A meeting will be held between representatives of the preparing activity and the vendor to discuss test results prior to a decision being made to continue to the next phase. This information shall not be used by the preparing activity for any purpose other than an initial evaluation of the materials provided by the vendor for pre-qualification on the T107 track system. Results will only be retained by the preparing activity should the vendor be selected to proceed to the next phase; otherwise, all retained copies of data pertaining to the vendor's product, digital or otherwise, shall be destroyed by the preparing activity.

E.3.3 Phase II, plant/facilities inspections. Defense Standardization and Specification Program SD-6, "Provisions Governing Qualification (Qualified Products Lists)" and DOD 4120.24, "Defense Standardization Program Policies and Procedures", authorizes the preparing activity or its authorized agent to conduct plant/facility inspections prior to the start of any qualification testing. Subcontractors that provide uncured rubber for processing by the contractor requesting qualification shall be subjected to the same inspection and test requirements on that portion of the product/process that is within the subcontractor's purview.

E.3.4 Phase III, qualification by on-vehicle endurance testing. Track provided by the contractor will be subjected to on-vehicle testing. The full test plan for this phase is detailed in E.5.1.

E.3.5 Phase IV, establishment of contractor's process control plan and rubber compound characteristics and inspections.

E.3.5.1 Product and process control plan. The control plan is an outline of how the contractor verifies fulfillment of the requirements of this specification. The control plan shall summarize the control techniques used from receipt of raw materials to shipment of product. Test/inspection characteristic values shall be identified in the Process Fingerprint Plan. The initial control plan shall be established prior to qualification and shall reflect the product and process controls used to manufacture the qualification hardware. The control plan shall be in chart form and shall, at a minimum, reflect the following:

a. Supplier name.

b. Process or product name and/or number.

c. Plan revision and revision date.

d. Operation number or process step, process parameters and product characteristics.

e. Method of control (gage, test).

f. Sample size and frequency.

g. Analysis method (control chart, lot plot, run chart), and other important control information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.3.5.1.1 Control plan. The control plan shall address the test methods/equipment used to meet the requirements of this specification. The use of alternative test methods/equipment (state-of-the-art) may be utilized provided supporting data and rationale are provided to show equivalency to the test/equipment being replaced and the contractor receives Government approval. The plans shall reflect the process parameter controls (see E.3.5.2) and product characteristic controls (see E.3.5.4) used to assure the quality of the end product. The control plans are intended to be dynamic and may be changed as process improvements are made. The initial plans shall be delivered to the Government QAR and the Preparing Activity for approval. Any changes to the plans shall be provided to the Government QAR for concurrence, prior to implementation. The contractor shall have data available to support any changes to the control plans. This plan shall bear the signatures of the Government QAR and an authorized representative of the contractor. This plan shall remain at the contractor's facility but will be made available for review by the preparing activity or its authorized agent. This information shall not be disclosed in whole or in part for any purpose other than to evaluate the product submitted for qualification testing.

E.3.5.2 Process parameter controls. The quality of the products produced under this specification shall be controlled through process control techniques, such as statistical process control (SPC). Process controls shall be of a type that will provide adequate control of the process. The type and extent of the control is a function of the significance of the parameter being controlled.

E.3.5.3 Process parameter selection. The process parameters selected for control shall be identified through one of the following process analysis methods: Design of Experiments (DOE), Regression Analysis, Correlation Studies, Failure Mode Effects Analysis (FMEA), or other formal or scientific process analysis techniques. The results of the process analysis shall be documented. As a minimum, the contractor shall identify how the following parameters are to be controlled or provide data from the process analysis or other evidence/information that justifies why one of the following are not controlled: raw material properties, material weights, mixing and milling conditions (time, temperature, mill banks), stock lay down temperatures, extrusion temperatures, booking temperatures, unvulcanized rubber block weights/dimensions, cleanliness of rubber and metal to be bonded, complete adhesive coverage, injection time, cure time, mold service time, runner temperature, nozzle temperature, mold temperature, and mold pressure. In addition, the contractor may use any additional parameters to assure production of acceptable track components. The selected parameters shall be reflected on the control plan(s).

E.3.5.4 Product characteristic controls. Product characteristics are identified in the technical data package and in this specification. The product characteristics identified shall be controlled by process control techniques. Adequate process controls are necessary for the reduction and elimination of these product characteristic inspections.

E.3.5.5 Product characteristic selection. As a minimum, the product characteristics to be controlled or tested are identified in Quality Assurance Provisions, drawings, and this specification. At its own discretion, the contractor may control or inspect any additional characteristics; however, elimination of the required characteristics shall be supported by adequate inspection process analysis data. The selected characteristics shall be reflected on the control plan.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.3.5.6 Baseline characteristics. The contractor shall evaluate the elastomeric compounds used for road wheel path pads, ground-side pads, and bushings as directed in E.4.4. The properties obtained during this phase of testing will be used for process control at subsequent inspection points, for example first-article and full-production inspections. All documentation relating to this characterization shall remain at the contractor's facility but be made available for review by QAR, the preparing activity, or its authorized agent. This information shall not be disclosed in whole or in part for any purpose other than to evaluate the product submitted for qualification testing.

E.4 VERIFICATION

E.4.1 Classifications of inspections. The inspection requirements specified herein are classified as follows:

a. Pre-qualification (see E.4.3).

b. Baseline characteristics (see E.4.4).

c. First-article inspection (see E.4.5).

d. Production quality control (see E.4.6).

e. Conformance inspections (see E.4.7).

E.4.2 Test records and compound identification. All test records must contain, at a minimum, the compound identification and source, test results, test facility identification, dates of tests, and name(s) of the tester(s). The contractor will identify the method to be used during qualification and utilize the same method during subsequent production testing. Compound numbers must be identified to the component being qualified, for example separate compound identifiers for bushing, ground pad, and roadwheel path compounds must be fully identified on the applicable test records/data sheets. Any record, data sheet, or certification lacking proper identification, or one that does not contain clear and concise information will not be considered in compliance to these requirements and rejected. All inspections shall be performed in accordance with conditions specified in applicable drawings, specifications, and standards except where explicitly stated.

E.4.3 Pre-qualification. Contractors shall provide samples of the intended wheel path compound, road pad compound, and bushing compound to the preparing activity for pre-qualification testing. Samples shall be provided in the form of ASTM D3182 sheets; 10 sheets for each compound. Table E-I lists the tests to be performed, the target values required to pass pre-qualification, and the subparagraph describing the test in detail. All tests shall be conducted at 73±4.0 °F, with the exception of the high-temperature tensile tests at 212±4.0 °F. This information shall not be disclosed in whole or in part for any purpose other than to evaluate the product submitted for qualification testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-I. Pre-qualification test properties and minimum required values.

Report values	Test method	73 °F Target	212 °F Target	Specification paragraph
Ground pad hardness	ASTM D2240	68 Shore A, min	No requirement	E.5.2.3
Ground pad tensile strength	ASTM D412 [1]	2,800 psi at break, min	Max 35% reduction from reported values at 73 °F	E.5.2.4
Ground pad tensile elongation at break	ASTM D412 [1]	375%, min	Max 50% change from reported values at 73 °F	E.5.2.4
Ground pad tear strength	ASTM D624	375 lbf/in-width, min	No requirement	E.5.2.5
Bushing endurance	MTS832	PASS	No requirement	E.5.2.6

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.

E.4.4 Baseline characteristics. The final product baseline evaluation is intended to create a standard reference for comparison against future production runs. The manufacturer will be required to maintain select material properties during production against the tolerances listed for first-article and production quality control inspections.

E.4.4.1 Roadwheel path and ground pad samples. All roadwheel path and ground pad samples are to be extracted from track shoe assemblies removed from the line directly; samples are not to be prepared from ASTM D3182 laboratory sheets during this inspection. Recommended sampling procedures are detailed in E.5.2.2.

E.4.4.2 Ground pad tests. Table E-II lists the tests to be performed on ground pad components and the section describing the test in detail. All tests shall be conducted at 73±4.0 °F unless otherwise noted or a static test temperature is not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-II. Final product roadwheel path and ground pad elastomer material property tests.

Test requirement	Test method	Specification paragraph
Hardness, Shore A	ASTM D2240	E.5.2.3
Specific gravity	ASTM D792	E.5.2.7
Tensile modulus @ 50/75/100% elongation (73 °F)	ASTM D412 [1]	E.5.2.4
Tensile modulus @ 50/75/100% elongation (212 °F)	ASTM D412 [1]	E.5.2.4
Tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4
Tensile strength (212 °F)	ASTM D412 [1]	E.5.2.4
Tensile elongation at tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4
Tensile elongation at tensile strength (212 °F)	ASTM D412 [1]	E.5.2.4
Tensile strength (aged)	ASTM D573 [2]	E.5.2.8
Tensile elongation at tensile strength (aged)	ASTM D573 [2]	E.5.2.8
Tear strength (73 °F)	ASTM D624	E.5.2.5
Tear strength (212 °F)	ASTM D624	E.5.2.5
Glass transition temperature(s) by differential scanning calorimetry	ASTM E1356	E.5.2.9
Thermogravimetric analysis	ASTM E1136	E.5.2.10
Adhesion, ground-side pads	ASTM D429	E.5.2.13
Adhesion, road wheel side pads	ASTM D429	E.5.2.13
Ozone resistance	ASTM D1149	E.5.2.14
Workmanship	--	E.5.2.11
Product marking	--	E.5.2.12
On-vehicle road test	--	E.5.1

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.
2. If ISO 37 was utilized in place of ASTM D412, ISO 188 shall be utilized for heat aging in place of ASTM D573.

E.4.4.3 Bushing tests. Table E-III lists the tests to be performed on bushing components and the section describing the test in detail. All tests shall be conducted at 73±4.0 °F unless otherwise noted or a static test temperature is not applicable. The results of the bushing endurance test performed during pre-qualification shall be added to these test results for future reference. If enough material cannot be obtained from molded bushing components, the contractor and Government shall agree upon alternative testing requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-III. Final product baseline bushing property tests.

Test requirement	Test method	Specification paragraph
Hardness, Shore A	ASTM D2240	E.5.2.3
Specific gravity	ASTM D792	E.5.2.7
Tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4
Tensile elongation at tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4
Tensile strength (aged)	ASTM D573 [2]	E.5.2.8
Tensile elongation 50/75/100% elongation	ASTM D412 [1]	E.5.2.8
Tensile elongation at tensile strength (aged)	ASTM D573 [2]	E.5.2.8
Glass transition temperature(s) by differential scanning calorimetry	ASTM E1356	E.5.2.9
Thermogravimetric analysis	ASTM E1136	E.5.2.10
Adhesion	ASTM D429	E.5.2.16
Compression set	ASTM D395	E.5.2.17
Workmanship	--	E.5.2.11
Product marking	--	E.5.2.12
Concentricity	--	E.5.2.18

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.
2. If ISO 37 was utilized in place of ASTM D412, ISO 188 shall be utilized for heat aging in place of ASTM D573.

E.4.5 First-article inspection. Unless otherwise specified, the Government shall randomly select track shoes produced under the production contract for first article inspection. For track roadwheel path and ground path, first article samples shall be inspected to table E-IV. For bushings, first article samples shall be inspected as specified in table E-V. Inspection results shall be within the tolerances indicated in comparison to the final product baseline evaluation (see E.4.4).

TABLE E-IV. First-article roadwheel path and ground pad elastomer material property tests.

Test requirement	Test method	Specification paragraph	Tolerance
Hardness, Shore A	ASTM D2240	E.5.2.3	±5 pnts
Specific gravity	ASTM D792	E.5.2.7	±0.020
Tensile modulus @ 50/75/100% elongation (73 °F)	ASTM D412 [1]	E.5.2.4	±15%
Tensile modulus @ 50/75/100% elongation (212 °F)	ASTM D412 [1]	E.5.2.4	Change of less than or equal to 30% of 73 °F value [1]
Tensile strength (aged)	ASTM D573 [2]	E.5.2.8	Change of less than 30% of 73 °F value [1]

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-IV. First-article roadwheel path and ground pad elastomer material property tests – Continued.

Test requirement	Test method	Specification paragraph	Tolerance
Tensile elongation at tensile strength (aged)	ASTM D573 [2]	E.5.2.8	Change of less than 30% of 73 °F value [1]
Tear strength (73 °F)	ASTM D624	E.5.2.5	±15% of minimum value [1]
Tear strength (212 °F)	ASTM D624	E.5.2.5	Change of less than or equal to 30% of 73 °F value [1]
Glass transition temperature(s) by differential scanning calorimetry	ASTM E1356	E.5.2.9	±5 °F
Thermogravimetric analysis	ASTM E1136	E.5.2.10	Plasticizer + residue: ±3% Polymer: ±5% Filler: ±5%
Adhesion, ground-side pads	ASTM D429	E.5.2.13	0
Adhesion, road wheel side pads	ASTM D429	E.5.2.13	0
Ozone resistance	ASTM D1149	E.5.2.14	Pass/Fail
Workmanship	--	E.5.2.11	Pass/Fail
Product marking	--	E.5.2.12	Pass/Fail

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.
2. If ISO 37 was utilized in place of ASTM D412, ISO 188 shall be utilized for heat aging in place of ASTM D573.
3. Contractor shall petition for a defined percent of minimum value and shall be supported by statistical analysis. Values to be documented in process fingerprint plan if in excess of 30%.

TABLE E-V. First-article bushing property tests. [3]

Test requirement	Test method	Specification paragraph	Tolerance
Hardness, Shore A	ASTM D2240	E.5.2.3	±5 pnts
Specific gravity	ASTM D792	E.5.2.7	±0.020
Tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4	±16%
Tensile elongation at tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4	±15%
Tensile strength (aged)	ASTM D573 [2]	E.5.2.8	Change of less than 30% of 73 °F value
Tensile elongation 50/75/100% EL	ASTM D412 [1]	E.5.2.8	±17%

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-V. First-article bushing property tests – Continued.

Test requirement	Test method	Specification paragraph	Tolerance
Tensile elongation at tensile strength (aged)	ASTM D573 [2]	E.5.2.8	Change of less than 30% of 73 °F value
Glass transition temperature(s) by differential scanning calorimetry	ASTM E1356	E.5.2.9	±5 °F
Thermogravimetric analysis	ASTM E1136	E.5.2.10	Plasticizer ±3% + residue: Polymer: ±5% Filler: ±5%
Adhesion	ASTM D429	E.5.2.16	See E.5.2.16.3
Compression set	ASTM D395	E.5.2.17	≤ 25 %
Concentricity	--	E.5.2.18	±1/64 inch
Workmanship	--	E.5.2.11	Pass/Fail
Product marking	--	E.5.2.12	Pass/Fail

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.
2. If ISO 37 was utilized in place of ASTM D412, ISO 188 shall be utilized for heat aging in place of ASTM D573.
3. If enough material cannot be obtained from molded bushing components, the contractor and Government shall agree upon alternative testing requirements.
4. Contractor shall petition for a defined percent of minimum value and shall be supported by statistical analysis. Values to be documented in process fingerprint plan if in excess of 30%.

E.4.5.1 First article sample approval. Approval of the first article sample by the Government shall not relieve the contractor of his obligation to supply bushings, roadwheel path, or ground pad items that are fully representative of those inspected as a first article sample. Any changes or deviations of the production units from the first article sample shall be subject to the approval of the contracting officer.

E.4.5.2 Failure. Deficiencies occurring during or as a result of first article inspection shall be cause for rejection of the products until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiency. The Government will not accept products until first article inspection is completed to the satisfaction of the Government. Further, the Government reserves the right to remove a contractor's name from the QPL pending successful completion of the first article.

E.4.6 Production quality control. In-process property inspections shall be performed on bushings, roadwheel path, and ground pad elastomer prepared in accordance with ASTM D3182. The frequency and allowable limits required for these tests are defined in E.4.6.2. In-process property inspections will also be performed on finished-piece components. The sampling frequency and allowable limits required for these tests are defined in E.4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.4.6.1 Reduction of production product test frequency through statistical process control. The frequency of property inspection defined in E.4.6.2 and E.4.6.3 are intended as initial production values. In accordance with the contractor's Defense Contract Management Agency (DCMA) approved process control plan, thefrequency of test may be incrementally reduced via statistically-validated process control. In the case of an out-of-tolerance failure, the frequency of property inspection shall return to default values. Incremental reduction of test frequencies may begin again only after the contractor hasdemonstrated that the process is once again in control to the satisfaction of DCMA.

E.4.6.2 Green component testing. Property inspections shall be performed on bushings, roadwheel path, and ground pad elastomer prepared in accordance with ASTM D3182. Test properties, methods, defining section in this document, frequency, and the allowable tolerances are specified in table E-VI. Inspection results shall be within the tolerances indicated in comparison to the final product baseline evaluation (see E.4.4).

TABLE E-VI. Green component inspections for bushing, roadwheel path and ground pad elastomer.

Test requirement	Test method	Specification paragraph	Frequency	Tolerance
Hardness, Shore A	ASTM D2240	E.5.2.3	1 / Batch	±5 pnts
Specific gravity	ASTM D792	E.5.2.7	1 / Batch	±0.020
Tensile modulus @ 50/75/100% elongation (73 °F)	ASTM D412 [1]	E.5.2.4	1 / Batch	±15%
Tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4	1 / Batch	±15%
Tensile elongation at tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4	1 / Batch	±15%

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.
2. 1 / Batch denotes a homogenous mix of elastomer from one mixing cycle.

E.4.6.3 Finished piece inspection. Inspections for roadwheel path and ground pad elastomer shall be performed on finished parts removed directly from the production line. Test properties, methods, defining section in this document, frequency, and the allowable tolerances are specified in table E-VII. Inspection results shall be within the tolerances indicated in comparison to the final product baseline evaluation (see E.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-VII. Finished piece inspections for roadwheel path and ground pad elastomer.

Test requirement	Test method	Specification paragraph	Frequency	Tolerance
Hardness, Shore A	ASTM D2240	E.5.2.3	1 / Strand	±5 pnts
Tensile modulus @ 50/75/100% elongation (73 °F)	ASTM D412 [1]	E.5.2.4	1 pitch / week or 1 pitch/10 strands, whichever is greater	±15%
Tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4	1 pitch / week or 1 pitch/10 strands, whichever is greater	±15%
Tensile elongation at tensile strength (73 °F)	ASTM D412 [1]	E.5.2.4	1 pitch / week or 1 pitch/10 strands, whichever is greater	±15%

NOTES:
1. ISO 37 specimens may be utilized with Government permission. Alternating between ASTM D412 and ISO 37 standards shall not be permitted.

E.4.6.4 Rework (workaway). Compounds that are defective or miscompounded shall not be used for rework (workaway) to fabricate any track components. Rework will be limited to conforming compounds that are generated during processing. Rework will consist of compounds being reworked into the same compounds using the lowest practical level in order to avoid process, compound, and finished product variation. This level shall be established by the contractor and shall not affect the rubber properties or result in processing difficulties. Rubber compounds for rework would normally be limited to the following:

a. Non-defective compounds being worked into themselves at the rate indicated above.

b. Excess rubber left on the mills after extrusion, provided it is sheeted off promptly, identified, and kept clean.

c. Extruded rubber that failed to meet dimensions provided the extruded rubber is milled, cooled, and identified.

d. Rubber used to warm up the tuber, but has not been contaminated with other rubber compound or scorched material.

E.4.6.5 Material weight tolerances. The ingredients shall be properly weighed on calibrated scales and controlled by inspections to assure compliance to the tolerances and inspection frequencies established by the contractor. The weights of all ingredients for the master batches, remills (if any), and final batches shall be inspected to assure process control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.4.6.6 Vulcanization time, pressure, and temperature. The vulcanization time, pressure, temperature, and other cure conditions for all compounds will be those established by contractors to assure that track components have acceptable properties. These established cure conditions and tolerances will continue to produce components with acceptable properties and will meet the requirements of this specification. The molding pressure will be set and maintained by the manufacturers to assure production of defect free components that will meet all specification requirements. The values for vulcanization time, pressure, and temperature shall be identified in the Process Fingerprint Plan.

E.4.6.7 Failures. Contractors may retest up to two additional specimens out of a suspect lot to confirm failure to meet requirements. Deficiencies occurring during or as a result of in-process inspection shall be cause for rejection of all the product up to the previous in-process check. Further product will not be accepted until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiency.

E.4.7 Conformance inspections.

E.4.7.1 Sampling for conformance inspection. The samples for Conformance Inspections (CI) examination shall be randomly selected from the inspection lot in accordance with table E-VIII.

TABLE E-VIII. Sampling plan for CI. [1, 2]

CI Sampling Plan [3]	
Inspection lot size	Sample size
2 to 8	See note 4
9 to 15	13
16 to 25	13
26 to 50	13
51 to 90	13
91 to 150	13
151 to 280	20
281 to 500	29
501 to 1200	34
1201 to 3200	42
3201 to 10,000	50
10,001 to 35,000	60
35,001 to 150,000	74
150,001 to 500,000	90
500,001 and over	102

NOTES:
1. Tightened inspection shall be introduced as soon as 2 out of 5 successive lots have been rejected and shall, as a minimum, impose a 30 percent increase in sample size. Normal inspection sampling may be restored after 5 successive lots have been accepted under tightened inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

2. Reduced inspection may be introduced when 10 successive lots have been accepted and shall, as a maximum, permit a 30 percent decrease in sample size. Normal inspection sampling shall be restored if a lot is not accepted under reduced inspection.
3. Acceptance number is always zero.
4. Indicates entire lot must be inspected (100% inspection).

E.4.7.2 Lot formation. Unless otherwise specified, a lot shall consist of all items submitted at one time, of one part number, manufactured under identical conditions from an identifiable production period not to exceed one work shift of a day's production from one manufacturer and from one production facility.

E.4.7.3 Inspection and defects. The selected sample shall be inspected to the requirements of table E-IX for roadwheel path and ground pads and table E-X for bushings. Defects shall be classified as specified in table E-XI. Note that table E-XI addresses only the visual and physical measurement inspections of vulcanized components. It does not address defects or failures found upon testing.

TABLE E-IX. Conformance inspections for roadwheel path and ground pad components.

Test requirement	Specification paragraph	Tolerance
Workmanship	E.5.2.11	Pass/Fail
Product marking	E.5.2.12	Pass/Fail

TABLE E-X. Conformance inspections for bushing components.

Test requirement	Specification paragraph	Tolerance
Concentricity	E.5.2.18	±1/64 inch
Workmanship	E.5.2.11	Pass/Fail
Product marking	E.5.2.12	Pass/Fail
Bushing endurance	E.5.2.6	See E.5.2.6.1

TABLE E-XI. Classification of defects.

Classification	Defect	Method of inspection
Blisters	A void or hole in article which causes protrusion on surface when hot, may not show on surface when cold. Unacceptable in bushings. Allowable tolerance 1/16 inch max length/depth on pads and wheel-side rubber. Same as backflow or back-flash. Distortion at the mold line in the form of wrinkles, folds, and tears.	SIE
Back-rinding	Unacceptable on bushings. Allowable tolerance 1/16 inch deep, 1/16 inch wide, 1/2 inch length along the mold line.	SIE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-XI. Classification of defects – Continued.

Classification	Defect	Method of inspection
Cracks	Failure of rubber stock to knit together properly. It may be found in any part of the rubber surface and also at the rubber base next to the metal.	Visual
Chipped	Rubber missing due to chipping, usually during removal from mold or during trimming. Unacceptable on bushings. Allowable tolerance 1/8 inch max in depth/ length, provided there is no cutting beyond this dimension.	SIE
Cuts/Tears	A slit, nick, or gash caused primarily by trimming of vulcanized components. Tear may be caused during removal of items from molds.	Visual
Folds	A crease or pleat, usually appears as overlap of rubber on itself with a relatively weak cohesion.	Visual
Foreign materials	Any extraneous matter such as wood, paper, metal, or dirt penetrating past the rubber surface.	Visual
Wide flash	Thick spew-out rubber during moldings that results in dimensional noncompliance of the vulcanized component.	SIE
Light/non-fill/air check	Insufficient material to fill mold, leaving voids or non-fill conditions on component. Trapped air, poorly vented molds, excess mold lubricant can also cause this defect. Unacceptable on bushings. Allowable tolerance 1/16 inch max depth and 1/8 inch max length.	SIE
Separation	Separation in the rubber or between the rubber and adhesives, or rubber and metals.	Visual
Off-register	Uneven or misaligned molds causing non-conformity to dimensional requirements of the drawing.	SIE
Undercure	Appears as tackiness, softness, porous, loginess, low hardness, or other inferior physical properties. Usually caused by improper cure conditions or defective rubber.	SIE
Overcure	Vulcanizing to the point that physical property requirements are impaired.	SIE
Dimensional non-compliance	Molding that will result in concaveness, convexity, or other dimension irregularities of the components to meet the dimensional requirements of the drawing or result in adverse performance of the product.	SIE

Note: SIE = Standard Inspection Equipment

E.4.7.4 Failures. Any item that fails to conform to any specified requirement shall be rejected and any failure (one or more) of the selected sample or test for the appropriate inspection lot size shall constitute a failure of the entire lot. The rejected item(s) may be repaired or corrected and resubmitted for inspection. If the contractor utilizes sampling inspection as an element of their

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

inspection system, rejected inspection lots may be resubmitted for acceptance if the contractor performs 100 percent inspection on the lot for those characteristics which were defective and resulted in rejection of the lot and removes all defective units or obtains procuring activity approval to resample the lot due to the insignificance of the defects. Resubmitted lots shall be kept separate from new lots and shall be clearly identified as resubmitted lots. Blemishes on rubber components which have not been listed in table E-X and are primarily appearance or cosmetic conditions (poor markings, pitting of molds, minor surface contamination) should be resolved by manufacturers as these conditions arise.

E.4.7.5 Packaging and packing.

E.4.7.5.1 Lot formation. A lot shall consist of all packs prepared for shipment in accordance with one level from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

E.4.7.5.2 Sampling for acceptance examination. Sampling for acceptance examination shall be performed in accordance with table E-VIII.

E.4.7.5.3 Sample failure. Failure of the sample to pass any specified inspection may be cause for the Government to refuse to accept the lot until it has been proved to the satisfaction of the Government that the faults revealed have been corrected.

E.5 QUALIFICATION

E.5.1 On-vehicle endurance testing. This section defines a set of instructions and requirements to be used for conducting all integral pad track vehicle qualification tests. The Preparing Activity may amend this appendix with a more detailed set of instructions to meet the needs of the particular test. The requirements of this section are not to be changed without prior permission from the Preparing Activity.

E.5.1.1 Drawings. A schematic of the T107 track system is presented in figure C-1. The drawing numbers for the assembly and individual components are listed in table E-XII.

TABLE E-XII. Individual components.

B1821BH075C250N	Bolt
8382359	Wedge
8382360	Bolt
12544579	Cap
12544580	Guide
8705899	Link assembly
12694350	T107 track
8705919	Connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.5.1.2 Test program review. A start of test meeting will be held at the test site on a date and time to be established by the Preparing Activity. Any additional review meetings shall be scheduled only if considered necessary by the Preparing Activity.

E.5.1.3 Test site access. Access to the test site will be required by Government personnel on a continuous basis to conduct their test responsibilities. Contractor personnel shall not be allowed test site access without specific approval from the Preparing Activity.

E.5.1.4 Test program scope. This test will be accomplished by assembling the manufacturer's T107 track samples on M88A2 series vehicle and operated to the requirements of this appendix.

E.5.1.5 Test course. The test course to be used for conducting all on-vehicle qualification tests will be selected by the Preparing Activity. The preferred course is located at the U.S. Army Proving Ground (YPG), Yuma, Arizona. Yuma has been traditionally selected for on-vehicle track testing because of climate, course, and test result consistency. The following standard track laying vehicle (tank and other tracked vehicles) test courses at YPG are designated for testing track for this specification.

a. Paved course. The dynamometer course is a 2 mile, smooth, near-level (0.8 percent grade) 30 foot wide roadway with 500 foot radius turnarounds at each end, surfaced with a high strength asphalt. The course is located at an elevation of approximately 470 feet above sea level and is staked at 0.1 mile intervals throughout its length with accurately surveyed distance markers.

b. Gravel course. The tank gravel course is a 3.6 mile compacted and graded gravel course and is for testing track laying vehicles under conditions simulating a secondary gravel road. The course consists of short straight sections and curves of varying radii with many moderate and sharp turns.

c. Hilly cross-country course. The tank hilly cross-country B course is 2.7 miles long and has short steep grades (35 percent) with a greater proportion of slopes less than 20 percent. This course has surfaces varying from sand and gravel to exposed bedrock. The loose gravel, sharp stones, and rocks present a severe cutting and abrasion problem for tracks and roadwheels.

d. Level cross-country course. The tank level cross-country course traverses areas of level, sandy terrain with many bumps that provide a severe test of track laying vehicles. The dust conditions are typical of cross-country operation on dry soil. One lap is 6.7 miles.

e. Hilly cross-country course (with a vehicle in tow). When towing a vehicle of equal weight, the recommended course is the “Truck Hilly Course”. This course is 2.2 miles long in one complete scenario. One mile of the course is in the form of rolling hills with the second mile a number of steep but controllable hills. The course consists of mostly gravel surfaces with the lower portion having sandy soil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.5.1.6 Operational mode summary. The vehicle shall perform to the requirements as specified in table E-XIII. Road testing will be conducted in 100 mile blocks over a combination of hard/gravel roadway, level cross-country, and hilly cross-country. Each block shall be run 12 times for a combined total of 1,200 miles. All terrains include miles with and without a towed load. A simulated combat payload for the test vehicle shall be in place for the duration of testing. The towed load shall be a vehicle of equal weight to the test vehicle (see E.5.1.16). The towing vehicle shall be outfitted with a simulated combat payload in all conditions. Maximum safe speed for the conditions and loads shall be maintained. Target values for each conditions are listed in table E-XIII. Pacing, for example testing conditions, operational times of day, maintained as uniform as possible. Failure criteria are described in E.5.1.27.

TABLE E-XIII. Road test block.

Sequence	Course	Towing	Distance (miles)	Target speed (MPH)
1	Hard/gravel surface	No	13	25
2	Hard/gravel surface	Yes	7	13
3	Level cross-country	Yes	14	9
4	Level cross-country	No	26	15
5	Hilly cross-country	No	28	15
6	Hilly cross-country	Yes	12	9

E.5.1.7 Break-in run. The purpose of the break-in run procedure is to simulate the natural aging process afforded production/spare track during normal transit/storage periods before actual vehicle use. All test samples (to include spares) shall be broken in prior to the road test by having the vehicle on which they are installed, operated for 45 miles on a paved road (concrete, asphalt, or macadam) as detailed in table E-XIV.

TABLE E-XIV. Break-in requirements.

Division of break-in run	Maximum speed (MPH)	Minimum distance (miles)
A	10	15
B	15	15
C	20	15

E.5.1.8 Climatological conditions. In order to expose the track test samples to the maximum "hot" weather conditions, vehicle road testing shall be scheduled to start no earlier than 1 March and no later than 1 September of the same calendar year.

E.5.1.9 Track delivery and storage. Track shoe/pad samples are to be delivered to the test site by a date specified by the Preparing Activity. Adequate time must be allowed for test site personnel to inspect, mark, and install the hardware so as not to impact the projected test start date. A secured area must be made available during and after the test for each of the track shoe/pad samples. The samples received will be placed in a shaded area that prevents direct sunlight from shining on the track pads during storage and assembly operations. The reduction of variables such

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

as solar heating of the pads in a stack while others are shaded and, therefore cooler, is mandatory. Any condition that might influence the relative performance of the track shoes/pads are to be held as uniform as possible.

E.5.1.10 Contractor hardware requirements. For the qualification road test, the contractor test sample shall consist of 50 complete T107 track shoe assemblies (see C.3.10 for strand configuration). In addition, the following spare hardware shall be required: (a) 45 complete T107 assemblies, to include all connecting components. (b) The contractor shall ship 15 track blocks for laboratory testing. Interested parties should contact the preparing activity for a specific address for shipment of the 15 track blocks.

E.5.1.11 Initial inspection/preparation for test. The test site shall perform a receiving inspection of the M88A2 series vehicle(s) to be used for the test. The basic test vehicle(s) will be visually and functionally checked with specific attention given to suspension, electrical systems, hydraulic systems, and automotive controls and accessories. Any damage or improper operation will be repaired/corrected to ensure the vehicle(s) will be capable of meeting the test requirements.

E.5.1.12 Track qualification samples. Contractor supplied track qualification samples will be inspected to ensure no physical damage has occurred in shipment, that the required number of samples and spares have been provided, and that all components are properly identified.

E.5.1.13 Track identification. To aid in failure and part life tracking, all track shoes, including spares, shall be identified to a manufacturer by permanent sequential number/letter codes applied to the metal portion of the shoe body. The test site shall apply the number/letter codes to the test track shoes prior to vehicle installation.

E.5.1.14 Track assembly marking. All contractor supplied track assemblies shall be stamped with a lead designator alpha character only prior to track break-in (see E.5.1.7). Following break-in, any failed shoes shall be removed and the remaining shoes shall be sequentially numbered. The track shoes shall be marked on both the inboard and outboard faces, in the recessed area between the track pins as illustrated in figure C-2. An example of the coding system to be used is as follows: X01, X02,……X160 (X for Contractor ABC and 1,2,3 for numeric shoe designation). The test site shall contact the Preparing Activity to request a code letter identification upon receipt of a contractor's supplied hardware.

E.5.1.15 Track shoe installation pattern. Each vehicle will have the capacity to test three contractors' samples. Each strand will consist of 27 assemblies from up to three contractors and three Government furnished T107 assemblies. The Government furnished assemblies will be removed, as required, to maintain track tension. Two transition shoes at the connection points will not be considered in the qualification sample, making the qualification sample size 25 in each of the two strands. The track shoe installation pattern on the M88A2 series vehicle shall be provided to the test site by the Preparing Activity. Track installation shall be accomplished in accordance with the appropriate technical manuals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.5.1.16 Loading condition. For the test, the weight of the M88A2 vehicle shall be adjusted to 140,000 pounds, plus or minus 400 pounds. The load shall be distributed approximately equal on each track when on a level surface.

E.5.1.17 Pivoting of vehicles. Pivot steering of vehicles during break-in and qualification testing shall be kept at a minimum. Sudden braking action shall also be avoided to the extent possible.

E.5.1.18 Track tension adjustments. All tension adjustments shall be made prior to the start of the test as well as during test operations. As a minimum, track tension shall be checked on a daily basis. These adjustments shall be made after inspection faults have been corrected. Track tension requirements can be found in the latest technical manuals for the M88A2 series vehicle.

NOTE: Low track tension will cause thrown tracks, broken or bent pins, and broken end connectors and center guides. High track tension shall also be avoided. Track pins will break and tracks will be thrown, the track adjuster or grease gun shall be kept from contacting the track shoe rubber parts. Any grease or oil accidentally contacting the shoe shall be immediately wiped off.

E.5.1.19 Track component replacement. Track shoe assembly replacements are required based on meeting the failure criteria for any number of component parts (bushing, roadwheel path rubber, center guide, or shoe body damage). The component replacement criteria and corrective actions are listed in E.5.1.31. The individual shoe replacements shall be made in the same strand location as the respective failed shoes.

E.5.1.20 Hardware torque check. When track shoes, center guides, or end connectors are replaced, the new hardware must be torqued checked after the first 50 miles of operation.

E.5.1.21 Torque values. All T107 track hardware shall be torqued to the following values and in accordance with proper maintenance procedures:

a. Connector wedge bolt 180 – 200 lb-ft.

b. Center guide fastener 370 – 400 lb-ft. if single bolt/nut is used on a track pitch
280 – 300 lb-ft. if two screws are used on a track pitch

E.5.1.22 Vehicle operation. The vehicle shall be operated in both directions for one-half of the total vehicle distance.

E.5.1.23 Track cooling. During the break-in run, the track shall be allowed to cool between each phase of testing. This cooling of the track can be verified through one of the following two procedures.

E.5.1.24 Track roadwheel path surface. Cool down between speed changes shall require the use of a device used to measure the temperature of the rubber pads. Measurements should be taken from both the roadwheel side and the road side. A reading of 100 °F or less should be recorded prior to restart of the break-in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.5.1.25 Speed change cool down. Cool down between speed changes shall require the use of a device used to measure the temperature of the rubber pads. Measurements should be taken from both the roadwheel side and the road side. A reading of 130 °F or less should be recorded prior to restart of the break-in.

E.5.1.26 Visual inspection. Between each division of the break-in run, a visual inspection shall be made of the track and the component parts. The inspection shall be in accordance with the inspection and replacement criteria found in table C-III. Hardware shall be retorqued if noticeably loose. After break-in, all hardware shall be torqued to values specified in E.5.1.21.

E.5.1.27 Track failures. Any track failures which occur during break-in do not count towards the failure criteria. Further, any failures during break-in do not reduce the original sample sizes. Track shoes failed during break-in shall be replaced with spares and noted on a Test Incident Report (TIR). The track shoes comprising a strand after break-in (including the recorded spares inserted for any failures during break-in) shall be denoted as the original strand sample at the start of test. Break-in mileage shall be counted toward the qualification mileage requirement.

E.5.1.28 Spare track. All spare track shall be installed on a vehicle and broken in before test start up. The break-in shall be performed in accordance with E.5.1.7. After completion of the break-in run, the track shall be removed from the vehicle and stored for future use during the qualification test.

E.5.1.29 Mission scenarios. During the test, operators are to run mission scenarios as specified by the Preparing Activity.

E.5.1.30 Track switching. Upon completion of the first 400 mile mission scenario, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. At 800 miles, the track strands shall be removed from the vehicle, inspected for overall condition, and switched to the opposite side. Repeat this switching procedure for every 400 miles of testing.

E.5.1.31 Inspection and replacement criteria. Failure or excessive wear of track components shall be determined by the inspection criteria in table E-XV. The corrective action(s) are also listed.

TABLE E- XV. T107 track hardware inspection and corrective actions criteria.

Item	Activity	Inspection or Action	Reference Figure
Track Strand	Inspect Daily	Visual observation of overall condition with specific attention to the road/grouser interface.	
	Replace	When 20% of the original track shoes have been replaced (or now require replacement) due to wearout.	Figure C-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

TABLE E-XV. T107 track hardware inspection and corrective actions criteria – Continued.

Item	Activity	Inspection or Action	Reference Figure
Track Pin	Inspect Daily	Visually check for cracked, broken, or bent pins.	
	500 miles	Hammer-Ring check at site discretion.	Figure C-3
	Replace Shoe	When pin broken, bent, or cracked.	
Bushing	Inspect Daily	Visually check for dead blocks or extruded bushing.	
	Replace Shoe	When dead blocks are found or a bushing is completely extruded (pin to shoe body contact).	Figure B-3
Roadwheel Path Rubber	Inspect Daily	Visually check for (1) cracks, chunks, or cuts. (2) Obvious lack of roadwheel support due to blowout, or chunking.	
	Replace Shoe	When more than 50% of rubber is lost.	Figure C-7
Track Shoe Body	Inspect Daily	Visually check for cracked shoes. Daily crushed binocular tubes, and loose or lost backing rubber.	
	Replace Shoe	When shoe body cracked, binocular tube crushed.	
End Connector	Inspect Daily	Visually check for cracked, broken, or missing bolts or connector.	Figure C-5
	Replace Shoe	When checked, broken, or worn to less than 1/8 inch thick.	
Center Guide	Inspect Daily	Visually check for cracked, broken, bent loose or worn center guides.	Figure C-6
	Replace Shoe	When missing, cracked, broken, or worn to less than 1/2 inch thick as measured 1 inch below top to the center guide.	
Roadside Rubber Pad	Inspect Daily	Visually check for rubber wear or loss of rubber.	
	Replace Shoe	Chevron is less than 1/2 inch* or the metal is exposed.	Figure C-4 and Figure C-7

*Note: At the test site discretion, chevron wear can be measured by a "Go/No/-Go" device having one leg sitting on top of one end plate of a block and a second leg sitting on top of the other end plate, the legs joined with a straight strip running parallel to the rubber surface of the ground side of the shoe. If both legs of the measuring device touch, at the same time, the two high points of the end plates, the wear on the ground side will be considered worn out.

E.5.1.32 Track failure during break-in. Any track failures which occur during break-in or are damaged as a result of the following incidents will not be counted against qualification requirements:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

a. Mechanical failure of non-track parts resulting in track damage.

b. Sprocket damaged shoes.

E.5.1.33 Disposition of track test hardware. All track test hardware shall be retained at the test site pending disposal instructions, including failed track components. Track that is defective or has completed testing may be stored outdoors while waiting for disposition instructions. It is essential that each manufacturer's track samples are not commingled with samples from another manufacturer.

E.5.1.34 Failed track components. All failed track components shall be tagged and marked so as to identify accumulated test miles and cross reference to daily logs or test reports, as appropriate to provide for traceable component failure history.

E.5.1.35 Hardware failure analysis. Hardware required for failure analysis shall be provided to the Preparing Activity upon request.

E.5.1.36 Vehicle disposition. Upon completion of the test and inspections, the vehicle shall be returned to the original pretest condition. Vehicle disposition instructions will be issued by the Preparing Activity.

E.5.1.37 Documentation/test reporting/photographic coverage. Any test incidents related to track, suspension or drive train components shall be documented on AMC Form 2134, Test Incident Report (TIR), or comparable test reporting document. The test site shall provide these reports to the Preparing Activity as they are generated. Each TIR or other test reporting document shall include as a minimum the following:

a. Description of failed component/part (noun).

b. Mileage track has endured.

c. Code/Serial number identification of failed component and code/serial number of replacement component.

d. Vehicle registration number.

e. Date of incident.

f. Description of incident. Description shall be detailed and include cause, if evident.

g. Test course where incident occurred, if known.

h. Estimated speed of vehicle when incident occurred.

i. Test environment at time of incident.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

j. Disposition of failed part. Hold and tag failed part.

k. Test report number (beginning with number 1, continuing in chronological order). Supplements to a specific number shall be identified with a letter (for example T0001A).

l. Authorized signature.

E.5.1.38 Track incidents. All track incidents determined to be major (that is, track throws or misguides) shall be immediately reported to TACOM and the Preparing Activity.

E.5.1.39 Final report. The test site shall prepare a final technical report at the completion of testing. The report shall include as a minimum the following:

a. Data collected. Include copies of TIRs for track related failures.

b. Summary of test findings and conclusions.

c. Photographs, tables, and charts to reflect test findings and conclusions.

d. If more than one contractor is attempting qualification testing at one time, test results shall be grouped by contractor.

E.5.1.40 Photographic coverage. The test site shall furnish color photographic coverage of all significant test events to include, as a minimum, track throw or misguide damage (vehicle and track system), broken or bent center guides, sprocket damaged shoes, and broken pins.

E.5.1.41 Applicable information. Together with the photographic coverage, applicable information (manufacturer, serial number, test course, mileage sustained) shall be recorded and accompany the photographs. This data is to be included in the final report.

E.5.1.42 Distribution of reports. The distribution of test incident reports and final reports shall be as specified by the Preparing Activity.

E.5.1.43 Materials. The materials used in the production of shoes, pads, bushings, and assemblies shall meet the requirements of this specification and be in accordance with the applicable drawings of the track TDPs.

E.5.1.44 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

E.5.1.45 Qualified products list. Track shoe assemblies, track shoe sets, and bushings furnished under this specification shall be products which are qualified for listing on the applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

qualified products list at the time set for opening of bids. Qualification for all systems/components includes the contractor's plan, all materials, processes, tests, facilities, and assembly, as applicable, of these systems or components. The contractor is responsible for the entire component/assembly being submitted for qualification and subsequent production including all metal parts and fasteners.

E.5.1.46 Approval for the rebuild/overhaul of track components. Contractors/military depots which desire to obtain approval for the rebuild of track or track components covered by this specification must utilize this specification in conjunction with the current Depot Maintenance Work Requirement (DMWR) for double-pin track used on military vehicles. This specification should be used to specify requirements for rubber and rubber processing. The DMWR should address the quality of the rebuilt/overhaul metal components.

E.5.2 Inspections and material property characterization.

E.5.2.1 Disclaimer regarding material property retention after storage or other aging events. Due to the multitude of environmental factors that can affect elastomeric compounds, it is not reasonable to assume elastomer material properties collected as part of this specification will be retained within tolerances after aging events. This includes proper storage of elastomeric track components for more than several weeks, improper storage of any kind, or use on a vehicle. The reference of properties produced by this specification are strictly for production control.

E.5.2.2 Sample preparation practices.

E.5.2.2.1 Elevated temperature conditioning requirements. Elevated temperature tests shall be conducted at 212±4.0 °F. Mold release or preservative agents should be removed with a mild degreaser prior to exposure. A convection-style furnace shall be used in all cases. Specimens shall be conditioned in the test furnace for between 8 and 12 minutes prior to placement in the test fixture. Temperature shall be observed using a calibrated temperature measuring devices, for example a thermocouple with readout instrument, placed near the specimens. It is recommended to place the specimens and temperature probe on an elevated rack within the furnace to promote adequate airflow. At the end of the conditioning period on the rack, the specimen shall be quickly moved to the clamping assembly and allowed to condition in the furnace for a further 3-5 minutes prior to starting the test.

E.5.2.2.2 Die cutting. Die-cut specimens shall be punched either by a mechanical press, "clicker" style press or equivalent, or by manual extraction. Do not mix techniques. Die cutting blades should be inspected regularly for damage or dulling. Dull or damaged die cutters must be refurbished to OEM condition or replaced. Directionality of the cut should be as uniform as possible and emphasize the strongest direction.

E.5.2.2.3 Calibration. All instrumentation shall be calibrated per the manufacturer's recommended guidelines. Test results collected outside the recommended calibration period will be considered invalid.

E.5.2.3 Hardness, Shore A durometer. Hardness tests will be performed on laboratory

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

specimens of pads (integral and replaceable) and roadwheel path compounds subject to qualification in accordance with ASTM D2240. As a minimum, hardness tests shall be conducted on 3 samples each of the unvulcanized compounds taken from the final mixing stage as well as 3 samples of the finished components. The results of all tests shall be provided to the Government.

E.5.2.4 Tensile properties of elastomeric compounds. As directed, prepare and test 5 specimens per ASTM D412 using the 'C' specimen size die cutter or per ISO 37, sample size Type 3, based upon agreed conditions with the Government. The methods shall not be considered interchangeable and the same method as previously used shall be chosen. Up to 3 replicates may be tested should samples break out of gage. An appropriate load cell for the load range is required for all tests. All force measurements used for reported values must be greater than 2 percent of the maximum capacity of the load cell. Force measurements shall not exceed 90% of the rated capacity of the load cell. The use of a 225 lbf (1 kN) capacity load cell is typical for these experiments. As required, report strength/modulus values in units of pounds force per square inch (psi) and all strain values in units of percent elongation. Strain may be measured using either contact or non-contact extensometers; however, the operator shall not consider the techniques interchangeable. The use of crosshead displacement as an estimation of strain is not acceptable.

E.5.2.5 Tear resistance of ground pads. The tear resistance of ground pad material shall be evaluated by determining tear strength in accordance with ASTM D624. A die C cutter, as described in the test standard, shall be used to cut specimens. 5 specimens shall be tested per condition. See E.5.2.2.1 for elevated temperature conditioning requirements. Due to the inherent variability of tear testing, up to three replicates per specimen may be tested and minimum values of breaking force per unit thickness shall be reported. Test acceptance criteria shall be determined from the requirements of ASTM D624.

E.5.2.6 Bushing endurance. The bushing endurance testing will be conducted in accordance with the test requirements of E.5.2.6.1 and results provided to the preparing activity. Compounds that have passed all qualification test requirements and have documented data supporting compliance to all requirements will be listed on the QPL by number and source for all track bushings. Bushing compounds that were tested and validated under a previous contract, in accordance with the requirements of this section, shall be considered validated for this effort and do not need to undergo endurance testing again.

E.5.2.6.1 Qualification requirements. Qualification requirements are determined by eliminating the highest bushing test cycle result and averaging the remaining 8 bushing test cycles. The average shall be a minimum of 130 000 compression load cycles. No single bushing of the 9 tested shall be less than 110 000 cycles. If, at any time during the test, a test sample fails to attain the minimum 110 000 cycles, the test facility shall notify the Preparing Activity for disposition and direction.

E.5.2.6.2 Drawings.

11678029 Bushing

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.5.2.6.3 Test site. Unless otherwise notified, qualification testing will be conducted at the Michigan Technological University, Keweenaw Research Center (KRC), Houghton County Airport, Calumet, Michigan 49913, (906) 487-2750.

E.5.2.6.4 Hardware requirements. Contractors submitting bushing samples for qualification in accordance with the following procedures are required to provide fifteen (15) T130El long bushings fabricated in accordance with Drawing Number 11678029. In addition, each contractor, at their option, will supply one (1) quart of the insertion lubricant of their choice to be used by the test facility during insertion of the candidate bushings into the simulated bore described below. If no lubricant is provided, Calight RPO will be used by the test site personnel.

E.5.2.6.5 Notification. Upon receipt of contractor supplied bushing samples intended for qualification testing, test site personnel will notify the Preparing Activity. No qualification testing shall begin until the Preparing Activity provides written authorization for testing to proceed.

E.5.2.6.6 Inspection of samples. Prior to the start of test, test site personnel will inspect each of the 15 sample bushings to ensure conformance to drawing number 11678029 and that no damage has occurred to the samples in shipment. Test site personnel will record the following information:

a. Date received.

b. Source address and code or compound number.

c. Quantity of bushings.

d. Conformance to Drawing No. 11678029.

e. Comments regarding bushing condition.

NOTE: If any nonconformance or unusual condition of the bushings is noted by test site personnel, the information shall be provided to the Preparing Activity, requesting disposition of the test samples.

E.5.2.6.7 Bushing sample insertion. Following a determination that all bushing samples meet the requirements established in A.3.3.2, test site personnel shall select and insert nine (9) bushings into simulated bores using the lubricant provided by the contractor or Calight RPO. Insertion shall be accomplished using the MTS 321 machine or equivalent.

E.5.2.6.8 Bushing sample aging. Following insertion, the nine bushing samples shall be aged for a minimum of 96 hours at an ambient room temperature of 75±10 °F.

E.5.2.6.9 Thermogravimetric analysis. Test site personnel shall select 1 bushing sample from the remaining 6 samples to be submitted to an independent laboratory capable of conducting

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

Thermogravimetric Analysis (TGA). TGA shall be performed in accordance with E.5.2.10. This information shall not be disclosed in whole or in part for any purpose other than to evaluate the product submitted for qualification testing.

E.5.2.6.10 Bushing test machines. Following the 96 hour aging, the simulated bores shall be placed into the bushing test machine(s). Three test machines are to be used, if possible, equally distributing the qualification samples (3 on each machine). The machine(s) will be calibrated and zeroed prior to test initiation.

E.5.2.6.11 Loading profile. The load profile and phase angle relationship of each test machine shall be checked within the first hour of the initial bushing test to ensure conformance to figure A-1 and figure A-2.

E.5.2.6.12 Cyclic compression. Cyclic compression load shall be from 0 to 5 200 pounds minimum at a frequency of 64±1 cycles per minute (CPM). To ensure conformance to the 5 200 pound minimum, the test machine shall be set to provide 5 300 pounds of compression load.

E.5.2.6.13 Cyclic torsional deflection load. Simultaneous cyclic torsional deflection load shall be from +15 to -15±l degree at a frequency of 256±4 CPM, as shown in figure A-2. Cyclic torsional deflection load frequency shall be maintained at 4 times the cyclic compression load frequency by positive mechanical means.

E.5.2.6.14 Testing duration. Testing will be continuous (24 hours per day) until bushing failure, defined by the deflection exceeding 0.144 inches (0.145 inches of deflection). Radial load, deflection, ambient temperature, bushing temperature, number of cycles, and time shall be continuously monitored and recorded on a floppy disk using a Daytronic data acquisition system, or equivalent, for future reference as required. A one-time lapse of up to 30 minutes from the requirement of continuous operation of the test machine is permitted.

E.5.2.6.15 Test machine failure. In the event of a test machine failure, the test facility shall discard the bushing undergoing the endurance test and any data pertaining to it, and will randomly select a new bushing specimen for testing.

E.5.2.6.16 Test completion. Following completion of the test, a report containing all test data shall be provided to the Preparing Activity. This report shall also include the results of the thermogravimetric analysis. All test information and reports will be released by Government personnel only. Test facility personnel shall not release any test information to the bushing manufacturers or any other entity.

E.5.2.6.17 Sample disposition. All samples shall be retained by the test site until receipt of official Government approval to release the samples to the contractor. All remaining samples shall then be returned to the contractor supplying parts for qualification.

E.5.2.6.18 Monitoring and certification. The test shall be monitored and results certified by the local Government Quality Assurance Representative (QAR). Monitoring will be conducted to

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

ensure proper machine calibration and that the test is conducted in accordance with the established procedures. At a minimum, the QAR will visit the test facility at the beginning of the test of a contractor's supplied bushings (at the installation of the first 3 bushings) and near the mid-point of the test (test initiation of bushing #5). At the conclusion of all bushing tests, the QAR will make a final visit to review the test results, certify that the test was conducted in accordance with the test plan, and machine calibration was maintained throughout the test. In addition, TACOM engineers may, at their option, visit the test site to review procedures and results at any time.

E.5.2.7 Specific gravity. Specific gravity tests will be performed on samples of the elastomeric component in accordance with ASTM D792. Specific gravity tests will be performed on a minimum of 3 samples for each condition and all results provided to the Government.

E.5.2.8 After aging tensile properties. A minimum of three style C specimens per ASTM D573 shall be collected from road wheel path and ground pad regions. Accelerated aging shall be conducted for 166±2 hours at 158±4.0 °F or 70 to 72 hours at 212±4.0 °F in air. Upon completion, tensile tests will be performed on the aged samples at 73±4.0 °F in accordance with the ASTM D412 method described in E.5.2.4. If ISO 37 was utilized in place of ASTM D412, ISO 188 shall be utilized for heat aging in place of ASTM D573.

E.5.2.9 Differential scanning calorimetry. The glass transition temperature(s) of ground pad material shall be determined by Differential Scanning Calorimetry (DSC) in accordance with ASTM E1356. The temperature scan shall be conducted starting at -112 °F (-80 °C) or at least 80 °F below the expected glass transition temperature, whichever is lowest, up to 212 °F. A constant 36 °F/min (20 °C/min) scan rate shall be used upon heating. A chart of mass-normalized heat flow with respect to furnace temperature will be provided to the Government. All phase transition measurements and construction lines will be presented on the chart. Cover gas type, purity and flow rate, and instrument make and model will also be included. The midpoint temperature of each observed glass transition, T_m, shall be reported as the glass transition temperatures. Blank curve subtraction is allowed to limit instrument and sample holder effects but results shall not be compared to those without blank curve subtraction.

E.5.2.10 Thermogravimetric analysis. This test will be performed in accordance with ASTM E1131 during qualification to establish requirements for future reference during process control. Dry nitrogen or helium cover gas shall be used during inert-phase measurements but not interchanged. Blank curve subtraction is allowed to reduce buoyance effects but results shall not be compared to those without blank curve subtraction.

E.5.2.11 Workmanship inspection. Workmanship shall be of such quality as to assure that track pin/bushing assemblies, track shoe pads, and track shoe assemblies furnished under this specification are free from defects that compromise, limit, or reduce performance in intended use. The bushing holes of the shoes shall be free from foreign substances that will adversely affect bushing installation and endurance. The shoe shall be free from sharp edges, concave roadwheel path surfaces, or other irregularities which may adversely affect operation. Molded elastomeric components shall be free from blisters, cracks, folds, porosity, backrinding, flash, and non-fill (air check), voids, cuts, foreign material, separation, off-register, undercure, overcure, and improper dimensions. Bushing rubber shall be free from installation cuts and tears. Additional information, guidance, and a listing of unacceptable defects are shown in table E-XI. Note that no defects are allowed on bushing assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.5.2.12 Product marking. Unless otherwise specified, each track shoe assembly (roadwheel path elastomer) and track shoe pad shall have the following information permanently and plainly marked on it. Every attempt possible should be made to locate this information in an area that may not get damaged/worn during field use.

a. Manufacturer's name or rubber manufacturer's code number.

b. National stock number of the track shoe assembly or track shoe pad kit as applicable.

c. Week of month and year of manufacture.

d. Compound number and mold number.

E.5.2.13 Track pad and roadwheel path adhesion tests. Adhesion tests will be conducted on the finished products of the track systems being submitted for qualification. As a minimum, two representative samples of the ground pad and two representative samples of the roadwheel path elastomer are required for the adhesion tests. One test specimen from each component shall be prepared for test in accordance with ASTM D429, method B.

E.5.2.13.1 Track pad and roadwheel path adhesion tests sample preparation. The samples shall be prepared in the location as shown in figure 2 through figure 4. The elastomer shall be cut down to the base metal along two (2) parallel lines, leaving an elastomer strip 1±1/16 inch in width, 1/2 to 1 inch in thickness, with length extending in the direction of maximum adhesive area. The elastomeric thickness shall be as uniform as practical of the thickness shown in the respective figures for the component under test. When necessary, the portion of the elastomer remaining outside of the 1 inch wide section of the cut strip shall be removed from the metal base to avoid any edge constraint during the test. The elastomer shall be stripped from the metal using a sharp knife for a sufficient distance to permit firm gripping of the tab in the grip of the test machine head.

E.5.2.13.2 Track pad and roadwheel path adhesion tests procedure. The metal base of the specimen shall be mounted to one head of the testing machine using care in centering and adjustment so that the tension shall be uniformly distributed across the strip width. The machine shall then be started and, when the applied force causes the elastomer to begin separating from the metal, the recorder shall be started. Force shall continue to be applied and recorded continuously throughout the test. The point of separation of the elastomer from the metal shall be observed carefully throughout the test. In the event that tearing up into the elastomer occurs, the specimen should be cut back to the metal without stopping the machine.

E.5.2.13.3 Track pad and roadwheel path adhesion tests acceptance. The roadwheel path adhesion shall not be less than 60 pounds per inch of width and the pad adhesion shall not be less than 120 pounds per inch of width. Successful adhesions will be those that result in a separation in

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

the rubber (rubber tear) without evidence of separation in the rubber-to-metal interface. The bond between metal and all bonding agents/cements shall be higher than the component compound so that separation during adhesion tests occurs only in the rubber. The elastomer pulled off the metal plate/shoe body and that remaining shall be examined for any defects including cracks, blisters, or porosity. Discontinuity (non-knit) of the elastomer resulting in any indication of separation of the elastomer shall be cause for rejection. All data generated during this test will be provided to the Government.

E.5.2.14 Ozone resistance testing. Prepare specimens in accordance with Method B, Procedure B2 of ASTM D1149. The specimens shall be smoothly finished in accordance with ASTM D3182 and ASTM D3183 and obtained from either of the following.

a. Three samples each shall be taken from each compound used on the track roadwheel path and ground pad and shall not include any outer surface.

b. Samples may be taken from each uncured compound production molding blanks, prepared in the form of ASTM tensile slabs, and certified as being of an equivalent state of cure as the production molded component.

E.5.2.14.1 Ozone resistance testing procedure. Specimens shall be tested in accordance with ASTM D1149 and mounted in accordance with Method B, Procedure B2 of ASTM D1149, exceptthe length of the clamping strips shall be such as to facilitate placement within the ozone chamber. Specimens shall then be placed in the chamber and exposed for 7 days at a temperature of 104±3.6 °F having a partial ozone pressure of 7.3 x 10^{-6} psi (50 mPa). The specimens shall show no evidence of cracks when inspected at seven power magnification.

E.5.2.15 Pin/bushing design and construction inspection. Unless otherwise specified, the thickness of the elastomeric sections bonded to the pin shall be such that compression of 35 to 40 percent of the original thickness will result when installed in the intended application. Unless otherwise specified, the width of the sections shall not be less than two and one-half or more than three times their thickness before compression. The contractor shall be responsible for the volume of bushing properly filling the total volume for which it is intended within +5 percent (95 to 105 percent of available volume). The bushing shall not protrude beyond nor be recessed inside the shoe in which it is assembled beyond the limits shown on applicable drawings. Unless otherwise specified, the bushing bore of the track shoe body shall have a surface roughness height between 63 and 250 microinches.

E.5.2.16 Bushing adhesion. Testing apparatus shall conform to ASTM D429, method B. A hub and spindle assembly is required for mounting the bushing insert (P/N 8756519) that shall permit full rotation about a fixed axis. Three complete bushing assemblies (P/N 11678029) shall be selected as the test samples and be of an equivalent state of cure to that of the bushings submitted for endurance test. Testing shall be conducted on the outer rings of the bushing assembly.

E.5.2.16.1 Bushing adhesion sample preparation. The bushings shall be prepared for testing

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

by cutting the rubber rings transversely down to the metal insert and separating circumferentially for a distance sufficient to permit a firm grip by the free end of the power-actuated clamp. Injection molded bushings shall be cut on the sprue side (injection side) to ensure discontinuity (non-knit) of the elastomer is checked.

E.5.2.16.2 Bushing adhesion procedure. The bushing shall be mounted on the pin in the hub and spindle assembly with the free end of the rubber firmly gripped by the machine clamp. The machine shall be started and the rubber pulled circumferentially from the sleeve/insert. In the event the elastomer is about to tear off, specimens should be cut back to the metal. Force measurements shall be recorded and observations made throughout the test to determine the minimum load required to separate the rubber from the metal/adhesive interface or from the rubber itself.

E.5.2.16.3 Bushing adhesion acceptance. Successful adhesions will be those that result in a separation in the rubber (rubber tear) without evidence of separation in the rubber-to-metal interface. The bond between metal and all bonding agents/cements shall be higher than the bushing rubber so that separation during adhesion occurs only in the rubber. For T130El bushing qualification, a minimum of 29 pounds per inch of width is required. The elastomer pulled off the sleeve and that remaining shall be examined for any defects including cracks, blisters, or porosity. Discontinuity (non-knit) of the elastomer resulting in any indication of separation of the elastomer shall be cause for rejection.

E.5.2.17 Compression set. The bushing laboratory specimen shall be subjected to the compression set test of method B of ASTM D395 for 22±0.5 hours at a temperature of 158±4.0 °F using type 1 specimens. Five specimens shall be tested with the average results reported in accordance with ASTM D395.

E.5.2.18 Bushing concentricity. The pin with the elastomer bushing thereon, assembled in the applicable shoe (or simulated bore), shall be concentric with the bore of the shoe (or simulated bore), so that the elastomer thickness is uniform within ±1/64 inch. Concentricity shall be measured with a depth gage or steel rule.

E.6 NOTES

E.6.1 Intended use. The elastomerized track shoe assemblies, track shoe bushings, and track shoe pads covered by this specification and track shoe sets assembled therefrom are intended for use in track systems on tracked military vehicles. These track shoes are military unique because they are used on tracked military vehicles and have a specific formulation which does not have a commercial application.

E.6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. ASSIST is to be cited in the solicitation, and if required, the specific issue of individual documents referenced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

c. Type and part number of the track shoe, track shoe pad, or track shoe set required.

d. Title, number, and date of applicable drawings.

e. Manufacturer's compound number from QPL.

f. Number of shoes to be assembled in a set.

g. If product marking should be other than as specified.

h. If first article test/inspection is required.

i. If pin/bushing design and construction should be other than as specified.

j. If first article sample should be selected other than as specified.

k. If CI inspection lot should be other than as specified.

l. Packing requirements.

m. Mileage track pads should be removed from vehicle.

n. Distribution of test incident reports and final reports.

E.6.3 Definitions.

E.6.3.1 Definition of defects.

a. Blister. Void or hole in item; causes protrusion on surface when hot; may not show on surface when cold; may be covered or open.

b. Crack. Failure of material to join together properly.

c. Nonfill. Air checks; depressions due to trapping of air at corners and edges.

d. Light stock. Insufficient material to fill mold.

e. Fold. Lapping or doubling of material resulting in a crease or pleat.

f. Backrinding. Distortion at the mold line, usually in the form of wrinkles, folds, tears, or indentations.

g. Flash rubber. Spew-out of material at mold parting line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

h. Porosity. Presence of numerous minute voids in cured material.

i. Non-knit. Weakness where rubber flows together during molding.

E.6.3.2 Definitions for process control.

a. Process parameter. Process parameters are associated with the process used for the manufacture of material. Typical parameters include: time, temperature, feed rate, pressure.

b. Product characteristic. Product characteristics include: hardness, length, diameter, specific gravity, tensile strength, concentricity.

c. Control techniques. Control techniques are used for either process or product purposes as applicable. Examples of control techniques include: Statistical Process Control, first and last piece verifications, temperature monitoring devices with warnings or auto processing stops, and detection inspections.

d. Analysis methods. Analysis methods are used for the identification of process parameters and product characteristics. Typical analysis methods include: Design of Experiments, Regression Analysis, Failure Modes Effect Analysis, Quality Functional Deployment.

e. Process fingerprint. Documented and detailed information that thoroughly describes the entire process used to produce the final product. This documentation includes: test, process parameter and product characteristic target values and tolerances, in-process materials and process settings, and all other important and relevant information.

E.6.3.3 Track terms.

a. Pitch. A fully assembled track shoe.

b. Strand. A chain of 27 pitches.

E.6.3.4 Preparing activity. The military activity responsible for the preparation and maintenance of this document and the associated Qualified Products List. The preparing activity is responsible for qualification, and is the qualifying activity and authority.

E.6.3.5 Definitions for rubber products. Use ASTM D1566 for rubber terminology and definitions.

E.6.4 Code numbers. Manufacturer's code numbers should conform to those listed in “Federal Supply Code for Manufacturers Cataloging Handbook”, identified as “H-4.1, H-4.2, and Supplement”.

E.6.5 Testing agencies. Contractors may use their own or any other testing agency for performing the tests required under this specification providing it is acceptable to the qualifying activity for qualification tests or the contracting officer for any other testing. On-vehicle testing will be performed by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

E.6.6 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory, and the number of items to be tested. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, finished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AT

Preparing activity:
Army - AT

(Project 2530-2022-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:06Z
Check the source to verify that this is the current version before use.