MIL-T-13626B(EL)

23 February 1976

Superseding
MIL-T-13626A(SigC)
18 December 1958

MILITARY SPECIFICATION

TELEPHONE SET TA-1( )/PT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of portable sound powered telephone set designated as Telephone Set TA-1( )/PT.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

T-T-871	Twine, Cotton, Wrapping
NN-P-71	Pallet, Materials-handling, Wood
QQ-S-781	Strapping, Steel, Flat and Seals
PPP-B-585	Box, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-F-320	Fiberboard, Corrugated and Solid Sheet Stock
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper Water Resistant
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

FSC 5805

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Contd)

MILITARY

MIL-P-116	Preservation, Methods of
MIL-P-11268	Parts, Materials, and Processes Used in Electronics Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment
MIL-P-19644	Plastic Molding Material
MIL-P-26514	Polyurethane Foam

STANDARDS

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized and Containerized Unit Loads 40 inch X 48 inch Pallets, Skids, Runners or Pallet Type Base
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defect
MIL-STD-454	Standard Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

SC-DL-168899	Telephone Set TA-1( )/PT

NAVY

SK-N-864	Simulated Gun Blast Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procurement activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 First Article. When specified in the contract or purchase order, the contractor shall furnish First Article units in accordance with 4.3.

3.2 Construction. The equipment shall be constructed in accordance with the requirements of this specification and Drawing and Data List SC-DL-168899 (including the requirements for parts, materials, and processes thereon) (See 4.4).

3.3 Parts, Materials, and Processes, General. In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply (See 4.4).

3.4 Finish. The equipment shall be finished in accordance with MIL-F-14072 and the equipment drawings (See 4.4).

3.5 Marking

3.5.1 General. Marking shall conform to Specification MIL-M-13231. Front panel marking shall be Group 1 as described in that specification (See 4.4).

3.5.2 Visibility. Wherever practical, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.5.3 Serial Numbers. The equipment shall be serially numbered.

3.6 Interchangeability. Like units, assemblies, subassemblies and replaceable parts shall conform to Requirement 7 of MIL-STD-454 (See 4.8).

3.7 Preconditioning. The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the bounce preconditioning of 4.6.

3.8 Electrical

3.8.1 Earphone Element TA-118( )/PT

3.8.1.1 Frequency Response. The response of the earphone element throughout the voice frequency range shall be greater or equal to that level specified in Figure 1 (See 4.9.1).

3.8.1.2 Impedance. The input impedance of the earphone element at 1000 Hz shall be 150 $\pm$ 15 ohms (See 4.9.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

3.8.1.3 Overload. There shall be no evidence of rattling or distortion in the earphone element when driven at a level of 5 mw throughout the frequency range from 500 to 2500 Hz.

3.8.1.4 Insulation Resistance. The element shall have a minimum insulation resistance of 5 Megohms between terminal and frame when measured at 500 volts D.C. (See 4.11.1).

3.8.1.5 Magnetic Stability. The frequency response of the element shall not have changed more than 4 db when subjected to the tests of 4.11.2.

3.8.2 Microphone Element TA-121( )/PT

3.8.2.1 Frequency Response. The response of the microphone in the voice frequency range shall be greater than or equal to that specified in Figure 2 (See 4.10.1).

3.8.2.2 Impedance. The output impedance of the microphone at 1000 Hz shall be 600 ± 60 ohms (See 4.10.2).

3.8.2.3 Insulation Resistance. The microphone shall have a minimum insulation resistance of 5 Megohms between terminal and frame when measured at 500 volts d.c. (See 4.11.1).

3.8.2.4 Magnetic Stability. The frequency response of the microphone shall not have changed more than 4 db from the initial response when subjected to the tests of 4.11.2.

3.8.3 Telephone Set TA-1( )/PT

3.8.3.1 Generator Output. When tested in accordance with 4.12.1, operation of the generator lever shall produce a minimum of 30 vrms, 20 ± 5 Hz output over a simulated 4 miles of WD-1( )TT field wire into a 1700 ohm load. (See 4.12.1).

3.8.3.2 Ring Sensitivity. The audible and visual signals shall operate with a minimum input of 30 vrms at any frequency between 15 and 25 Hz. (See 4.12.2).

3.8.3.3 Input Impedance. The input impedance of the combined signal circuit at 20 Hz shall be 1800 ± 100 ohms. (See 4.12.3).

3.8.3.4 Insulation Resistance. All metal parts intended to be insulated from each other shall have a minimum insulation resistance of 100 Megohms at 500 volts d.c. (See 4.12.4).

3.8.3.5 Operational. The equipment shall provide satisfactory performance when tested in accordance with 4.12.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

3.9 Service Conditions. The equipment shall meet the following service conditions.

3.9.1 Temperature

3.9.1.1 Low. During and after testing as specified in 4.13.1, the equipment shall meet the requirements of Table I.

3.9.1.2 High. During and after testing as specified in 4.13.2, the equipment shall meet the requirements of Table I.

TABLE I

	Earphone Element TA-118( )/PT
3.8.1.1	Frequency Response
3.8.1.2	Impedance
	Microphone Element TA-121( )/PT
3.8.2.1	Frequency Response
3.8.2.2	Impedance
	Telephone Set TA-1( )/PT
3.8.3.1	Generator Output
3.8.3.2	Ring Sensitivity
3.8.3.5	Operational

3.9.2 Humidity. During and after testing as specified in 4.14, the equipment shall exhibit no physical damage, such as corrosion, rust, blistering, swelling, or deterioration of parts and materials, and shall meet the requirements of 3.8.3.1, 3.8.3.2 and 3.8.3.5. In addition, the earphone and microphone elements shall meet the requirements of 3.8.1.1 and 3.8.2.1 after completion of the humidity test.

3.9.3 Altitude (Elevation). The equipment shall show no evidence of damage or deterioration in performance at altitudes up to 10,000 feet above sea level after storage at altitudes up to 25,000 feet above sea level(See 4.15).

3.9.4 Leakage(Immersion). The equipment carrying case shall show no evidence of leakage after testing as specified in 4.18.

3.9.5 Bounce and Shock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

3.9.5.1 Bounce, Loose Cargo. Following testing as specified in 4.16, the equipment shall meet the requirements of Table I.

3.9.5.2 Shock, Drop. Following testing as specified in 4.17, the equipment shall meet the requirements of Table I.

3.9.6 Blast. Following testing as specified in 4.19, the frequency response of the earphone and microphone elements (3.8.1.1 and 3.8.2.1) shall not have changed by more than 3 db.

3.10 Workmanship. The equipment shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454 and the applicable portions of the following paragraphs:

In MIL-P-11268

General requirements for plastic material and plastic parts.

Wiring and cabling, including:

Slack
Protection
Clearance
Splicing
Connections, general
Grounding, general
Shielding on wire and cable
Soldering and brazing

Cleaning of Units

General Requirements for securing of parts

Process for welding

Cleaning after welding

Controls

Self-tapping screws

Cleaning prior to welding

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and service conform to prescribed requirements.

4.2 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. First Article Inspection (See 4.3). Does not include preparation for delivery.

b. Inspections covered by subsidiary documents (See 4.4).

c. Quality conformance inspections:

(1) Quality conformance inspection of equipment before preparation for delivery (See 4.5).

(2) Quality conformance inspection of preparation for delivery (See 4.20).

4.3 First Article. Unless otherwise specified in the contract or purchase order, the First Article inspection shall be performed by the contractor.

4.3.1 First Article Units. The contractor shall furnish the number of First Article units in accordance with the following:

a. Two (2) each Telephone Sets TA-1( )/PT

b. Two (2) each Earphone Elements TA-118( )/PT

c. Two (2) each Microphone Elements TA-121( )/PT

4.3.2 First Article Inspection. The First Article inspection shall consist of the inspections specified in Table II, and shall be performed in the order specified therein.

4.3.3 First Article Data. The First Article test plan and test report(s) shall be as required in the contract or purchase order.

4.4 Inspections Covered by Subsidiary Documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

ITEM	WHERE REQUIRED
Construction	3.2
Parts, Materials and Processes	3.3
Finish	3.4
Marking	3.5

TABLE II

First Article Inspection

Insp	Reqmt	Insp	Units
Insp. covered by subsidiary documents		4.4	All
Bounce Preconditioning	3.7	4.6	All
Group A Inspection	See Table III		All
Group B Inspection	See Table IV		All
Group C Inspection	See Table V		
Blast Test	3.9.6	4.19	Unit 2

4.5 Quality Conformance Inspection of Equipment Before Preparation for Delivery. The contractor shall perform the inspections specified in 4.4, 4.6, and 4.5.1 through 4.5.3. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

4.5.1 Group A Inspection. Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table III. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels, and AQL's indicated in Table III.

4.5.1.1 Order of Inspection Within Group A. Group A inspection shall be performed in an order satisfactory to the government, except that the operational in 4.12.5 shall be last.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

TABLE III

Group A Inspection

Insp	Reqmt	Insp	AQL Major	AQL Minor
Visual Mechanical	3.10	4.7	1%	4%
Electrical				
TA-118( )/PT				
Impedance	3.8.1.2	4.9.2	1%	-
TA-121( )/PT				
Impedance	3.8.2.2	4.10.2	1%	-
TA-1( )/PT				
Generator Output	3.8.3.1	4.12.1	1% for the group	
Ring Sensitivity	3.8.3.2	4.12.2		
Input Impedance	3.8.3.3	4.12.3		
Operational	3.8.3.5	4.12.5	1%	

4.5.2 Group B Inspection. Group B inspection shall normally be performed on lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. This inspection shall conform to Table IV and to the special inspection levels of Table 1 of MIL-STD-105.

4.5.2.1 Group B Sampling Plans. The Group B sampling plans, for the AQL's listed in Table IV, shall be as follows:

AQL	Inspection Level
4.0%	S-4
6.5%	S-4

4.5.2.2 Order of Inspection Within Group B. Group B inspection shall be performed in an order satisfactory to the government.

TABLE IV

Group B Inspection

Insp	Reqmt	Insp	AQL
TA-118( )/PT			
Frequency Response	3.8.1.1	4.9.1	4% for the group
Overload	3.8.1.3	4.9.3	
Insulation-Resistance	3.8.1.4	4.11.1	
Magnetic Stability	3.8.1.5	4.11.2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

Group B Inspection (Contd)

Insp	Reqmt	Insp	AQL
TA-121( )/PT			
Frequency Response	3.8.2.1	4.10.1	4% for the group
Insulation Resistance	3.8.2.3	4.11.1	
Magnetic Stability	3.8.2.4	4.11.2	
TA-1( )/PT			
Interchangeability	3.6	4.8	6.5%
Leakage(Immersion)	3.9.4	4.18	4%
Insulation Resistance	3.8.3.4	4.12.4	4%

4.5.3 Group C Inspection. Group C inspection shall be performed on units that have passed Group A and Group B inspection. The inspection shall consist of the inspections specified in Table V. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C Inspection. Two sample units of telephone sets, earphone elements, and microphone elements shall be selected at random for each group of inspection, as applicable, in Table V, every two months or 500 units or fraction thereof produced, whichever occurs first. The first samples shall be selected from the first production lot.

4.5.3.2 Order of Inspection Within Group C. Group C inspection shall be performed in the order specified in Table V.

4.5.3.3 Group C Failures. Actions required relative to Group C failures shall be as specified in the contract or purchase order.

4.5.4 Reinspection of Conforming Group C Sample Units. Unless otherwise specified, sample units which have been subjected to and passed Group C inspection may be accepted on contract provided all damage is repaired and the sample units are resubjected to and pass the leakage (immersion) test of 4.18 and Group A inspection, in that order.

TABLE V

Group C Inspection

Insp	Reqmt	Insp	Unit 1	Unit 2
TA-1( )/PT				
Low Temperature	3.9.1.1	4.13.1	1	2
High Temperature	3.9.1.2	4.13.2	2	3
Humidity	3.9.2	4.14	3	4
Altitude	3.9.3	4.15		1
Bounce	3.9.5.1	4.16	4	
Drop	3.9.5.2	4.17	5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

Group C Inspection(Contd)

Insp	Reqmt	Insp	Unit 1	Unit 2
TA-118( )/PT				
Low Temperature	3.9.1.1	4.13.1	1	1
High Temperature	3.9.1.2	4.13.2	2	2
TA-121( )/PT				
Low Temperature	3.9.1.1	4.13.1	1	1
High Temperature	3.9.1.2	4.13.2	2	2

4.6 Preconditioning Bounce. The unit shall be placed in its normal operating position on the table of the Package Tester, Type 1000-SC, as made by the L.A.B. Corporation, Skaneateles, N. Y., or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32 inch thick strip of material under one corner or edge to a distance of 3 inches as the unit bounces. The unit shall be subjected to this preconditioning for 1 minute. After bounce preconditioning; the unit shall not be repaired, aligned, cleaned, or otherwise changed prior to subjection to inspection.

4.7 Visual and Mechanical Inspection of Equipment. Equipment shall be examined for the defects listed in MIL-STD-252.

4.8 Inspection for Dimensional Interchangeability. The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.6. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a. External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

b. Dimensions of cavities, when such dimensions affect insertion of items.

c. Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

d. Location of connectors, locking pins, fasteners, slides, and mountings which receive mating parts of plug-in assemblies and major units; and location of the mating parts on the plug-in assembly or major unit.

e. Size and form of special threads.

4.9 Electrical Tests for TA-118( )/PT

4.9.1 Frequency Response. Connect the equipment as shown in Figure 3. Set the audio oscillator to 300 Hz, .12 vrms or VTVM 1. The microphone and output circuit shall be calibrated to measure the sound pressure level within the 6cc cavity. Record the sound pressure level for compliance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

3.8.1.1. Repeat the procedure with the oscillator set at 400, 500, 600, 800, 1000, 1250, 1500, 1750, 2000, 2250, 2500, 2750, 3000, 3250, 3500, 3750, 4,00 Hz.

4.9.2 Impedance. Connect the equipment as shown in Figure 4. Set the audio oscillator to 1000 Hz, .06 volts on the VTVM. Replace the earphone element with a decade resistor and vary the resistance until the VTVM again reads .06 volts. Record the value of the decade resistor for compliance with 3.8.1.2.

4.9.3 Overload. Connect the earphone element to an audio oscillator set at a power level of 5 mw, throughout the frequency range from 500 to 2500 Hz. There shall be no evidence of rattling or distortion when the unit is held in close proximity to the ear.

4.10 Electrical Tests for TA-121( )/PT

4.10.1 Frequency Response. Connect the equipment as shown in Figure 5 with S1 closed. Position the microphone element 1/4 inch directly in front of the driver unit with the diaphragm of the microphone parallel to the diaphragm of the driver. The driver unit shall be calibrated to provide a sound pressure of 28 dynes/cm^2 at 300 Hz at the face of the microphone element. Record the voltage across the 600 ohm resistor for compliance with 3.8.2.1. Repeat the procedure with the reference sound pressure and the driver frequency set successively at 400, 500, 600, 800, 1000, 1250, 1500, 1750, 2000, 2250, 2500, 2750, 3000, 3250, 3500, 3750, and 4000 Hz.

4.10.2 Impedance. Connect the equipment as shown in Figure 5 with S1 open. Position the microphone as in 4.10.1 and adjust the output of the oscillator until the VTVM reads .06 volts at 1000 Hz. Close S1 and adjust the decade resistor until the VTVM reads .03 volts. Record the value of the resistance for compliance with 3.8.2.2.

4.11 Electrical Tests for TA-118( )/PT and TA-121( )/PT

4.11.1 Insulation Resistance. The elements shall be tested in accordance with test condition B, Method 302 of MIL-STD-202. Measurements shall be taken between a terminal and the cover mounting screw. There shall be no evidence of arcing or breakdown.

4.11.2 Magnetic Stability. Record the frequency response of the units under test (See 4.9.1 and 4.10.1). The units shall then be subjected to 6 successive discharges of opposite polarity applied from terminal to terminal from a 10 microfarad capacitor charged to 130 volts. Following this procedure, the frequency response shall not have changed more than 4 db from the initial response.

4.12 Electrical Tests for TA-1( )/PT

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

4.12.1 Generator Output. Connect the equipment as shown in Figure 6. Operate the generator lever and measure the generator output for compliance with 3.8.3.1.

4.12.2 Ring Sensitivity. Connect the telephone set to an audio oscillator set at 30 vrms, 15 Hz. Set audible control to maximum. Verify that the audible and visual signals operate. Repeat the procedure with the oscillator set at 20 Hz and 25 Hz.

4.12.3 Input Impedance. Connect the equipment as shown in Figure 7. Set the audio oscillator to 20 Hz, 30 vrms on the VTVM. Replace the telephone with a decade resistor and vary the resistance until the VTVM again reads 30 vrms. Record the value of the decade resistor for compliance with 3.8.3.3.

4.12.4 Insulation Resistance. The equipment shall be tested in accordance with test condition B, Method 302 of MIL-STD-202. Measurements shall be taken between each line terminal and the case.

4.12.5 Operational. Connect two TA-1( )/PT telephones together and perform the following tests:

a. Operate the generator lever on unit 1 and verify that the audible and visual signals operate on unit 2. The audible signal volume shall be variable from loud to low, and shall be inaudible in the off position. The visual signal shall remain on until the push-to-talk switch is depressed. Repeat the procedure with the units reversed.

b. With the push-to-talk switch depressed sidetone shall be noted on each unit.

c. Establish a two-way conversation between unit 1 and unit 2.

4.13 Temperature Test.

4.13.1 Low Temperature. The equipment shall be tested in accordance with Method 502.1, Procedure I, of MIL-STD-810. The storage temperature shall be -80°F for a period of 24 hours, and the operating temperature shall be -65°F.

4.13.2 High Temperature. The equipment shall be tested in accordance with 501.1, Procedure I, of MIL-STD-810. The operating temperature shall be 150°F.

4.14 Humidity Test. The equipment shall be tested in accordance with Method 507.1, Procedure II, of MIL-STD-810. Measurements shall be made during the periods shown on the figure for the cycle.

4.15 Altitude Test. The equipment shall be tested in accordance with Method 500.1, Procedure I, of MIL-STD-810, except the operating altitude shall be 10,000 feet above sea level and the storage altitude shall be 25,000 feet above sea level. Connect the equipment in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

Figure 8 and perform a "talk-thru" test on the telephone. Following the altitude test, perform the operational inspection of 4.12.5.

4.16 Bounce, Loose Cargo Test. The equipment shall be tested in accordance with Method 514.2, Procedure XI, Part 2 of MIL-STD-810.

4.17 Shock, Drop Test. The equipment shall be tested in accordance with Method 516.2, Procedure II of MIL-STD-810.

4.18 Leakage (Immersion) Test. The equipment carrying case shall be tested in accordance with Method 512.1, Procedure I, of MIL-STD-810.

4.19 Blast Test. The telephone set shall be mounted on the carriage of the US Navy Simulated Gun Blast Equipment in accordance with Bureau of Ships Drawing SK-N-864 with the front edge in the test plane and its axis coincident with that of the explosion chamber. The equipment shall be subjected to 30 rounds of blast at a peak pressure of 9.5 rounds per square inch. Following the test, measure the frequency response of the microphone and earphone elements for compliance with 3.9.6.

4.20 Quality Conformance Inspection of Preparation for Delivery. Preparation for delivery shall be inspected in accordance with MIL-P-116 to conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging. Preservation and packaging shall be level A or C, as specified (See 6.1).

5.1.1 Level A.

5.1.1.1 Cleaning. Telephone Set TA-1( )/PT shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Telephone Set TA-1( )/PT shall be dried in accordance with applicable procedure of MIL-P-116.

5.1.1.3 Preservation Application. None required.

5.1.1.4 Unit Packaging. Unit packaging shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical Literature. Each technical literature shall be packaged method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

5.1.1.4.2 Telephone Set TA-1( )/PT. Each telephone set shall be individually packaged method III as follows: Secure the set within the case, close the cover and secure with fasteners provided. Fold the carrying strap in proportionate dimensions and tie with twine conforming to T-T-871, Type I. Cushion each case on all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320, type CF, class weather-resistant, variety SW, grade W6c, designed to protect all projections and absorb the shock of impact in handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane foam conforming to MIL-P-26514. Place the cushioned item within a close-fitting fiberboard box conforming to PPP-B-636, W6c. Place the technical literature, packaged as specified in 5.1.1.4.1 on top of the contents, directly under the lid of the box. Close the box in accordance with the appendix of the box specification.

5.1.2 Level C. Each Telephone Set TA-1( )/PT shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited intransit storage.

5.2 Packing. Packing shall be level A, B or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents (See 6.1).

5.2.1 Level A.

5.2.1.1 Consolidation. A quantity of Telephone Set TA-1( )/PT, packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. To facilitate palletization, fiberboard boxes shall be uniform in size and contain equal quantities of the packaged items to the greatest extent practicable.

5.2.1.2 Palletized Load. A quantity of containers, packed as specified in 5.2.1.1, shall be placed on a pallet, load type I, conforming to MIL-STD-147 except that the pallet shall be softwood conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accomodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A or shrink film.

5.2.1.3 Less Than Palletized Load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.1.1 shall be waterproofed, with tape conforming to PPP-T-76, in accordance with the taping requirements of the appendix of the box specification. A quantity

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

of the waterproofed containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.2 Level B.

5.2.2.1 Consolidation. A quantity of Telephone Set TA-1( )/PT, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1.

5.2.2.2 Palletized Load. A quantity of containers, packed as specified in 5.2.2.1, shall be palletized as specified in 5.2.1.2.

5.2.2.3 Less Than Palletized Load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.2.1 shall be reinforced by pressure-sensitive filament tape conforming to PPP-T-97, type IV as specified in the appendix of the box specification. No further packing shall be required.

5.2.3 Level C.

5.2.3.1 Consolidation. A quantity of Telephone Set TA-1( )/PT, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that the fiberboard boxes shall be class domestic.

5.2.3.2 Palletized Load. A quantity of containers, packed as specified in 5.2.3.1, shall be palletized as specified in 5.2.1.2, except that the fiberboard cap shall be class domestic.

5.2.3.3 Less Than Palletized Load. When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.3.1 shall be used as the shipping container. No further packing shall be required.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering Data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

a. Title, number, and data of this specification and any amendment thereto.

b. Type required.

c. Level of packaging and level of packing required for shipment (Level A, level B or level C).

d. The specific paragraphs of Section 5 which are applicable to the particular procurement.

e. When the rough handling test is required.

f. Marking and shipping of samples.

g. Place of final inspection.

6.3 Group C Inspection. Approval to ship may be withheld, at the discretion of the government, pending the decision from the contracting officer on the adequacy of corrective action (See 4.5.3.3).

6.4 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: TA-1W/PC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract(See 1.1).

6.5 Verification Inspection. Verification by the government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.6 Location of Operation Inspection. It is desirable that the operational inspection (4.12.5) be performed at a location that will minimize handling (which might cause damage to the equipment)after this inspection is completed. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

Custodian:


Army - (EL)

Preparing Activity

Army - (EL)

Project No. 5805-A231

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

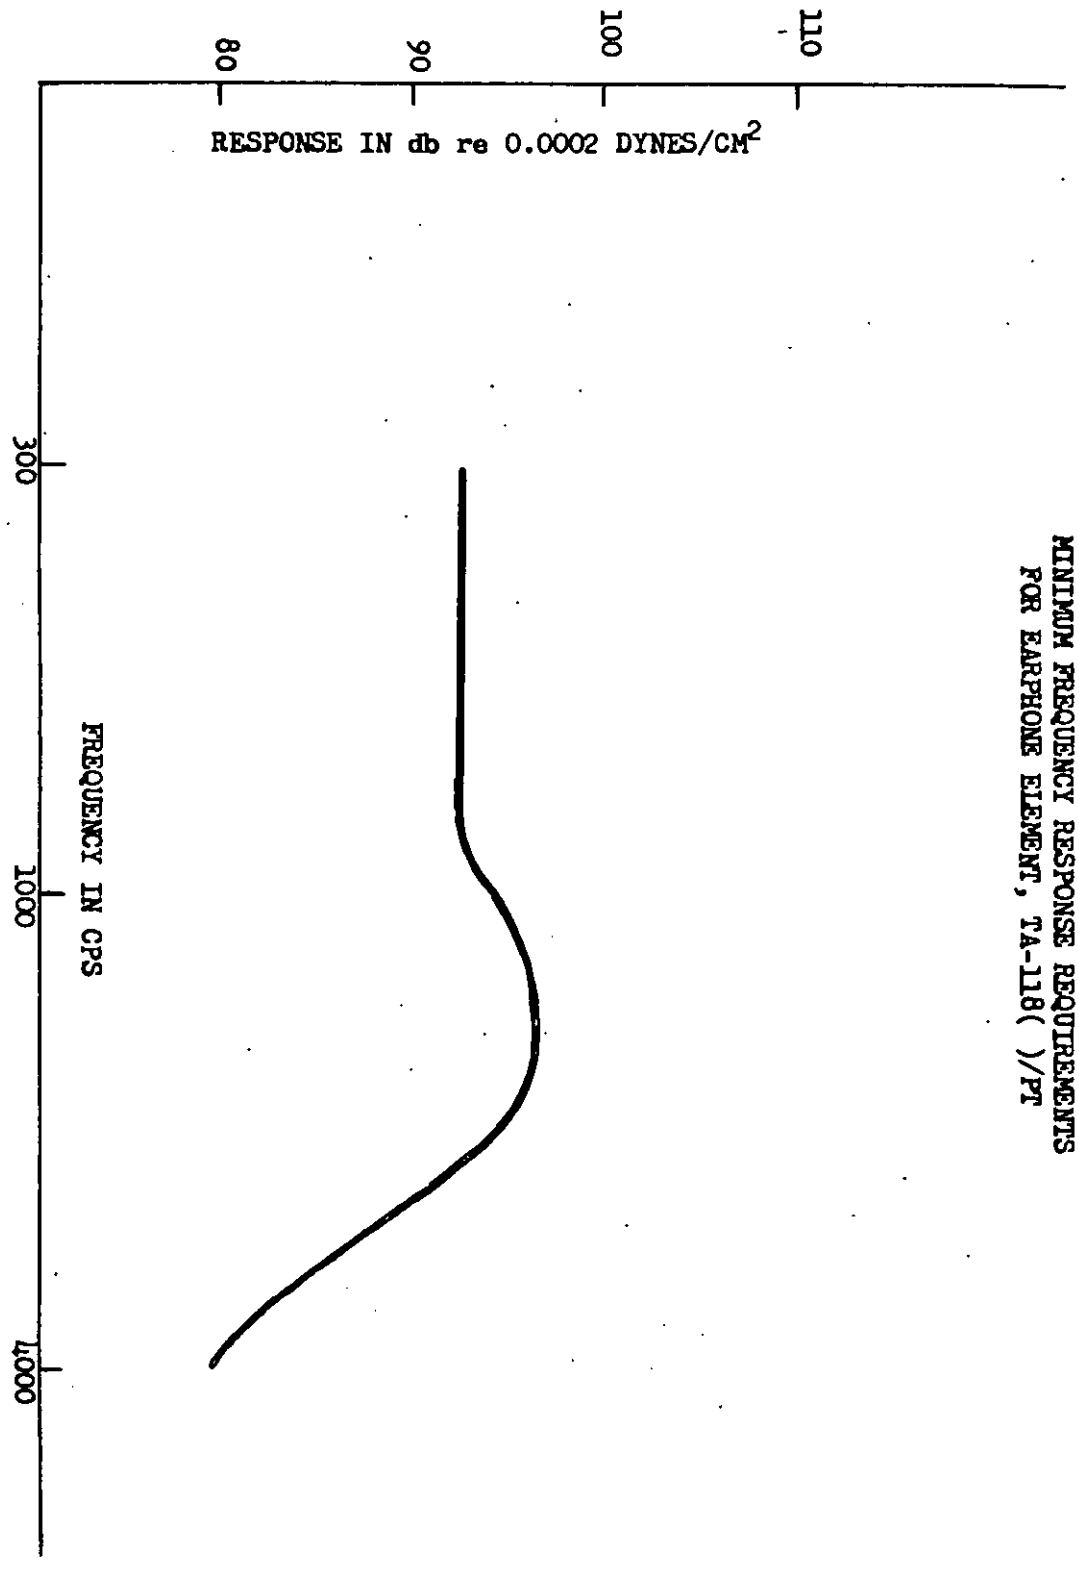

MINIMUM FREQUENCY RESPONSE REQUIREMENTS
FOR EARPHONE ELEMENT, TA-118( )/PT

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

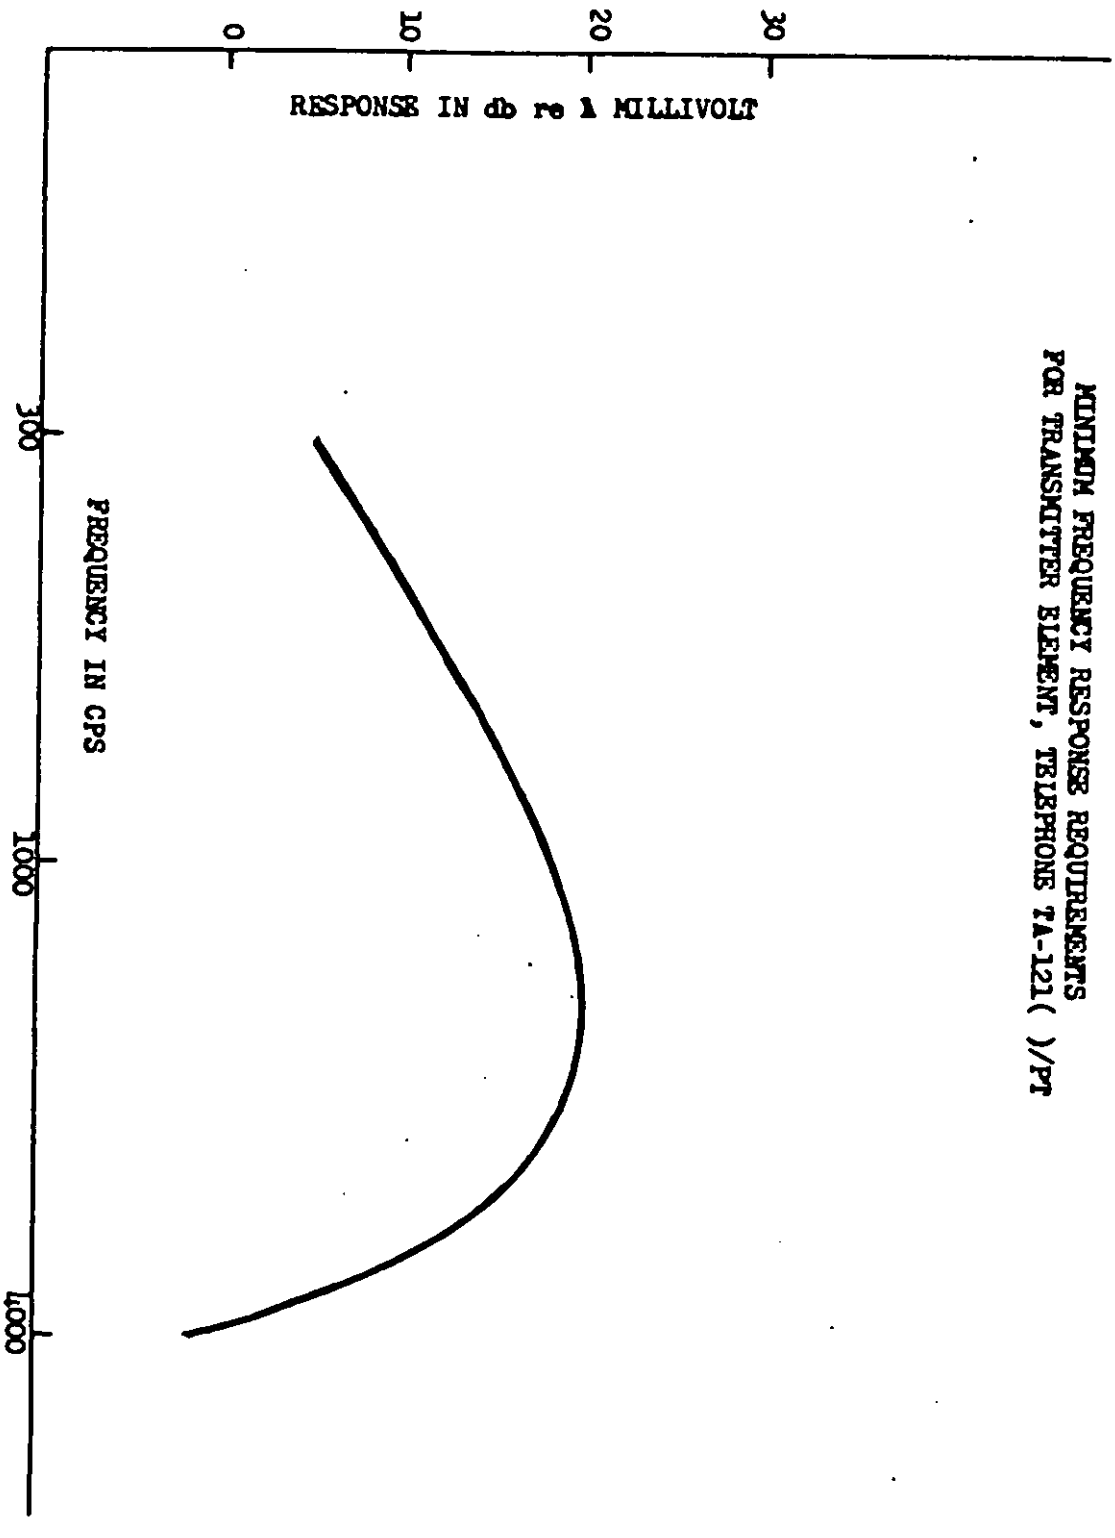


FIGURE 2

MINIMUM FREQUENCY RESPONSE REQUIREMENTS FOR TRANSMITTER ELEMENT, TELEPHONE TA-121( )/PT

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

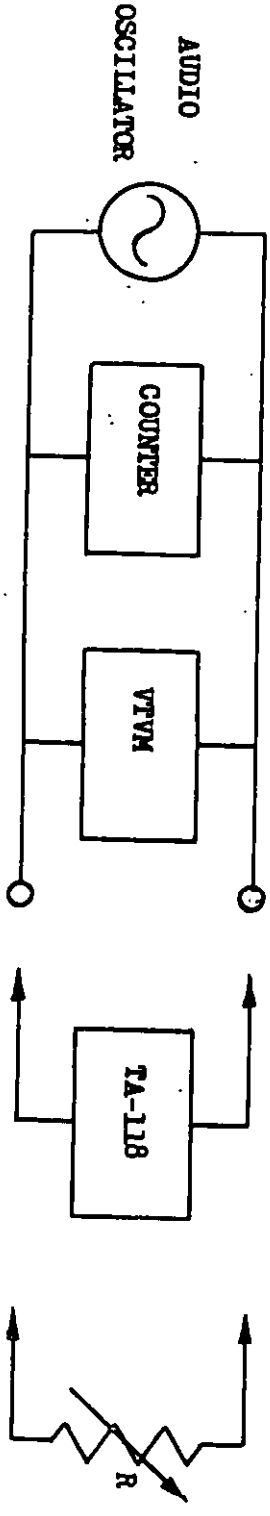


FIGURE 4 EARPHONE IMPEDANCE

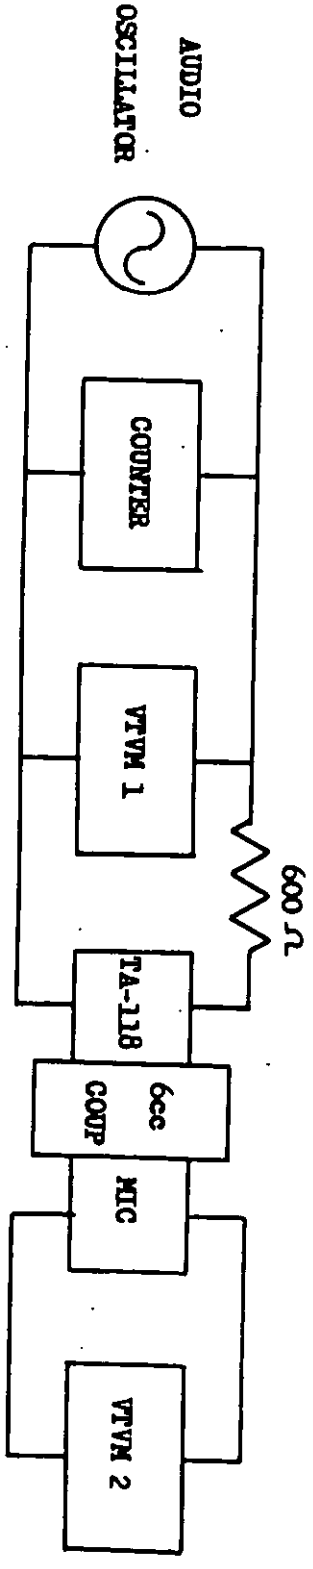


FIGURE 3 EARPHONE FREQUENCY RESPONSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

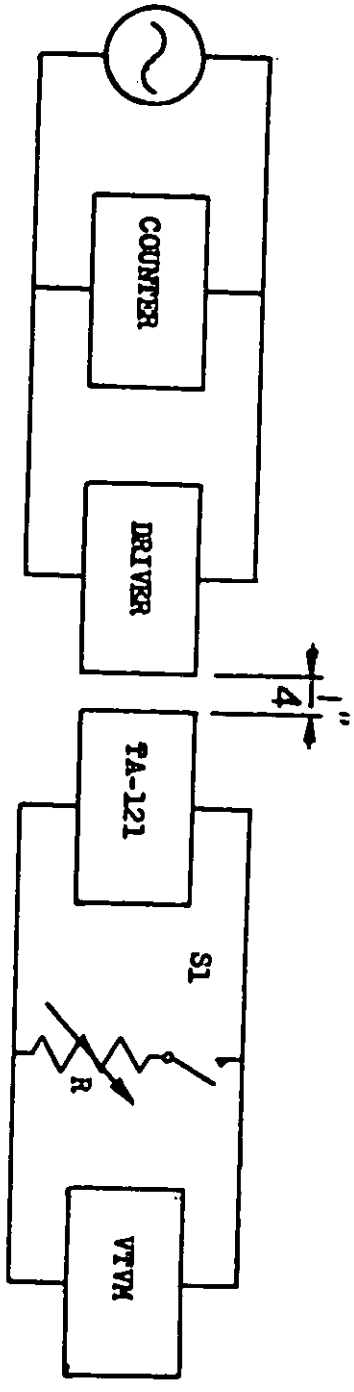


FIGURE 5 MICROPHONE FREQUENCY RESPONSE & IMPEDANCE

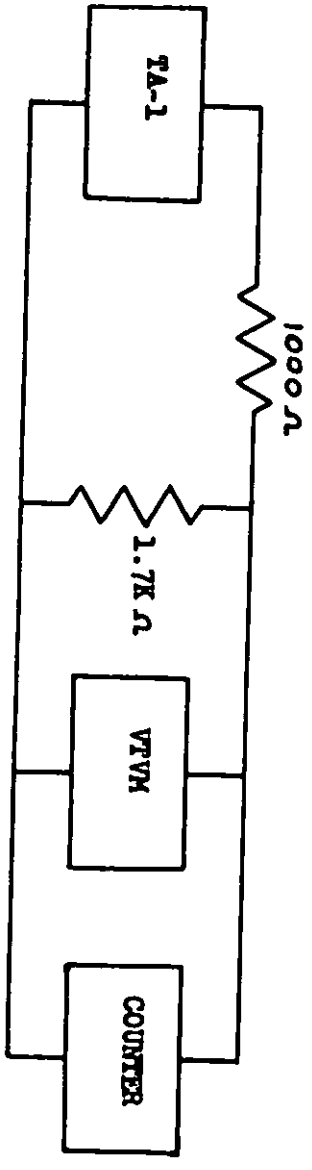


FIGURE 6 GENERATOR OUTPUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

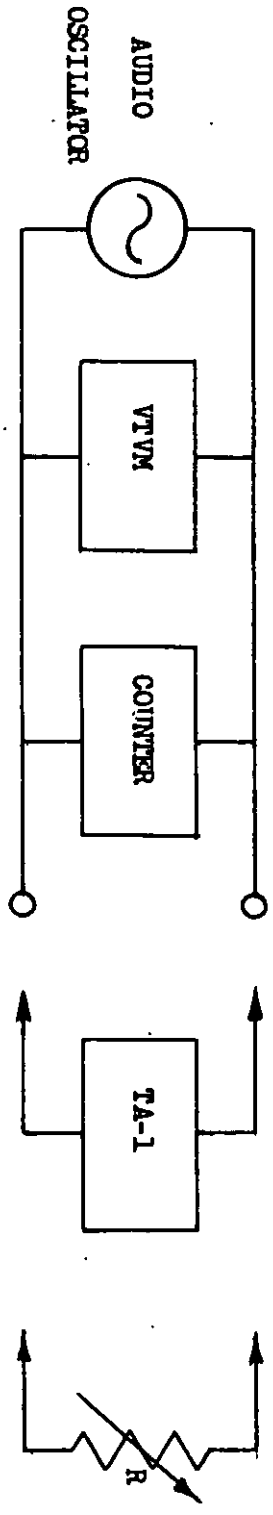


FIGURE 7 RINGER IMPEDANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.

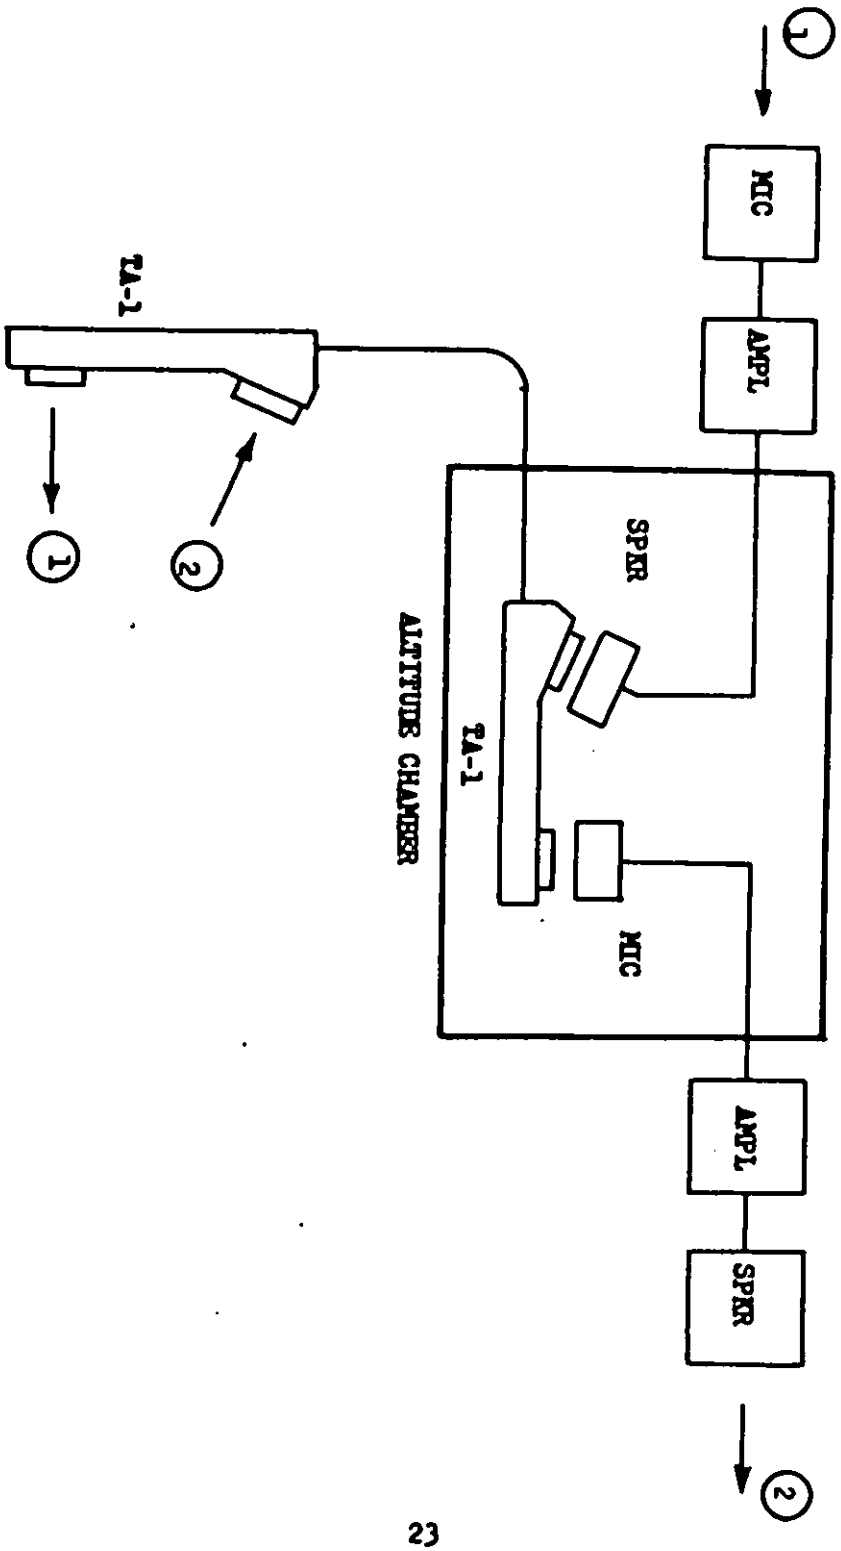


FIGURE 8 ALTITUDE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.