
PALLETIZING
DOMESTIC UNIT LOAD

500 LB. FIRE BOMB MK 77 MOD 2 (EMPTY)
(IN WIREBOUND CRATE)

UNIT LOAD DATA

NUMBER OF BOMBS PER CONTAINER		1
NUMBER OF CONTAINERS PER UNIT LOAD		8
GROSS WEIGHT OF ONE CONTAINER(EST.)	(Lbs.)	107
WEIGHT OF TWO PALLETS	(Lbs.)	188
GROSS WEIGHT OF UNIT LOAD (EST.)	(Lbs.)	1044
CUBE	(Cu. Ft.)	198.3

DO NOT STACK MORE THAN 2 UNIT LOADS HIGH IN STORAGE

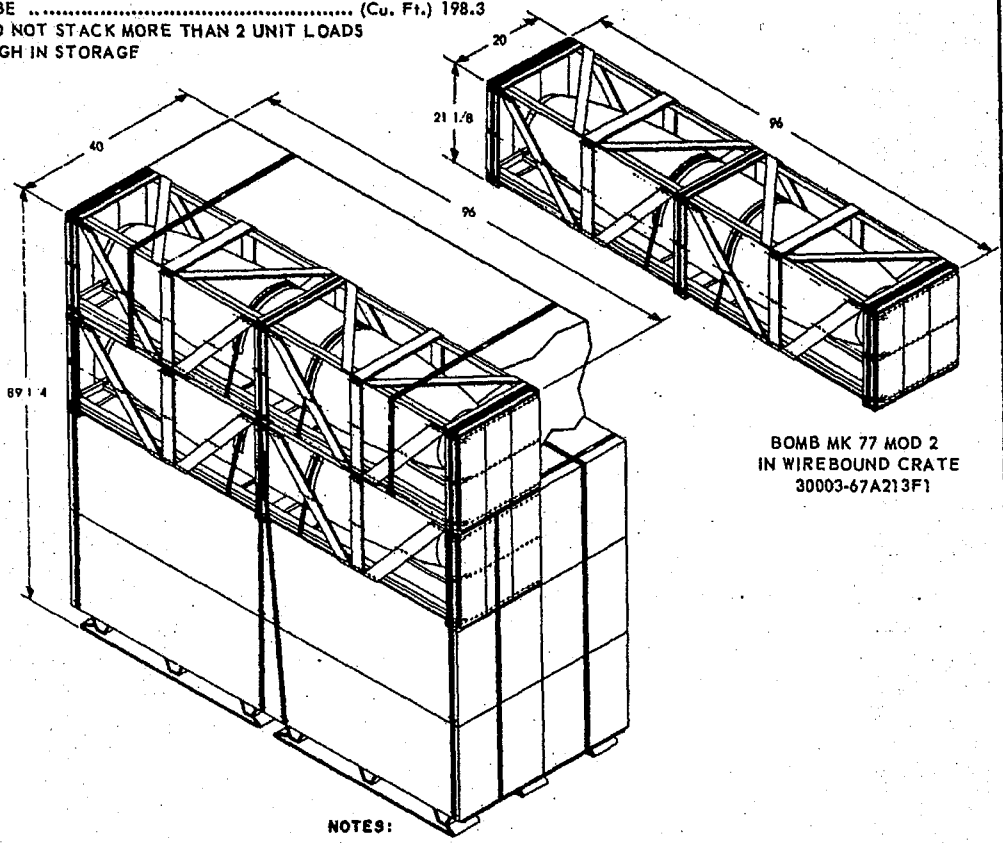

BOMB MK 77 MOD 2
IN WIREBOUND CRATE
30003-67A213F1

NOTES:
1. FOR GENERAL PALLETIZING REQUIREMENTS SEE MIL-STD-1322(NAVY).
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

MIL-STD NUMBER	ASSOCIATED PROCESS
1320-2	TRUCKLOADING
1325-28	CARLOADING

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T
Check the source to verify that this is the current version b

PALLETIZING PROCEDURE

(a) TIE THE TWO PALLETS, ITEM 1, TOGETHER WITH STRAPPING, ITEM 2, ALONG THE WIDTHWISE DIMENSION, AS SHOWN IN DETAIL A.

(b) THREAD STRAPPING, ITEM 3, THROUGH DECK WIRES OF PALLET, AS SHOWN IN DETAIL B.

(c) PLACE SIX CONTAINERS ON PALLET AND POSITION STRAPPING, ITEM 3, AROUND THE UNIT LOAD, TENSION AND DOUBLE CRIMP SEAL, ITEM 5.

(d) POSITION STRAPPING, ITEM 4, UNDER THE PALLET DECK AND AROUND UNIT LOAD, TENSION AND DOUBLE CRIMP SEAL.

(e) SECURE STRAPPING, ITEM 4, WITH STAPLES, ITEM 6, TO THE CLEATS OF THE CONTAINER AS SHOWN.

(f) THREAD STRAPPING, ITEM 7, UNDER AND THROUGH THE TOP CONTAINERS.

(g) PLACE TWO ADDITIONAL CONTAINERS ON THE UNIT LOAD, TENSION STRAPPING, ITEM 7, AND DOUBLE CRIMP SEAL, ITEM 5.

(h) SECURE STRAPPING, ITEM 7, WITH STAPLES, ITEM 6, TO THE TOP CLEAT OF THE THIRD LAYER OF CONTAINERS AND THE TOP AND BOTTOM CLEAT OF THE FOURTH LAYER OF CONTAINERS, AS SHOWN.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

DEPALLETIZING PROCEDURE

(a) WHEN A FLEET ISSUE UNIT LOAD IS REQUIRED, REMOVE THE STAPLES SECURING THE TOP TWO CONTAINERS.

(b) CUT AND REMOVE STRAPPING, ITEM 7.

(c) REMOVE THE TOP TWO CONTAINERS.

(d) WHEN IT IS DESIRED TO DEPALLETIZE THE REMAINING FLEET ISSUE UNIT LOAD, REMOVE THE STAPLES.

(e) CUT AND REMOVE THE STRAPPING, ITEM 3 AND 4.

(f) REMOVE CONTAINERS.


(g) CUT AND REMOVE STRAPPING, ITEM 2.

* .031 COLD ROLLED, HEAT TREATED MAY BE SUBSTITUTED.


REQ.	ITEM	DESCRIPTION	MAT'L.	MAT'L. SPEC.	DIMENSIONS
2	7	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 10 FT. 6
34	6	STAPLE	STEEL	COM'L	3/4
10	5	SEAL	STEEL, COATED	COM'L	3/4 X 22 GA. MIN.
4	4	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 18 FT.
2	3	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 27 FT. 6
2	2	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * 2 FT. 8
2	1	PALLET, MK 3 MOD 0	STEEL	564200	40 X 48

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T2
Check the source to verify that this is the current version be

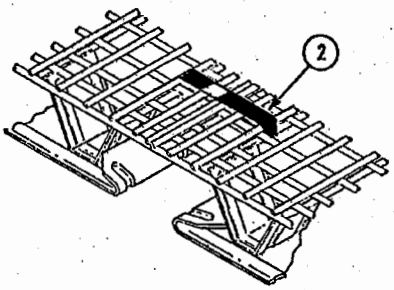

DETAIL A

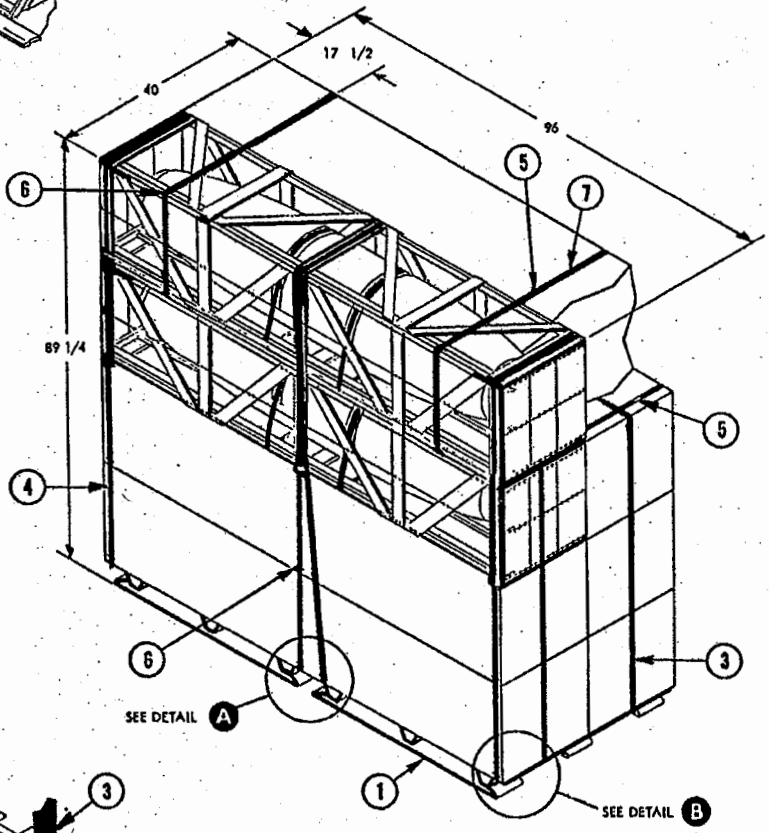

ASSEMBLED UNIT LOAD

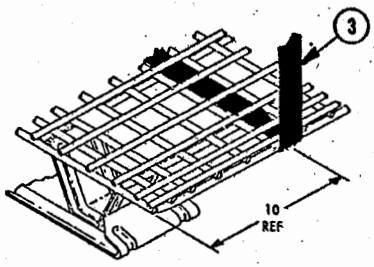

DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T2
Check the source to verify that this is the current version be