MILITARY SPECIFICATION

LIGHT, BEACON LNU-1/W

This specification has been approved by the
Naval Air Systems Command, Department of the Navy.

1. SCOPE

*1.1 This specification covers the requirements for one type of battery-powered light assembly that produces intermittent flashes at nighttime, intended for use with Buoy, DAN BNU-1/W.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

HH-I-595	Insulation Tape, Electrical, Pressure Sensitive Adhesive, Plastic, General Purpose
PPP-B-601	Boxes, Wood Cleated-Plywood
PPP-B-636	Boxes, Shipping, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-C-3955	Cans, Fiber, Spirally Wound

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

Department of the Navy

WR-43	Quality Assurance Provisions, Preparation of

DRAWINGS

Naval Air Systems Command

30003-DL168AS100	Light, Beacon LNU-1/W Assembly

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction - The Light, Beacon LNU-1/W furnished under this specification shall be a product, samples of which have been tested and have passed the preproduction tests specified herein.

*3.2 Parts and Materials - Parts and materials shall be as specified in all drawings and subsidiary documents listed in 30003-DL168AS100. Any deviation by the contractor from the use of these specified parts and materials necessarily places both the burden of proof for the acceptability of the change, and the cost associated therewith, upon the contractor. Approval for deviations must be requested from the procuring agency by the contractor and granted by the procuring agency prior to submission of equipments for preproduction tests. Approval of parts and material deviations shall not be construed by the contractor to constitute a waiver of any other requirement of this specification, or of 30003-DL168AS100. When a requirement of a referenced document conflicts with a requirement of this specification, the requirement of this specification shall govern. The contract shall have precedence over this specification.

3.2.1 Toxic Materials - Materials other than those specified which are capable of procuding dangerous gases or other harmful toxic effects under conditions, including fire, encountered in Naval service shall not be used, unless suitable nontoxic material is not available. These materials shall not be incorporated into the equipment without prior approval of the procuring agency.

*3.3 Design and Construction - The equipment shall be manufactured in accordance with the drawings of 30003-DL168AS100 and subsidiary specifications except insofar as errors of omission or commission on the drawings may be incompatible with the requirements of this and related specifications. Minor variations in the design that provide for improved production techniques, reduced product cost, or improvements in the overall operation may be allowed. In any case it is a condition of final acceptance that the equipments meet all the performance requirements of the drawings of 30003-DL168AS100 and such acceptance test documents as may be applicable. Proposed changes, either to correct drawing discrepancies or for any other reason, shall be specifically approved by the procuring agency prior to their incorporation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

*3.3.1 Weight - The weight of the potted battery shall be not greater than 14.0 ounces (oz) when weighed in water. The weight of all components, except the potted battery, shall be not greater than 4.0 ounces when weighed in air.

3.4 Operational Requirements - The equipment shall meet the following operational requirements.

3.4.1 Watertight Integrity - The equipment, except for the switch, shall be completely watertight to external water pressure of 100 pounds per square inch gage (psig).

*3.4.2 Operating Temperature Range - The equipment shall operate as specified throughout a temperature range of 32 degrees Fahrenheit (F) to 100 degrees Fahrenheit.

*3.4.3 Light-Sensitive Circuit - The light-sensitive circuit shall provide for automatically starting the light to flash. The lamp should flash when the illumination level at the outer surface of the unit is 4-foot candles, and must flash when the illumination level is 0.7-foot candles. The flashing may stop when the illumination level rises above 0.7-foot candles and must stop when the illumination level just exceeds 4-foot candles.

*3.4.3.1 Flash Rate - The equipment shall provide a flash rate of 90 plus or minus 30 flashes per minute over a temperature range of 32°F to 100°F, except at 74°F, the flash rate shall be 95 ± 15 flashes per minute.

3.4.4 Operating Life - The equipment shall provide not less than 72 hours of active (flashing) operation. This shall be based on a schedule of 12 hours active operation (nighttime) followed by 12 hours of inactive operation (daytime).

*3.5 Workmanship - The equipment shall be constructed and finished in a thoroughly workmanlike manner. Parts and materials shall be free from manufacturing defects and foreign matter that would affect or impair the operation and serviceability of the equipment.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all tests/inspections as specified herein. Except as otherwise specified, the supplier may utilize his own facility or any commercial laboratory acceptable to the Government. The Government reserves the right to witness or separately perform any of the tests/inspections set forth in this specification where such tests/inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

*4.2 Classification of inspection - The examination and testing of the beacon light shall be classified as follows:

(a) Preproduction inspection (see 4.6).

(b) Initial Production inspection (see 4.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

(c) Quality conformance inspection (see 4.9).

(d) Special tests (see 4.10).

*4.3 Test conditions - The ambient temperature and relative humidity that prevails during testing shall be within the range from 32 to 90 degrees Fahrenheit and from 45 to 99 percent relative humidity. The temperature and relative humidity shall be recorded and submitted for each test of each equipment tested.

*4.4 Test equipment and inspection facilities - Test equipment and inspection facilities shall be of sufficient accuracy and quality to permit performance of the required tests and inspections. The contractor shall establish adequate test equipment and the calibration thereof, each to the satisfaction of the Government.

*4.5 Presubmission Testing - No item, part or complete equipment shall be submitted or resubmitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

*4.6 Preproduction Inspection - Preproduction inspection is that inspection accomplished on units selected as specified in 4.6.2 for the purpose of determining that production methods and procedures utilized are capable of producing equipments which comply with the requirements specified herein.

*4.6.1 Preproduction Inspection Data - The testing activity shall submit all data collected in conducting these inspections to the procuring agency for review and approval.

*4.6.2 Preproduction Sample - Unless otherwise specified (see 6.2), for each contract or order, 20 complete units shall be manufactured using the same methods and procedures proposed for production. Each preproduction unit shall be essentially a model of the product that the contractor will subsequently produce to fulfill the contract. As soon as is practicable after the award of the contract, and prior to submission of any complete units for final acceptance, the contractor shall furnish preproduction units as specified in 4.6.4. The contractor shall record and submit with the preproduction units the data resulting from his tests of the preproduction units. Approval of the preproduction units by the agency concerned shall not relieve the contractor of the obligation to supply equipment conforming to this specification. Changes or deviation in production units from the approved preproduction units shall require the written approval of the agency concerned. The contractor shall forward written notice to the procuring agency at least 30 days prior to inspection, furnishing the date that the preproduction sample will be provided.

*4.6.3 Scope of Tests - Preproduction tests shall include all tests deemed necessary by the procuring agency to determine that the equipment meets all the requirements of this specification and the contract. Preproduction inspection shall include as a minimum the inspections and tests of 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

*4.6.4 Submission of preproduction sample - The preproduction sample specified in 4.6.2 shall be delivered to the testing activity at the contractor's expense as designated by the procuring agency (see 6.2). The units shall be plainly identified by securely attached durable tags marked with the following information:

(a) Units are for preproduction inspection.

(b) Nomenclature, part number and military specification number of unit.

(c) Name of manufacturer.

(d) Contract or order number.

*4.6.5 Preproduction Approval - Approval of the preproduction samples shall be by the procuring agency upon satisfactory completion of all tests. No production equipments shall be delivered prior to the approval of the preproduction samples. Prefabrication of production equipment prior to the approval of the preproduction samples is at the contractor's own risk. The approved preproduction samples shall be retained by the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance. The preproduction samples shall not be considered as equipments deliverable under the contract.

*4.7 Inspections and Test Methods

*4.7.1 Light-Sensitive Circuit - The performance required by 3.4.3 shall be demonstrated within a temperature range from 70 to 80°F.

*4.7.2 Flash Rate - The flash rates required by 3.4.3.1 shall be demonstrated within a temperature range from 32° and 100°F.

*4.7.3 Operating Life (low temperature) - The operating life required by 3.4.4 shall be demonstrated at a temperature of 35° F ± 3°F.

*4.7.4 Operating Life (room temperature) - The operating life required by 3.4.4 shall be demonstrated at a temperature of 75°F ± 4°F.

*4.7.5 Operating Life (high temperature) - The operating life required by 3.4.4 shall be domonstrated at a temperature of 95°F ± 5°F.

*4.7.6 Watertight Integrity - Immerse the unit in water under a pressure of 95 ± 5 pounds per square inch (psig) for 10 ± .5 minutes. After being removed from the water, the unit shall perform as required by 3.4.3 and 3.4.3.1 when tested in accordance with 4.7.1 and 4.7.2.

*4.7.7 Potted Battery Weight - Measure the weight of the potted battery in water. The weight shall not exceed 14 ounces.

*4.7.8 Light Assembly and Cable Weight - Measure, in air, the weight of the light assembly and the cable combined. The weight shall not exceed 4 ounces.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the current version before use.

*4.7.9 Conformance to Drawings - Acceptance criteria for verification of characteristics classified on the drawings of 30003-DL168AS100 shall be in accordance with MIL-STD-105, general inspection level II. The major characteristics shall have an AQL of 2.5.

*4.7.9.1 Classification of Characteristics - Characteristics identified by the symbol (M) on the drawings of 30003-DL168AS100 are classified as major in accordance with WR-43. The number following the classification symbol indicates the serial number of the characteristic.

*4.8 Initial Production Inspection - Five of the first 15 production equipments shall be selected by the Government representative and sent at the contractor's expense to a testing laboratory designated by the procuring agency for inspection. The equipments shall be selected by the procuring agency after the equipment has been successfully tested and inspected by the contractor. The preproduction samples shall not be selected for this inspection.

*4.8.1 Scope of Tests - These equipments may be subjected to any and all tests the procuring agency deems necessary to ensure that the production equipments are equivalent to the previously approved preproduction samples in design, construction, workmanship, performance, and quality, and that they meet all applicable requirements.

*4.8.2 Accessory Material - In addition to the complete equipments submitted for initial production inspection, the contractor shall also submit such accessory material and data necessary to inspect the equipment.

*4.8.3 Initial Production Sample Approval - Approval of the initial production samples shall be by the procuring agency upon satisfactory completion of all tests and inspections. Any design, material or performance defect made evident during this inspection shall be corrected by the contractor to the satisfaction of the procuring agency. Failure of the initial production samples to pass any of the tests or inspections shall be cause for deliveries of equipment under the contract to cease until proper corrective action is approved and accomplished. Corrective action shall also be accomplished on equipment previously accepted when requested by the procuring agency. Disposition of the initial production samples shall be by the procuring agency after testing is completed. These samples shall not be considered as equipments deliverable under the contract.

*4.9 Quality Conformance Inspection - A random sample of units shall be selected by the Government representative from each lot offered to the Government in accordance with MIL-STD-105 at inspection level II. Each sample shall be forwarded at the contractor's expense to a testing laboratory designated by the procuring agency for inspection. Unless otherwise specified in the contract, the sample units shall not be considered as equipments deliverable under the contract.

*4.9.1 Inspection Lot Size - The lot size of equipments shall not exceed 1 month's production and shall be approved by the procuring agency.

*4.9.2 Scope of Inspection (minimum) - Examination shall include as a minimum, examination in accordance with the classification of defects set forth in 4.9.4.

*4.9.3 Additional Inspection - Inspection shall also include any other tests deemed necessary by the procuring agency to assure that the equipment conforms to all specification and contractural requirements. Any unit containing one or more

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

defects shall be rejected. If the number of defective units in any sample exceeds 6.5 percent of the number of samples selected, the lot represented by the sample shall be rejected.

*4.9.4 Examination - Examination shall be in accordance with the classification of defects set forth in table I and 4.7.9. Any unit in the sample containing one or more defects shall be rejected, and if the number of defective beacons in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected. The acceptable quality level (AQL) shall be 2.5 percent defective for major defects and 6.5 percent for minor defects.

Table I. Classification of Defects in Accordance with MIL-STD-105

Categories	Defects
Major	(AQL shall be 2.5 percent defective.)
101	Part included which is not specified.
102	Material not as specified.
103	Power cable damaged, kinked, or broken.
104	Unit not complete; component part missing.
105	Light sensitivity not in accordance with 4.7.1.
106	Flash rate not in accordance with 4.7.2.
107	Operating life not in accordance with 4.7.3.
108	Operating life not in accordance with 4.7.4.
109	Operating life not in accordance with 4.7.5.
110	Watertight integrity not in accordance with 4.7.6.
111	Weight not in accordance with 4.7.7.
112	Weight not in accordance with 4.7.8.
Minor	(AQL shall be 6.5 percent defective.)
201	Finish not as specified.
202	Marking not as specified.
203	Shrinkage cracks in potted components.

*4.10 Special Tests - Special tests shall be conducted on a quantity of equipments for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

equipment selected for special tests may be selected from equipments previously subjected to the quality conformance inspection.

*4.10.1 Special Test Schedule - Selection of equipments for special tests shall be made as follows:

(1) On an early equipment after an engineering or material change.

(2) Whenever failure reports or other information indicate that additional tests are required. (This will be determined by the procuring agency.)

*4.10.2 Scope of Tests - Special tests shall consist of such tests as approved by the procuring agency. Preproduction tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure and submit it to the procuring agency for approval prior to conducting the tests.

*4.11 Equipment Failure - Should a failure occur during either the quality conformance inspection or special tests, the following action shall be taken:

(1) Determine the cause of failure.

(2) Determine if the failure is an isolated case or design defect.

(3) Submit to the procuring agency for approval, proposed corrective action intended to reduce the possibility of the same failure(s) occurring, and to permit correction of all units represented by the sample.

(4) Include a test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

*4.12 Material Inspection - The contractor shall certify that all materials used in fabrication of the unit are in accordance with the requirements of this specification. Material manufacturer's certification or test data will be acceptable for fulfilling this requirement. Acceptance or approval of any material or component part shall not be construed as a guarantee of acceptance of the unit.

*4.13 Rejection and Resubmission - Units which are rejected during any inspection specified herein may be reworked or have any part replaced to correct defects, and resubmitted for acceptance (see 4.5).

4.14 INSPECTION OF PREPARATION FOR DELIVERY: Each shipping container shall be examined to determine compliance with the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging - Preservation and packaging shall be level A.

5.1.1 Level A -

5.1.1.1 Unit Packaging - Unit packages shall be packaged and preserved in accordance with submethod IC-4 of MIL-P-116, except that no preservatives shall be applied to the assembly. Can containers shall conform to type II, grade B,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

style b, class 1, of MIL-C-3955. Ends of containers shall be black. A unit package shall consist of one light assembly, wrapped and cushioned as specified. Container closure shall be in accordance with the appendix to MIL-C-3955.

*5.1.1.2 Intermediate Packaging - Intermediate packages shall be packaged in accordance with method III of MIL-P-116. Box containers shall conform to style RSC, class 2, W5c of PPP-B-636. An intermediate package shall consist of 12 unit packages, 108 feet (1 roll) of 3/4-inch wide insulation tape, HH-I-595, and 2 bond paper copies of Figure 1 Light Assembly Installation Instructions and 2 bond paper copies of Figure 2, Air-drop Lock Installation Instructions. The size of these copies and the characters and lines thereon may be reduced 20 percent maximum relative to the size of the corresponding copies, characters, and lines of Figures 1 and 2 as depicted in this specification. The copies shall be clearly legible at a normal reading distance. Box closure shall be in accord ance with the appendix to PPP-B-636 except that reinforcing bands shall be of pressure-sensitive adhesive filament tape and shall include a minimum of two ban placed in a girthwise direction.

5.2 Packing - Packing shall be level A or B as specified (see 6.2).

5.2.1 Level A - Four intermediate packages (48 light assemblies) shall be packed in a box conforming to PPP-B-601, overseas type, style B. Boxes shall be close fitting, and strapping shall be zinc coated, in accordance with the appendix to PPP-B-601.

5.2.2 Level B - Four intermediate packages (48 light assemblies) shall be packed in a box conforming to PPP-B-601, domestic type, style A. Boxes shall be close fitting and strapping shall be in accordance with the appendix to PPP-B-601 except that zinc coating is not required.

5.3 Marking - Unit packages, intermediate packages, and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

*6.1 Intended Use - The equipment covered by this specification is intended for use as a navigational aid at night. It will be assembled onto Buoy, DAN BNU-1/W in accordance with Figures 1 and 2.

*6.2 Ordering Data - Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Number of preproduction samples required if other than 20 (see 4.6.2).

(c) Place where preproduction samples, initial production samples, and quality conformance samples are to be tested (see 4.6.4, 4.8, 4.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.


(d) Level of preservation and packaging, and additional marking if other than that specified (see 5.1 and 5.3).

(e) Level of packing required (see 5.2).

6.3 Asterisk - In specification revisions and superseding amendments, an asterisk "" preceding a paragraph number denotes paragraphs in which changes have been made from the previous issue. This has been done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of the asterisk notation and relationship to the previous issue.

Project No. 2050-N021

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

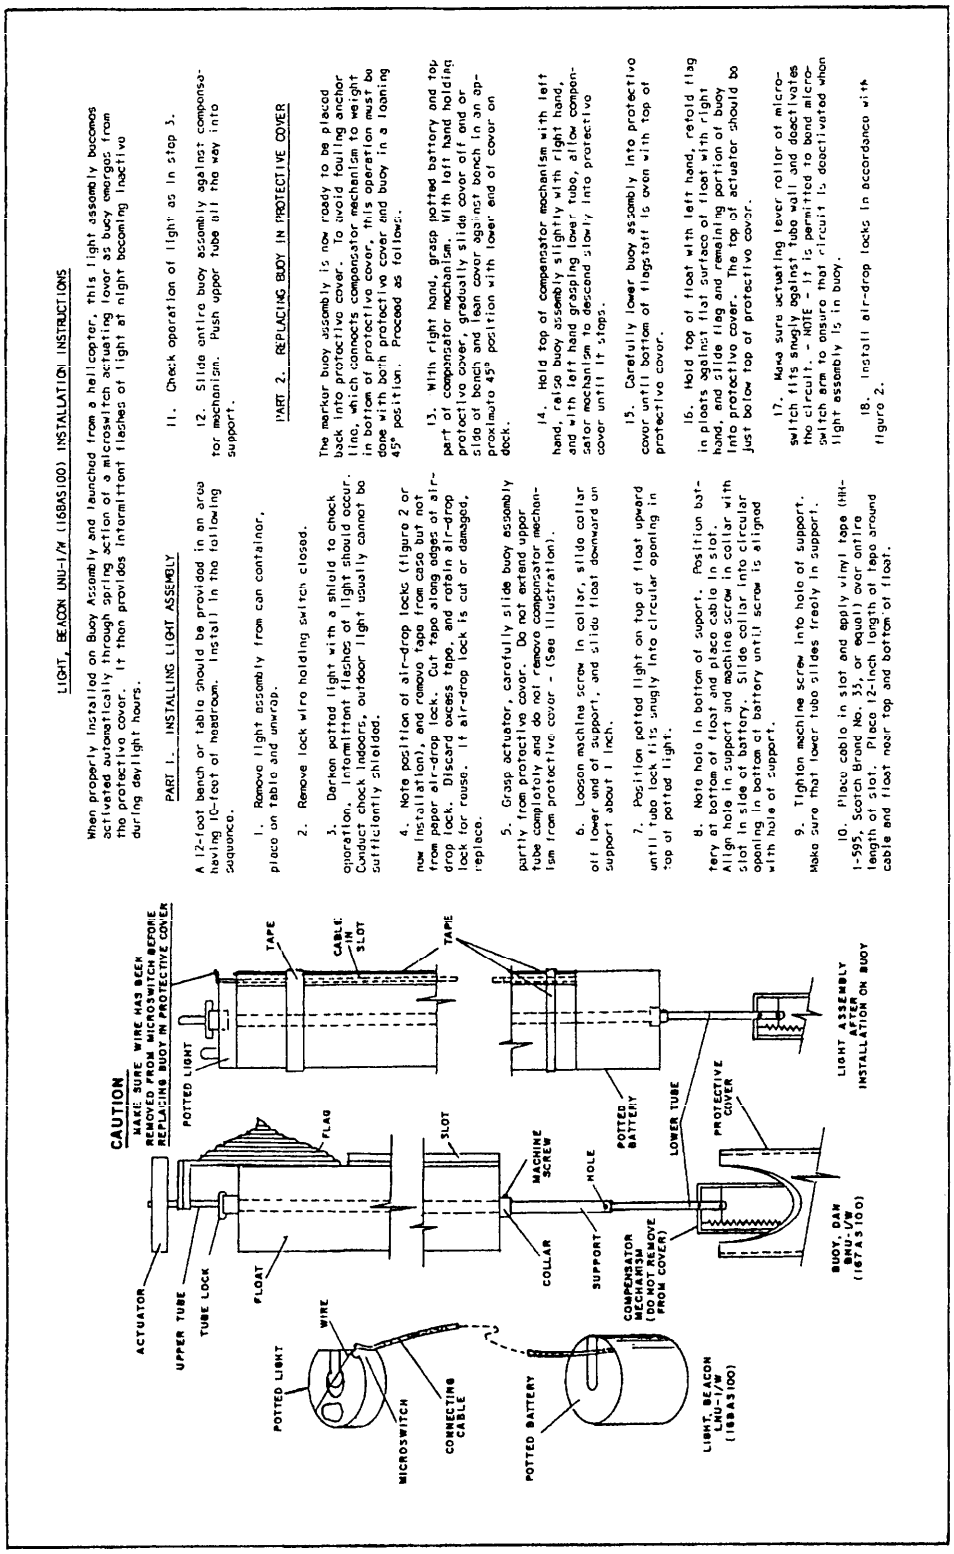

LIGHT, BEACON LNU-1/M (16BAS100) INSTALLATION INSTRUCTIONS

When properly installed on Buoy Assembly and launched from a helicopter, this light assembly becomes activated automatically through spring action of a microswitch actuating lever as buoy emerges from the protective cover. It then provides intermittent flashes of light at night becoming inactive during daylight hours.

PART 1. INSTALLING LIGHT ASSEMBLY

A 12-foot bench or table should be provided in an area having 10-foot of headroom. Install in the following sequence.

1. Remove light assembly from can container, place on table and unwrap.
2. Remove lock wire holding switch closed.
3. Darken potted light with a shield to check operation. Intermittent flashes of light should occur. Conduct check indoors, outdoor light usually cannot be sufficiently shielded.
4. Note position of air-drop locks (figure 2 or new installation), and remove tape from case but not from paper air-drop lock. Cut tape along edges of air-drop lock. Discard excess tape, and retain air-drop lock for reuse. If air-drop lock is cut or damaged, replace.
5. Grasp actuator, carefully slide buoy assembly partly from protective cover. Do not extend upper tube completely and do not remove compensator mechanism from protective cover - (See illustration).
6. Loosen machine screw in collar, slide collar off lower end of support, and slide float downward on support about 1 inch.
7. Position potted light on top of float upward until tube lock fits snugly into circular opening in top of potted light.
8. Note hole in bottom of support. Position battery at bottom of float and place cable in slot. Align hole in support and machine screw in collar with slot in side of battery. Slide collar into circular opening in bottom of battery until screw is aligned with hole of support.
9. Tighten machine screw into hole of support. Make sure that lower tube slides freely in support.
10. Place cable in slot and apply vinyl tape (MIL-I-595, Scotch Brand No. 33, or equal) over entire length of slot. Place 12-inch length of tape around cable and float near top and bottom of float.
11. Check operation of light as in step 3.
12. Slide entire buoy assembly against compensator mechanism. Push upper tube all the way into support.

PART 2. REPLACING BUOY IN PROTECTIVE COVER

The marker buoy assembly is now ready to be placed back into protective cover. To avoid fouling anchor line, which connects compensator mechanism to weight in bottom of protective cover, this operation must be done with both protective cover and buoy in a leaning 45° position. Proceed as follows:

13. With right hand, grasp potted battery and top part of compensator mechanism. With left hand holding protective cover, gradually slide cover off end or side of bench and lean cover against bench in an approximate 45° position with lower end of cover on dock.
14. Hold top of compensator mechanism with left hand, raise buoy assembly slightly with right hand, and with left hand grasping lower tube, allow compensator mechanism to descend slowly into protective cover until it stops.
15. Carefully lower buoy assembly into protective cover until bottom of flagstaff is even with top of protective cover.
16. Hold top of float with left hand, retold flag in plastic against flat surface of float with right hand, and slide flag and remaining portion of buoy into protective cover. The top of actuator should be just below top of protective cover.
17. Make sure actuating lever roller of microswitch fits snugly against tube wall and deactivates the circuit. - NOTE - It is permitted to bend microswitch arm to ensure that circuit is deactivated when light assembly is in buoy.
18. Install air-drop locks in accordance with figure 2.

Figure 1. Light Assembly Installation Instructions.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the current version before use.

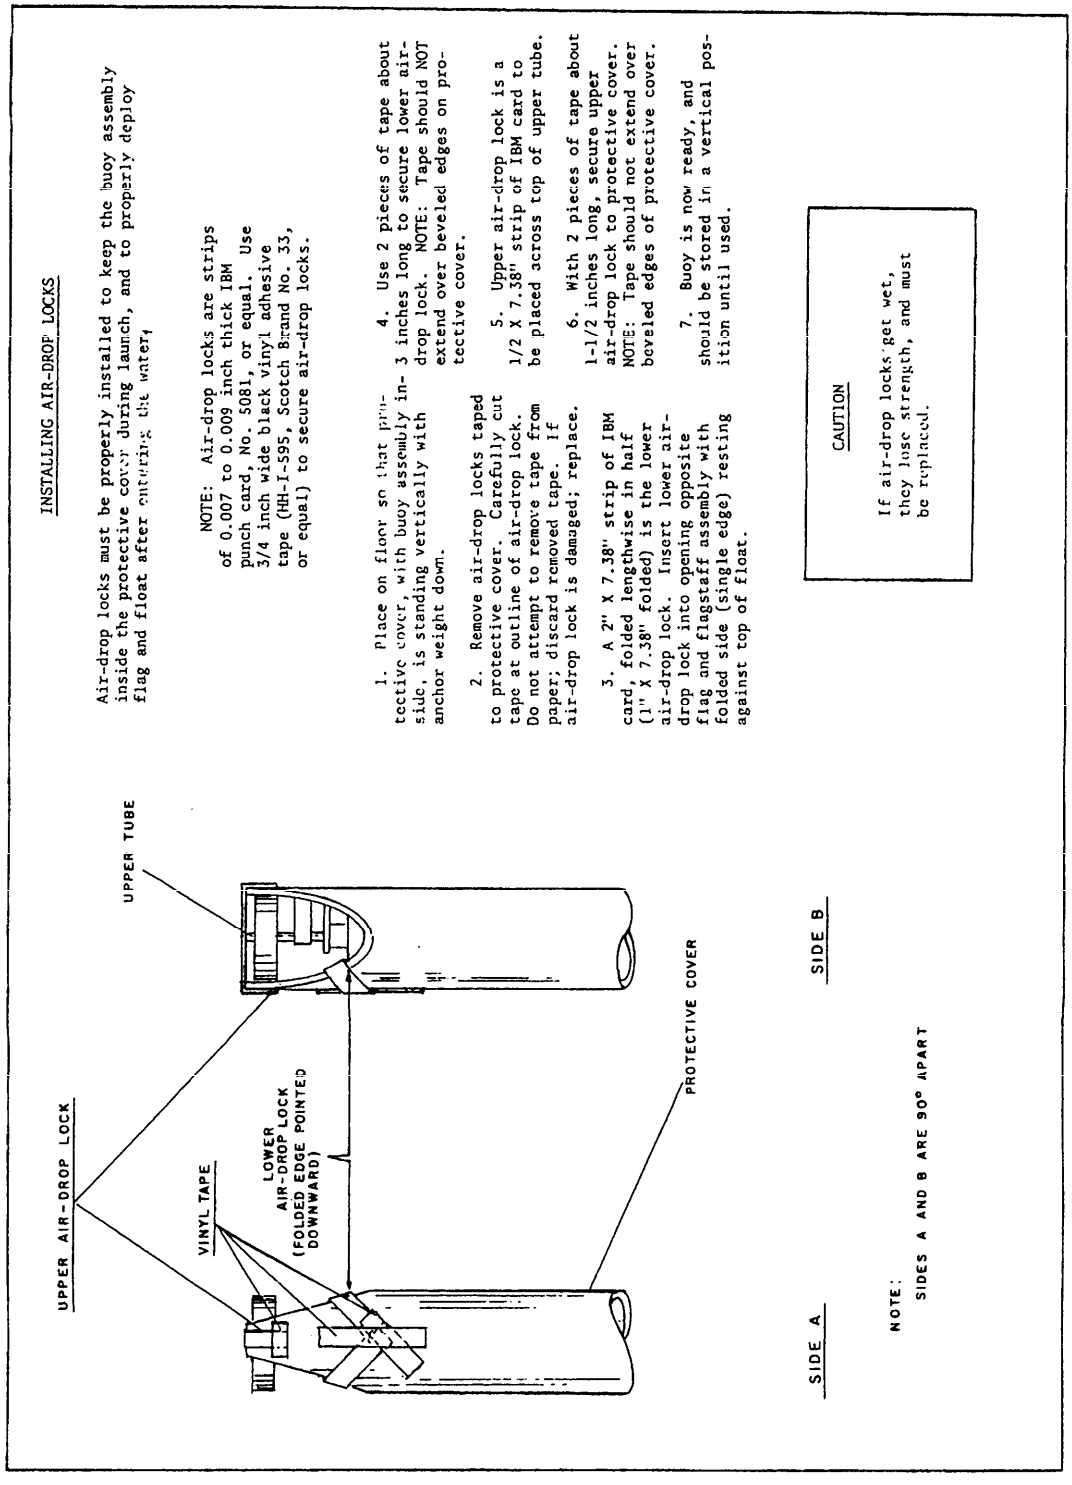


Figure 2. Air-Drop Lock Installation Instructions.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-713-144/338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MIL-L-81742A(AS) LIGHT, BEACON LNU-1/W

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:36Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20361

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY



Naval Air Systems Command (AIR-52021)
Department of the Navy
Washington, D.C. 20361

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the current version before use.