MILITARY SPECIFICATION

DELAY UNIT

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of Delay Unit which is used to time delay the acceleration monitoring circuit on the Lance warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection By Attributes.
MIL-STD-331	- Fuze and Fuze Components Environmental and Performance Test For.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components.
MIL-STD-1460	- Soldering Of Electrical Connections and Printed Wiring Assemblies, Procedure For.

DRAWINGS

U.S. ARMY

9237025 - Delay Unit.

NUOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The delay unit shall comply with all requirements specified on the drawing (dwg) 9237025, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.5 Insulation resistance. The delay unit insulation resistance between each terminal and case shall be 100 mehogms minimum when tested as specified in 4.4.1.

3.6 Dielectric strength. The delay unit shall be capable of withstanding 500 volts root mean square (vrms) $\pm$ 25 vrms at 60 Hertz (Hz) between each terminal and the case without damage for a minimum of 1 minute. Testing shall be as specified in 4.4.2.

3.7 Hermetic seal. The delay unit shall have a maximum leakage rate of 1×10^{-8} atmosphere cubic centimeters per second (atm cc/sec) (air equivalent) when tested as specified in 4.4.3.

3.8 Function.

3.8.1 Input.

3.8.1.1 Power input. The power input to the delay unit shall be as follows: Ebb +30 volts direct current (vdc) $\pm$ 5 vdc; scr +30 vdc +5/-10 vdc. Power will be applied simultaneousy to pins 9, 8 and 1 and shall be a square type input voltage with a rise time of 3 $\pm$ 2 microseconds. Testing shall be as specified in 4.4.4.1.

3.8.1.2 Control unit voltage. The control input voltage to the delay unit shall be from +12 vdc to +35 vdc and shall be square type input voltage with a rise time of 5 $\pm$ 3 microseconds. Testing shall be as specified in 4.4.4.2.

3.8.2 Time delay functioning.

3.8.2.1 Non-function. The delay unit shall not produce an output with a control input pulse width of 0.899 $\pm$.100 seconds. Testing shall be as specified in 4.4.4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

3.8.2.2 Function. The delay unit shall function and produce an output when a control input pulse width of 1.00 seconds + 10% is applied. Testing shall be as specified in 4.4.4.3.2.

8.8.3 Recycle. The delay unit shall reset to zero time with an interruption of the control signal for 25 milliseconds (ms) or more, providing the delay unit has not functioned for a time greater than 0.9 seconds. Testing shall be as specified in 4.4.4.4.

3.8.4 Output.

3.8.4.1 Load current. The load current shall be 1.0 + 0.1 amperes steady state or 7.0 + 0.2 amperes for 10 + 1 milliseconds. Testing shall be as specified in 4.4.4.5.

3.8.4.2 Voltage drop. The voltage drop across the solid state switch shall not exceed 4 volts with a current of 1.0 + 0.1 ampere through the circuit. Testing will be as specified in 4.4.4.5

3.8.5 Reset. After initial functioning the solid state switch shall be capable of reset when its applied power is removed. Testing shall be as specified in 4.4.4.6.

3.9 Current drain. The total current drain shall be 250 millamperes maximum plus the current drawn by the load. Testing shall be as specified in 4.4.5 (30 vdc at 25 degrees centigrade (°C)).

3.10 Leakage current. Leakage current through the SCR in the "off" state shall not exceed 350 microamperes when tested as specified in 4.4.6.

3.11 Environmental testing. The delay unit shall comply with MIL-STD-810, visual inspection and failure criteria, section 3. The delay unit shall also comply with 4.3.3.1 before and after each environmental test. Testing shall be as specified in 4.4.7. Tests shall be conducted in the order specified.

3.11.1 Temperature.

3.11.1.1 High temperature. The delay unit shall withstand exposure to temperature of 165 + 5°F for a minimum of 72 hours without evidence of cracking, splitting, separation of parts or other damage when tested as specified in 4.4.7.1.1. After this test, the device shall comply with the requirements of 3.5, 3.6 and 3.8. During this test, the device shall comply with the requirements of 3.8. There shall be no premature output.

3.11.1.2 Low temperature. The delay unit shall withstand exposure to temperature of -65 + 5°F for a minimum of 72 hours without evidence of cracking, splitting, separation of parts or other damage when tested as specified in 4.4.7.1.2. After this test, the device shall comply with the requirements of 3.5, 3.6 and 3.8. During this test, the device shall comply with the requirements of 3.8. There shall be no premature output.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

3.11.1.3 Temperature shock. The device shall withstand temperature shocks of 160 ± 5°F to -65 ± 5°F to 160 ± 5°F without cracking, splitting, peeling, or other damage when tested as specified in 4.4.7.1.3. After the test the device shall comply with the requirements of 3.5, 3.6 and 3.8. There shall be no premature output.

3.11.1.4 Temperature humidity. The device shall withstand a relative humidity of 95 + 5 percent at temperatures cycling from 80 ± 20°F to 160 ± 5°F to 80 ± 20°F without peeling, chipping, cracking or other damage when tested as specified in 4.4.7.1.4. After the test the device shall comply with the requirements of 3.5, 3.6 and 3.8. There shall be no premature output.

3.11.2 Vibration.

3.11.2.1 Transportation vibration. The delay unit shall withstand vibrations along each of its mutually perpendicular axes in accordance with Table I. After completion of the vibration test the delay unit shall comply with 3.5, 3.6 and 3.8. Testing shall be as specified in 4.4.7.2.1.

Table I

Frequency Hz	Time Minutes	Double Amplitude (da) or g's
10-80	18	0.06" da
80-2000	18	30 g's

3.11.2.2 Flight vibration. The delay unit shall withstand random vibration in accordance with the vibration spectrum in 3.11.2.2.1 and 3.11.2.2.2 respectively without evidence of damage or deterioration such as cracking, chipping, or loosening of parts. Testing shall be as specified in 4.4.7.2.2 after which the device shall comply with the requirements of 3.5, 3.6 and 3.8. During the vibration test specified in 3.11.2.2.2, the device shall comply with the requirements of 3.8. There shall be no premature output.

3.11.2.2.1 Boost phase. Power spectral density (psd) of 0.1 squared acceleration in gravity units per Hertz (g^2/Hz); 11.00 overall root mean square (rms) g's minimum. Tolerance levels shall be + 1.5 decibels (db) between frequencies of 100 Hz and 1000 Hz (flat portion of the spectrum) and +3.0 db between frequencies of 100 Hz and 2000 Hz. Attenuation outside the flat portion of the spectrum shall be 12 db/octave. Total frequency range shall be from 50 Hz to 2000 Hz. Duration of test shall be 10 seconds.

3.11.2.2.2 Sustainer phase. Psd of 0.01 g^2/Hz; 3.46 overall rms g's minimum. Tolerance level shall be +1.5 db between 100 Hz and 1000 Hz (flat portion of spectrum) and +3.0 db between 1000 Hz and 2000 Hz. Attenuation ouside the flat

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

portion of the spectrum shall be 12 db/octave. Total frequency range shall be from 50 Hz to 2000 Hz. Duration of test shall be 3 minutes.

3.11.3 Shock. The delay unit shall withstand 18 shocks at 100 g's ± 10 g's in both directions along each of three mutually perpendicular axes without evidence of damage or deterioration. Each shock pulse shall last for 11 milliseconds (ms) ± 2 ms. Testing shall be as specified in 4.4.7.3. After completion of the shock test the delay unit shall comply with 3.5, 3.6 and 3.8. There shall be no premature output.

3.11.4 Acceleration. The delay unit shall withstand steady state acceleration of 100 ± 10 g's for 1 minute in each of three mutually perpendicular axes without evidence of damage or deterioration. Testing shall be as specified in 4.4.7.4. After completion of the acceleration test the delay unit shall comply with the requirements of 3.5, 3.6 and 3.8. There shall be no premature output.

3.12 Soldering. All soldering shall comply with the requirements specified in MIL-STD-1460.

3.13 Workmanship.

3.13.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.13.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.13.3 Burrs. Parts shall be free from burrs.

3.13.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.13.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

3.13.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 10 complete assemblies (see dwg 9237025) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table II. Tests shall be conducted in order specified in Table II.

Table II

First article inspection and tests

Inspection or Test	
1.	Classification of characteristics (see 4.3.2.1)
2.	Insulation resistance (see 3.5)
3.	Dielectric strength (see 3.6)
4.	Hermetic seal (see 3.7)
5.	Function (see 3.8)
6.	Current drain (see 3.9)
7.	Leakage current (see 3.10)
8.	Temperature (see 3.11.1)
9.	Vibration (see 3.11.2)
10.	Shock (see 3.11.3)
11.	Acceleration (see 3.11.4)

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Inspection lot formation. All items in each inspection lot shall be from one production line, one shift, one batch of products, one manufacturer of raw material or components, one production method or manufacturing operation. The entire lot shall be submitted as a unit for inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table III and Table IV), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Table III
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Table IV
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Delay unit (see dwg 9237025).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Incorrect diameter of mounting studs (3)	Gage
	102. Location of mounting studs (3)	Gage
	103. Wiring diagram missing	Visual
	104. Pins missing or loose	Visual/Manual
	105. Max height of pins (9)	Gage
	106. Identification missing, improper or illegible	Visual
	107. Workmanship (see 3.13)	Visual
	108. Objective evidence relating to material missing or improper (see 3.1)	Visual
Minor:	None defined.	

4.3.2.1.2 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Preservation packaging and packing not in accordance with MIL-STD-1169	Visual
	102. Marking not in accordance with MIL-STD-1169	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

Minor:

201. Evidence of poor workmanship (see 3.13).....Visual

4.3.3 Testing. All tests shall be performed. Tests need not be performed in the order specified below:

Test	Test Classification
a. Insulation resistance	Major
b. Dielectric strength	Major
c. Function	Major

4.3.4 Acceptance inspection equipment.

4.3.4.1 Critical and major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions and calibration instructions designed or specified by the contractor. The contractor shall obtain approval of such designs, operating instructions and calibration instructions prior to use on the contract from Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T as specified in DI-R-1714 (see 6.1.2).

4.3.4.2 Minor characteristics and tests. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Insulation resistance. An insulation resistance tester, capable of supplying 500 vdc $\pm$ 50 vdc and with which the required resistance in megohms can be verified, shall be used to measure the insulation resistance. The current shall be limited to 5 milliamperes. The test voltage shall be applied for 5 seconds minimum, and the test time shall not exceed 60 seconds.

4.4.2 Dielectric strength. The delay unit shall be tested with an approved dielectric tester.

4.4.3 Hermetic seal. The delay unit shall be tested with an approved mass spectrometer.

4.4.4 Function.

4.4.4.1 Power input. An approved dc power supply shall be used to apply power simultaneously to pins 9, 8 and 1 as shown on Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

4.4.4.2 Control input. An approved dc power supply shall be used to apply dc power to pins 4 and 1 (see Figure 1).

4.4.4.3 Functioning.

4.4.4.3.1 Nonfunction. The delay unit shall be electrically connected as shown in Figure 1 and with control input pulse as specified in 3.8.2.1. The unit shall not produce an output. Control input voltage as in 3.8.1.2.

4.4.4.3.2 Function. The delay unit shall be functioned in accordance with 3.8.2.2 when electrically connected as shown in Figure 1. Power shall be applied as specified in 3.8.1.1. Control input voltage as in 3.8.1.2.

4.4.4.4 Recycle. The voltage to pin 4 shall be interrupted for 25 milliseconds minimum with the delay unit connected as shown in Figure 1. The voltage shall then be applied and the unit shall reset as specified in 3.8.3.

4.4.4.5 Output. With the delay unit electrically connected as specified in Figure 1, the outputs shall be as specified in 3.8.4.1 and 3.8.4.2.

4.4.4.6 Reset. With the delay unit connected electrically as shown in Figure 1, remove the control input voltage. The power to the SCR shall then be removed and re-applied and the current through the load shall not exceed 350 microamperes.

4.4.5 Current drain. The delay unit shall be electrically connected as specified in Figure 1. The total current drain shall be as required in 3.9.

4.4.6 Leakage current. With the delay unit electrically connected as shown in Figure 1 the outputs shall be as specified in 3.10.

4.4.7 Environmental testing (see 3.11).

4.4.7.1 Temperature.

4.4.7.1.1 High temperature. The device shall be placed in a suitable chamber. The temperature within the test chamber shall be raised and stabilized (see 6.4) at 165 + 5°F for 72 hours, minimum. While at 165 + 5°F, the device shall comply with the requirements specified in 3.8. The device shall then be returned to ambient room temperature by removal from the test chamber. No forced cooling shall be used in returning the device to ambient room temperature.

4.4.7.1.2 Low temperature. The device shall be tested as specified in 4.4.7.1.1 except that the test chamber temperature shall be lowered to -65 + 5°F. While at -65 + 5°F, the device shall comply with the requirements specified in 3.8. No forced warming shall be used in returning the device to ambient room temperature.

4.4.7.1.3 Temperature shock. The device shall be tested as specified in test 503 MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

4.4.7.1.4 Temperature humidity. The device shall be tested as specified in test 105 of MIL-STD-331 except that only one 14-day humidity and temperatures cycle shall be performed.

4.4.7.2 Vibration.

4.4.7.2.1 Transportation. The device shall be rigidly mounted to a fixture capable of being supported readily in each of the specified directions, with the fixture mounted on a suitable vibration producing apparatus. The device shall be vibrated at the frequencies, amplitudes, temperatures, and for the time as specified in 3.11.2.1 in each of the specified directions.

4.4.7.2.2 Flight. The device shall be rigidly mounted to a fixture capable of being supported readily in each of the specified directions. The fixture shall be mounted on an approved vibration producing apparatus. The device shall be vibrated to the vibration spectrum specified in 3.11.2.2.

4.4.7.3 Shock. The device shall be rigidly mounted to a fixture capable of being supported in each of the specified directions, with the fixture mounted on a suitable shock producing device. The device shall be shocked at the g levels, amplitudes, and specified directions as specified in 3.11.3.

4.4.7.4 Acceleration. The device shall be rigidly mounted on a fixture capable of being readily oriented in each of its three mutually perpendicular axes. With the fixture mounted on an approved acceleration producing machine, the device shall be subjected to the acceleration spectrum specified in 3.11.4 along each axis for one minute in each plane.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The delay unit shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.1.2 Level C. The delay unit shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.2 Packing.

5.2.1 Levels A and C. The delay unit shall be packed in accordance with the applicable instructions contained in MIL-STD-1169(MU).

5.3 Marking. Marking shall be in accordance with MIL-STD-1169(MU).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.

b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T.

6.4 Temperature stabilization. The temperature is considered stabilized when the greatest peaks (both highest and lowest) continually observed over 5 minutes min. do not exceed the nominal temperature plus tolerance specified.


6.5 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-1206 dated 24 February 1971, with Amendment 1, dated 27 April 1971.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. NUOR-A058

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

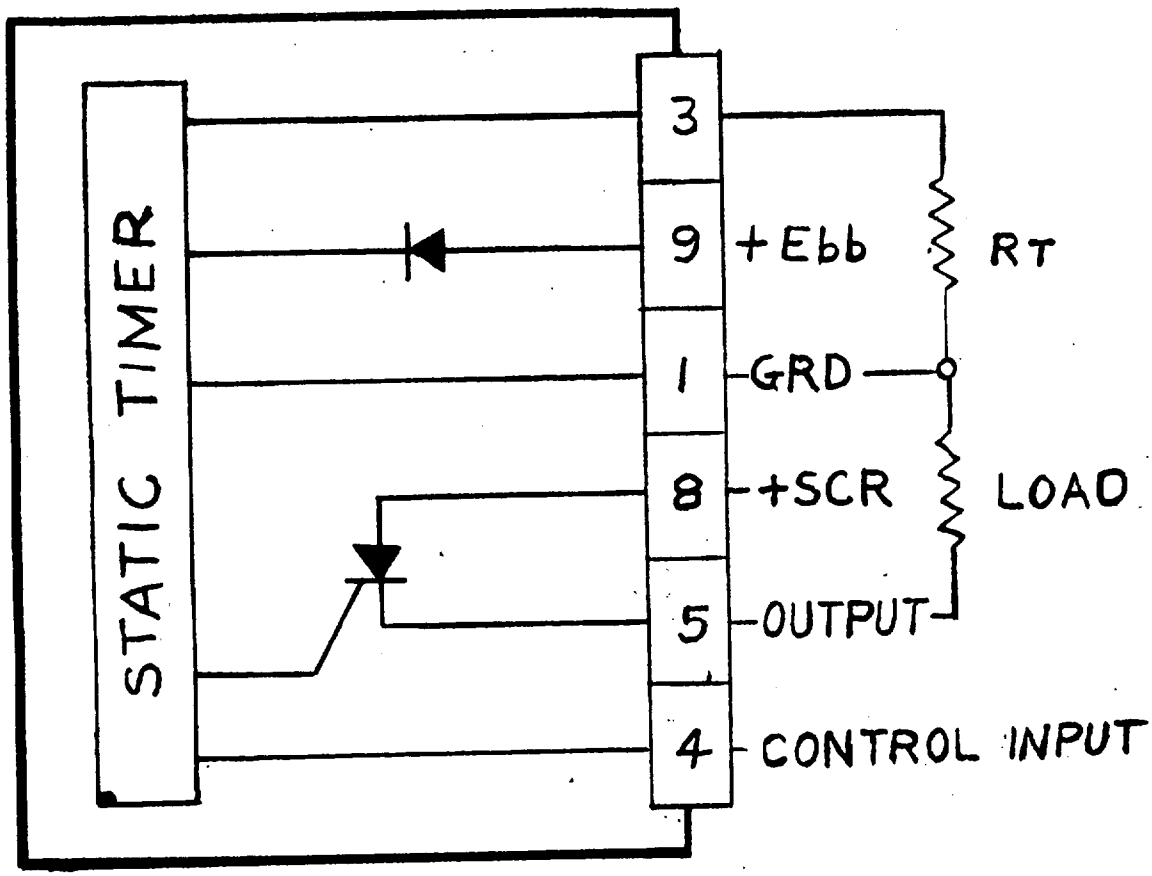

R_T = 47 K ohms ± 5%

Figure 1. Delay Unit

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE.

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-N-Q
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:30Z
Check the source to verify that this is the current version before use.