MILITARY SPECIFICATION SHEET

HEAT EXCHANGER, NBC SYSTEM
CONDENSER P/N 12336772

This specification is approved for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the condenser 12336772 described herein shall consist of this document and the latest issue of specification MIL-H-62411(AT).

3. REQUIREMENTS

3.4 Design and construction. The condensor shall conform to the drawing hierarchy of which Drawing 12336772 is the top drawing.

3.4.1 Weight. The weight of the heat exchanger shall not exceed 4.94 pounds (lb) (see 4.6.3).

3.5 Performance.

3.5.1 Leakage.

3.5.1.1 External leakage. The pneumatic pressure applied to the hot air passages of the heat exchanger unit shall be 39 pounds per square inch gage (psig) (see 4.6.4.1).

3.5.1.2 Internal leakage. The pressure applied to the hot air passages shall be 39 psig. The pressure loss shall not exceed 20 psig in the first 20 seconds (see 4.6.4.2).

3.5.2 Proof pressure. The proof pressure shall be 79 psig (see 4.6.5).

3.5.3 Burst pressure. The burst pressure shall be 120 psig at 126 degrees Fahrenheit (°F) (see 4.6.6).

FSC 4130

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

vehicle shall not constitute a waiver by
Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the current version before use.
of the first production or

3.5.4 Heat transfer. Heat transfer performance shall be not less than that shown in figure 1 (see 4.6.7).

3.5.5 Air pressure loss.

3.5.5.1 Hot air. The hot air pressure loss shall not exceed that shown in figure 2 (see 4.6.8).

3.5.5.2 Cold air. The cold air pressure loss shall not exceed that shown in figure 2A (see 4.6.8).

4.6.4 Leakage.

4.6.4.1 External leakage. A pneumatic pressure of 39 to 40 psig shall be applied to the hot air passages.

4.6.4.2 Internal leakage. A penumatic pressure of 39 to 40 psig shall be applied to the hot air passages.

4.6.5 Proof pressure. The test pressure shall be 79 to 83 psig.

4.6.6 Burst pressure. The oven temperature shall be 360°F. The test pressure shall be 180 to 184 psig.

4.6.7 Heat transfer. To determine conformance to 3.5.4, the condenser shall operate at each combination of the steady state conditions specified in table VI. The measured hot air outlet temperature shall be equal to or greater than that specified in table VI.

TABLE VI. Heat transfer.

Initial air temperature		Air flow		Hot air Outlet temperature °F ± 10°F
Hot	Cold	Hot	Cold	
136		10	15	66
136			30	76
136			52.2	86
136		14.7	15	50
136			30	60
136			52.2	70
136		20	15	40
136			30	48
136			52.2	57

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project No. 4130-A289)

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the current version before use.

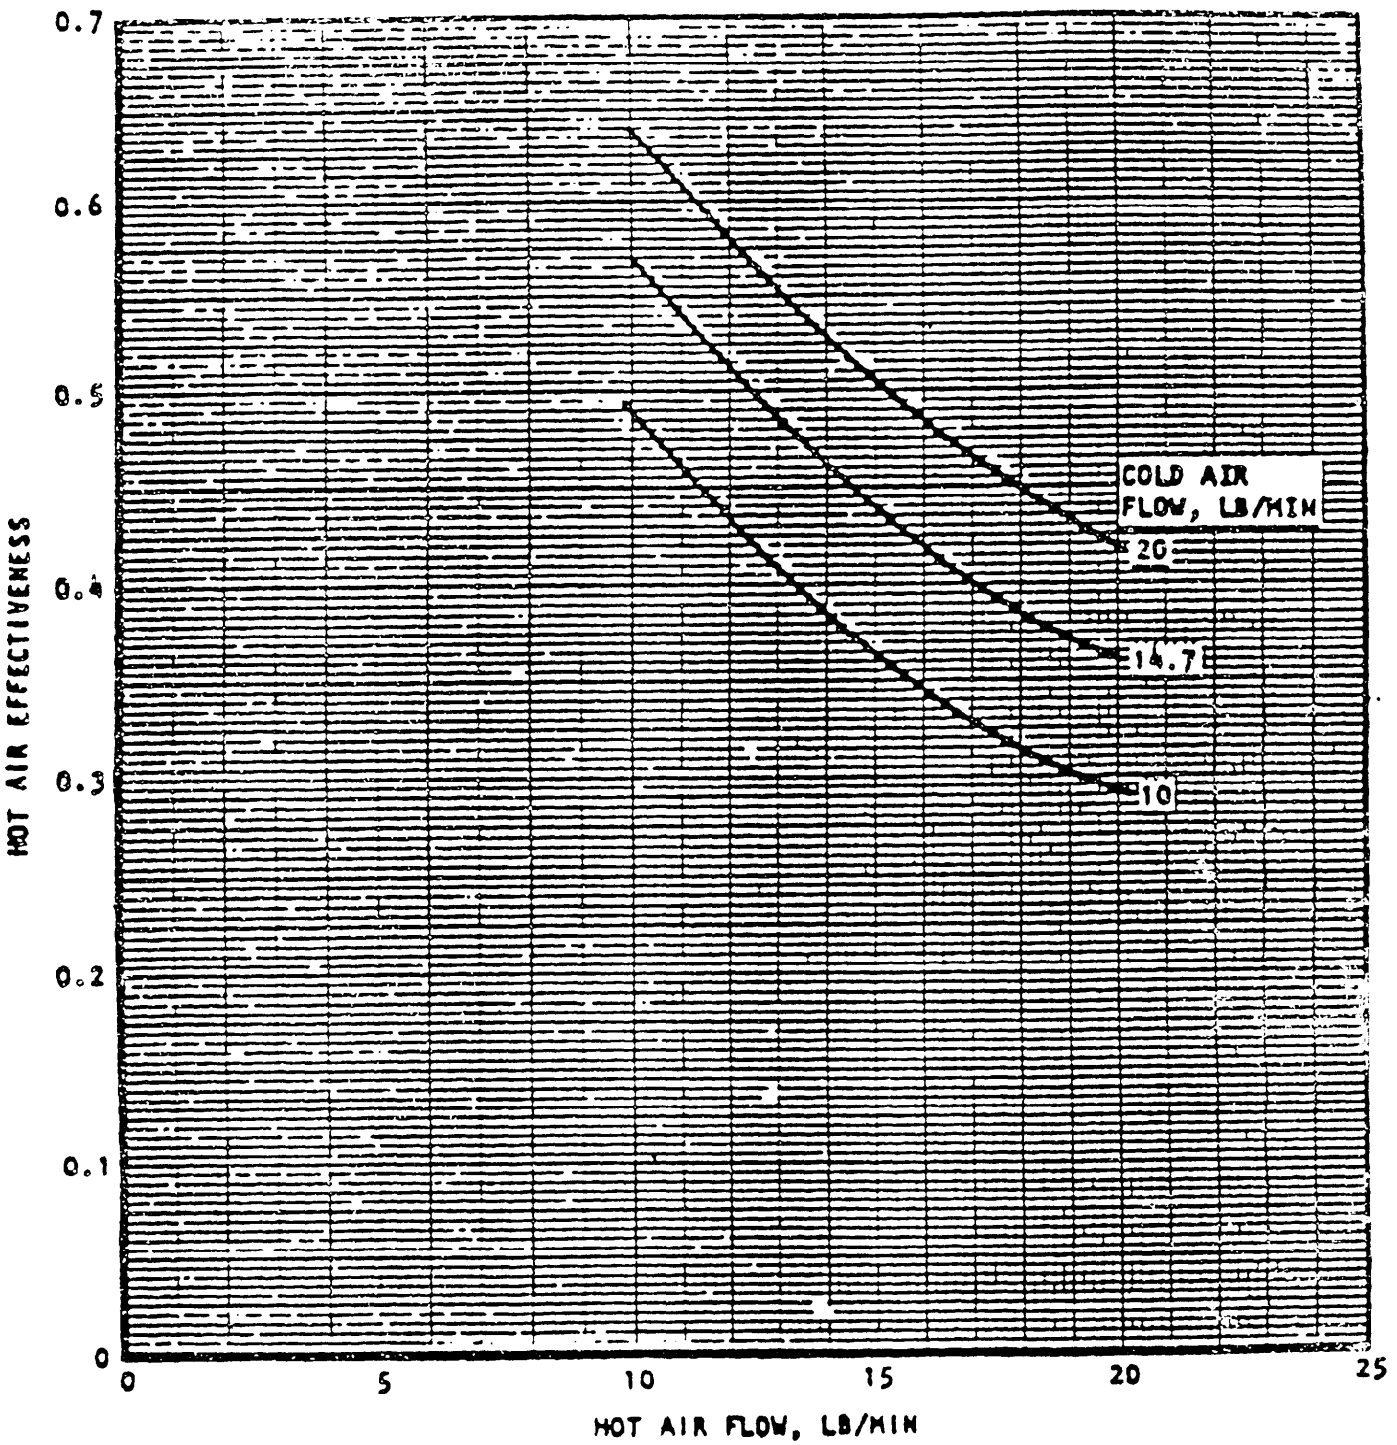


FIGURE 1. Required condenser performance.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T01:39Z
Check the source to verify that this is the current version before use.

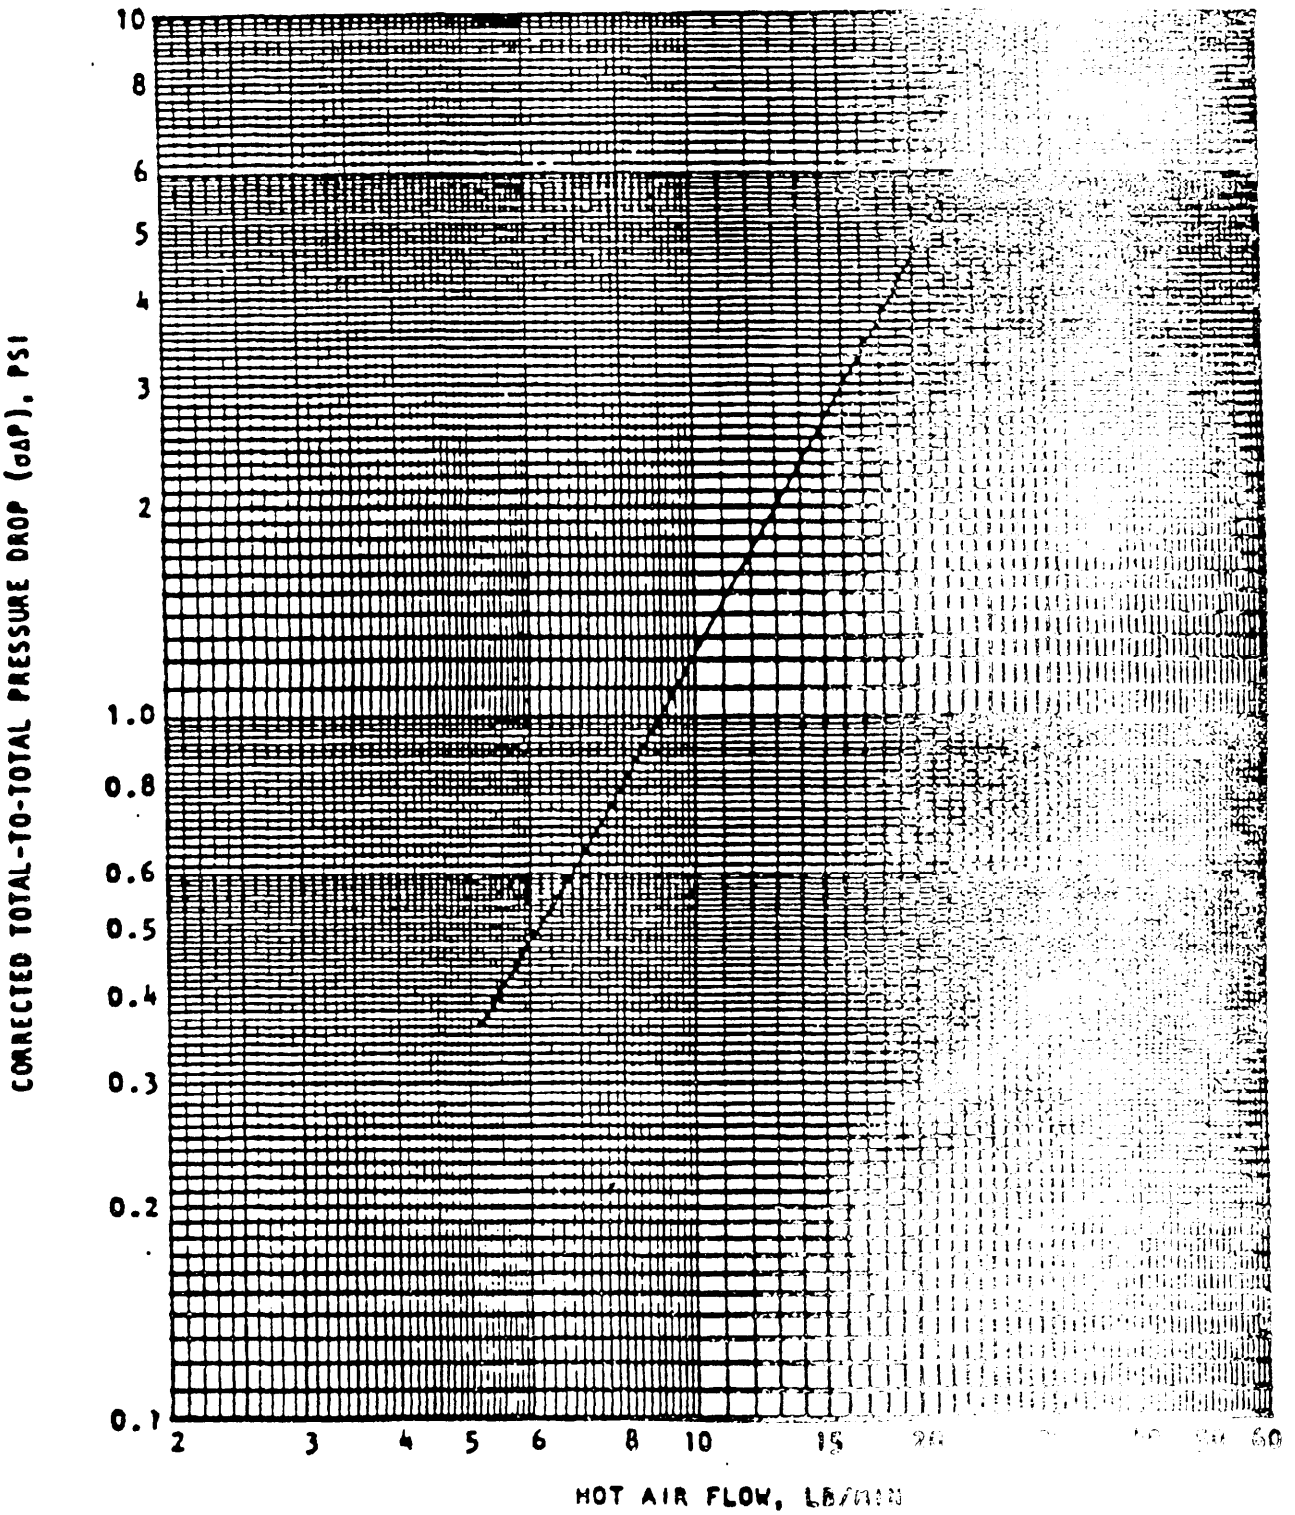


FIGURE 2. Allowable condenser hot air pr[illegible]

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the current version before use.

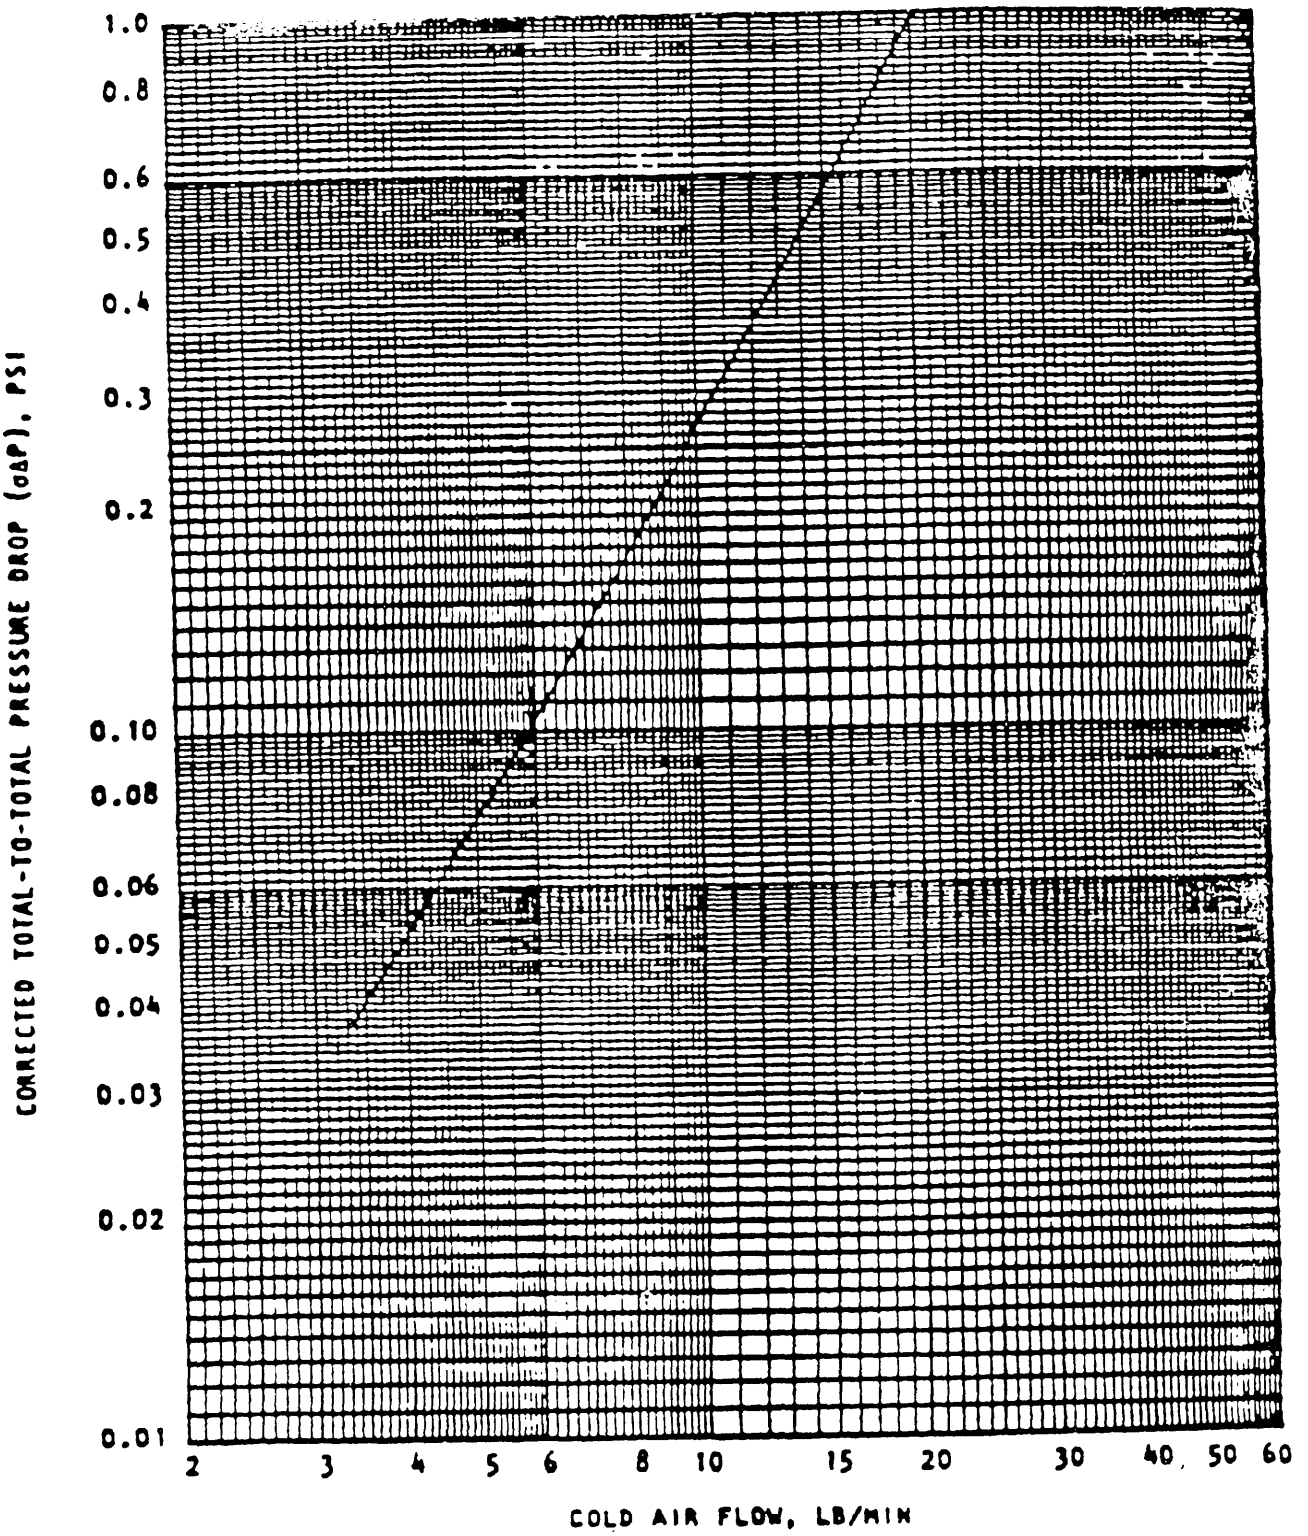


FIGURE 2A. Allowable condenser cold air pressure loss.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the current version before use.

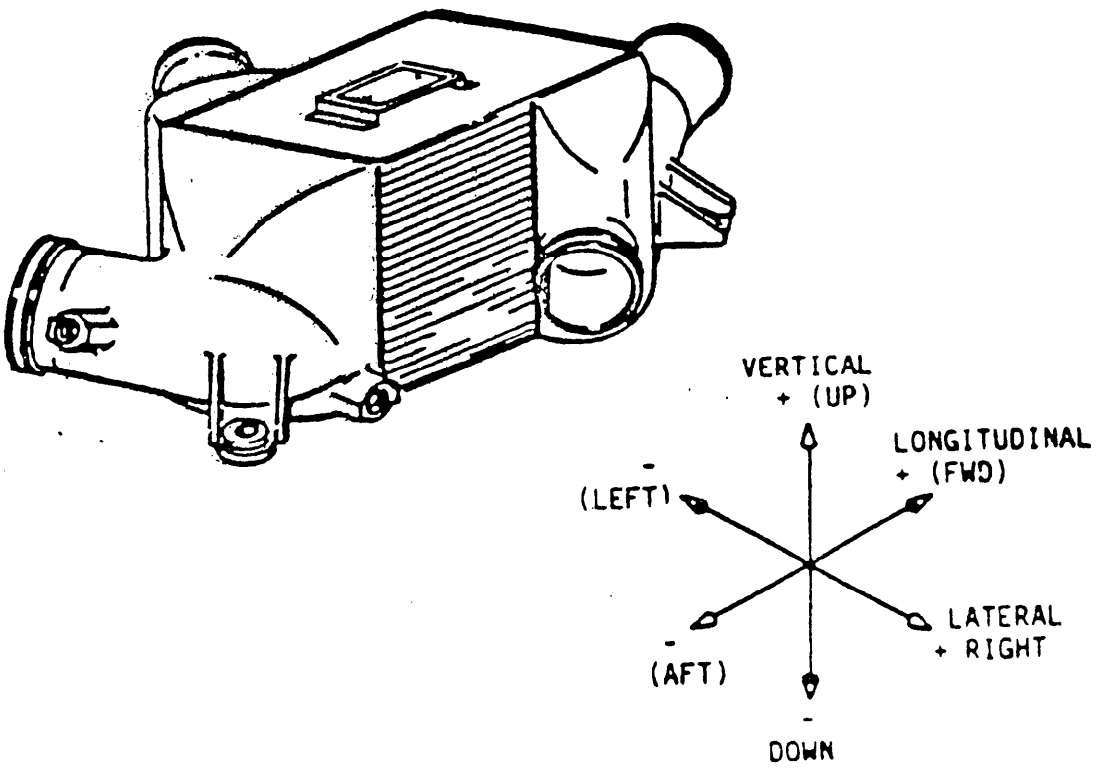


FIGURE 3. Axes orientation.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the currenversion before use.

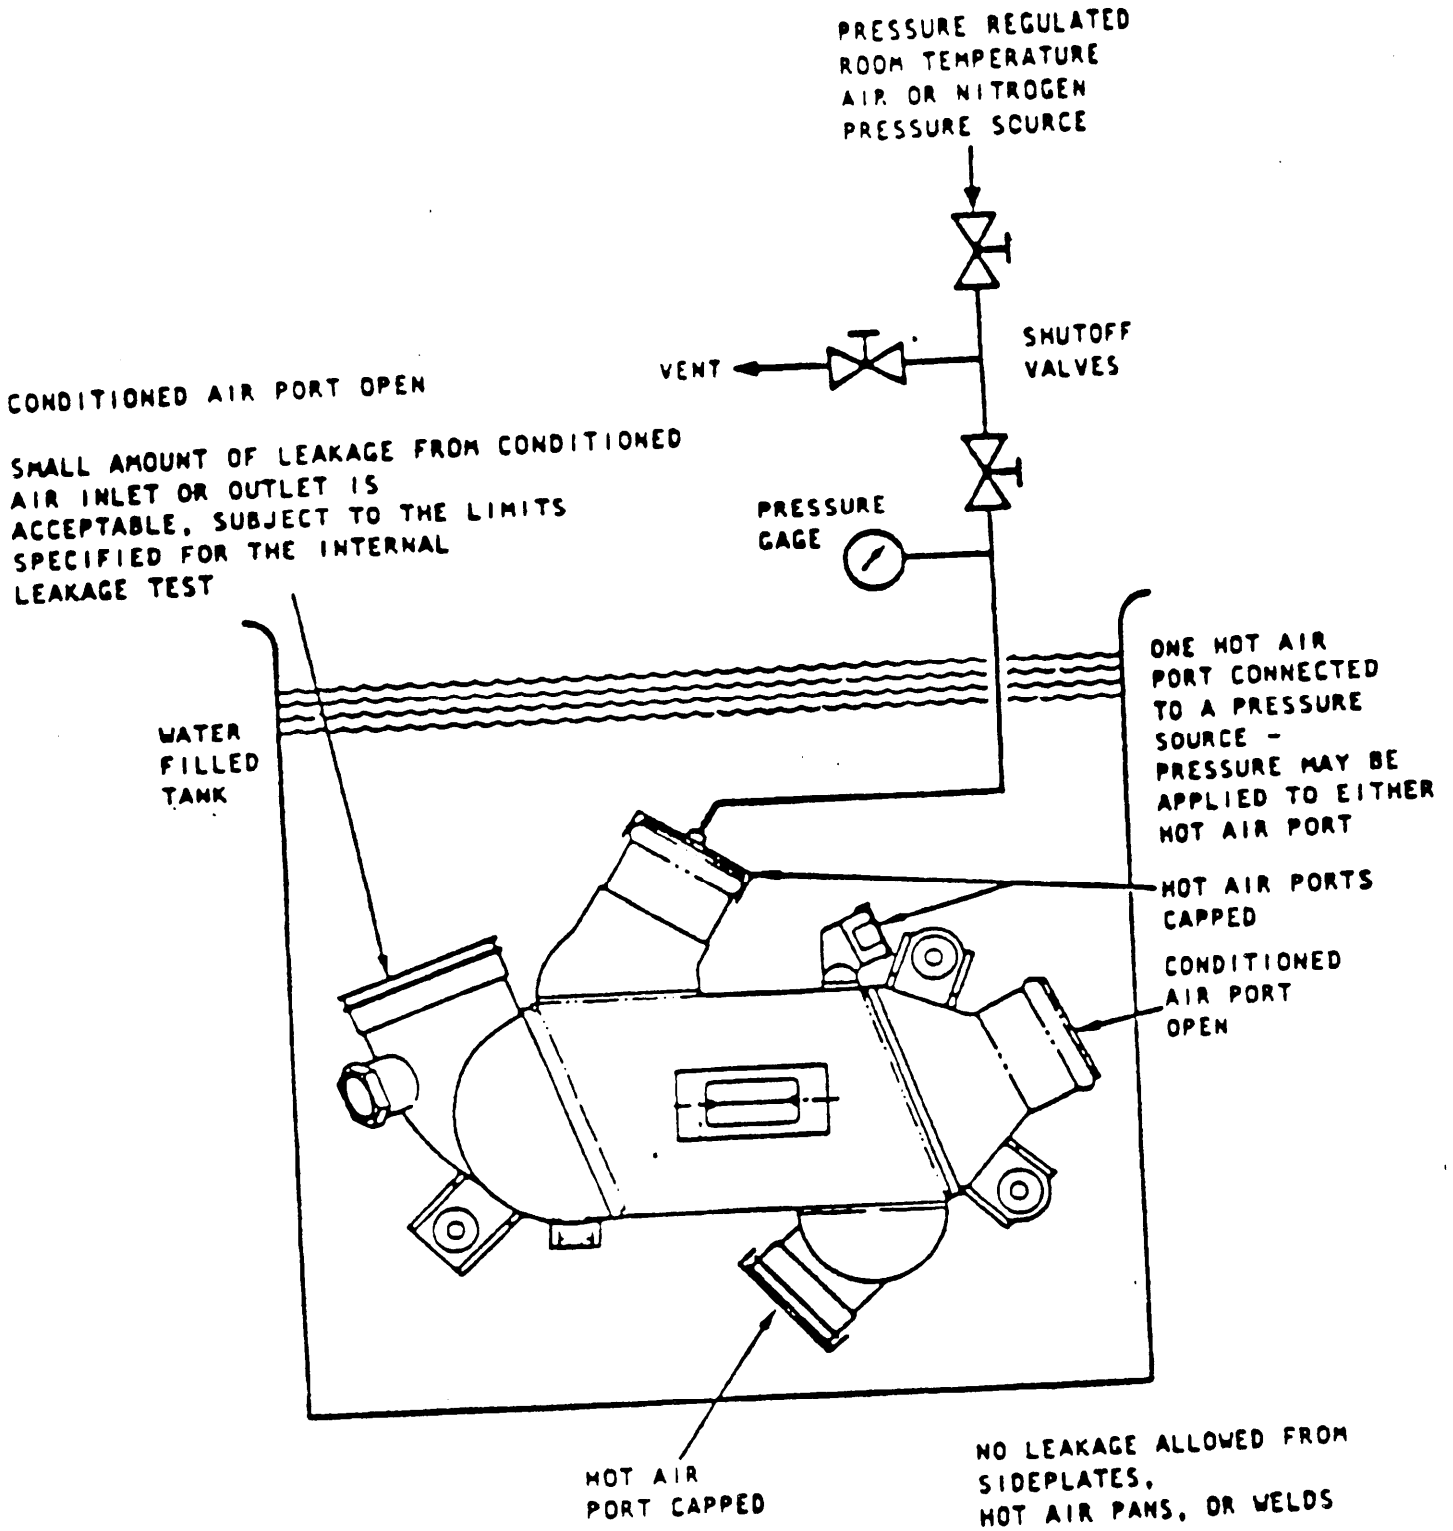


FIGURE 4. Leakage test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the current version before use.

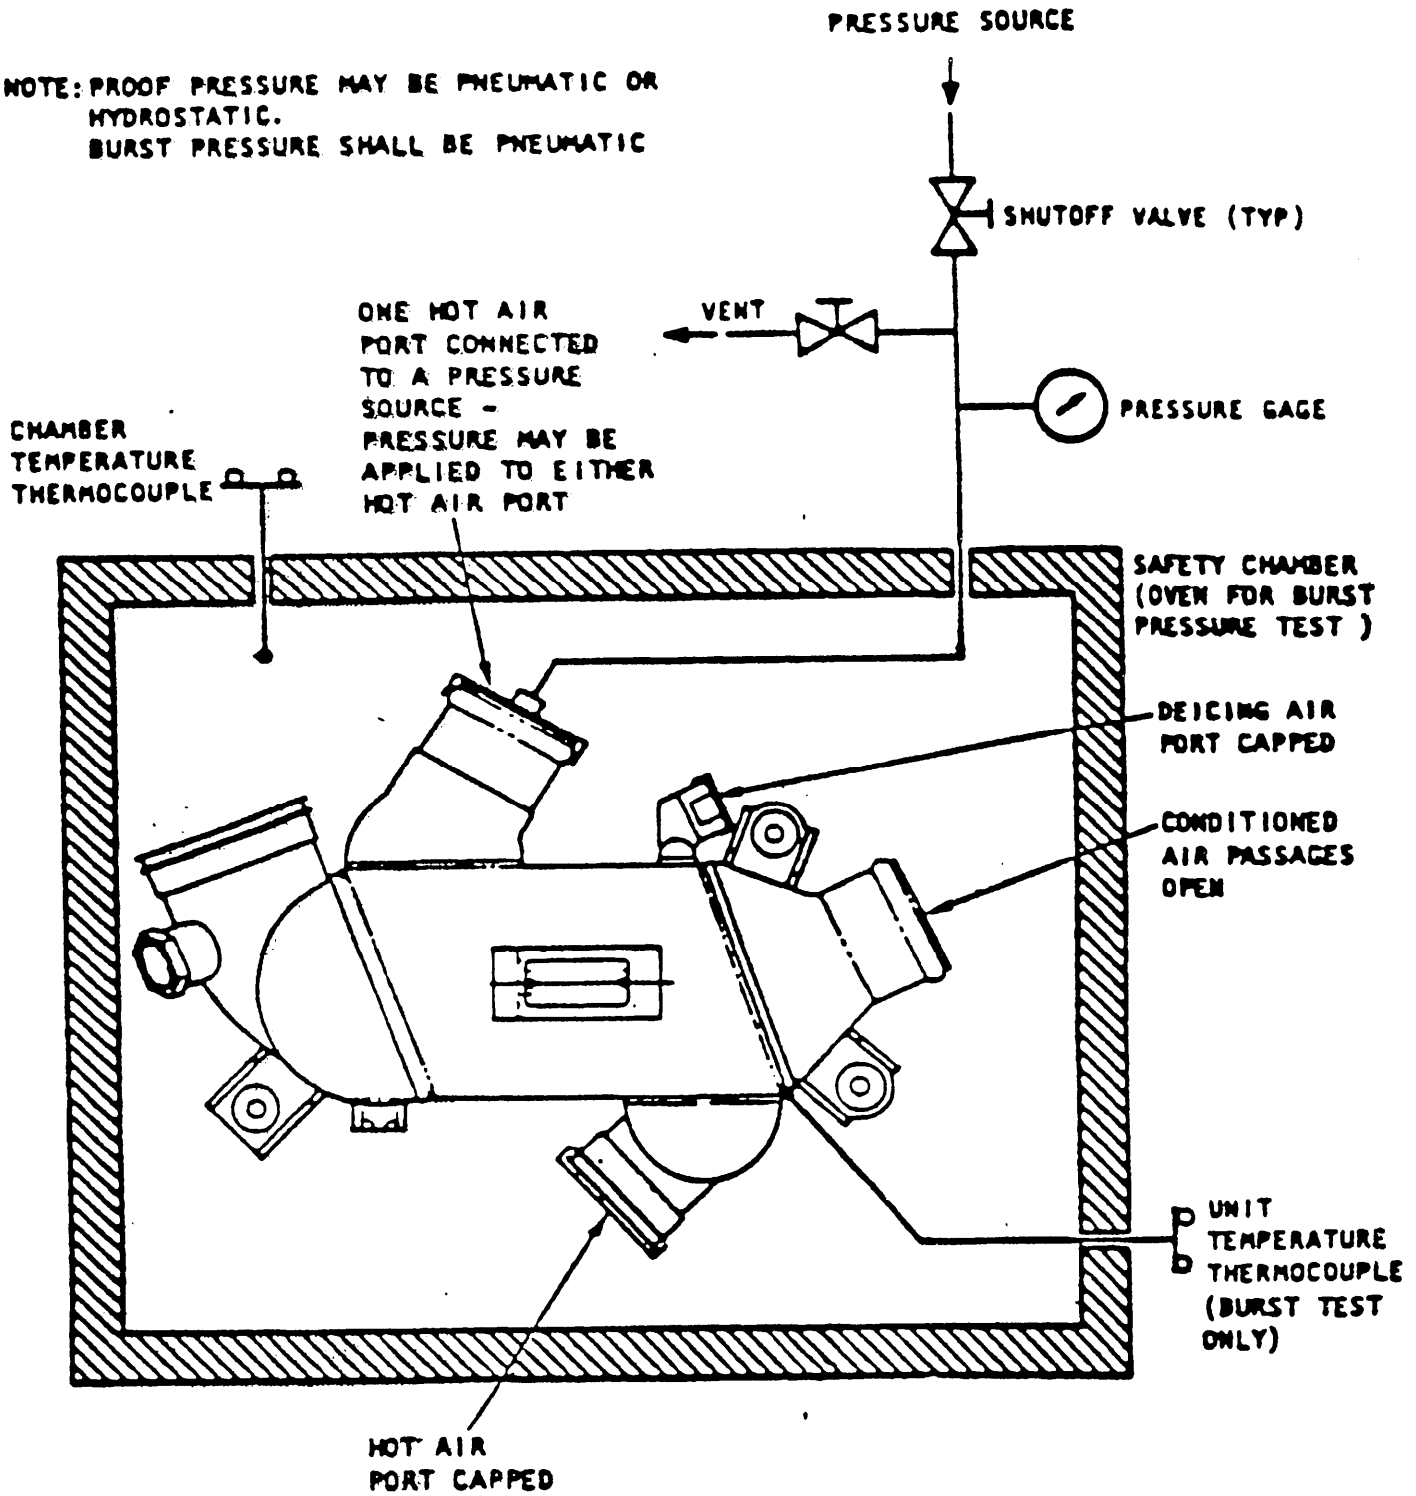


FIGURE 5. Proof and burst pressure test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:39Z
Check the source to verify that this is the current version before use.