29 September 1970
SUPERSEDING
MIL-A-55671(EL)
1 May 1969

MILITARY SPECIFICATION

ANTENNA AS-1425( )/GRC

1. SCOPE

1.1 This specification covers one type of antenna designated as Antenna AS-1425( )/GRC consisting of:

Reflector assembly
Button hook feedhorn assembly (including de-icing heater)
Backmount assembly (including tilt mechanism)
Mast cap adapter
Outrigger guy assemblies
Flexible waveguide sections CG-3307( )/GRC
Flexible waveguide sections CG-3251( )/GRC
Drain adapter waveguide section CG-3250( )/GRC
Mast-to-waveguide clamps

Antenna AS-1425( )/GRC is a lightweight 4-1/2 foot diameter parabolic antenna assembly for operation in the 4.4 to 5.0 Ghz band and is used with Radio Sets AN/GRC-66(V), 147, and 144 (see 6.1 and 6.5).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock Corner
PPP-B-636	Boxes, fiber
PPP-F-320	Fiberboard, sheet, stock and cut shapes
PPP-P-291	Paperboard, wrapping, cushioning
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Contd)

MILITARY

MIL-P-116	Preservation, Method of
MIL-P-11268	Parts, Materials, and Processes Used in Electronic Equipment
MIL-M-13231	Marking of Electronic Items
MIL-C-13924	Coating, Oxide, Black for Ferrous Metals
MIL-F-14072	Finishes for Ground Signal Equipment

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-280	Definition of Terms for Equipment Divisions
MIL-STD-454	Standard General Requirements for Electronics Equipment
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

DRAWINGS

ELECTRONICS COMMAND

SC-DL-561639 Antenna Assembly AS-1425( )/GRC

(Copies of specifications standards and drawings required by contractors in connection with the specific procurement functions should be obtained from the procuring agency or as directed by the Contracting Officer).

3. REQUIREMENTS

3.1 First article samples. - The contractor shall furnish three first article sample for approval, if required by the invitation for bids and contract (see 4.3).

3.2 Construction. - The equipment shall be constructed in accordance with the requirements of this specification and of USAECOM Drawing SC-DL-561639 (including the requirements for parts, materials, and processes thereon).

3.3 Overall characteristics. -

3.3.1 Antenna. - The antenna shall have the following features:

3.3.1.1 Simulated wind load and velocity. - The antenna shall be capable of surviving in simulated winds of 100 mph (42.0 psf) peak, no ice, in any direction, with maximum permanent deformation of the dish not to exceed ±0.141 inches. The antenna shall be subjected to and meet Voltage Standing Wave Ratio and Tilt requirements after being subjected to the above condition (see 4.6).

3.3.1.2 Simulated ice load (non-operating). - Permanent deformation exceeding .080 inches shall not occur to antenna components covered with 1 inch of radial ice (simulated) while stored in open transport frames and subjected to 75 mph (23.6 psf) peak winds in any direction.

3.3.1.3 Reflector. - The reflector shall have a surface tolerance of ± 0.141 inches from the required curve (see 4.6).

3.3.1.4 Minor lobes. - The ratio of the major lobe to any minor lobe shall be at least 20 decibels (db) at any frequency between 4.4 to 5.0 Ghz (see 4.8).

3.3.1.5 Radiation pattern and gain. - The gain of the antenna relative to an isotropic radiator shall be at least 33 db over the range 4.4 to 5.0 Ghz. The beamwidth shall not be less than 3 degrees or more than 4 degrees between half power points (see 4.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

3.3.1.6 Tilt. - It shall be possible to vary the tilt of the antenna through an angle of plus or minus 10 degrees from the ground when the antenna is mounted atop a 50 foot mast AB-577( )/G or AB-621( )/G. The maximum force required to adjust elevation in moderate winds (20 mph) shall not exceed 10 pounds. A restraining force on the rising rope shall not be necessary (see 4.10).

3.3.1.7 Voltage standing wave ratio (VSWR). - The VSWR shall not exceed 1.15:1 over the frequency range 4.4 to 5.0 GHz, referred to the feedhorn input when the feedhorn is mounted in the parabolic reflector under free space conditions and fed with a flexible waveguide system at least 60 feet long (see 4.11).

3.3.1.8 Feedhorn deicer. - The heater circuit shall operate on 115 V ac, 60 cycles, and shall draw 300 milliamperes, plus or minus 10 percent (see 4.12).

3.3.1.9 Vibration. - The antenna shall be subjected to the Vibration Test specified in 4.13. There shall be no evidence of cracked welds, deformation, or other defects which will hinder the operation of the antenna and it shall meet the tilt and VSWR requirements (see 3.3.1.6 and 3.3.1.7).

3.3.1.10 Shock (drop). - The antenna shall be subjected to the shock (drop) test specified in 4.14. There shall be no evidence of cracked welds or other defects which will hinder the operation of the antenna and it shall meet tilt and VSWR requirements (see 3.3.1.6 and 3.3.1.7).

3.3.1.11 Temperature. - The antenna shall be subjected to ambient temperature from -55°F. to +160°F.

a. Exposure at the high temperature extreme shall be for a minimum of 24 hours.

b. Exposure at the low temperature extreme shall be for a minimum of 24 hours (see 4.15 and 4.16). At the conclusion of these tests, the antenna shall meet tilt and VSWR requirements (see 3.3.1.6 and 3.3.1.7).

3.3.1.12 Humidity. - The antenna shall be subjected to Humidity Test, method 507, Procedure II, MIL-STD-810. At the conclusion of this test, the antenna shall meet tilt and VSWR requirements (see 3.3.1.6, 3.3.1.7 and 4.17).

3.3.1.13 Dust. - The antenna shall be subjected to Dust Test Method 510, Procedure I, MIL-STD-810. At the conclusion of this test, the antenna shall meet tilt and VSWR requirements (see 3.3.1.6, 3.3.1.7 and 4.18).

3.3.1.14 Salt Fog. - The antenna, waveguide sections and all hardware shall be subjected to Salt Fog Test Method 509, Procedure I, MIL-STD-810 for 48 hours. There shall be no evidence of flaking paint, pitting or rusting of metal parts and all parts shall be demountable without excessive force or special tools. At the conclusion of this test, the antenna shall meet tilt and VSWR requirements (see 3.3.1.6, 3.3.1.7 and 4.19).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

3.4 Parts, materials, and processes; general. - Materials, parts, and processes shall be in accordance with MIL-P-11268.

3.5 Finish, protective. - Equipment shall be given protective finish in accordance with MIL-F-14072. This includes finish on hardware such as buckles, screws, bolts, etc. and necessary touch-up after mounting. The final paint film on Type I surfaces shall be green color (olive drab) semigloss enamel matching a color chip provided by the procuring agency. All exterior stainless steel shall be black oxide coated conforming to MIL-C-13924 (see 6.3).

3.6 Marking. - Marking shall conform to MIL-M-13231.

3.6.1 Serial numbers. - All nomenclatured units shall have serial numbers.

3.7 Interchangeability. - Like units, assemblies, subassemblies, and replaceable parts shall conform to Requirement 7 of MIL-STD-454.

3.8 Workmanship. - The equipment shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. - Inspection shall be classified as follows:

a. First Article Inspection (Preproduction) does not include preparation for delivery.

b. Inspection covered by subsidiary documents.

c. Quality conformance inspection:

(1) Quality conformance inspection of equipment before preparation for delivery (see 4.4).

(2) Quality conformance inspection of preparation for delivery (see 4.22).

4.3 First article inspection. - This inspection shall be performed by the supplier unless otherwise specified in the contract. It shall consist of Group A, B and C inspections specified in Tables I, II and III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection of equipment before preparation for delivery. - The contractor shall perform the inspection specified in 4.4.1 through 4.4.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government, at its discretion, may perform all or any part of the specified inspection to verify the contractor's compliance with specified requirements (see 6.8). Test equipment for Government verification inspection shall be made available by the contractor.

4.4.1 Group A inspection. - Each unit of each lot of equipment shall be inspected for conformance to all the inspection and test requirements of Table I. Each lot will be subject to verification, utilizing the procedures of MIL-STD-105, using the general inspection levels and the AQLs indicated in Table I. Group A inspection shall be performed in any order which is satisfactory to the Government, except that operational inspection shall be last.

Group A Inspection - Table I

Inspection	Req Para	Test Para	AQL Major	AQL Minor	No of 1st Art Samples
Mechanical-Visual					
Reflector Assembly	3.8	4.21	1%	4%	3
Button hook feedhorn assembly (including de-icing heater)	3.8	4.21	1%	4%	3
Backmount (including tilt mechanism)	3.8	4.21	1%	4%	3
Antenna Mast Cap adaptor	3.8	4.21	1%	4%	3
Outrigger Guy Cable Assemblies	3.8	4.21	1%	4%	3 sets
Flexible Waveguide-15 ft long CG-3307( )/GRC	3.8	4.21	1%	4%	3
Flexible Waveguide-4 1/2 ft long CG-3251( )/GRC	3.8	4.21	1%	4%	3
Mast-to-Waveguide Clamps	3.8	4.21	1%	4%	3 sets
Drain Adaptor Waveguide Section, CG-3250( )/GRC	3.8	4.21	1%	4%	3
Waveguide Messenger Cable	3.8	4.21	1%	4%	3
Messenger Cable Hangers	3.8	4.21	1%	4%	3 sets
Antenna AS-1425( )/GRC	3.8	4.21	1%	4%	3
Electrical					
Minor lobes	3.3.1.4	4.8	1%	*	3
Radiation pattern and gain	3.3.1.5	4.9	1%	*	3
VSWR	3.3.1.7	4.11	1%	*	3

* All electrical defects are considered major.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. - This inspection, including sampling, shall conform to Table II and to the special procedures for small-sample inspection of MIL-STD-105. Group B inspection shall be performed on all inspection lots that have passed Group A inspection.

Group B Inspection Level S-4 - Table II

Inspection	Req Para	Test Para	AQL	No of First Article Samples
Interchangeability	3.7	4.20	4%	3

4.4.3 Group C inspection. - This inspection shall consist of the tests listed in Table III, and shall be performed on sample units that have been subjected to and passed Groups A and B inspections.

Group C Inspection - Table III

Inspection	Req Para	Test Para	Unit No. of First Article Samples
Simulated wind load and velocity	3.3.1.1	4.6	1
Simulated ice load (non-operating)	3.3.1.2	4.7	1
Feedhorn de-icer	3.3.1.8	4.12	1
Vibration	3.3.1.9	4.13	1
	3.3.1.6	4.10	
	3.3.1.7	4.11	
Shock (drop)	3.3.1.10	4.14	1
	3.3.1.6	4.10	
	3.3.1.7	4.11	
High temperature	3.3.1.11	4.15	2
	3.3.1.6	4.10	
	3.3.1.7	4.11	
Low temperature	3.3.1.11	4.16	2
	3.3.1.6	4.10	
	3.3.1.7	4.11	
Humidity test	3.3.1.12	4.17	3
	3.3.1.6	4.10	
	3.3.1.7	4.11	
Dust test	3.3.1.13	4.18	2
	3.3.1.6	4.10	
	3.3.1.7	4.11	
Salt Fog	3.3.1.14	4.19	3
	3.3.1.6	4.10	
	3.3.1.7	4.11	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

4.4.3.1 Sampling for inspection of equipment. - One assembly for each Group C inspection shall be inspected during first article testing and once every 200 production units.

4.4.4 Non-compliance. - The contractor shall immediately report in writing each Group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and, (ii) all units of production which were manufactured under the same conditions and which the Government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the quality assurance representative. After corrective action has been taken, additional sample units shall be subjected to Group C inspection (all inspections or the inspections which the sample failed, at the option of the Government) and Groups A and B inspection may be reinstituted; however, final acceptance and shipment will be withheld until the Group C reinspection results have shown that the corrective action was effective.

4.4.4.1 Disposition of Group B sample units. - Unless otherwise specified, sample units which have been subjected to and passed Group B inspection may be accepted on the contract or order provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.4.4.2 Disposition of Group C sample units. - Unless otherwise specified, sample units which have been subjected to and passed Group C inspection may be accepted on the contract or order provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.5 Visual and mechanical inspection. - The antenna shall be examined for the defects listed in MIL-STD-252.

4.6 Simulated wind load and velocity. - The reflector and backmount shall be supported on a cantilever mock-up of the top of the antenna mast with the reflector aperture in the horizontal plane. The inside of the reflector surface shall be loaded with 660 pounds of sand to simulate 100 mph winds. The load shall be maintained for a period of 5 minutes. At the conclusion of the test, the assembly shall be subjected to visual examination for evidence of structural failures or permanent deformation. The inside surface of the reflector shall be measured and shall not deviate from the prescribed curve by more than ± 0.141 inches. Record maximum deviation of the reflector surface before and after test. The antenna reflector shall be disassembled from and reassembled to its backmount. Excessive force shall not be required for disassembly and reassembly. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.1, 3.3.1.3, 4.10 and 4.11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

4.7 Simulated ice load test (non-operating). - A simulated Ice-Load Test shall be conducted on the feedhorn assembly which is cantilever supported with the broad face of the waveguide parallel to the ground. A twelve (12) pound weight shall be suspended from the feedhorn at a distance of approximately twenty-four (24) inches from the flange. (This simulates the worst-case bending moment for 75 miles per hour winds with 1/2 inch coating of radial ice). This load shall be maintained for approximately five (5) minutes. At the conclusion of the test, the feedhorn aperture shall not be displaced from the location of the reflector axis by more than 0.25 inches in any direction (see 3.3.1.2).

4.8 Minor lobes test. - Minor lobes of the antenna test pattern shall be determined and recorded for 4.40, 4.55, 4.70, 4.85 and 5.00 Ghz using the test set-up shown in figure 1 (see 3.3.1.4).


4.9 Radiation pattern and test. - Radiation pattern and gain of the antenna shall be determined for frequencies of 4.40, 4.55, 4.70, 4.85 and 5.00 Ghz using the test set-up shown in figure 1. Record E and H planes (horizontal and vertical polarization) patterns of the test antenna. On the radiation pattern sheet for the polarization of the standard gain horn, record a segment of its radiation pattern which includes the peak of its beam. Antenna half power beamwidth shall not be less than 3° or more than 4°. The maximum sidelobe level shall be at least 20 db below the peak of the main beam. The antenna gain shall be at least 33 decibels (see 3.3.1.5).

4.10 Tilt test. - The antenna shall be installed on a simulated mast approximately fifty (50) feet above ground. Provided that it does not result in unreasonable test schedule delays, the Tilt test shall be performed at a time when the ambient winds are in the range of ten (10) to twenty (20) miles per hour. Measure the force (pull) on the tilt rope required to provide an elevation angle adjustment at the center and at the two extreme positions of the tilt range. Maximum force required in moderate winds (20 mph) shall not exceed 10 pounds and a restraining force on the rising rope shall not be necessary. The tilt rope shall not slip on the sheave when pulled in either direction (see 3.3.1.6).

4.11 Voltage standing wave ratio test (VSWR). - The VSWR of the antenna system shall be measured at the input to the sixty (60) foot minimum length flexible waveguide assembly, using the test set-up shown in figure 2, for frequencies of 4.40, 4.55, 4.70, 4.85 and 5.00 Ghz. Maximum VSWR shall not exceed 1.15:1 (see 3.3.1.7).

4.12 Feedhorn de-icer test. - The de-icing circuit shall be checked electrically for continuity and proper electrical operation by applying 115v ac, 60 cycles at the connector mount on the feedhorn flange. The heater circuit shall draw 300 milliamperes, plus or minus 10 percent (see 3.3.1.8).


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

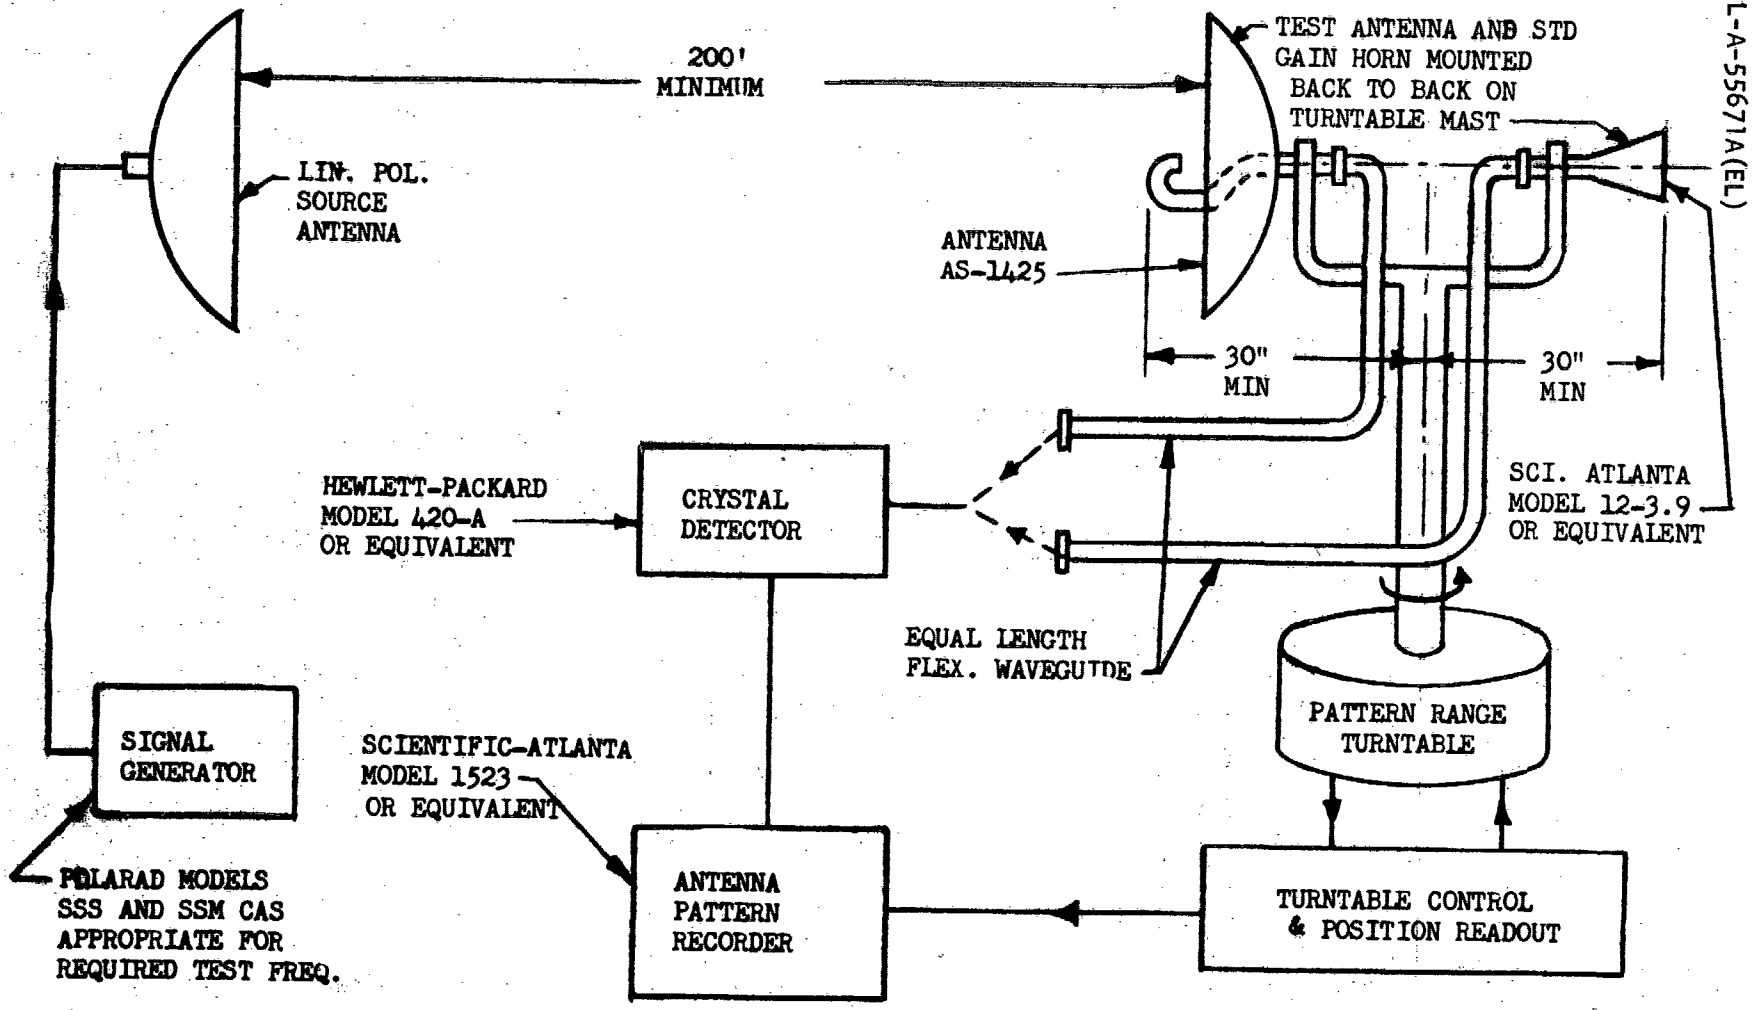

BLOCK DIAGRAM FOR RADIATION PATTERN & GAIN TESTS

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

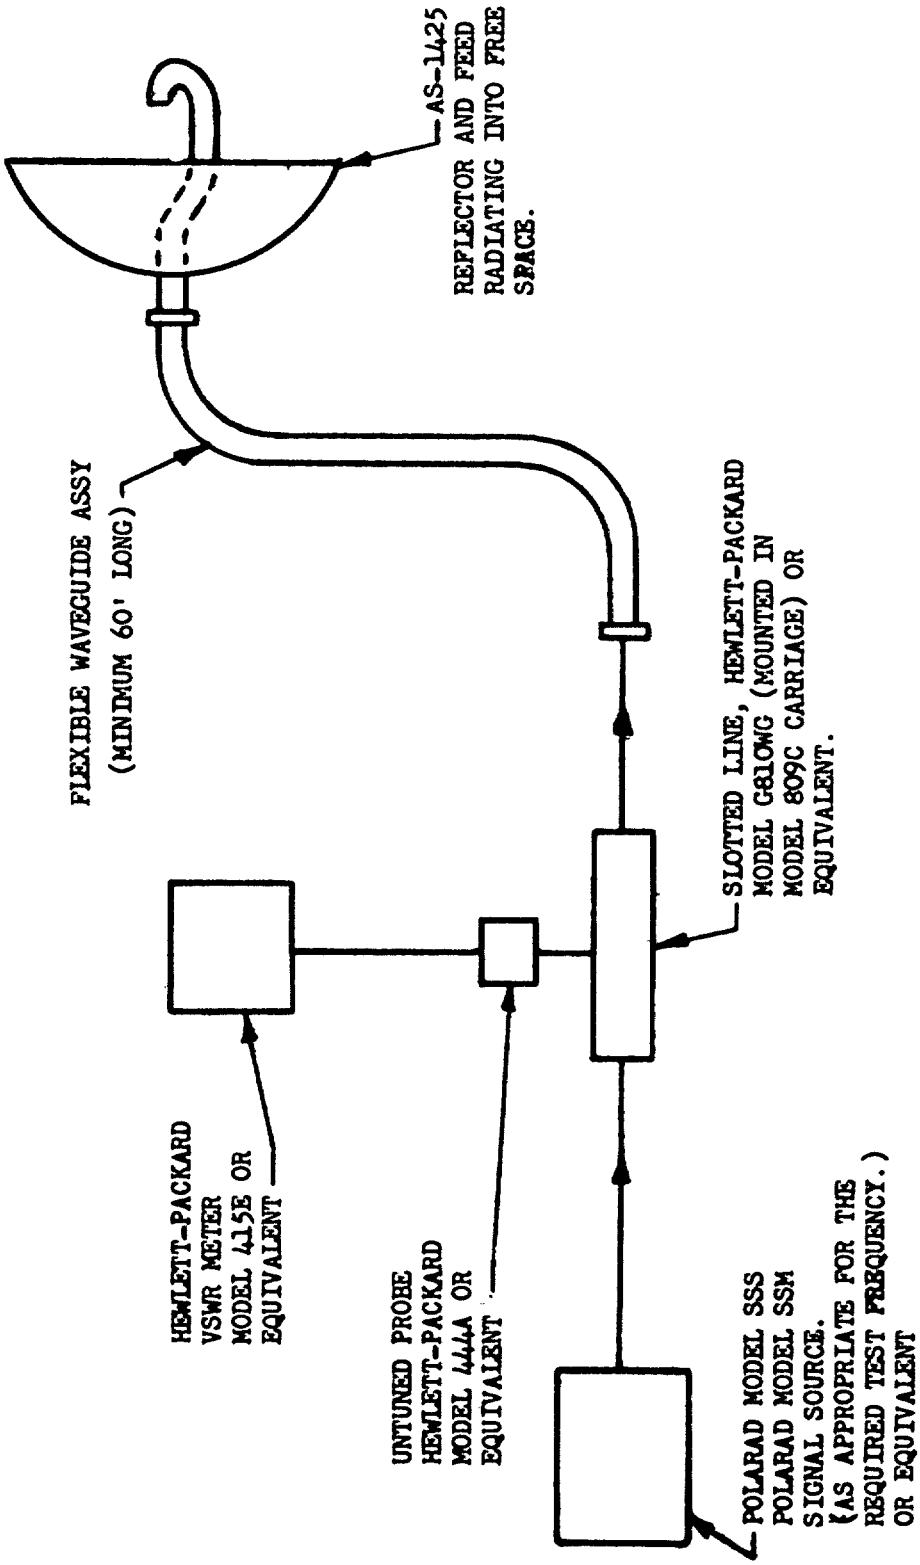

BLOCK DIAGRAM FOR VSWR TEST

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use

4.13 Vibration test. - The antenna shall be subjected to Vibration Test Method 514, procedure IX, Part I of MIL-STD-810. At the conclusion of this test, the antenna shall be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.9, 4.10 and 4.11).

4.14 Shock (drop) test. - The antenna shall be subjected to the shock (drop) test, method 516, Procedure II, of MIL-STD-810. The antenna reflector shall be disassembled from and reassembled to its backmount. Excessive force shall not be required for disassembly and reassembly. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.10, 4.10 and 4.11).

4.15 High temperature test. - The antenna assembly shall be subjected to the High Temperature test, Method 501, Procedure I of MIL-STD-810. Temperature for Step 4 shall be 160°F. (+6, -0°F.) for a period of 24 hours. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.11, 4.10 and 4.11).

4.16 Low temperature test. - The antenna assembly shall be subjected to the Low Temperature test, Method 502, Procedure I of MIL-STD-810. Temperature for Step 4 shall be -55°F. (+0, -6°F.). Maintain temperature of -55°F. for a period of 24 hours or to practical thermal equilibrium, whichever occurs first. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.11, 4.10 and 4.11).

4.17 Humidity test. - The antenna shall be subjected to the Humidity Test, Method 507, Procedure II of MIL-STD-810 for five continuous 48 hour cycles. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.12, 4.10 and 4.11).

4.18 Dust test. - The antenna shall be subjected to Dust Test, Method 510, Procedure I of MIL-STD-810. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.13, 4.10 and 4.11).

4.19 Salt fog test. - The antenna assembly, including flexible waveguide sections, mast to waveguide clamps, messenger cable, hangers and drain sections shall be exposed to the Salt Fog Test, Method 509, Procedure I of MIL-STD-810, for 48 hours. At the conclusion of exposure, the antenna and all other items subjected to the test shall be given a thorough inspection. Corrosion deficiencies (flaking paint, pitting, rusting, etc.) shall be recorded. The antenna shall then be subjected to and meet the requirements of Tilt and VSWR tests (see 3.3.1.14, 4.10 and 4.11).

4.20 Interchangeability test. - The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirements of 3.7. When a listed dimension is not within specified design limits, it shall be considered a major defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

4.20 Interchangeability test (Contd). -

a. Dimensions and location of reflector storage tabs..

b. Three points of attachment between backmount and reflector.

c. Mating of backmount split casting assembly to mast cap adaptor and to Mast AB-621( )/G (latter may be simulated by dimensional check).

d. Feedhorn flange thumbscrew placement for proper mate to reflector ring assembly tapped holes. Tapped hole placement dimension center to center in ring assembly.

e. Dimension check by proper mating of: flexible waveguide section to antenna feedhorn flange; adjoining flexible waveguide flange surfaces including proper closure of quick release clamps; flexible waveguide flanges and flanges of waveguide drain section. Random selection of components shall properly mate without requirement to apply excessive force (see 3.7).

4.21 Visual and mechanical inspection. - The antenna shall be examined for the defects listed in MIL-STD-252 (see 3.8).

4.22 Quality conformance inspection of preparation for delivery. - Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. -

5.1.1.1 Cleaning. - Components of Antenna AS-1425( )/GRC, shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. - Components of Antenna AS-1425( )/GRC shall be dried in accordance with the applicable procedures of MIL-P-116.

5.1.1.3 Preservation application. - None required.

5.1.1.4 Unit packaging. - Unit packaging shall be in accordance with the methods prescribed in MIL-P-116, as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

5.1.1.4.1 Technical literature. - Each technical literature shall be packaged method IC-7.

5.1.1.4.2 Guy cables. - Each guy cable shall be packaged method III, as follows: Cushion each guy cable by wrapping in paperboard cushioning material conforming to PPP-P-291, type I. Seal the cushioning with gummed paper tape, conforming to PPP-T-45.

5.1.1.4.3 Antenna adapters. - Package each antenna adapter method IC-1.

5.1.1.4.4 Consolidated package. - Consolidate the items packaged as specified in 5.1.1.4.1 through 5.1.1.4.3, together within a close-fitting fiberboard box, conforming to PPP-B-636, W5c, weather resistant. Fill all voids with paperboard cushioning material, conforming to PPP-P-291, type I. Box closure shall be as specified in the appendix of the box specification.

5.1.1.4.5 Feedhorn. - Package each feedhorn method III, as follows: Cushion each feedhorn on all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320. Place the cushioned item within a fiberboard box conforming to PPP-B-636, W5c, weather-resistant. Box closure shall be in accordance with the appendix of the box specification.

5.1.1.4.6 Reflector and Backmount. - No packaging required.

5.1.2 Level C. - Antenna AS-1425( )/GRC shall be packaged in a manner that will afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity.

5.2 Packing. - Packing shall be level A, B or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed load during shipment and storage without damage to the containers or its contents.

5.2.1 Level A. - Antenna AS-1425( )/GRC, packaged as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-621, the reflector and the backmount shall be blocked or cradled within the shipping container. The feedhorn and the consolidated package shall also be blocked to prevent movement. Shipping containers shall be closed and strapped in accordance with the appendix of the box specification.

5.2.2 Level B. - Antenna AS-1425( )/GRC shall be packed as specified in 5.2.1.

5.2.3 Level C. - Antenna AS-1425( )/GRC, packaged as specified in 5.1, shall be packed in shipping containers that comply with Federal or Military specifications, in a manner that will afford adequate protection to the package and its contents against physical and environmental deterioration and damage during limited shipment, handling and intransit storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. - Antenna AS-1425( )/GRC is used with AN/GRC-66(V), 147 and 144 (see 1.1).

6.2 Ordering data. - Procurement documents should specify the following:

a. Levels of packaging and packing (see Section 5).

b. When rough handling and functional tests are required.

6.3 Definitions. -

6.3.1 Equipment divisions. - The terms used herein for equipment divisions conform to MIL-STD-280.

6.3.2 Definitions of inspection terms. - The inspection terms used herein conform to MIL-STD-109. The following are abbreviated definitions selected from those given therein for immediate reference.

6.3.2.1 Inspection. - Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.3.2.2 Examination. - Examination consists of simple, generally non-destructive determinations of compliance, without use of special testing equipment.

6.3.2.3 Testing. - Testing consists of determinations of compliance, using technical means.

6.4 Group C inspection. - Approval to ship may be withheld, at the discretion of the Government, pending the decision from the Contracting Officer on the adequacy of corrective action (see 4.4.4).

6.4.1 Initial shipments. - Initial shipments, of end items will be contingent only upon successful completion of all Group C tests (see 4.4.3).

6.5 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: AS-1425 (W)/GRC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

6.6 Color of textiles. - Standard samples of olive drab No. 7 may be obtained from Sample Loan Unit, Defense Clothing and Textile Supply Center, Philadelphia, Pennsylvania 19101. When requesting samples, indication should be given as to type of material concerned.

6.7 Color. - The color chip furnished by the procuring agency will be color chip No. X24087 and may be obtained upon request to Commander, US Naval Supply Depot, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120.

6.8 Verification inspection. - Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product, and will normally be identified by the categories listed below:

NOTE: Any proposed "or equal" guy tensioning devices will require full verification testing, the extent of which shall be determined by the Contracting Officer or his authorized representative.

Custodian:
Army - EL

Preparing Activity
Army - EL

Project Number 5985-A349

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MIL-A-55671A(EL), ANTENNA AS-1425( )/GRC

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:52Z
Check the source to verify that this is the current version before use.