MILITARY SPECIFICATION

GENERATOR, SMOKE, MECHANICAL PULSE JET M3A4

This specification is approved for use within the Chemical Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a smoke generator for use in producing smoke screens.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-T-60 - Tape: Packaging, Waterproof.

: Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed: to: Commander, U.S. Army Chemical Research, Development and Engineering CENTER, ATTN: SMCCR-SPD-TS, Aberdeen Proving Ground, MD 21010-5423 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1040

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116 - Preservation, Methods Of.
MIL-B-121 - Barrier, Material, Grease Proofed, Waterproofed, Flexible.
MIL-C-5501 - Caps and Plugs, Protective, Dust and Moisture Seal, General Specification for.
MIL-F-12070 - Fog Oil.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-171 - Finishing of Metal and Wood Surfaces.
MIL-STD-1168 - Ammunition Lot Numbering.
MS 51938 - Seal, Metallic, Lead and Wire.

2.1.2 Other Government documents and drawings. The following other Government documents and drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation

DRAWINGS AND TECHNICAL DATA PACKAGE LIST (TDPL)

U.S. ARMY CHEMICAL RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

TDPL 31-15-2000 - Generator, Smoke, Mechanical, Pulse Jet, M3A4,, Assembly.
31-15-2000 - Generator, Smoke, Mechanical, Pulse Jet, M3A4.
31-15-1419 - Marking for Generator, Smoke, Mechanical, Pulse Jet, M3A3 and M3A4.
31-15-1420 - Packing for Generator, Smoke, Mechanical, Pulse Jet, M3A3 and M3A4.
31-15-1435 - Packing, Tools, Accessories and Spare Parts (M3A3 and M3A4 Generator).

(Copies of specifications, standards, drawings, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are indicated as DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

ASTM STANDARDS

D 3699 - Kerosine.

(Application for copies should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedences Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials and components

3.1.1 Materials. All materials cited in TDPL 31-15-2000 shall conform to the specifications listed thereon or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components of the generator shall conform to the specifications and drawings listed on TDPL 31-15-2000.

3.2 Assembly. The generator shall be assembled as shown on Drawing 31-15-2000.

3.3 Functioning.

3.3.1 Magneto air pump assembly (Drawing 31-15-1052).

3.3.1.1 Air. The pump shall be capable of pressurizing the accumulator assembly (Drawing 31-15-2019) to 30 pounds per square inch gage (psig) minimum within 16 full strokes. Test shall be in accordance with 4.5.4.1(a).

3.3.1.2 Voltage. The magneto shall deliver voltage sufficient to permit an electrical discharge across a 3/8-inch minimum air gap when the pump is operated as specified in 4.5.4.1(b). A minimum of 14 repetitive electrical discharges across the electrodes shall be observed for five strokes when tested in accordance with 4.5.4.1(b).

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:02Z
Check the source to verify that this is the current version before use.

3.3.2 Accumulator assembly (Drawing 31-15-2019) and pump assembly (Drawing 31-15-2040). The air pump shall pressurize the accumulator assembly to 60 psig minimum within 45 full strokes. The pressure shall be maintained within 2 psig for one minute when "tested in accordance with 4.5.4.2.

3.3.3 Smoke generator assembly (Drawing 31-15-2000).

3.3.3.1 Functioning. The smoke generator shall start within 3 strokes of the magneto-air pump when operated in accordance with 4.5.4.3 and the smoke generator shall operate without stalling or stopping and shall produce smoke continuously for a minimum period of 15 minutes. The fog oil shall be consumed at a minimum rate of 30 gallons per hour when the oil metering valve is opened or adjusted to the proper setting which will produce maximum smoke continuously. During production of smoke excess oil shall flow from the exhaust hose. There shall be no evidence of gasoline or fog oil leakage when tested in accordance with 4.5.4.3 except for an occasional drop around the engine head (not to exceed two drops per minute).

3.3.3.2 Endurance (reproduction only). The smoke generator shall operate continuously for six intervals of 40 minutes each (see figure 1). A period of up to 3 minutes will be permitted between intervals for refueling and a period of up to 2 minutes will be permitted between intervals for restarting. The smoke generator shall not stop or stall (considered downtime period) more than two times for the entire operating test other than for refueling. The total downtime (other than refueling) shall not exceed 10 minutes (see figure 2). Total operating test time shall be counted only when the generator is producing smoke. The refueling time, maintenance and repair time, and restarting time shall not be counted as operating time. Replacement of parts shall be limited to generator "on board" repair parts. The fog oil consumption rate shall be checked and recorded for the 40-minute operation interval. The average fog oil consumption shall be a minimum of 30 gallons per hour. During the operation of the smoke generator, excess fog oil shall flow from the exhaust hose. There shall be no leakage of gasoline or fog oil from the gasoline tank, M4 fog oil pump or any filter, hose, line, fitting or valve through which these fluids flow when tested as specified in 4.4.3. This does not include the liquid emerging from the area of the engine head (see 3.3.3.1).


3.4 Preproduction. Prior to the start of regular production, a preproduction lot of generators shall be produced in accordance with this specification for examination and test (see 4.4).

3.5 Workmanship. The generator assembly and components shall be free from damage, contamination and sharp edges that could affect functioning or personnel safety.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

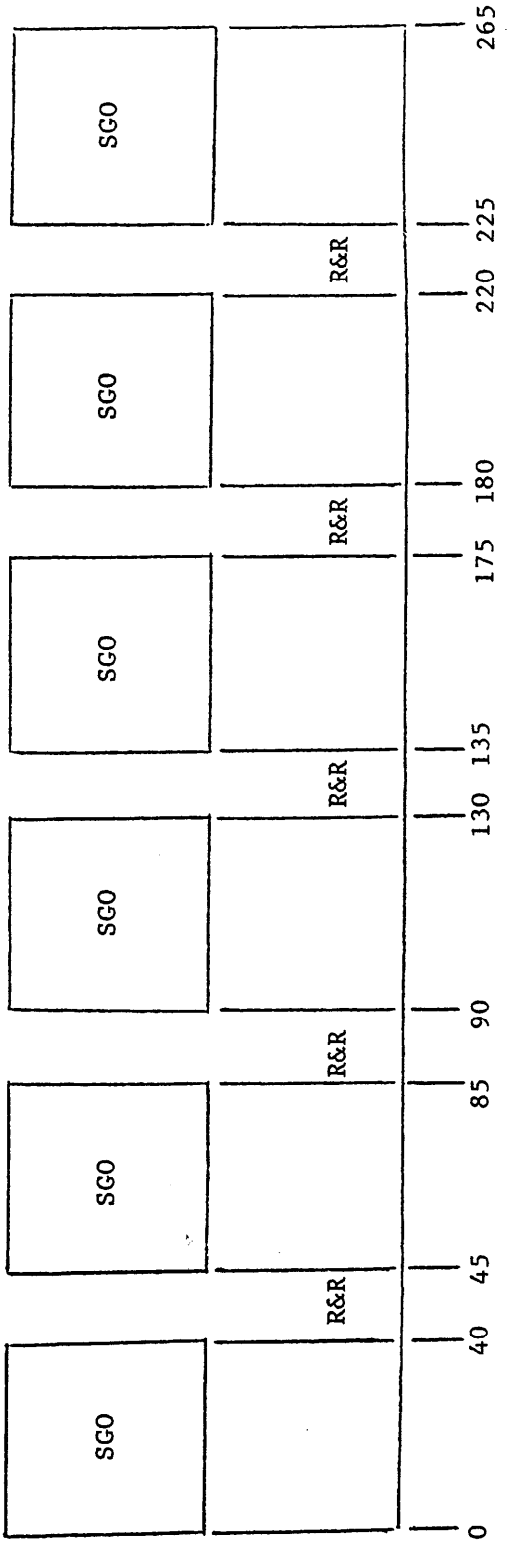


SGO - SMOKE GENERATOR OPERATION INTERVAL

R&R - REFUELING AND RESTARTING - 25 MINUTES MAXIMUM PER 240 MINUTE TEST PERIOD
NO MORE THAN 5 MINUTES FOR EACH R&R PERIOD

FIGURE 1. Endurance preproduction (without downtime)

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:02Z
Check the source to verify that this is the current version before use.

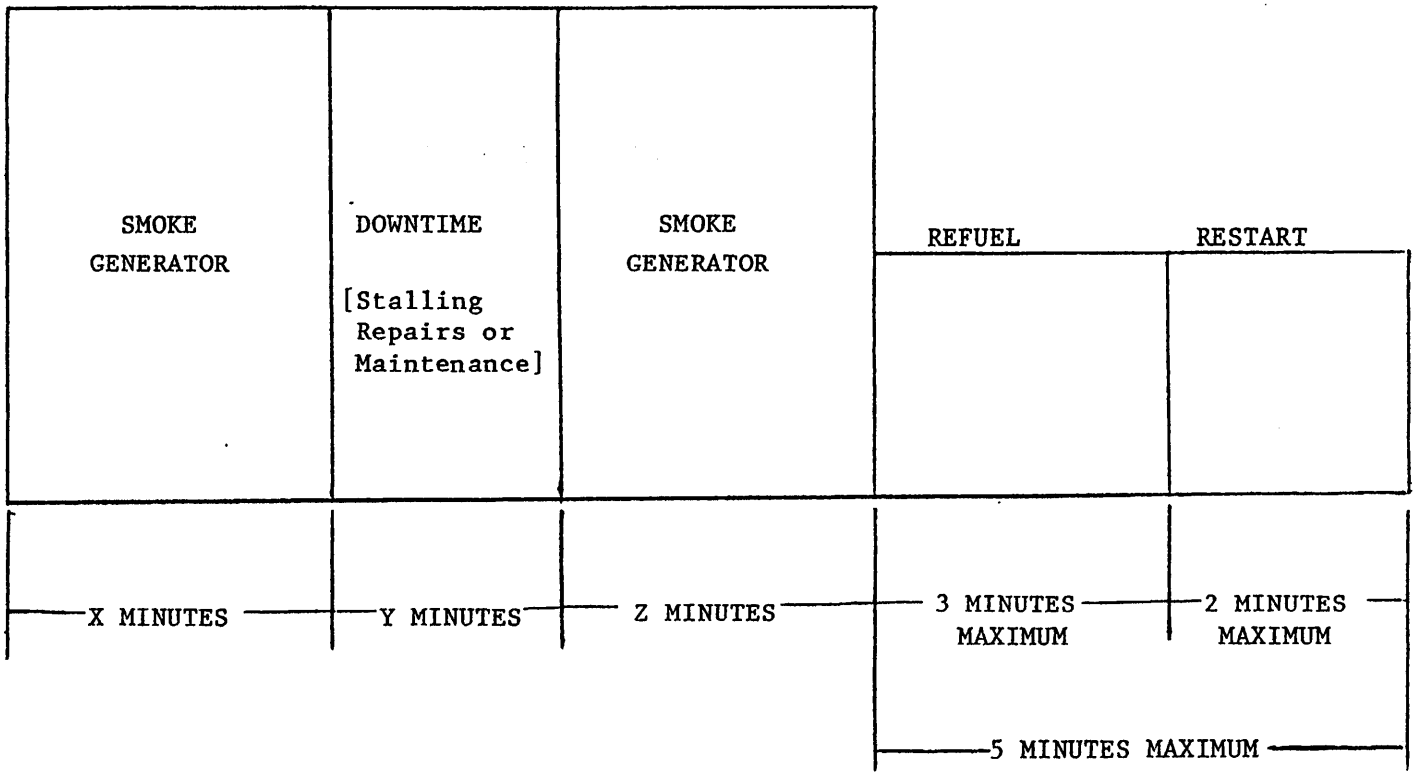

NOTES

(1) X = SMOKE OUTPUT TIME BEFORE STOP
(2) Y = DOWNTIME DURING SMOKE GENERATOR OPERATION INTERVAL
(3) Z = SMOKE OUTPUT TIME AFTER GENERATOR IS RESTARTED
(4) TOTAL SMOKE OUTPUT TIME (X+Z) MUST BE 40 MINUTES. NO MORE THAN ONE DOWNTIME IS ALLOWED DURING ANY INTERVAL.
(5) NO MORE THAN TWO DOWNTIME PERIODS ARE ALLOWED DURING THE TEST (240 MINUTES). THE TOTAL DOWNTIME (Y) SHALL NOT EXCEED 10 MINUTES FOR THE TEST (240 MINUTES).

FIGURE 2. Smoke generator operation interval

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Additional contractor's responsibility. The contractor shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.2 Classification of inspections.

(a) Preproduction inspection (see 4.4)
(b) Quality conformance inspection (see 4.5)

4.3 Precautionary.

4.3.1 General precautions. This specification involves materials which are potentially hazardous to personnel. All applicable safety rules, regulations and procedures shall be followed in the handling and processing of these materials,

4.3.2 Functional testing precautions. During the production of fog oil smoke, a protective mask shall be provided and held at "ready" position in the vicinity of dispersed smoke, and is to be worn if exposure appears likely. Bathing and laundering of clothing following the production of smoke will reduce the risk of skin irritation following exposure to fog oil smoke. Personnel shall avoid skin contact with fog oil and breathing of fog oil smoke, vapors or fumes.

4.4 Preproduction.

4.4.1 Lot. Prior to the start of regular production, two generators shall be produced using the same methods, materials, and equipment that will be used during regular production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

4.4.2 Examination and test. The generators shall be examined and tested for all the requirements of this specification.

4.4.3 Smoke generator endurance. Operate the generator in accordance with 4.5.4.4(a) for the required period of time (see 3.3.3.2). During the smoke generator operation period, determine the fog oil consumption during each 40-minute smoke production interval. The fog oil consumption rate shall be as specified in 3.3.3.2. Observe the exhaust hose for flow of excess fog oil. Observe for leakage of fog oil or gasoline.

4.4.4 Acceptance/rejection criteria. The generators shall meet all the requirements of this specification to be acceptable. The contractor shall obtain written approval from the contracting officer prior to proceeding with regular production.

4.5 Quality conformance inspection.

4.5.1 Lotting. Each lot shall be identified and controlled in accordance with MIL-STD-1168. A lot shall consist of like components or like subassemblies of one interfix number, produced by one manufacturer, from the same materials and under essentially the same manufacturing conditions.

4.5.2 Sampling.

4.5.2.1 For examination and nondestructive test. Sampling shall be conducted in accordance with MIL-STD-105.

4.5.3 Inspection procedure.

4.5.3.1 For examination and nondestructive test. Sample components and smoke generator assemblies, including levels A and B packaging shall be examined and tested in accordance with the classification of defects and with MIL-STD-105.

4.5.3.2 For critical defects. Each item in the lot shall be tested for its critical characteristics listed in the classification of defects.

4.5.3.3 Classification of defects

(a) Generator, smoke, mechanical, pulse jet, M3A4 (Dwg 31-15-2000).

Categories	Defects	Acceptance standards
Critical:		
1	Functioning (smoke generator assembly only)	4.5.4.3
Major	AQL 1.0 percent defective	
101	Component missing or incorrectly assembled	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

102	Identification plate missing or incorrect	
103	Finish missing or incorrect	
104	Workmanship (3.5)	
105	Sealing compound missing	
106	Bolt torque incorrect	
Minor:	AQL 2.5 percent defective	
201	Carrying handle not free	

(b) Magneto-air pump assembly (Dwg 31-15-1432).

Categories	Defects	Acceptance standards
Critical:	None defined	
Major:	AQL 0.65 percent defective	
101	Air	4.5.4.1(a)
102	Voltage	4.5.4.l(b)

(c) Accumulator assembly (Dwg 31-15-2019) and pump assembly (Dwg 31-15-2040).

Categories	Defects	Acceptance standards
“Critical:	None defined	
Major:	AQL 0.65 percent defective	
101	Pump assembly	4.5.4.2(a)
102	Accumulator assembly	4.5.4.2(b)

(d) Packaging inspection (section 5).

Categories	Defects
Critical:	None defined
Major:	AQL 1.0 percent defective
101	Preservation missing or incorrect
102	Contents missing or incorrect
103	Contents incorrectly located or secured
104	Strap missing, loose, or incorrect
105	Marking incorrect or missing
106	Workmanship (3.5)
107	Damaged areas not repainted
108	Lead seal missing or broken

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:02Z
Check the source to verify that this is the currentversion before use.

Minor: AQL 2.5 percent defective

201 Loose nails

4.5.4 Functional tests.

4.5.4.1 Magneto-air pump assembly. Magneto-air pump assembly tests shall be conducted as follows:

(a) Air. Connect the magneto-air pump assembly to an air accumulator assembly. Operate the pump using full strokes. The air pressure within the cylinder shall meet or exceed the pressure specified within the required number of strokes.

(b) Voltage. Connect a cable of suitable length to the magneto electrical outlet and to an 18-millimeter internal resistor spark plug with the electrode gap set at 3/8-inch minimum. Operate the pump for the required number of full strokes and observe whether the minimum number of repetitive electrical discharges have occurred.

4.5.4.2 Accumulator assembly and pump assembly tests. The accumulator and pump shall be tested as follows:

(a) Pump. Operate the pump using full strokes to pressurize the accumulator assembly. The air pressure within the assembly shall meet or exceed the pressure specified within the required number of strokes.

(b) Accumulator. If the pump has passed inspection under 4.5.4..2(a) record the pressure and record the pressure again one minute later. Any pressure difference shall not exceed the specified amount.

4.5.4.3 Smoke generator assembly. Operate the smoke generator in accordance with 4.5.4 (a) using fog oil, type SGF2, MIL-F-12070. The generator shall start within the required number of strokes when 4.5.4.4(a), step 11, is performed. Perform steps 12-14 and when maximum smoke emission is obtained measure the fog oil consumption during a 15 minute period thereafter. The consumption rate shall be as specified. No stoppage or stalling is allowable after the engine fires and before shut down. Observe the exhaust hose for flow of excess oil and the complete system for gasoline or fog oil leakage. No leakage of gasoline or fog oil is permitted from the gasoline tank M4 fog oil pump or any filter, hose, line, fitting or valve through which these liquids flow. This does not include the liquid emerging from the area of the engine head (see 3.3.3.1).

4.5.4.4 Operating and shut down procedures.

(a) Operating procedure. The M3A4 smoke generator shall be operated for tests as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

(1) Insert the fog oil inlet hose and exhaust hose into a container of fog oil.
(2) Open front cover.
(3) Raise float bowl to maximum eight.
(4) Open bleed valve on fog oil pump.
(5) Open fuel line plug cock.
(6) Operate the air accumulator pump handle and charge the air accumulator to 60 psig; pin handle.
(7) Open float bowl toggle valve.
(8) Remove fuel hose at engine head and drain any water from float bowl.
(9) Reattach fuel hose to engine head.
(10) If the generator has recently been operated, operate the magneto-air pump handle 15-20 strokes to purge the combustion chamber of combustion products and vaporized fog oil.
(11) Simultaneously press the air accumulator air release button and operate the magneto-air pump handle.
(12) When engine fires, release the air release button.
(13) Adjust the float bowl until the generator is running smoothly.
(14) Close the bleed valve on the fog oil pump and adjust the oil metering valve for maximum smoke emission.
(15) Throughout the test the operator may continue to adjust the height of the float bowl to obtain smooth engine performance and adjust the oil metering valve for optimum smoke output.

(b) Shut down procedure. The M3A4 smoke generator shall be shut down as follows:

(1) To stop generator, open bleed valve on the fog oil pump and close float bowl toggle valve when smoke emission ceases.
(2) Close oil metering valve.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, or B as specified (see 6.1).

5.1.1 Level A.

5.1.1.1 Preservation. The following procedures shall be used:

(a) Prime unit. Remove the strainer from the fog oil intake line and replace. Disconnect the air pressure line and flexible-fuel line from the engine head assembly. Drain the gasoline from the fuel tank and float bowl assembly. Remove the fuel sediment strainer and replace it. Remove the engine head assembly and replace the engine valve. Re-install the engine head assembly. Open all fuel line valves except the float bowl toggle valve and gas tank drain cock. Fill fuel tank with #1 fuel oil (ASTM D3699). Open float bowl

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

toggle valve and gas tank drain cock simultaneously and drain system. Remove fuel filter bowl, empty it, and replace. Close all valves. Reconnect flexible fuel line and air pressure line to engine head assembly. Secure fuel tank cap. Close and latch front cover.

(b) Hinges, draw bolt (latch and catch) and hasp. Treat functional areas with P-9 preservative oil in accordance with MIL-P-116. Work items during application to insure penetration. Wipe off all excess oil.

5.1.1.2 Repainting. Damaged portions of painted surfaces shall be treated and painted in accordance with MIL-STD-171 finish 20.24, color forest green.

5.1.1.3 Unit packing.

(a) Strainer guard. Wrap strainer guard assembly in MIL-B-121, type 2, grade A, class 2, greaseproof wrap, size 6 by 12. Wrap so that length of wrap runs with length of hose. Secure wrap to itself in two places and hose in one place using PPP-T-60 tape, size 2 by 6 (3 pieces). Do not attach tape to any metal parts.

(b) Exhaust hose. Plug the exhaust hose using a MIL-C-5501/7 Dash No-F13 plug.

(c) Nozzle(s). Plug the nozzle openings using plugs conforming to MIL-C-5501/7 Dash No-F22.

(d) Accessories, tools, repair parts and mount nuts and bolts. Examine tool box to insure all contents are present, packaged and properly located in accordance with Drawing 31-15-1435. Close latch and secure with a lead seal (MS 51938-5). Secure carrying handles, 4 each, in the retracted position with 4 pins by aligning holes.

5.1.2 Level B. Preservation and unit packing shall be as specified in 5.1.1.

5.2 Packing. The level of packing shall be as specified in the contract or purchase order (see 6.1).

5.2.l Level A. The smoke generator and its accessories, tools, repair parts, and technical publication, preserved and unit packed as specified in 5.1.1 shall be packed as shown on Drawing 31-15-1420.

5.2.1 Level B. The smoke generator and its accessories, tools, repair parts, and technical publication, preserved and unit packed as specified in 5.1.1 shall be packed as shown on Drawing 31-15-1420.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages shall be marked in accordance with MIL-STD-129. The shipping containers shall be marked in accordance with Drawing 31-15-1419.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:02Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this specification
(b) Level of preservation , packaging and packing required
(c) Preproduction:

(1) Time allowed for contractors to submit samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether to proceed with production.

6.2 Repair parts packaging. When repair parts packaging and packing is required for items authorized for stocking as repair parts, the repair parts data sheets covering the applicable components of the smoke generator should be used. (Copies of repair parts packaging data sheets maybe obtained from Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-SPD-PP, Aberdeen Proving Ground, MD 21010-5423).

6.3 Assembly. The following specification is used in the assembly of the smoke generator:

MIL-P-51062 - Pump, Fog Oil, Smoke Generator, M4.

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 1040-A177

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

ISTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in bmitting comments and suggestions for improvements. All users of military standardization documents are invited to provide ggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and ailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was o rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the oblems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an knowledgement will be mailed to you within 30 days to let you know that your comments were received and are being nsidered.

OTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of ecification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

FFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 Alexandria, VA

POSTAGE WILL BE PAID BY

Commander
U.S. Army Chemical Research, Development
and Engineering Center
ATTN: SMCCR-SPD-TS
Aberdeen Proving Ground, MD 21010-5423

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-G-51491A(EA)	GENERATOR, SMOKE, MECHANICAL PULSE JET, M3A4

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.

NOTICE OF INACTIVATION
FOR NEW DESIGN

INCH-POUND

MIL-G-51491A(EA)
NOTICE 1
27 December 1995

MILITARY SPECIFICATION

GENERATOR SMOKE, MECHANICAL PULSE JET, M3A4

This notice should be filed in front of MIL-G-51491A(EA)
dated 16 April 1986.

MIL-G-51491A(EA) is inactive for new design and is no longer used except for replacement purposes.

Preparing activity:

Army - EA

AMSC N/A

FSC 1040

DISTRIBUTI0N STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:02Z
Check the source to verify that this is the current version before use.