MIL-P-52855A(ME)
9 April 1979
SUPERSEDING
MIL-P-52855(ME)
14 April 1975

MILITARY SPECIFICATION

POWER PLANT, ELECTRIC, TRAILER MOUNTED: DIESEL ENGINE, 15KW, 400 HERTZ, AN/MJQ-15

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an electric power plant designated AN/MJQ-15. The power plant consists of Department of Defense design, diesel-engine-driven, 15kW, 400 Hertz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power, Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-705	- Generator Sets, Engine-Driven, Methods of Tests and Instructions.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:36Z
Check the source to verify that this is the current version before use.

MS16992	- Bolt (Screw), Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose (In/MM).
MS35355	- Bolt, Machine, Square Head, Steel, Cadmium or Zinc Plated, UNC-2A.
MS51922	- Nut, Self-Locking, Hexagon-Prevailing Torque, General Purpose, 250° F, UNC-2B and UNF-2B (In/MM).

DRAWINGS

ME

TA13220E8042	- Power Plant, Electric, AN/MJQ-15.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U. S. DEPARTMENT OF COMMERCE

Product Standard.

PS1 - Softwood Plywood; Construction and Industrial.
PS51 - Hardwood and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The AN/MJQ-15 power plant shall be in accordance with Top Assembly TA13220E8042 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power unit for examination within the time frame specified (see 6.2) to prove prior to starting production that his production methods will produce power units that comply with the requirements of this specification. Examinations shall be as specified in Section 4; and, unless otherwise specified herein, all examinations shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examinations as specified (see 6.2).

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each AN/MJQ-15
1	Chassis, trailer, 2-1/2 ton, 2 wheel, Model M200A1	MIL-C-45150	2
2	Generator Set, diesel-engine-driven, 15kW, 400 Hertz DOD Model MEP-113A	NSN 6115-00-118-1244	2

3.5 Workmanship. Workmanship shall be of a quality to assure that the power units are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed neccssary to assure supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of any examination or test by the preproduction model shall be cause for disassembly in the presence of a Government representative of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power plant shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection, or for performing the disassembly inspection specified in 4.1.1.

4.3.2 Tests. Power plant components shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection or for performing the disassembly inspection specified in 4.1.1.

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:36Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1. Examination. Each power plant shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Power plant components shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power plants shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparations shall be made prior to testing the switch box assembly:

(a) Power input cables shall be connected to the switch box assembly.
(b) The free ends of the power input cables shall be attached to a commercial power source as follows:

(1) Cable wire marked L_1 shall be attached to Phase A.
(2) Cable wire marked L_2 shall be attached to Phase B.
(3) Cable wire marked L_3 shall be attached to Phase C.
(4) Cable wire marked L_0 shall be attached to neutral.

(c) Paralleling cables shall be connected to the switch box assembly.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not more than 6 months thereafter.

4.5.2.3 Operation. Switch box circuit breakers No. 1 and No. 2 shall be in the "OFF" position. Commercial power equivalent to the rated load of the generator set shall be supplied to the switch box through generator set No.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:36Z
Check the source to verify that this is the current version before use.

1 power input cable assembly. Circuit breaker No. 1 shall be turned to the "ON" position and the load measured at the load terminals for a period of not less than 5 minutes. During this period phase sequence (rotation) shall be tested in accordance with MIL-STD-705, Method 507.1. Phase rotation shall be L_1, L_2, and L_3. At the conclusion of the No. 1 cable and circuit breaker test, the circuit breaker shall be turned to the "OFF" position. The test shall be repeated for No. 2 cable and circuit breaker. Input and output indicator lights shall operate during tests. Inability of the switch box assembly to maintain and transfer rated load shall constitute failure of this test. With the paralleling cables connected to the switch box assembly, a continuity test of connector pins at cable ends shall confirm proper assembly; absence of continuity shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106.	Materials, containers or procedures not as specified.	Each incorrect material, container or procedure shall constitute one defect.
107.	Generator sets not preserved as specified.	
108.	Fire extinguisher not removed and packaged as specified.	
109.	Ground cable not disconnected and secured and the cable and terminals not matchmarked as specified.	
110.	Repair parts and maintenance tools not preserved as specified.	
111.	Trailer chassis components not preserved as specified.	
112.	Switch box cables not coiled and secured as specified on Figure 3.	
113.	Preservation of power plants and components not as shown on figures or as specified herein.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

114. Packing not in accordance with Table I and Figures 1, 2, and 3 for the level required.
115. Depreservation guides not prepared and attached to the power plant as specified.
116. Technical publications not preserved and secured as specified.
117. Marking illegible, incomplete, incorrect or missing.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power plant or a production power plant. If the preproduction model power plant is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the preproduction model power plant and production power plants.

5.2 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with Table I, Figures 1, 2, and 3, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator sets. The generator sets shall be preserved in accordance with MIL-G-28554, Level A, Method 11a. The generator sets shall be secured directly through the barrier material to the trailer using the required bolts, in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicator and inspection port shall be installed on an end or side in a location convenient for inspection of the humidity indicator.

5.2.1.2 Fire extinguisher. Each fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, Type CF, Variety SW, Grade 125, style optional.

5.2.1.3 Ground cable. The ground cable shall be disconnected from the generator sets. The disconnected ground cables and terminals on the power units shall be matchmarked with cloth tags conforming to UU-T-81, Type A, to facilitate reinstallation of the cables.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:36Z
Check the source to verify that this is the current version before use.

5.2.1.4 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, Level A.

5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, Method IC-1 and shall be secured to the generator set outside the Method II barrier.

5.2.1.7 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

5.2.1.8 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level A as specified for mobile vehicles.

5.2.2 Level B.

5.2.2.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, Level B.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved as specified for Level A.

5.2.2.3 Ground cables. The ground cables shall be disconnected and matchmarked as specified for Level A.

5.2.2.4 Repair parts, maintenance tools, and technical publications. The repair parts, maintenance tools, and technical publications shall be preserved as specified for Level A.

5.2.2.5 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

5.2.2.6 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level B as specified for mobile vehicles.

5.2.3 Commercial. The components of each complete AN/MJQ-15 shall be preserved in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:36Z
Check the source to verify that this is the current version before use.

5.3 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with Table I, and Figures 1, 2, and 3 and as specified herein.

5.3.2 Commercial. The components of each complete power plant shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide." One copy shall be secured on the generator set and a second copy shall be secured in a conspicuous location on the power unit. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved and packed as specified herein, regardless of the preservation and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power unit is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) Time frame required for submission of the preproduction pack (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

(d) Degree of preservation and degree of packing required (see 5.2 and 5.3). Level B preservation is intended to provide economical but limited protection and should be specified only when it has been determined the power plant will be held in covered storage.
(e) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power plants from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power plants conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power plants in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
DLA - GS

Project 6115-A431

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

TABLE I. Packaging material.

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B	
1	PPP-B-601, OVERSEAS TYPE, STYLE I, MODIFIED (NOTES 1 AND 3)	BOX, PLYWOOD, $\frac{1}{4}$ THK	2	2	
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR		
3	PPP-F-320, TYPE SF, GRADE V3S	FIBERBOARD, 1/2 THK, MINIMUM	AR		
4	MIL-G-12803, TYPE I, RUBBER BINDER, 1 1/2 X 1 1/2 X 1/8	GASKET, 11/16 DIA HOLE IN CENTER	16		
5	WEDGE	LUMBER, SOFTWOOD	4	4	
6	SPACER	LUMBER, SOFTWOOD 1 X 8 NOMINAL	4		
7	MS 27183-11, .312 ID X .734 OD X .065 THK	WASHER, PLAIN, CS, CAD. PL	24	16	
8	MS 16992-505, $\frac{1}{4}$-10, 2 LG	BOLT, LAG, HEX HD, GIMLET PT, STL, GALV	16	16	
9	NN-P-530 (NOTE 2)	PLYWOOD, $\frac{3}{8}$ THK	2		
10	MS 35355-8, $\frac{1}{4}$-20 UNC-2A, $3\frac{1}{2}$ LG	BOLT, SQ HD, STL, CAD. PL	8		
11	MS 51922-1, $\frac{1}{4}$-20 UNC-2B	NUT, SELF LOCKING	8		
12	BLOCKING	LUMBER, SOFTWOOD, 2 X 4 NOMINAL	AR		
13	FF-N-105, TYPE II, STYLE 4	NAIL, 4d	AR		
14					
15	PPP-T-60, TYPE IV	TAPE, PRESSURE-SENSITIVE	AR	AR	
16	QQ-S-781, TYPE I OR IV, FINISH B	STEEL STRAPPING, FLAT, .020 X 3/4	AR		
16	QQ-S-781, TYPE I OR IV, FINISH A	STEEL STRAPPING, FLAT, .020 X 3/4		AR	
17	PPP-B-636, TYPE CF, CLASS DOMESTIC, VARIETY SW, GRADE 125	BOX, FIBERBOARD	2	2	
18	PPP-B-601, OVERSEAS TYPE, STYLE I, (NOTE 1)	BOX, PLYWOOD $\frac{1}{4}$ THK.	1	1	

NOTES:
1. NO CONTENT WEIGHT, WITHOUT BOTTOM.
2. GROUP A, CONFORMING TO PS51 TYPE I, GRADE 3-4 OR GROUP B, CONFORMING TO PS1, GRADE C-D INTERIOR WITH EXTERIOR GLUE.
3. TOP TO BE ONE PIECE, 1/2 INCH THICKNESS, AND SHALL COMPLETELY COVER ALL EDGES.

X-1054C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

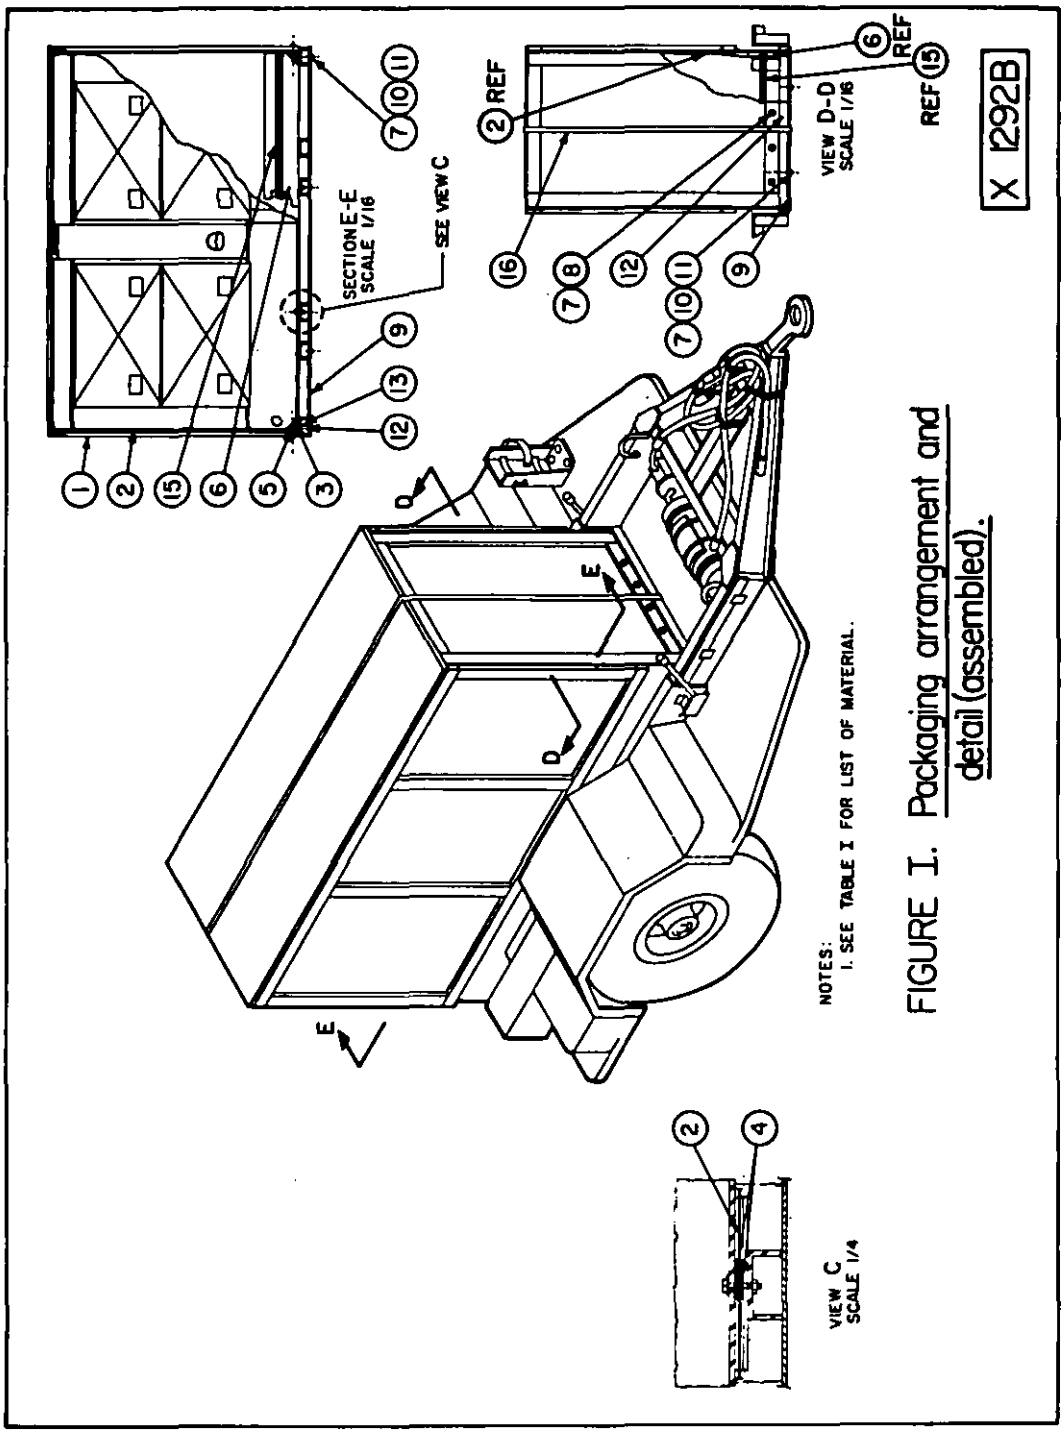


FIGURE I. Packaging arrangement and detail (assembled).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.


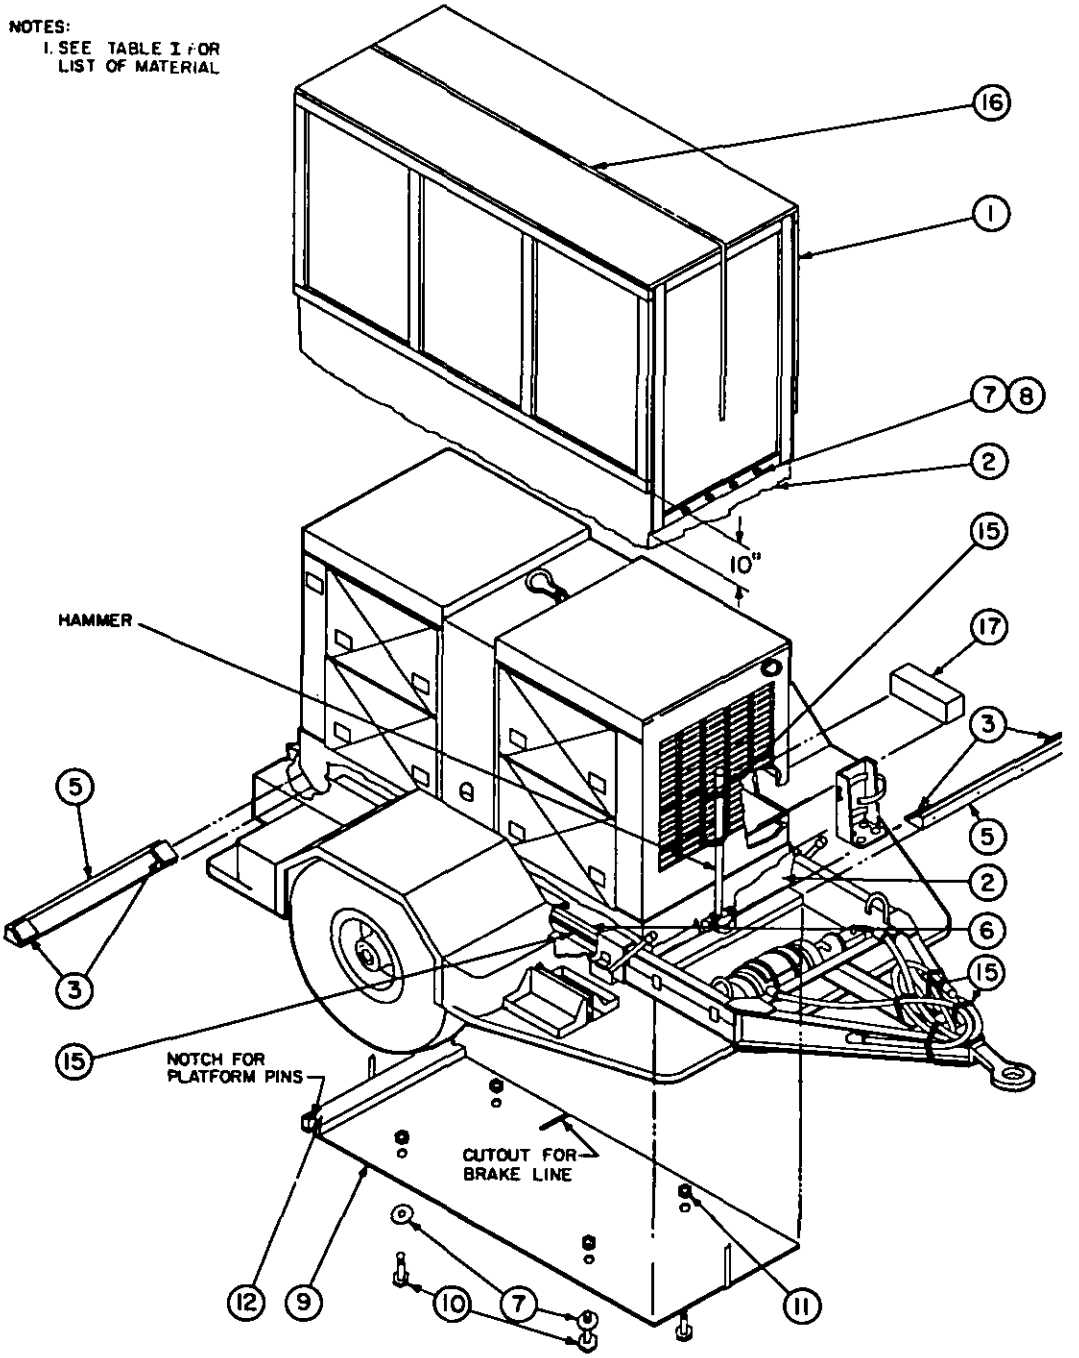


FIGURE 2. Packaging arrangement and detail (exploded). X-1291B

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:36Z
Check the source to verify that this is the current version before use.

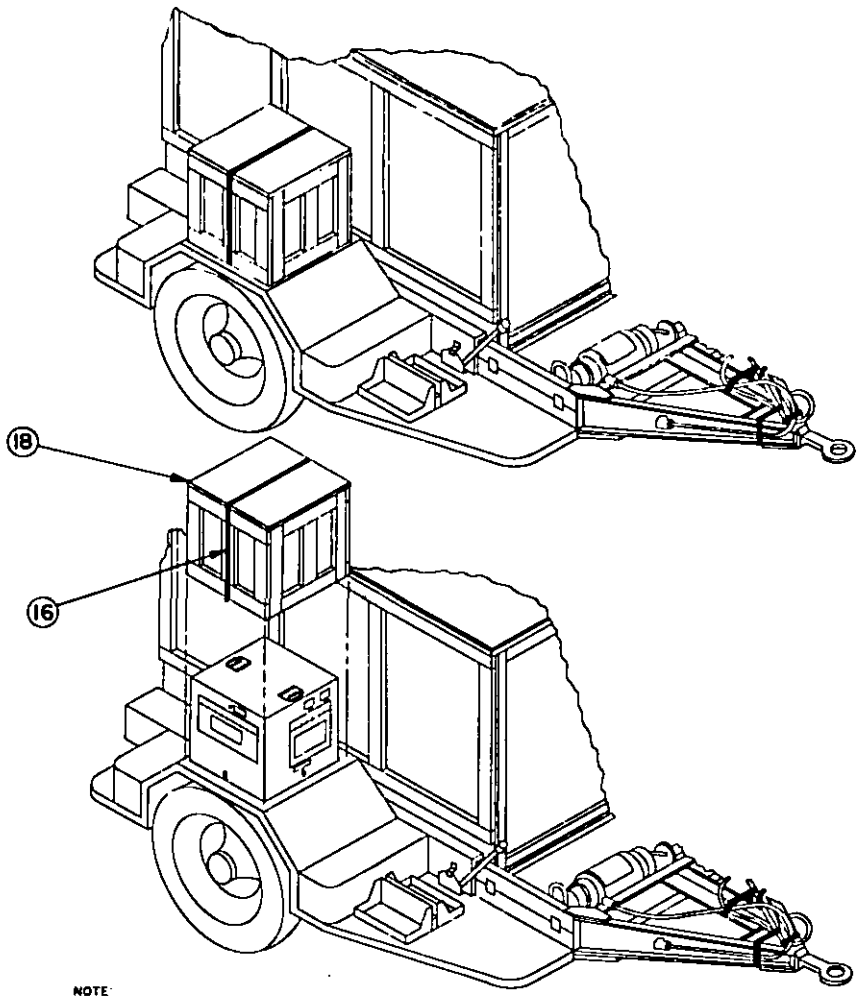

NOTE:
CABLES TO BE COILED AND SECURED IN OR ON THE GENERATOR HOUSING. WHEN LEVEL A IS SPECIFIED THE CABLES SHALL BE UNDER THE METHOD II BARRIER WHEN SECURED ON OUTSIDE OF THE GEN. HOUSING.

FIGURE 3. Packaging arrangement and detail (assembled and exploded) for unit containing switch box.

X-3488

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-P-52855A(ME) Power Plant, Electric, Trailer Mounted: Diesel Engine, 15 KW, 400 Hertz, AN/MJQ-15

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:36Z
Check the source to verify that this is the current version before use.