MIL-C-17536D

12 September 1972
SUPERSEDING
MIL-C-17536C
2 May 1969

MILITARY SPECIFICATION

COFFEE BOILER, METAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of metal coffee boiler having a minimum capacity of 2 gallons.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-M-14 - Molding Plastics and Molded Plastic Parts, Thermosetting

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

Specification A167-70 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

Specification A270-64 - Seamless and Welded Austentic Stainless Steel Sanitary Tubing

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036).

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 So. Riverside Plaza, Chicago, Illinois 60606).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for coffee boilers provided the completed items comply with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

3.1.1 Corrosion-resisting steel.-

3.1.1.1 Sheet and strip.- Corrosion-resisting steel sheet and strip shall conform to the chemical composition of any steel in the 300 series of ASTM A167-70.

3.1.1.2 Tube.- Corrosion-resisting steel tube shall conform to ASTM A270-64.

3.1.2 Plastic.- Plastic shall conform to type MFG of MIL-M-14.

3.2 Design and construction.- The design and construction of the coffee boiler shall conform to figure 1 and shall consist of a body, spout, pouring handle, cover, bail and bail ears. The coffee boiler shall not leak when tested as specified in 4.4.1. The minimum capacity of the coffee boiler shall be 2 gallons when tested as specified in 4.4.2.

3.2.1 Body.- The body shall be formed seamless from corrosion-resisting steel as specified in 3.1.1.1 and shall have a final finished thickness not less than 0.0375 inch. The body wall within the spout, shall be cut-away for a distance of 3/4 of an inch from the bottom of the spout. The area above the cut-away shown on figure 1 shall be perforated with 13 to 17 holes measuring 13/64 inch nominal diameter.

3.2.2 Spout.- The spout shall be formed from corrosion-resisting steel specified in 3.1.1.1 and shall be not less than 0.0375-inch thick. The spout shall be spot welded or continuous welded to the body. When spot welding is used, the spout shall be sealed by welding or silver soldering the spout at the edge on the outside of the body. The inside bottom and sidewall of the spout shall be flush with the cutaway in the body for ease of cleaning.

* 3.2.3 Pouring handle.- The pouring handle shall be formed from a single piece of tube as specified in 3.1.1.2. The tube shall be nominal 1/2 inch diameter with 0.050 inch wall thickness. The handle shall be located diametrically opposite the pouring spout at the lower part of the body. The tube ends shall be either flanged or flattened and spot welded or continuous welded to the body of the coffee boiler. When spot welding is used the crevices between the handle ends and body shall be sealed by welding or silver soldering.

3.2.4 Cover.- The cover shall be either a slip-on or hinged type, formed from one piece of corrosion-resisting steel specified in 3.1.1.1 and shall have a finished thickness not less than 0.0375 inch. The cover shall have a strip handle formed from one piece of corrosion-resisting steel specified in 3.1.1.1. The handle shall be spot welded or continuous welded to the cover. When spot welding is used the crevices between the handle and cover shall be sealed by welding or silver soldering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

3.2.5 Bail.- The bail shall be formed from corrosion-resisting steel wire. The bail shall be provided with a grip, 1 inch in diameter and 4 inches long, made from a single piece of plastic material specified in 3.1.2.

3.2.6 Bail ears.- The bail ears shall be formed from corrosion-resisting steel specified in 3.1.1.1 and shall be not less than 0.078 inch thick. The bail ears shall be either spot welded or continuous welded to the body. When spot welding is used, the bail ears shall be sealed to the body by welding or silver soldering around the circumference of the bail ears. The bail shall move freely and bail ears shall be designed to permit the bail to rest in a horizontal position, so that the handle does not come in contact with the coffee boiler.

* 3.3 Finish.- All surfaces of the finished coffee boiler shall have the manufacturer's standard finish.

3.4 Marking for identification.- The coffee boiler shall bear the manufacturer's name, trade name, or trademark of such known character as to be easily identifiable with the manufacturer. Marking shall be applied in accordance with MIL-STD-130. Metal shall not be distorted or penetrated by the marking process.

3.5 Workmanship.- The coffee boiler shall be clean, and free from cracks, fractures, punctures, malformation, sharp edges, burrs, projections which might cause injury, waves, wrinkles, grind-, trimming-, or die-marks, scale, pits, or rust. Welding and sealing around the spout, bail ears, and pouring handle shall be continuous, ground smooth, and not fractured, burned-through, or separated. The finish shall not be burned or discolored.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

4.2.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item inspection.- The lot shall consist of all coffee boilers offered for inspection at one time. The sample unit shall be one completely fabricated coffee boiler.

4.2.2.1 Visual examination.- Examination shall be made of the coffee boiler for defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Is not manufacturer's standard finish	X	
Construction	Any component missing	X	
	Top edge of body not double rolled bead, or beak not rolled tight (open spaces), or slivered top edge	X	
	Crevices not sealed	X	
	Side wall and bottom of spout not flush with inside cutaway of body	X	
	Assembly of components out of alignment or position	X	
	Fit of cover not as specified		X
	Cover handle and body handle not securely welded	X	
	Bail ears do not permit bail handle to swing freely or rest in horizontal position	X	
Workmanship	Any component cracked, fractured, malformed, punctured, or otherwise damaged	X	
	Sharp or burred edges, or projection which might cause injury	X	
	Waves or wrinkles from forming	X	
	Burned or discolored finish	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship (cont'd)	Grind marks, trimming marks, die marks, scale, pits, or rust	X	
	Weld missing	X	
	Spot weld loose	X	
	Spout, bail ears, and handles not sealed when spot welded	X	
	Weld not ground smooth or is pitted	X	
	Weld fractured or burned through	X	
	Weld separated (no fusion to metal parts)	X	
	Silver soldering missing, incomplete	X	
Identification marking	Missing, incomplete, illegible		X
	Metal distorted by impressing or embossing		X

4.2.2.2 Dimensional examination.- Examination shall be made of the complete coffee boiler to determine compliance with dimensional requirements. Any dimension not within the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in defects per hundred units.

* 4.2.2.3 End item test.- Testing shall be performed on the end item in accordance with 4.4.1 and 4.4.2. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

4.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking are in compliance with section 5 of this specification. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking (interior and exterior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged, or otherwise defective
Contents	Number per container is more or less than required

4.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

* 4.3.2 Examination of palletization.- An examination shall be made to determine that palletization is in compliance with Section 5 of this specification. Defects shall be as indicated in Table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III.- Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:15Z
Check the source to verify that this is the current version before use.

4.4 Test.-

4.4.1 Leak test.- The coffee boiler shall be filled to the top of the spout with hot water having a temperature of 180 Fahrenheit (F), plus or minus 5 F. After a period of 15 minutes, the entire coffee boiler shall be examined for leaks to determine compliance with 3.2. Particular attention should be given to the spout welded areas. Nonconformance to leakage requirements of 3.2 shall constitute failure of the test.

4.4.2 Capacity test.- The coffee boiler shall be filled to capacity with water. The water shall then be poured into a graduated beaker to determine compliance with 3.2. Nonconformance to capacity requirements of 3.2 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each coffee boiler shall be packaged in the most compact manner in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Box closure shall be in accordance with the appendix of PPP-B-636.

5.1.2 Level C.- The coffee boilers shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Six coffee boilers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Level A packages shall be packed upright, three in length, two in width, and one in depth. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Six coffee boilers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Level A packages shall be packed upright, three in length, two in width, and one in depth. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:15Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C.- Coffee boilers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules as applicable.

5.3 Palletization.- Unless otherwise specified (see 6.2), coffee boilers packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The coffee boiler covered by this specification is intended for carrying coffee from urns to points of service, and also for making coffee by boiling ground coffee in water.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(c) When weather-resistant class fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(d) When palletization is not required (see 5.3).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MS

User activity:


Navy - CG

Preparing activity:

Army - GL

Project No. 7330-0370

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

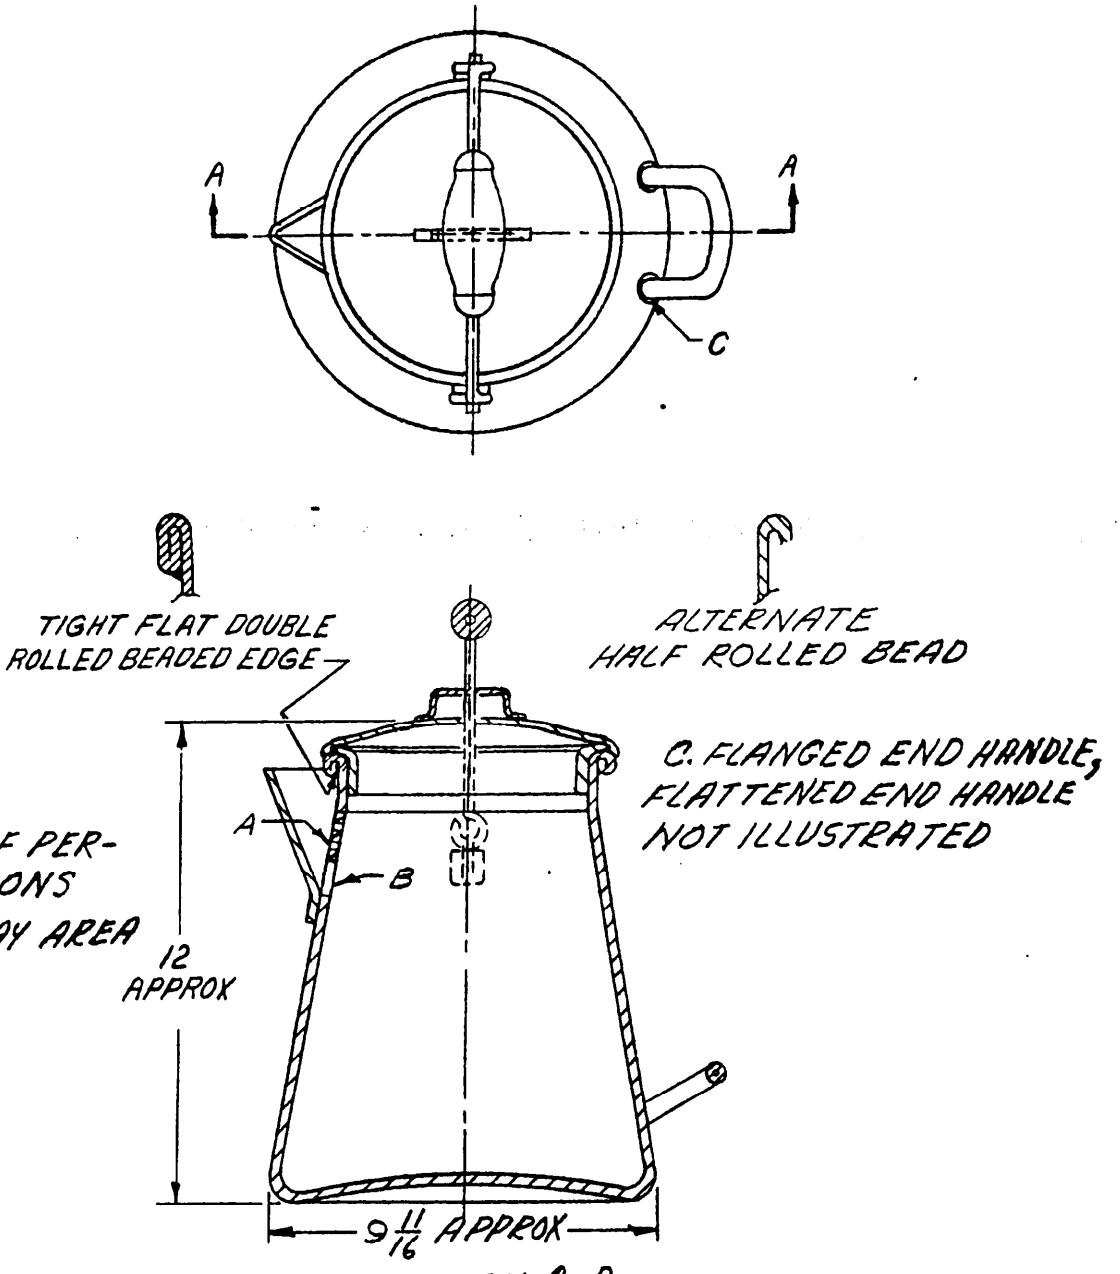

SECTION A-A

FIG 1. COFFEE BOILER, METAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Coffee Boiler, Metal; MIL-C-17536D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:15Z
Check the source to verify that this is the current version before use.