NOT MEASUREMENT SENSITIVE

MIL-C-85437B(AS)
9 FEBRUARY 1989
SUPERSEDING
MIL-C-85437A(AS)
15 November 1982

MILITARY SPECIFICATION

CAMERA SET, TELEVISION, AN/AXX-1

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes requirements for the manufacture and acceptance of Television Camera Set (TCS) AN/AXX-1 prime item.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Systems Engineering and Standardization Department (SESD) Code 53, Lakehurst, NJ 08733-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5821

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Military

MIL-W-5088	Wiring; Aircraft, Installation of
MIL-E-5400	Electronic Equipment, Aircraft, General Specification for
MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-M-7793	Meter, Time Totalizing
MIL-E-17555	Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of
MIL-T-18303	Test Procedures; Preproduction and Acceptance for Aircraft Electronic Equipment, Format for
MIL-N-18307	Nomenclature and Nameplates for Aeronautical Electronic and Associated Equipment
MIL-S-19500	Semiconductor Device, General Specification for
MIL-M-38510	Microcircuits, General Specification for
MIL-I-46058	Insulating Compound, Electrical (for Coating Printed Circuit Assemblies)
MIL-C-83723	Connector, Electrical (Circular, Environment Resisting), Receptacles, and Plugs

STANDARDS

Military

MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-470	Maintainability Program Requirements (for Systems and Equipments)
MIL-STD-704	Electric Power, Aircraft, Characteristics, and Utilization of
MIL-STD-781	Reliability Design Qualification and Production Acceptance Tests: Exponential Distribution
MIL-STD-785	Reliability Program for Systems and Equipment, Development and Production

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

MIL-STD-794 Parts and Equipment, Procedures for Packaging and Packing of

MIL-STD-883 Test Methods and Procedures for Microelectronics

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

AFSC DESIGN HANDBOOK

DH 1-4, 5 Jan 76 — Electromagnetic Compatibility, 3rd Edition, Revisions 1 and 2

NAVAL RESEARCH LABORATORY
SHOCK AND VIBRATION INFORMATION CENTER

Shock and Vibration Bulletin No. 41

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

ELECTRONIC INDUSTRIES ASSOCIATION (EIA)

RS-170 - Electrical Performance Standard for Monochrome Television Studio Facilities.

(Application for copies should be addressed to the Electronic Industries Association, 2001 Eye Street, N.W., Washington, D.C. 20006).

NORTHROP CORPORATION

WS-1308 - Norcote, Moisture- and Fungus-Resistant Coating.
MP-101 - Fabrication and Inspection of Printed Wiring Boards.

DRAWINGS

336241 - Reliability Test Plan for TVSU Program.
336256 - Reliability Test Procedure, Reliability Qualification Test for Television Camera Set (TCS).
336700 - Acceptance Test Procedure for Television Camera Set.
339000-501 - Camera Set, Television.
339005 - Wiring Diagram Interface Drawing.
339009 - Television Camera Assembly Installation Control Drawing.
339010 - Control-Power Supply Installation Control Drawing.
339050-501 - Television Camera Assembly.
339500-501 - Control-Power Supply Assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

339005 - Wiring Diagram Interface Drawing.
339009 - Television Camera Assembly Installation Control Drawing.
339010 - Control-Power Supply Installation Control Drawing.
339050-501 - Television Camera Assembly.
339500-501 - Control-Power Supply Assembly.

(Application for copies should be addressed to Northrop Corporation, Electro-Mechanical Division, 500 East Orangethrope Avenue, Anaheim, California 92801.)

2.1.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 System description. The TCS shall provide the F-14 aircraft with a visual target identification system that offers a 10:1 nominal improvement in resolution within the positive identification range of the unaided eye of the aircrew during clear weather and daylight conditions.

3.1.1 Major components list. The TCS major components shall be as follows: (see Drawing 339000-501)

TABLE I. Major Components List.

Weapon-Replaceable Assemblies (WRA)	Measurement	Maximum Weight (lb)
WRA-1 Television Camera Assembly (TCA) Drawing No. 339050-501	Length shall be not greater than 31.8 inches. Diameter shall be not greater than 9.0 inches. (See Drawing 339009)	60
WRA-2 Control-Power Supply (CPS) Drawing No. 339500-501	Length shall be not greater than 16.0 inches. Height and width shall be not greater than 8.0 inches each. (See Drawing 339010)	40
		Total 100

3.2 First article. When specified (see 6.6), a sample shall be subjected to first article inspection (see 6.6) in accordance with 4.4.2.4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the current version before use.

3.3 Characteristics

3.3.1 Detail performance requirement

3.3.1.1 Television Camera Assembly (TCA). The TCA shall meet the requirements specified in 3.3.1.1.1 through 3.3.1.1.7.

3.3.1.1.1 Function. The TCA shall convert target images into television images at two selectable magnifications while providing two axis rate stabilization of the television cameras lines of sight.

3.3.1.1.2 Form factor. The TCA shall be mounted and enclosed in a cylindrical case which will attach to the F-14 airframe. The enclosure shall be not greater than 31.8 inches in length nor 9.0 inches diameter.

3.3.1.1.3 Weight. The weight for the TCA shall be not greater than 60 pounds.

3.3.1.1.4 Contents. The TCA shall contain the following components: vidicons, telescopes, gimbals, and the associated electronics of the TCA.

3.3.1.1.5 Controls. All controls for the TCS shall be located in the F-14. These controls are not provided as part of the TCS system. Control signals will be provided to the TCS interface. The TCS shall, when specified power is provided, respond to all proper control signals arriving at the TCS-F-14 interface, shown on Drawing 339005. Control signals are specified in 3.3.2.17.

3.3.1.1.6 Electrical connections. External electrical connectors on the TCS shall meet the requirements of MIL-E-5400 or MIL-C-83723 and shall also be as shown on Drawing 339005.

3.3.1.1.7 Warmup time. The time required after initial turn-on for the TCS to perform as specified shall be not greater than two minutes from a 25°C ambient condition and not greater than 9 minutes from a -18°C ambient condition.

3.3.1.2 Control-Power Supply (CPS). The CPS shall contain regulated dc power supplies and electronics required for synchronization signal generation, video tracker logic, video symbology generation, mode control, position control, and interface buffers.

3.3.1.2.1 Form factor. The CPS shall be mounted internal to the F-14 and shall be 16.0 inches long by 8 inches wide by 8 inches high.

3.3.1.2.2 Weight. The weight of the CPS shall not be greater than 40 pounds.

3.3.1.2.3 CPS performance. The CPS shall include the interface between: the TCS and the F-14 air vehicle; the AN/AWG-9 radar; and the AN/AWG-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

computer. The source, destination, and characteristics of these interface signals, their purpose, and interaction with other onboard systems and components are specified in 3.3.2.

3.3.1.3 Television Camera Set (TCS). The TCS shall consist of the TCA and the CPS. Modes of operation of the TCS as installed in the F-14 aircraft shall be as specified in 3.3.1.3.1 through 3.3.1.3.4.

3.3.1.3.1 Tracking mode. The TCS shall be capable of automatically video tracking any airborne target, within its cone of vision, that has an apparent contrast at the system input of not less than 20 percent. Contrast is considered as the ratio of the difference between the target brightness, B_T, and the target background brightness, B_B, to the target background brightness, or:

$$\frac{B_T - B_B}{B_B}$$

3.3.1.3.2 Acquisition modes. The TCS shall have four selectable modes for acquiring targets for autotracking: Manual Acquisition (MA) (see Figure 1), Automatic Acquisition (AA) (see Figure 2), Semiautomatic Acquisition (SAA) (see Figure 1), and Automatic Acquisition with Search (AS) (see Figure 3). Appendix D tabulates the TCS acquisition mode structure.

3.3.1.3.2.1 Manual acquisition. The manual acquisition mode shall provide the operator with the capability to manually track (point) and manually acquire (initiate autotrack) small targets or targets that are in a cluttered environment. Acquisition requirements in this mode are that the target shall be stable with an aspect ratio of approximately 1:1 and that it be not less than two raster lines (TV lines) in height. The manual acquisition mode shall be capable of being entered at any time from any mode. Entry into the manual acquisition mode shall be made by first entering the manual track capability. Entry into manual track shall be accomplished by positioning the switch on the hand control to the first detent (half action) to enable the system to respond to rate commands generated by the hand control unit. Once the operator has positioned the track window over the selected target, manual acquisition shall be entered by positioning the switch on the hand control to the second (full action) detent. Acquisition time during the manual mode is a function of the availability of targets and the skill of the individual operator.

3.3.1.3.2.2 Automatic acquisition. When the automatic acquisition mode is enabled, the TCS shall automatically acquire a stable target, having an aspect ratio of approximately 1:1, that is within the center 50 percent of the raster of the field of view selected. The target must exhibit an image that is not less than three raster lines (TV lines) high in an uncluttered, uniform background. Figure 4 details the dimensions of the center 50 percent of the raster (automatic acquisition window).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

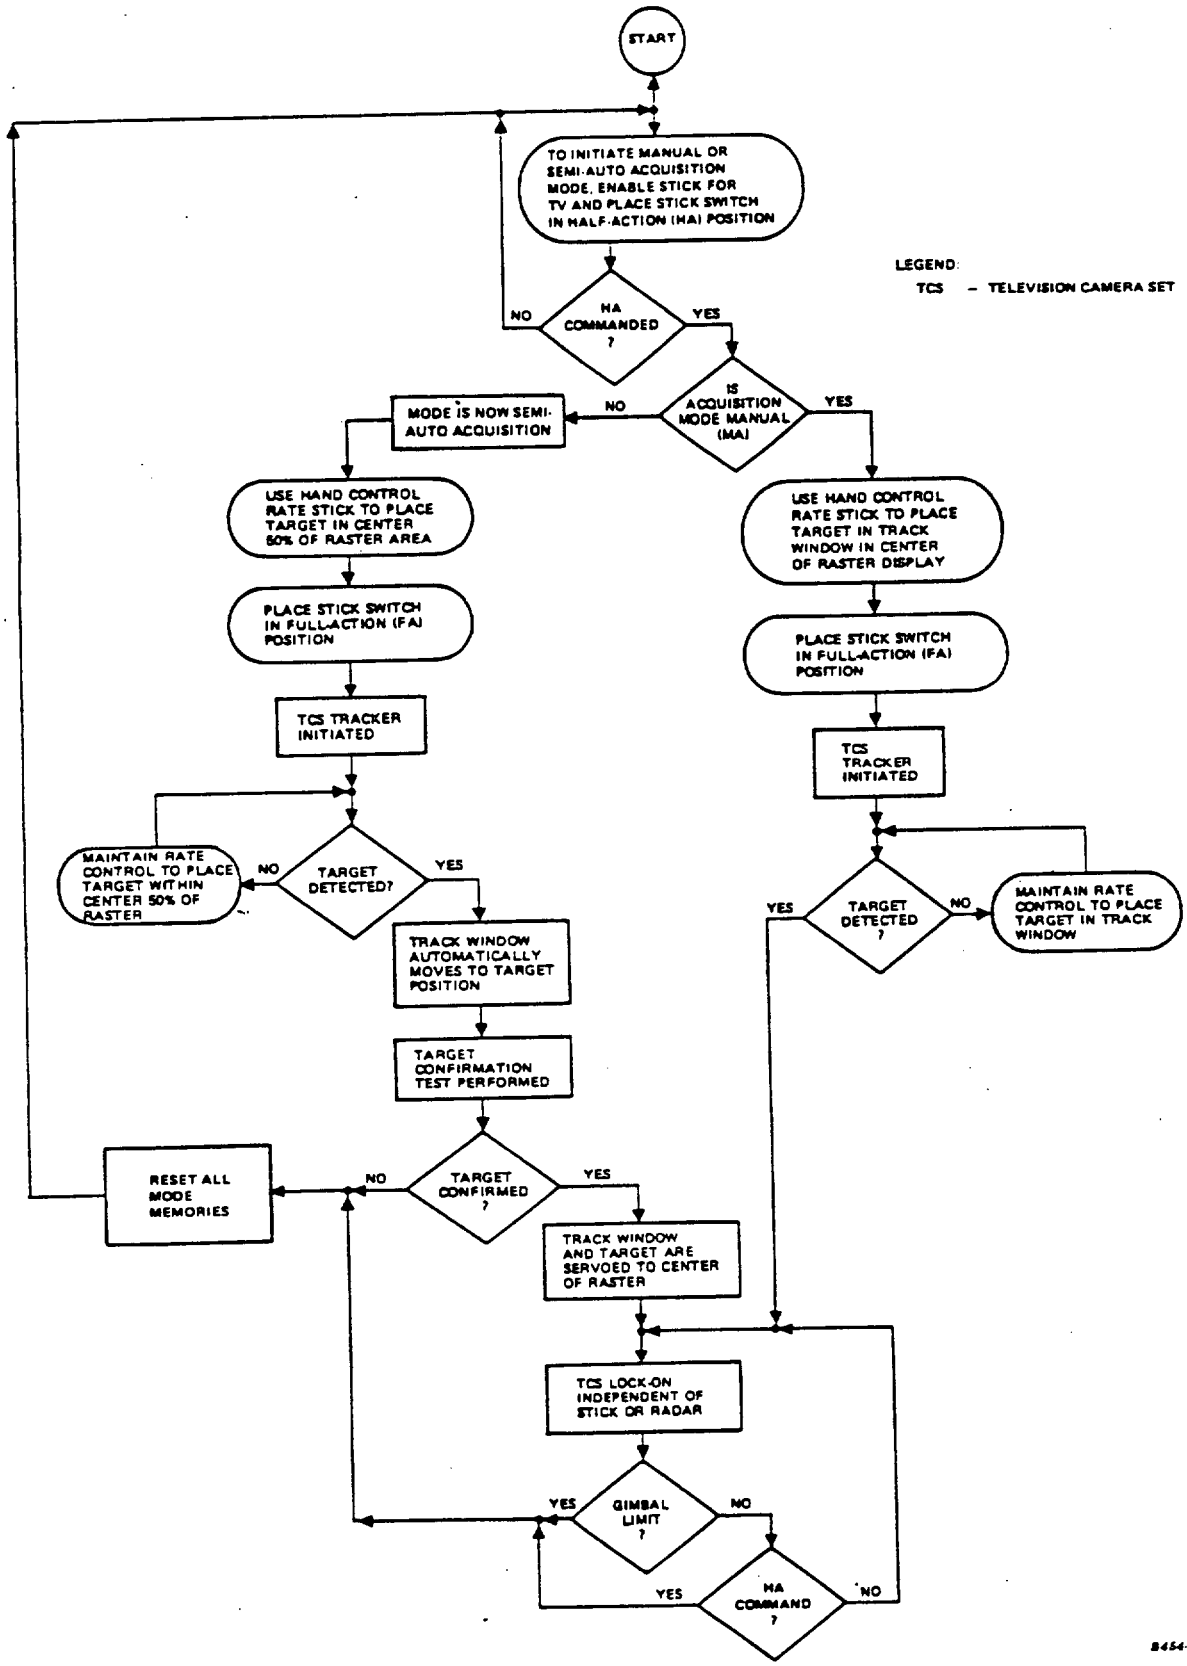


FIGURE 1. TCS flow diagram, manual acquisition (MA) and semi-automatic acquisition (SAA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

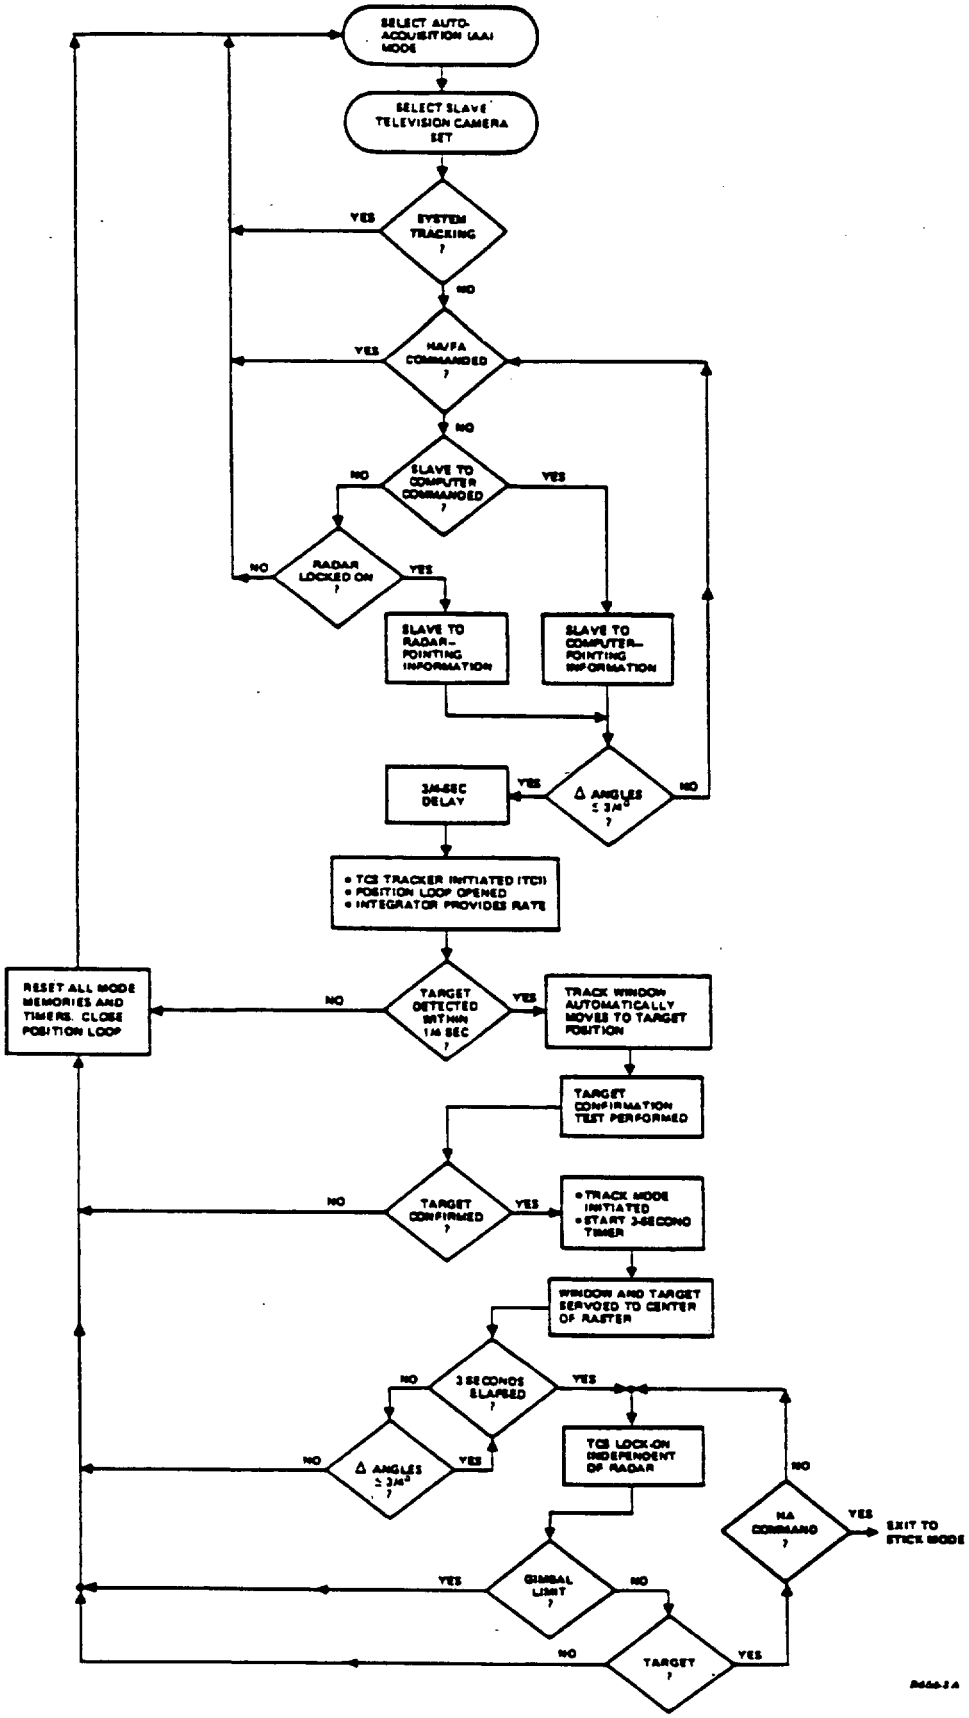


FIGURE 2. TCS flow diagram, automatic acquisition (AA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.


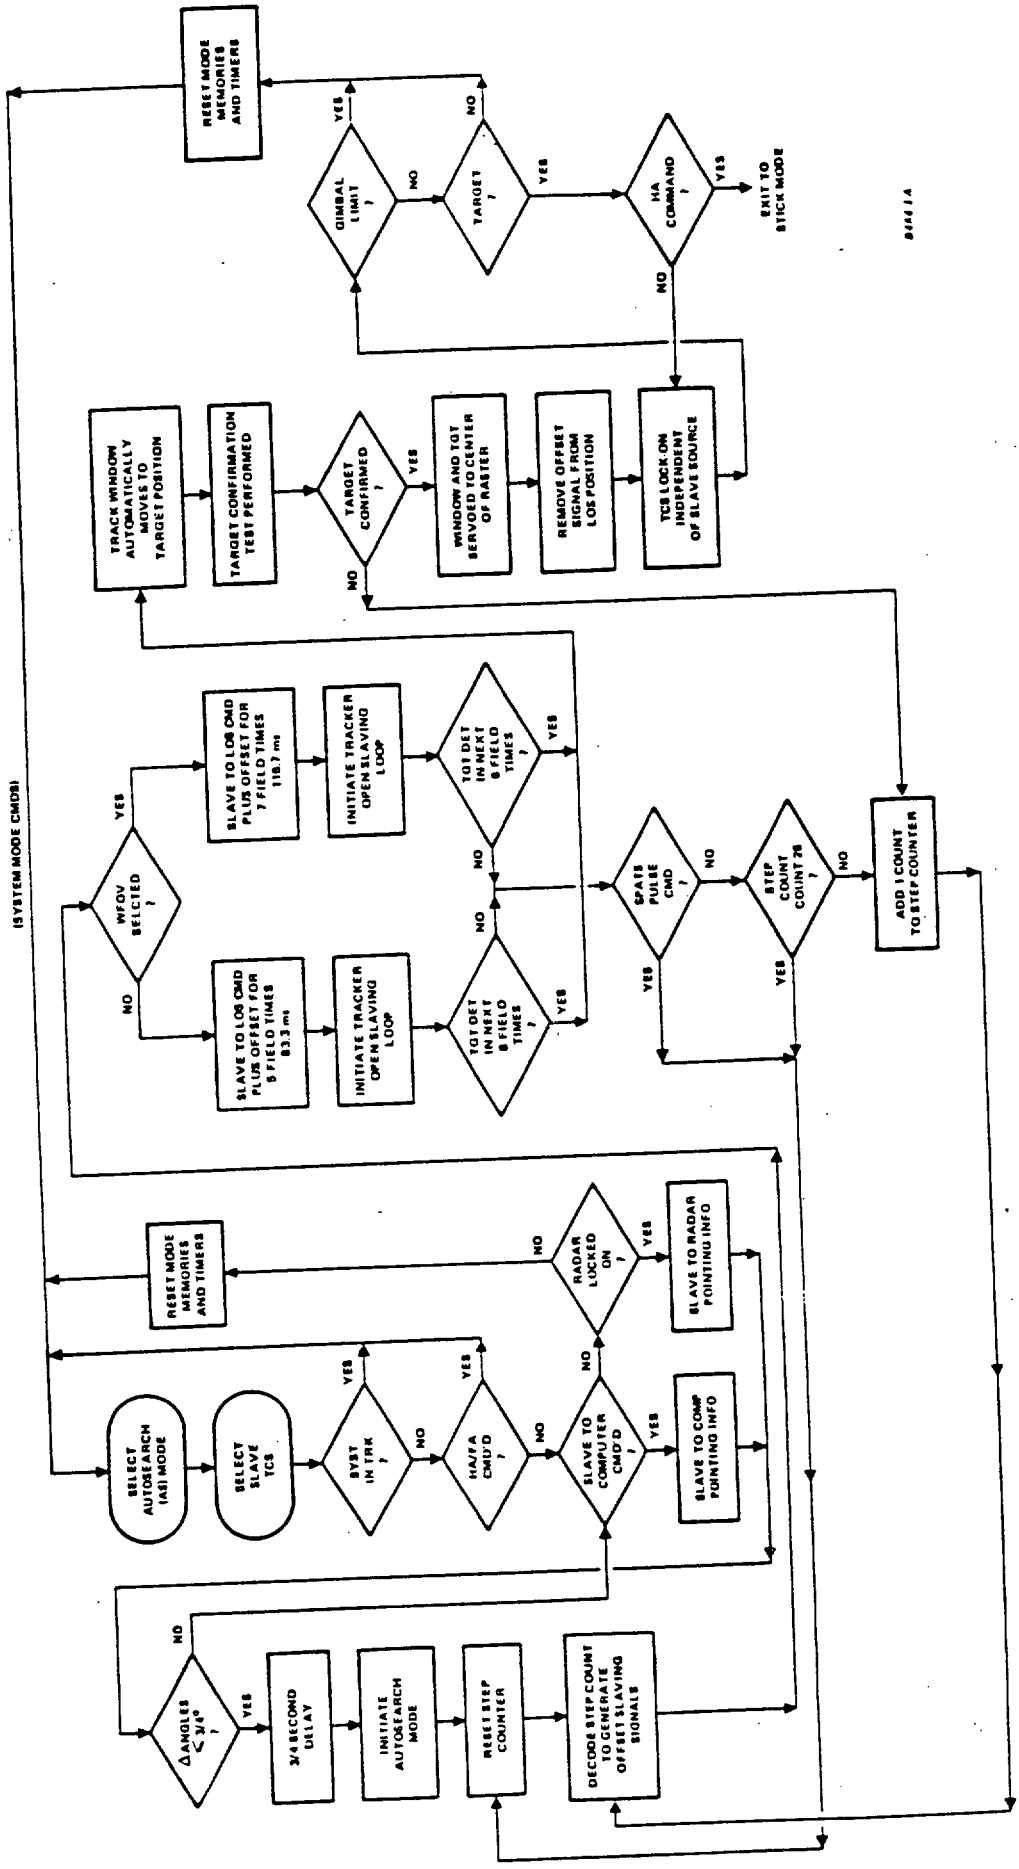


FIGURE 3. TCS Flow Diagram, Automatic Acquisition with Search (AS)

Source: https://assist.dla.mil- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

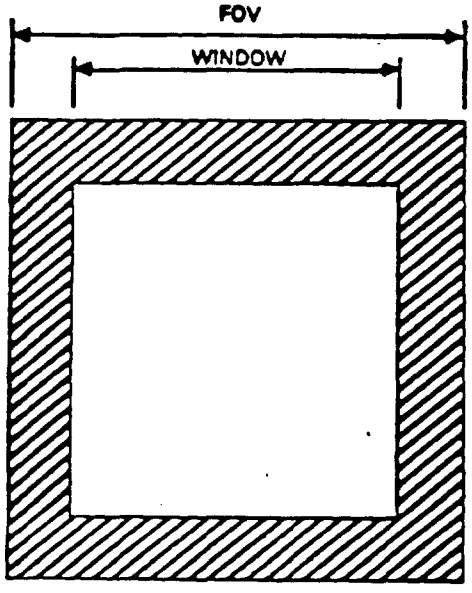

	NFOV	WFOV
FOV	7.7 mrad ±8 percent	24.7 mrad ±8 percent
Window	5.4 mrad ±8 percent	17.3 mrad ±8 percent

B21S4A

FIGURE 4. Center dimensions, automatic acquisition window

3.3.1.3.2.3 Semiautomatic acquisition. The semiautomatic mode is a submode that can be entered when either the Automatic Acquisition (AA) mode or the Automatic Search (AS) mode is selected. This mode shall provide the operator with the capability of taking control of the pointing (manual tracking) and autotracking (manual acquisition) functions during either automatic mode by manipulating the hand control. Both target tracking and target acquisition operations shall be as described in the Manual Acquisition (MA) mode except that acquisition is initiated whenever the target is within the center 50 percent of the raster of the FOV selected. Target requirements are the same as in the AA mode.

3.3.1.3.2.4 Automatic acquisition with search. When the automatic acquisition with search mode has been selected, the TCS shall enter a mode that augments the automatic acquisition mode. In this mode, a search pattern, generated internally by the TCS, will be added to the externally-applied slaving commands to effectively increase the acquisition field of view. The target acquisition requirements for the Automatic Search (AS) mode shall be the same as for the Automatic Acquisition (AA) mode.

3.3.1.3.3 Search modes. The TCS shall be capable of operating in one of two search modes. Either mode, when enabled, shall generate a repetitive search pattern that expands the automatic acquisition target gathering area. One TCS search mode shall be synchronous with the Track While Scan (TWS) mode of the AN/AWG-9 computer-generated cyclic Search Pattern Size (SPATS) signal

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

for synchronization. The other TCS search mode shall be asynchronous and shall be enabled by the absence of the computer SPATS signal. The flow diagram shown on Figure 3 describes the TCS search modes.

3.3.1.3.3.1 Asynchronous search mode. A repetitive 25-step (5 by 5) search pattern shall be generated by the TCS when the AN/AWG-9 computer SPATS signal is inactive. (See Appendix A, Mode Chart.) The pattern shall consist of a mosaic of overlapping automatic acquisition target-gathering windows, and the size of the pattern shall vary as the FOV selection is varied. The direction of the pattern, as shown on Figure 5, is as viewed looking forward. The table shown on Figure 5 details the parameters of this pattern.

3.3.1.3.3.2 Synchronous search mode. The TCS synchronous search mode has been optimized for the TWS mode of the AN/AWG-9 fire control system. In this mode the TCS shall use the AN/AWG-9 computer track file update signal, SPATS, to synchronize the search pattern. The pattern generated by the synchronous mode shall be a 3 by 3 pattern that results from interrupting the 5 by 5 pattern upon completion of the ninth step. Figure 5 shows the parameters of this nine-step pattern.

3.3.1.3.4 Gunscore mode. The TCS shall be capable of scoring hits upon a target during real or simulated use of the M61A cannon of the F-14A. This selectable Gunscore mode can be entered any time prior to initiating an airborne gun firing routine. The requirements for Gunscore are that the TCS not be autotracking and that the TCS WFOV, TCS Manual Acquisition (MA), and TCS Slave be selected. Figure 6 shows the Gunscore mode sequence. During simulated firing sequences the TCS LOS is driven to the point where the projectiles meet the target. At the calculated time of impact the TCS autotracker evaluates the 5.4 mrad square center of the FOV for targets whose height subtends an angle greater than 1 mrad. The 5.4 mrad section covers the dispersion pattern of the M61A cannon at a distance of 1,000 feet. The AN/AWG-9 fire control computer scores simulated hits by evaluating the TCS TRACK VALID interface during the firing sequence.


3.3.1.4 Instantaneous FOV. The TCS shall incorporate two selectable Fields of View. The Narrow Field of View (NFOV) shall be 7.7 by 7.7±0.58 mrad (26.5 arc minutes ±2 arc minutes). The Wide Field of View (WFOV) shall be 24.7 by 24.7±2.9 mrad (85 arc minutes ±10 arc minutes).

3.3.1.5 Cone of vision. The cone of vision of the TCS shall be 30±1 degrees in azimuth and in elevation. The cone of vision shall be provided by a gimbal system within the TCA. Positioning of the gimbal system shall be controlled by signals/commands from the control-power supply unit.

3.3.1.6 Alignment

3.3.1.6.1 Display centerline. A display reference centerline for test use shall be digitally generated within the TCS in the form of a Vertical Centerline (VCL) and a Horizontal Centerline (HCL). These signals, when combined with the test monitor video, shall define the center of the display

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

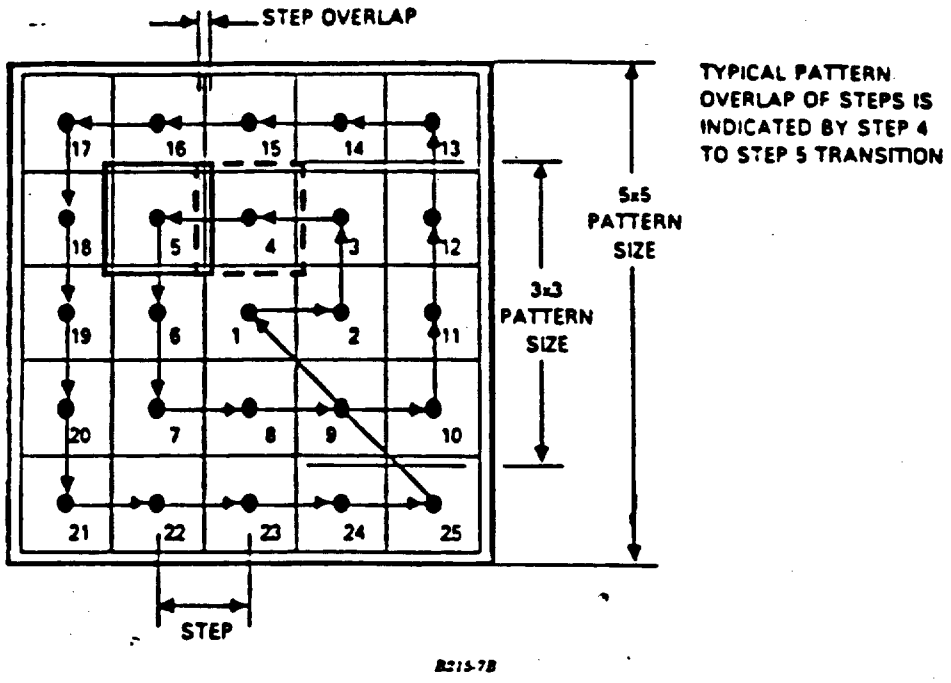

Parameter		NFOV	WFOV
Step Size		4.8 mrad ±11 percent	15.8 mrad ±11 percent
Step Overlap		0.6 mrad ±10 percent	1.5 mrad ±10 percent
pattern size with overlap	3 by 3	15 by 15 mrad ±10 percent	49 by 49 mrad ±10 percent
	5 by 5	25 by 25 mrad ±10 percent	81 by 81 mrad ±10 percent
pattern period	3 by 3	2.04 sec nominal. See paragraph 3.3.2.12.	
	5 by 5	5.50 sec $^{+0.00}_{-0.01}$	
Step Period		Step 1 = 283 ms	
		Step 2 to 25 = 217 ms	

FIGURE 5. TCS search modes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

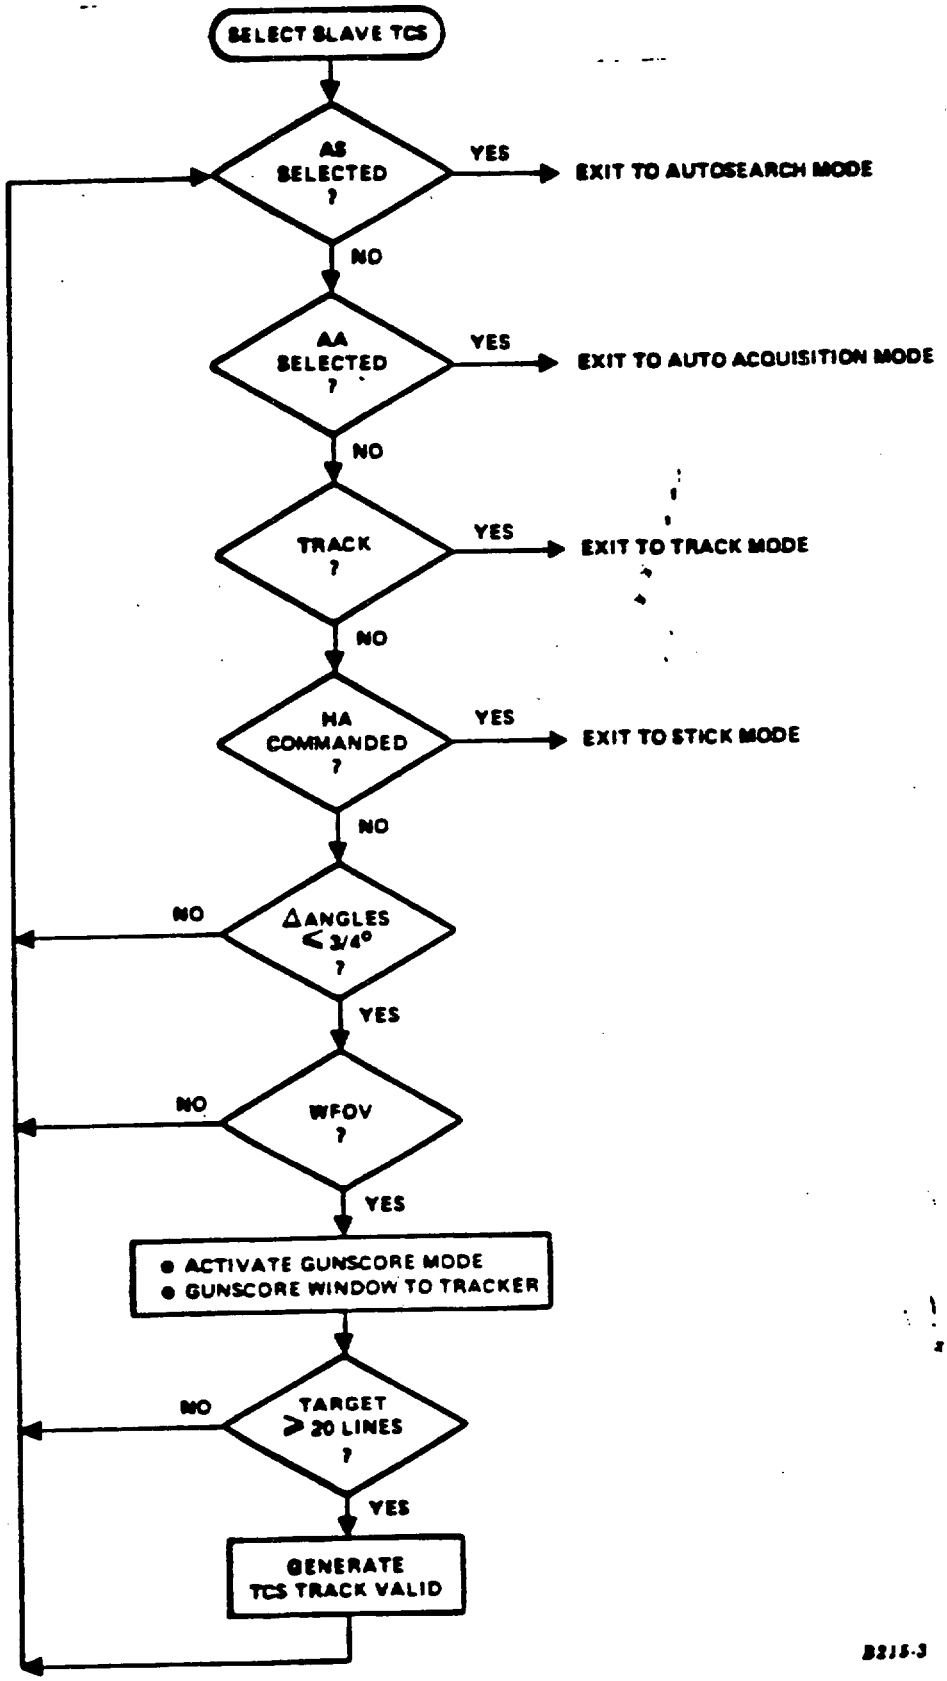


FIGURE 6. TCS flow diagram - Gunscore (GSS) mode

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

raster with respect to time to ±0.7 percent of the sweep time. The Line of Sight (LOS) in either field of view is considered as the display raster center which is determined by the test display centerline.

3.3.1.6.2 Track window alignment. In the cage mode, the center of the track window shall be coincident with the center of the TV display raster within a tolerance of ±0.29 mrad (±1 arc minute), 1σ, in each axis, and shall be referred to the normal narrow field of view raster of 7.7 mrad (26.5 arc minutes) in height and width. The cage mode shall be the normal operating mode when not slaving, tracking, or using hand control inputs in the rate mode. In the cage mode, the slaving signals to the TCS shall not be used and the TCS gimbals shall be positioned so that they are boresighted with respect to the TCA mounting surface.

3.3.1.6.3 Bench alignment accuracy. The TCS, as delivered, shall be bench aligned, so that when caged the NFOV is within ±0.29 mrad (±1 arc minute) in both azimuth and elevation, with respect to the TCA mounting surface.

3.3.1.6.4 Bench boresight adjustments. The TCS shall include adjustments that provided for positioning of the narrow field Line of Sight (LOS) to within 0.07 mrad (±0.25 arc minute) (azimuth and elevation) of the TCA mounting surface. The roll adjustment shall be capable of positioning the NFOV LOS to the TCA mounting surface to within 1.45 mrad (±5 arc minutes) in roll.

3.3.1.7 Lines of sight. The narrow and wide-field lines of sight shall be coincident within 1.45 mrad (±5 arc minutes).

3.3.1.8 Sun sensor. The vidicon sensors (narrow and wide) shall be protected from sun illumination damage. The sun shutter mechanism shall be failsafe in that power shall be required to keep the sun shutter open.

3.3.1.8.1 Sun shutter triggering levels. The sun sensor shall activate the protective shutter when the illumination level exceeds 20,000±5,000 foot Lamberts (fL) from a 3,000 Kelvin tungsten source.

3.3.1.8.2 Sun sensor cone of view. The sun sensor shall have a cone of view with a 174±52 mrad (10±3 degrees) included angle.

3.3.1.8.3 Sun sensor shutter speed. The sun sensor shall close, after triggering, within 120 milliseconds.

3.3.1.9 Gimbal slewing dynamics. Stabilization shall be provided by a stabilized two-gimbal system. The maximum angular slew rate capability for the LOS shall be not less than 30 degrees/seconds. The maximum angular slew acceleration capability for the LOS shall be not less than 115 degrees/second^2. The TCS shall be capable of accepting LOS pointing commands or manual control stick commands as specified in 3.3.2.17.1 and 3.3.2.17.2. The stick position versus rate command shall be implemented as shown on Figure 7. Table II specifies control stick movement versus gimbal angle motion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.1.10 Automatic video tracking target dynamics. The maximum video autotrack rate, in the WFOV and NFOV, shall be not less than 87 mrad (5 degrees) per second. The maximum video autotrack acceleration, in the WFOV and NFOV, shall be not less than 72 mrad (4.1 degrees) per second^2.

3.3.1.11 Base motion isolation. Base motion isolation shall accommodate F-14 aircraft pitch and yaw rates of up to 3 rad (175 degrees) per second and angular accelerations up to 6.1 rad (350 degrees) per second^2.

3.3.1.12 Optical video tracker. The TCS shall provide automatic video tracking in either the WFOV or NFOV. The video tracking logic shall contain as a minimum:

a. Tracking of gated video
b. Adaptive tracking window size logic
c. Automatic contrast polarity selection logic

3.3.1.13 Static limiting resolution. The angular horizontal resolution of the complete system, when observing a stationary target (collimated at infinity) with the NFOV, shall be equal to or better than 34 μrad (7 arc seconds) when measured with a USAF 1951 resolution standard on Conrac Model QQA 14C-SP-1 video monitor or its equal. The wide field resolution, when measured under the same conditions, shall be equal to or better than 126 μrad (26 arc-seconds). (See Table III.) The NFOV resolution, when measuring a target collimated at 7 nautical miles, shall be equal to or better than 34 μrad (7 arc-seconds).

3.3.1.14 Dynamic limiting resolution. The angular horizontal resolution of the complete system, when subjected to the vibration environment specified in 3.3.5.3, shall be equal to or better than 39 μrad (8 arc-seconds), when measured with a USAF 1951 resolution standard on a Conrac Model QQA 14C-SP-1 video monitor or its equal.

3.3.1.15 Square wave response. The modulation of the video signal, while observing a four-bar pattern, shall be greater than values listed in Table III. The modulation is determined by recording the peak-to-peak amplitude of the video signal (as observed on an oscilloscope) through the four-bar pattern, then calculating the percent modulation as follows:

$$\% \text{ modulation} = \frac{A_p}{M_o} \times 100$$

when:

A_p = recorded peak-to-peak amplitude of the modulated signal

M_o = the amplitude difference between the black and white level of the video signal measured at spatial frequency of approximately 25 TVL.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the current version before use.

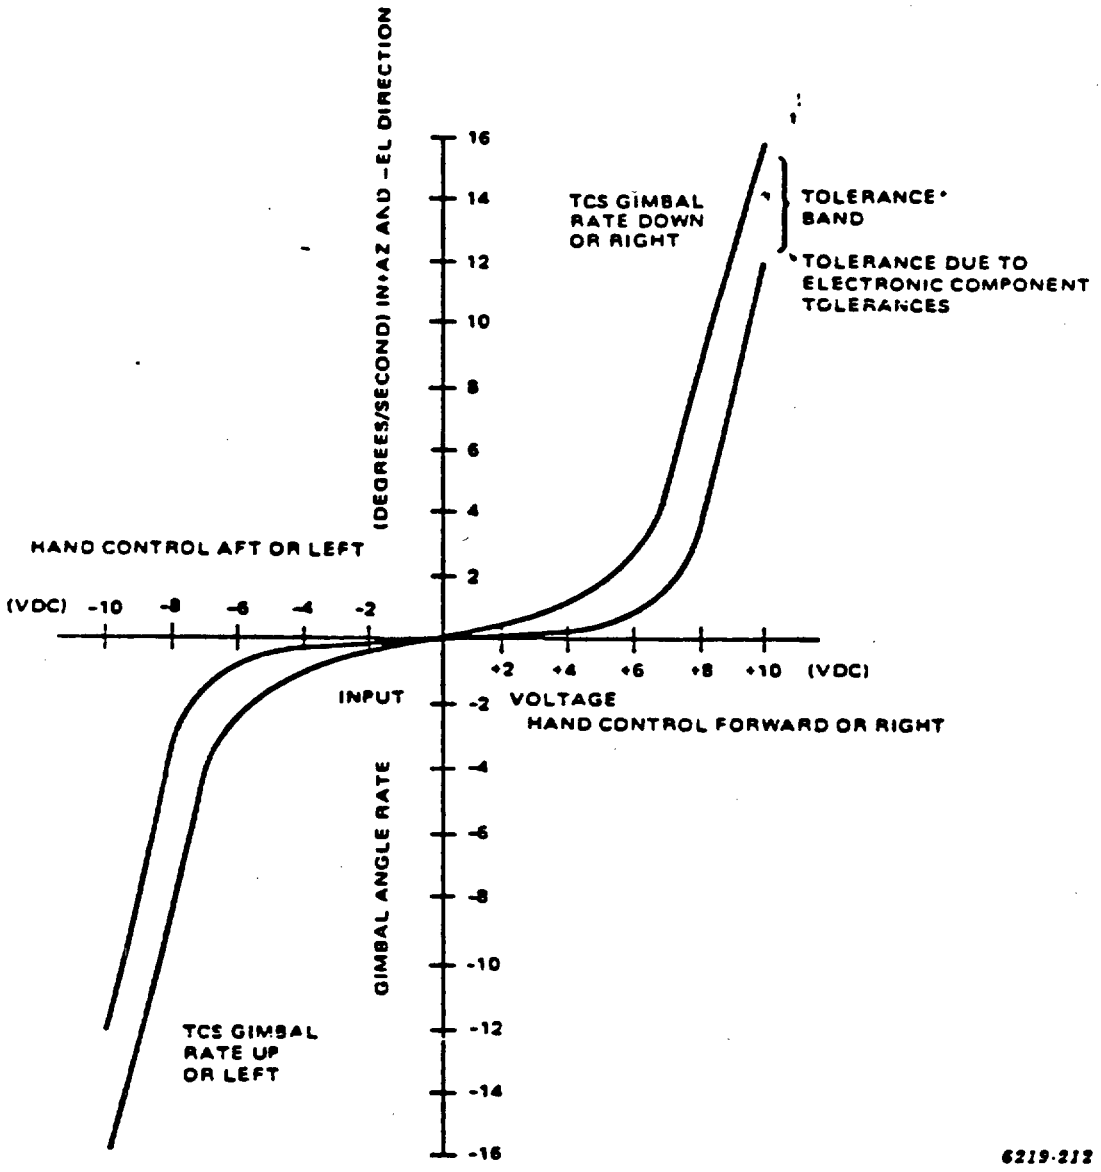


FIGURE 7. Gimbal rate for TCS versus input voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Stick motion versus gimbal angle motion.

Hand Control Stick Motion	Gimbal Angle, Cross-Hair Motion
Forward	Down
Aft	Up
Right	Right
Left	Left

TABLE III. Static resolution and square wave response.

	Static Limiting Resolution		Square Wave Response		
			Cycles/Millirad		
	Millirad	Cycles/Millirad	6.5	13.0	19.5
WFOV	0.034	29.4	(100 TVL) 85%	(200 TVL) 55%	(300 TVL) 25%
WFOV	0.126	7.9	2.0 (100 TVL) 80%	4.0 (200 TVL) 45%	6.1 (300 TVL) 20%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.1.16 Gray scale rendition. The TCS video signal shall exhibit at least eight gray shades from a ten-shade scale when displayed on a Conrac Model QQA 14C-SP-1 video monitor or its equal. Gray shade steps are defined as follows:

Step	1	2	3	4	5	6	7	8	9	10
Percent Transmission	100	71	50	35	25	17.7	12.5	8.8	6.3	4.4

NOTE: 100 percent transmission is defined at a nominal 1,500 fL scene brightness.

3.3.1.17 Automatic light range. The TCS shall automatically maintain the video output peak white reference levels specified in 3.3.2.1 for scene brightness variations from 100 to 6,000 foot-Lamberts. The automatic light range is based upon scene video and is independent of the display symbology signal component.

3.3.1.18 Scan failure protection. The TCS vidicon shall not incur damage or permanent degradation due to loss of sweep.

3.3.1.19 TCS geometric distortion. The total displacement of any point for both NFOV and WFOV shall be not greater than 2 percent of the full raster inside zone 1 and not greater than 4 percent of the full raster outside of zone 1. Zone 1 is a square area having a center coincident with the raster area and an area equal to one-half of the full raster area.

3.3.1.20 Television format. The TCS television format shall be characterized as follows:

a. 30 picture frames per second
b. 525 scan lines per frame
c. 2 fields per frame fixed interface
d. Unity (1:1) camera scan aspect ratio

3.3.1.21 Display symbology. Symbology information shall be contained in the four TCS video signal sources specified in 3.3.2.1. The symbology shall be in the form of constant voltage amplitude pulses added to the scene during active raster scan periods. The following information shall be contained in the TCS display symbology signals:

a. Track window. The track window shall be as shown in Figures 8 and 9 and each corner representation shall be not less than two line widths in height with a nominal 1:1 aspect ratio.

b. TCS gimbal angle crosshair. The Gimbal Angle Crosshair (GACH) shall be as shown on Figures 8 and 9 and shall be 118±18 raster lines in height and 13±2 microseconds in width. The line thickness shall be 2±1 TV lines for the horizontal and 0.22±0.12 µsec for the vertical. The crosshair position in the raster display shall indicate the TCS LOS with respect to the FRL. The scaling shall be such that the total

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

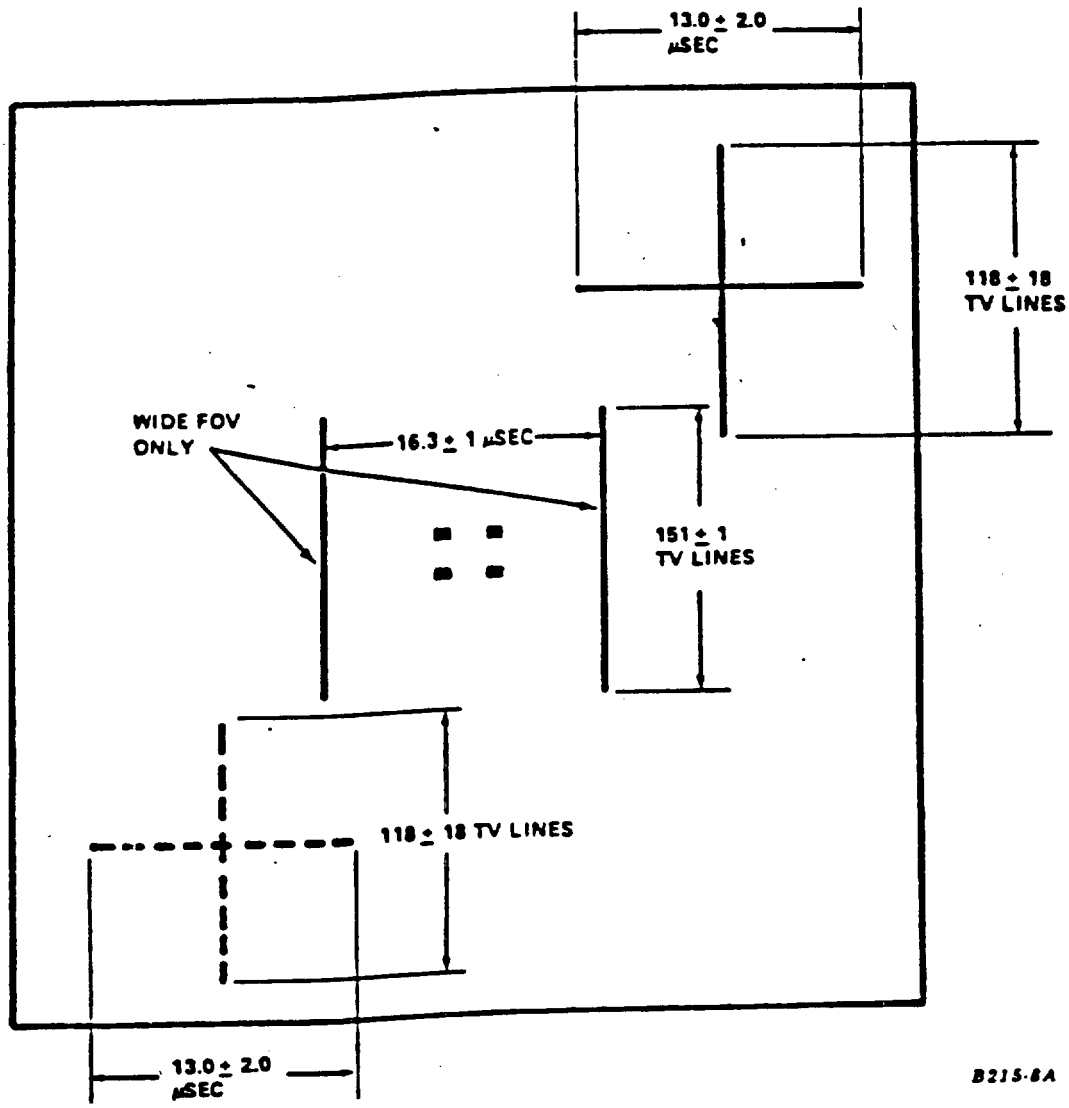


FIGURE 8. Video symbology of both fields of view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

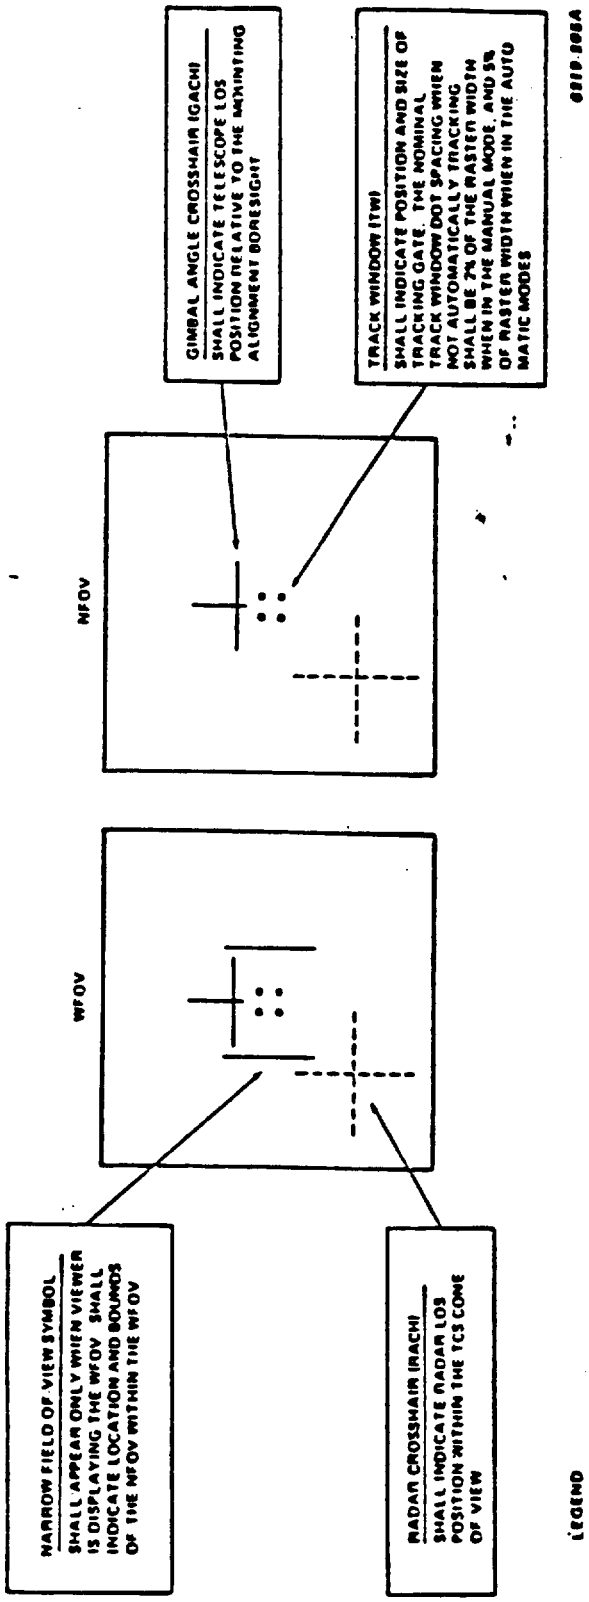


FIGURE 9. Symbology definition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

raster width represents ±15° ±10 percent in azimuth and the total raster height represents ±15° ±10 percent in elevation. In the TCS caged position, the crosshair center shall be in the timewise center of the display raster within ±3 percent of the raster width and height.

c. Radar LOS position crosshair. The Radar Crosshair (RACH) symbol shall be as shown on Figures 8 and 9. The crosshair shall be a dash line cross with each dash consisting of a width of 0.3±0.1 microsecond and a height of 3±2 TV lines. The line thickness shall be 2±1 TV lines for the horizontal and 0.22±0.12 μsec for the vertical. The crosshair position in the raster shall indicate the radar LOS with respect to the FRL when the radar is tracking, or the commanded LOS when slaving to the AWG-9 computer. Scaling shall be the same as for the TCS gimbal angle crosshair.

d. Blanking of radar and TCS crosshairs. The radar and TCS crosshairs shall be blanked when over the track window to approximately twice the track window dimensions. The maximum dimension of the blanked area shall be not greater than 15 percent of the total raster area.

e. Wide field of view symbol. The wide field of view symbol shall be as shown on Figures 8 and 9. It shall appear only when the viewer is displaying the wide field of view, and shall be 151±1 raster lines in height and 16.3±1 microseconds in width.

3.3.1.22 Angular accuracy. The TCS narrow field-of-view line-of-sight shall be positioned with respect to the TCS mounting provisions to an accuracy of ±1.5 milliradians (5 arc minutes) 2σ in both azimuth and elevation when slaved with errorless slaving signals, and with the radome refraction compensation circuit (see 3.3.1.23) inhibited within the TCS. This accuracy shall apply throughout the 524 milliradian (30 degree) cone of vision of the TCS.

3.3.1.23 Radome refraction compensation. The TCS shall incorporate a radome refraction compensation circuit which adds a correction term to the slaving K direction component whenever the TCS is slaved in the minus elevation direction. The correction shall be effective in both the slave-to-radar and slave-to-computer modes. The correction polarity shall be such as to decrease the slaved "look-down" angle, and shall have a magnitude that is a function of the commanded minus elevation angle as shown on Figure 10. The corrected elevation angles versus commanded elevation angles shall be as specified in Table IV. The correction circuit shall be capable of being inhibited during bench calibration and alignment of the TCS.

3.3.1.24 TCS reset. A TCS reset shall be initiated whenever the LOS limit switch is activated at gimbal limit or whenever the hand control is enabled for TCS and the hand control action switch is placed in the half-action (HA) position and released. When the TCS reset occurs and "Slave TCS" has been selected, the TCS shall reslave the radar LOS if the radar is tracking, or to the AWG-9 computer if SLAC is true. If the conditions for reslaving are not met, the TCS shall return to the cage forward position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

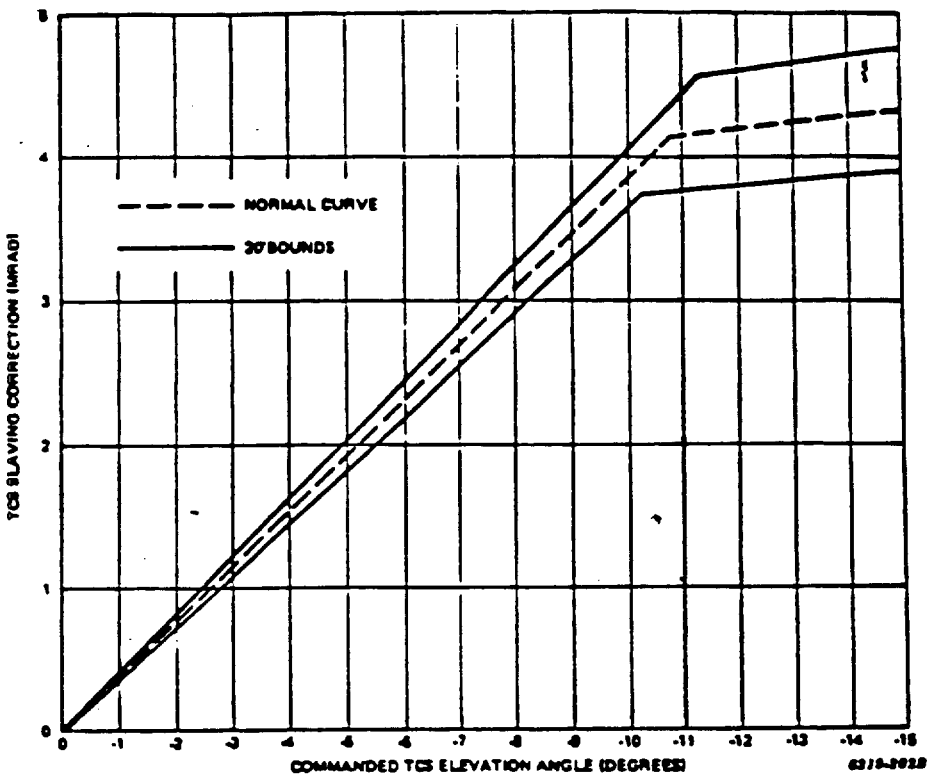


FIGURE 10. TCS elevation correction for radome refraction.

3.3.2 TCS/F-14 interface. The following paragraphs 3.3.2.1 through 3.3.2.22 describe the characteristics of the interface between the TCS and F-14 aircraft. All angular position data is referenced to the TCS mounting surface.

3.3.2.1 Video outputs. The TCS shall provide four mutually isolated television video signal sources for the aircraft interface. Table V specifies parameters that must be measured in accordance with 1, 2, and 3 below. Specifications for additional characteristics with respect to the four output signals follow the table. (See Figures 11 and 12).

a. All levels, except for the display symbology, are measured with respect to the blanking level.

b. All measurements shall be made at the TCS output terminals with the noted load impedances and do not take into consideration losses in the interface.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IV. Radome correction.

Commanded Elevation Angle (Deg)	Corrected Elevation Angle (Deg)	2σ Tolerance (Deg)
-1	-0.978	±0.0013
-2	-1.957	±0.0024
-3	-2.935	±0.0034
-4	-3.913	±0.0045
-5	-4.891	±0.0056
-6	-5.869	±0.0067
-7	-6.847	±0.0078
-8	-7.825	±0.0089
-9	-8.803	±0.010
-10	-9.781	±0.011
-11	-10.762	-0.016+0.022
-12	-11.760	±0.023
-13	-12.757	±0.023
-14	-13.754	±0.024
-15	-14.752	±0.025

3. The black reference levels are specified as a maximum level with a scene illumination no less than 1500 foot-Lamberts and a vidicon ambient temperature no greater than 72°F.

a.	Shading horizontal	Less than 35 percent over the center 80 percent of the raster
b.	Horizontal period	63.49±0.01 microseconds
c.	Vertical period	16,666.7±1.7 microseconds
d.	Polarity	Black - negative
e.	Bandwidth	16 Hz to 12 MHz (NFOV), 16 Hz to 8 MHz (WFOV), at 3 dB down

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE V. Output destination.

Parameter	DD	TID*	VTR	VDI*
Video Output Format	Clamped Composite	Clamped Composite	Clamped Composite	Clamped Only
Reference Figure No. Source Impedance	12 51Ω±5%	12 91Ω±5%	12 75Ω±5%	11 91Ω±5%
Load Impedance (Nominal)	50Ω	93Ω	75Ω	93Ω
Blanking Level (VDC)	0±0.1 V	0±0.1 V	0±0.1 V	0±0.1 V
White Reference Level (ß)	1.75 Vdc ±10%	1.75 Vdc ±10%	1.45 Vdc ±10%	2.0 Vdc ±10%
Black Reference Level (Maximum)	0.16ß	0.16ß	0.16ß	0.16ß
Display Symbology	0.4 V PP ±10%	0.4 V PP ±10%	0.35 V PP ±10%	0.53 V PP ±10%
Sync Level (α)	-0.75 Vdc ±10%	-0.75 Vdc ±10%	-0.6 Vdc ±10%	---
Wiring, Triaxial, Nominal Impedance	50Ω	95Ω	75Ω	95Ω

*Separate Horizontal and Vertical sync signals shall be provided to the TID and VDI.


f. Square Wave Response — See Table III (Static Resolution and Square Wave Response)

g. Common mode noise — 40 dB less than the signal at the TCS outputs

h. Blanking duration — Horizontal: 11.16±0.01 microseconds
Vertical 1st field: 1281.21±0.13 microseconds
Vertical 2nd field: 1269.84±0.13 microseconds

i. Noise in blanking — Shall be not greater than 7 percent of white level

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

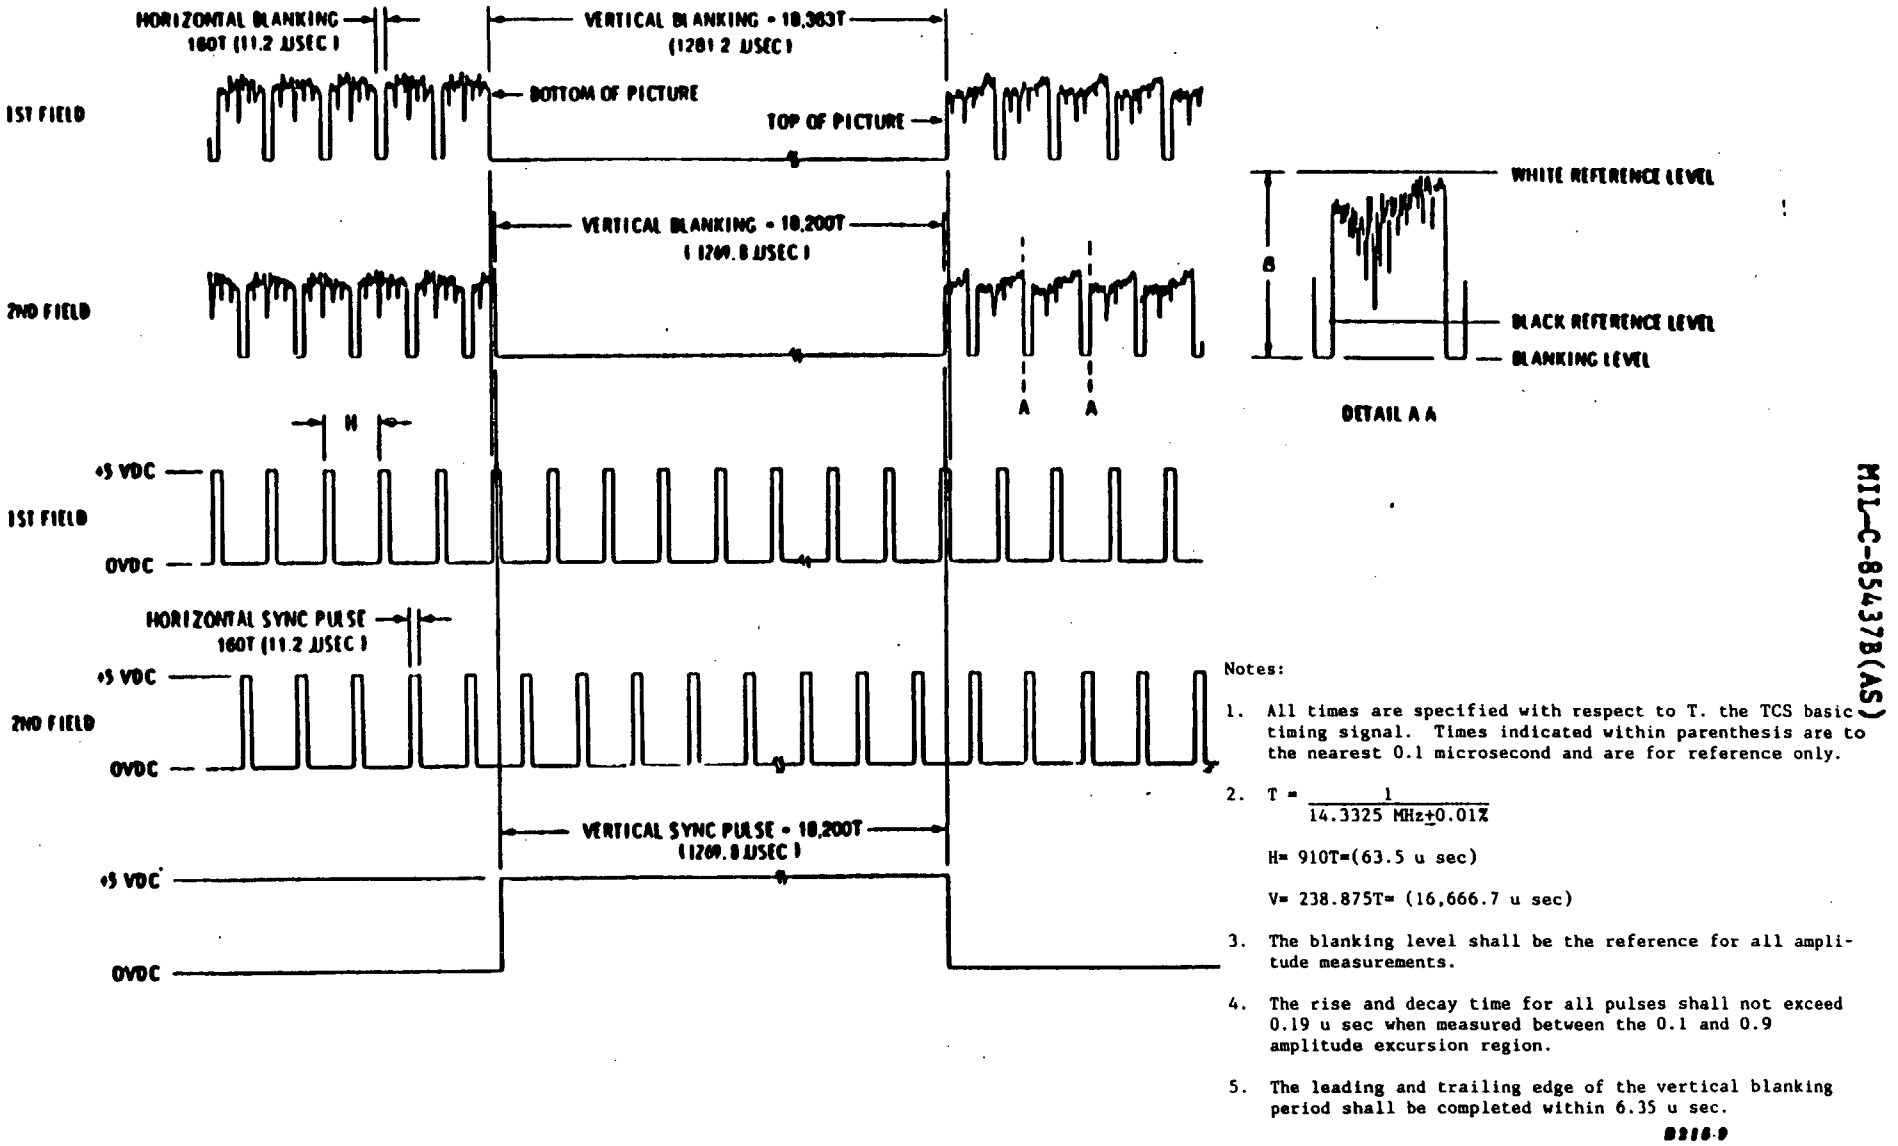

Notes:

1. All times are specified with respect to T. the TCS basic timing signal. Times indicated within parenthesis are to the nearest 0.1 microsecond and are for reference only.
2. $T = \frac{1}{14.3325\ \text{MHz} \pm 0.01\%}$


   H= 910T=(63.5 u sec)


   V= 238.875T= (16,666.7 u sec)
3. The blanking level shall be the reference for all amplitude measurements.
4. The rise and decay time for all pulses shall not exceed 0.19 u sec when measured between the 0.1 and 0.9 amplitude excursion region.
5. The leading and trailing edge of the vertical blanking period shall be completed within 6.35 u sec.


8316-9

FIGURE 11. TCS clamped video format and external display synchronization signals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

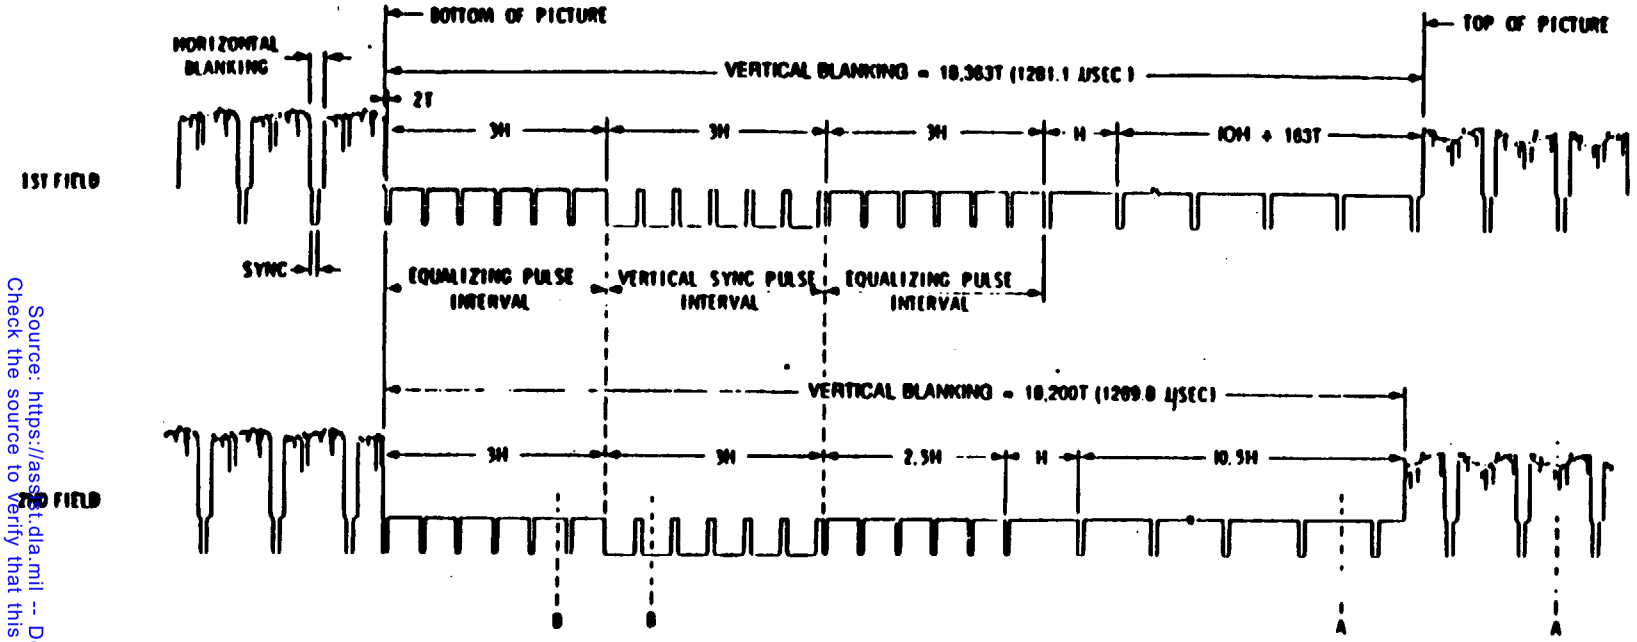

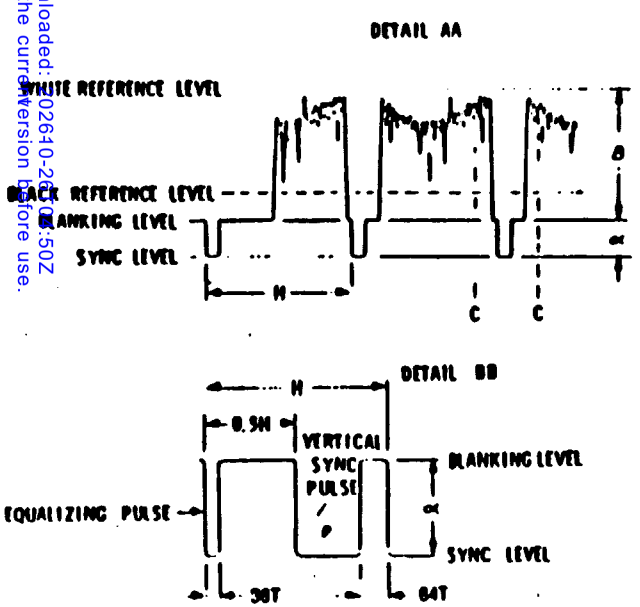

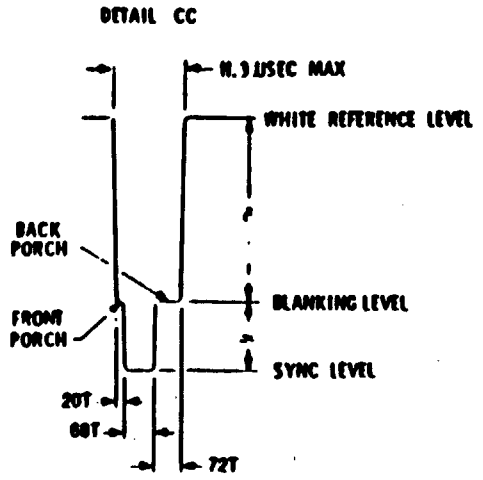

Notes:

1. All times are specified with respect to T, the TCS basic timing signal. Times indicated within parenthesis are to the nearest 0.1 microsecond and are for reference only.
2. $T = \frac{1}{14.3325\text{MHz} \pm 0.01\%}$
3. The blanking level shall be the reference for all amplitude measurements.
4. The rise and decay time for all pulses shall not exceed 0.19 usec when measured between the 0.1 and 0.9 amplitude excersion region.
5. The leading and trailing edge of the vertical blanking period shall be completed within 6.35 usec.
6. The overshoot and the undershoot excursions of the horizontal blanking signal shall not exceed 0.02 at the beginning of the front porch and shall not exceed 0.05 at the end of the back porch.
7. The overshoot and the undershoot excursions of all sync pulses shall not exceed 0.5 at the beginning and shall not exceed 0.1 at the end.

D218-10

FIGURE 12. Coordinate transformation channel.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20 02:50Z
Check the source to verify that this is the current version before use.

3.3.2.2 Horizontal sync signal. The TCS shall provide two separate horizontal sync outputs to the interface. One output shall be for the AN/AWG-9 TID and the other output for the VDI display. Each signal shall provide the necessary drive voltage and timing to lock the TV picture at the horizontal frequency and shall have the following characteristics measured across a 93-ohm, nominal, termination at the output of the TCS system. (See Figure 11 for time/phase relationship.)

a.	Type signal	Pulse
b.	Polarity	Positive
c.	Rise time	Equal to or less than 190 nanoseconds
d.	Fall time	Equal to or less than 190 nanoseconds
e.	Duration	11.16±0.01 microseconds
f.	Period	63.49±0.01 microseconds
g.	Amplitude	+5±0.5 volts is on state; $0.0\ ^{+0.4}_{-0.0}$ volt is off state
h.	Stability	As specified in EIA Standard RS-170
i.	Noise	Shall not exceed 7 percent of sync amplitude
j.	Wiring	Triax, 95±5 ohms

3.3.2.3 Vertical sync signal. The TCS shall provide two separate vertical sync outputs to the interface. One output shall be for the AN/AWG-9 TID and the other output for the VDI display. Each signal shall provide the necessary drive voltage and timing to lock the TV picture at the vertical frequency. It shall have the following characteristics measured across a 93-ohm ±10 percent termination at the output of the TCS system. (See Figure 11 for time/phase relationship.)

a.	Type signal	Pulse
b.	Polarity	Positive
c.	Rise time	Equal to or less than 6.3 microseconds
d.	Fall time	Equal to or less than 6.3 microseconds
e.	Duration	1269.84±0.13 microseconds
f.	Period	16,666.7±1.7 microseconds

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the current version before use.

g.	Amplitude	+5±0.5 volts is on state; $0.0\ ^{+0.4}_{-0.0}$ volt is off state
h.	Stability	As specified in EIA Standard RS-170
i.	Noise	Shall not exceed 7 percent of sync amplitude
j.	Wiring	Triax, 95±5 ohms

3.3.2.4 TCS onboard signal. This signal shall indicate to the AN/AWG-9 radar that the TCS is on board the aircraft and shall have the characteristics specified below. This signal shall be provided to the interface for the AN/AWG-9 081 unit which will provide this signal to the computer subsystem via the serial data inteface when terminated with a 2.7 kilohm ±2 percent load.

a.	Type signal	Switched dc
b.	Voltage	+12±1 Vdc when TCS is onboard and has power on, and open circuit when TV is not aboard.
c.	Wiring	Unshielded.

3.3.2.5 TCS temperature warning signal. This signal shall indicate when the TCS is operating in an over-temperature condition. The over-temperature signal shall be generated when the internal temperature of the TCS exceeds 140°F ±3.5 percent. This signal shall be provided to the interface for energizing an indicator on the hand control unit. Signal characteristics are specified in 3.3.2.21.

3.3.2.6 TCS elevation gimbal. This signal shall provide the elevation gimbal angle signal of the TCS to the interface for the Detailed Data Display (DDD). The signal shall have the following characteristics.

a.	Type signal	Dc analog
b.	Scale factor	61±4.4 mrad (3.5±0.25 degrees) per volt (minus voltage up and plus voltage down)
c.	Load impedance	37 kilohms or greater

3.3.2.7 TCS azimuth gimbal. This signal shall provide the azimuth gimbal angle of the TCS to the interface for the DDD. The signal shall have the following characteristics.

a.	Type signal	Dc analog
b.	Scale factor	61±4.4 mrad (3.5±0.25 degrees) per volt (minus voltage to the right, plus voltage to the left)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

c.	Load impedance	37 kilohms or greater
d.	Wiring	Shielded

3.3.2.8 TCS optical position to radar. The TCS optical position signal shall be provided to the interface for the AN/AWG-9 radar subsystem in the form of three direction cosine signals (in order that the radar antenna may be slaved to the TCS optical position) (see Figure 13). The three direction cosine signals and their characteristics are defined as follows when terminated in a load 150-kilohm or greater impedance. [The accuracy of the angle defined by the i, j, -k signals shall be 12 mrad (41.25 arc minutes) 2σ in elevation and 6 mrad (20.6 arc minutes) 2σ in azimuth.]:

i TCS Track

a.	Track signal	Ac analog
b.	Voltage amplitude	7.5±10% volts rms cosine AZ cosine EL
c.	Frequency	400±12 Hz
d.	Source impedance	Less than 800 ohms
e.	Wiring	Shielded
f.	Remarks	AZ and EL are actual TCS gimbal angles

j TCS Track

a.	Track signal	Ac analog
b.	Voltage amplitude	7.5±10% volts rms cosine AZ cosine EL
c.	Frequency	400±12 Hz
d.	Source impedance	Less than 800 ohms
e.	Wiring	Shielded
f.	Remarks	AZ and EL are actual TCS gimbal angles. Output null voltage at AZ=0, consisting of quadrature and harmonics, shall be less than 50 millivolts rms.

-k TCS Track

a.	Track signal	Ac analog
b.	Voltage amplitude	7.5±10% volts rms sine EL
c.	Frequency	400±12 Hz

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the current version before use.

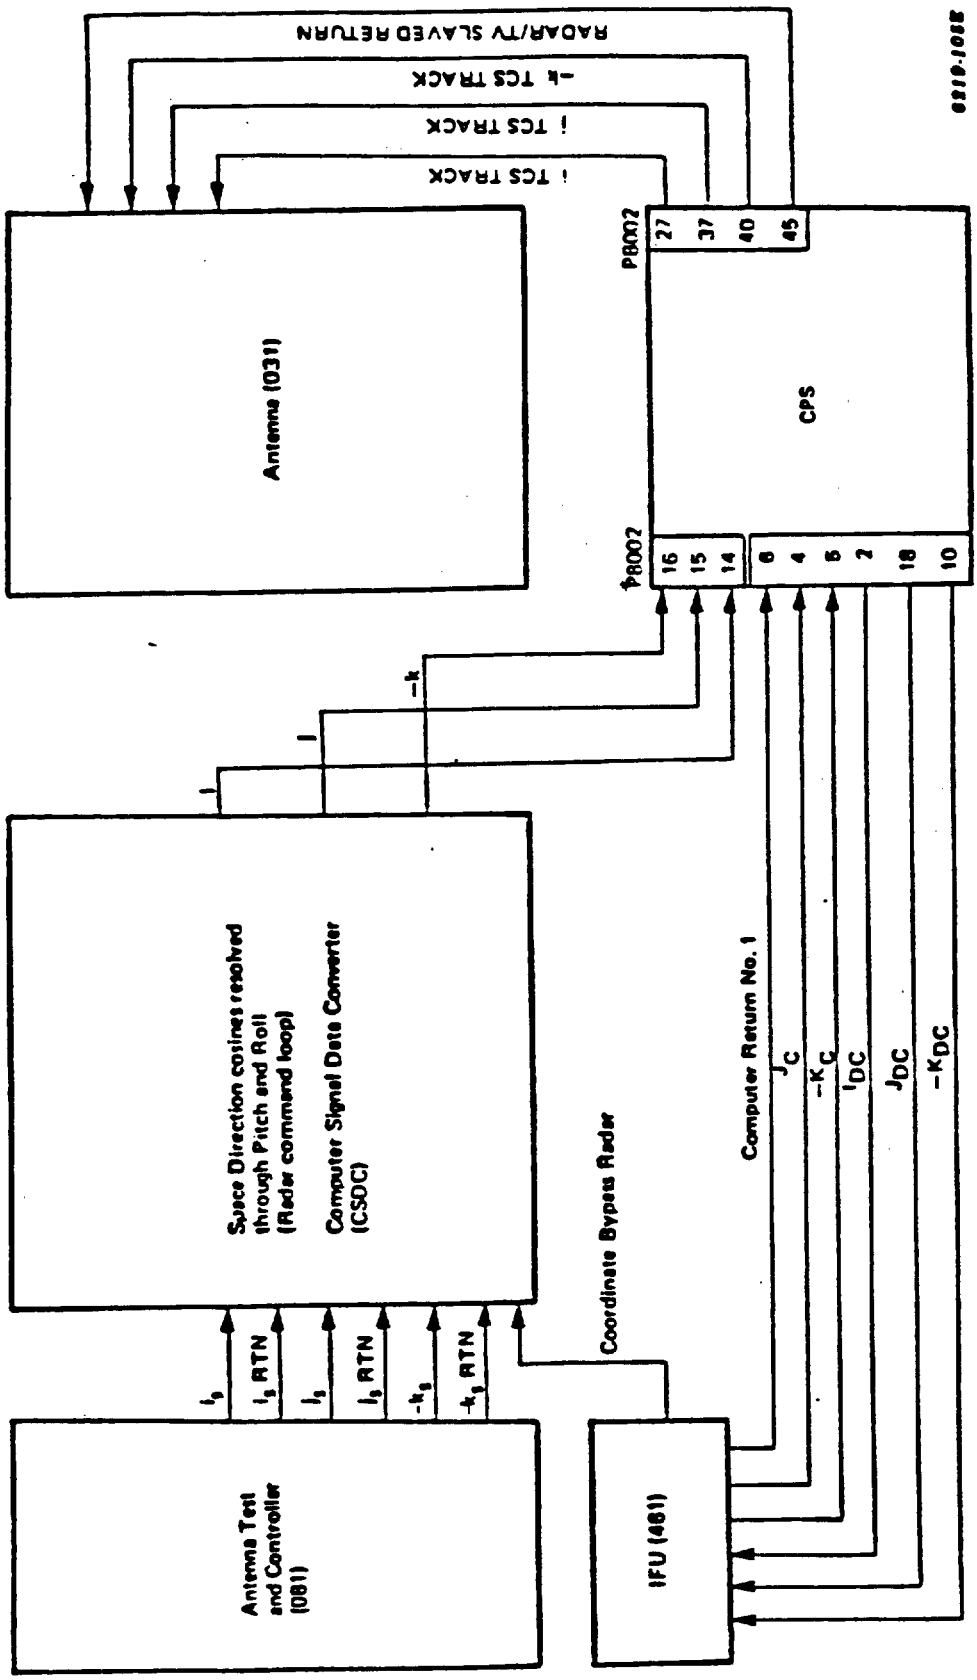


FIGURE 13. Coordinate transformation channel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

d. Source impedance	Less than 800 ohms
e. Wiring	Shielded
f. Remarks	EL is actual TCS gimbal angle. Output null voltage at EL=0, consisting of quadrature and harmonics, shall be less than 50 millivolts rms.

Radar Slaved Return

a. Type signal	Ac analog return
b. Signal function	Signal return

3.3.2.9 TCS optical position to AN/AWG-9 computer. The TCS optical position shall be provided to the interface for the AN/AWG-9 computer in the form of three dc direction cosine signals. These signals shall be available during all modes of TCS operation. The three dc direction cosine signals and their characteristics shall be as described below. These signals shall track the AWG-9 +10 Vdc analog reference described in 3.3.2.13. The accuracy of the angle defined by the I, J, -K signals shall be 2 mrad (6.9 arc minutes) 2σ in azimuth and elevation:

I_{DC}

a. Type signal	Dc analog
b. Voltage amplitude	10 cosine AZ cosine EL (Vdc)
c. Source impedance	Less than 20 ohms
d. Load impedance	Greater than 20 kilohms
e. Wiring	Shielded
f. Remarks	AZ and EL are actual TCS gimbal angles

J_{DC}

a. Type signal	Dc analog
b. Voltage amplitude	40 sine AZ cosine EL (Vdc)
c. Source impedance	Less than 20 ohms
d. Load impedance	Greater than 20 kilohms
e. Wiring	Shielded
f. Remarks	AZ and EL are actual TCS gimbal angles

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the currentversion before use.

$-K_{DC}$

a.	Type signal	Dc analog
b.	Voltage amplitude	40 sine EL (Vdc)
c.	Source impedance	Less than 20 ohms
d.	Load impedance	Greater than 20 kilohms
e.	Wiring	Shielded
f.	Remarks	EL is actual TCS gimbal angle

3.3.2.10 TCS gimbal angle from AN/AWG-9 computer. The AN/AWG-9 computer will provide AZ and EL directional information to the TCS in order to acquire and lock on a target. In the Auto-Acquisition mode, the target shall appear in the auto-acquisition window which encompasses not less than the center 50 percent of the field of view. This requires that the TCS be slaved to the target with an accuracy of ±2.72 millirads in each axis. The two dc directional cosine signals shall have the following characteristics when terminated in a 200-kilohm ±1 percent load:

J_{DC}

a.	Type signal	Dc analog
b.	Voltage amplitude	40 sine AZ cosine EL (Vdc)
c.	Source impedance	Less than 20 ohms
d.	Wiring	Shielded
e.	Remarks	AZ and EL are commanded TCS gimbal angles. Maximum signal amplitude is equal to the ±10 Vdc AWG-9 analog reference.

$-K_{DC}$

a.	Type signal	Dc analog
b.	Voltage amplitude	40 sine EL (Vdc)
c.	Source impedance	Less than 20 ohms
d.	Wiring	Shielded
e.	Remark	EL is the commanded TCS elevation gimbal angle. Maximum signal amplitude is equal to the ±10 Vdc AWG-9 analog reference.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.2.11 Computer return #1. This line connects the computer interface unit (962 rack) ground to the TCS, and shall serve as the J_C and $-K_C$ signal return.

3.3.2.12 SPATS (Search Pattern Size). The TCS shall require a cyclic signal to control the start and the size of the search pattern and to synchronize it with the radar antenna during the Track While Scan (TWS) mode of the AN/AWG-9 fire control system.

Signal characteristics are:

a.	Type signal	Digital type A avionics (see appendix 1)
b.	Logic "One"	Enables the TCS search pattern
c.	Logic "Zero"	Stops and resets the TCS search pattern
d.	Wiring	Shielded
e.	Timing	As shown in Figure 14

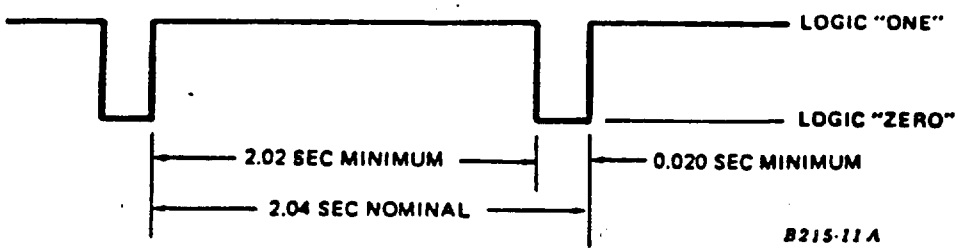


FIGURE 14. TCS synchronizing signal for TWS mode operation.

3.3.2.13 +10 Vdc analog reference. A +10 Vdc analog reference is supplied from the AN/AWG-9. This voltage shall be used to scale the TCS generated I, J, K set to be compatible with the slaving inputs J_C and $-K_C$. It shall also be used to scale the demodulated 400 Hz slaving signals j_i and $-k_i$ from the CSDC to be compatible with the TCS generated I, J, K set.

a.	Type signal	Dc
b.	Voltage amplitude	+10 V ±1 percent
c.	Source impedance	20 ohms max
d.	Load impedance	200 kilohms ±1 percent
e.	Remarks	This voltage track the positive portion of the ±10 Vdc analog reference used in the A/D and D/A converter in the AN/AWG-9 computer interface unit (962 rack).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.2.14 TCS track valid. In all modes except gunscore this signal shall indicate that the TCS is automatically tracking a target. This signal shall be provided to the interface on the existing "On Target" (OT) indicate line to the DDD unit and on the existing "track valid" line to the computer Interface Unit (IFU) when the TCS is onboard. In the gunscore mode this signal indicates the presence of a 20 TVL (minimum) target in the gunscore window.

a.	Type signal	Switched dc
b.	Voltage amplitude	+12±1 Vdc shall indicate tracking, 0 ± Vdc indicates not tracking
c.	Load impedance	1.3 kilohms min in the DDD unit and 1.5 kilohms ±30 percent in the computer interface unit
d.	Wiring	Shielded

3.3.2.15 Computer return #2. This line connects the computer interface unit (962 rack) ground to the TCS, and shall be used in the TCS so that the TCS outputs I_{DC}, J_{DC} and $-K_{DC}$ are referenced to the computer interface unit ground.

3.3.2.16 TCS power interlock signal. The TCS shall provide a power interlock signal to the F-14 power control distribution system when the AN/AWG-9 is in STANDBY or ON and the TCS power switch is placed to STBY or ON and the CPS and TCA are installed in the aircraft. This signal commands the F-14 power distribution and control system to provide 3-phase, 400-Hz, 115 Vac power to the TCS subsystem. This signal shall have the following characteristics.

a.	Type signal	Switched dc
b.	Voltage amplitude	28 Vdc +5.2, -2.9 or open circuit
c.	Load current	125 mA max
d.	Remarks	The source of this 28 Vdc signal is the TCS Standby Select signal (see 3.3.2.17.10).

3.3.2.17 TCS control inputs from AN/AWG-9 and F-14

3.3.2.17.1 TCS hand control X. The TCS shall respond to the hand control X (Azimuth Positioning) signal from the AN/AWG-9 hand control unit. This signal shall have the following characteristics when terminated with a load of 30 kilohms or greater impedance:

a.	Type signal	Dc analog
b.	Voltage amplitude	+10 to -10 Vdc ±3%, positive voltage with hand control stick to the right
c.	Wiring	Shielded

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.2.17.2 TCS hand control Y. The TCS shall respond to the hand control Y (Elevation Positioning) signals from the AN/AWG-9 hand control unit. This signal shall have the following characteristics when terminated with a load of 30 kilohms or greater impedance:

a.	Type signal	Dc analog
b.	Voltage amplitude	+10 to -10 Vdc ±3%, positive voltage with hand control stick forward
c.	Wiring	Shielded

3.3.2.17.3 Half action. The TCS shall respond to the hand control half action signal from the AN/AWG-9 hand control unit. When the Stick has been selected for TV control and True signal (as described below) is received, the TCS shall switch to a manual rate mode. This signal shall have the following characteristics when terminated with a 5-kilohm ±10 percent load:

a.	Type signal	Dc analog
b.	Voltage amplitude	Open circuit for false state, +12±0.5 Vdc for true state
c.	Wiring	Shielded

3.3.2.17.4 Full action. The TCS shall respond to the hand control full action signal from the AN/AWG-9 hand control unit. When the Stick has been selected for TV control and True signal (as described below) is received, the TCS shall initiate video tracking sequences. This signal shall have the following characteristics when terminated with a 5-kilohm ±10 percent load:

a.	Type signal	Switched dc
b.	Voltage amplitude	Open circuit for false state, +12±0.5 Vdc for true state
c.	Wiring	Unshielded
d.	Remarks	Half Action held true.

3.3.2.17.5 TCS power on select. This signal shall be used by the TCS system to apply ac power to the appropriate module in the TCS subsystem. The signal shall have the following characteristics when terminated with a 125-ohm minimum load impedance:

a.	Type signal	Switched dc
b.	Voltage amplitude	+28 Vdc, +5.2, -2.9 Vdc or open; +28 Vdc in the true state

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

c.	Wiring	Shielded
d.	Remarks	The 28 Vdc is provided by the AN/AWG-9

3.3.2.17.6 AUTO-ACQ. When the signal is true, the TCS automatic acquisition mode shall be selected. The signal shall have the following characteristics when terminated with a 2-kilohm ±10 percent load:

a.	Type signal	Switched dc
b.	Voltage amplitude	+12 Vdc, ±0.5 Vdc or open circuit +12 Vdc is the true state
c.	Wiring	Unshielded
d.	Remarks	The 12 Vdc is provided by the AN/AWG-9

3.3.2.17.7 AUTO-SEARCH. When this signal is true, the automatic-acquisition with Search Mode shall be selected. The signal shall have the following characteristics when terminated with a 2-kilohm ±10 percent load:

a.	Type signal	Switched dc
b.	Voltage amplitude	+12 Vdc, ±0.5 Vdc or open circuit +12 Vdc is the true state
c.	Wiring	Unshielded
d.	Remarks	The +12 Vdc is provided by the AN/AWG-9

3.3.2.17.8 RDR/TCS trim azimuth. The azimuth boresight trim provides an adjustable electrical error correction which can be used to modify the demodulated and normalized j component of the ac radar slaving signal. This signal shall act to trim out azimuth misalignment between the radar and slaved TCS lines of sight at boresight position. It shall have the following characteristics when terminated with a 100-kilohm ±10 percent load:

a.	Type signal	Dc analog
b.	Voltage amplitude	-12±0.3 Vdc to +12±0.3 Vdc continuously adjustable to 0.1 V or less increments
c.	Nominal range of adjustment	±1.95°
d.	Wiring	Shielded
e.	Polarity	(+) moves head to left

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.2.17.9 RDR/TCS trim elevation. The elevation boresight trim provides an adjustable electrical error correction which can be used to modify the demodulated and normalized k component of the ac radar slaving signal. This signal shall act to trim out elevation misalignment between the radar and slaved TCS lines of sight at boresight position. It shall have the following characteristics when terminated with a 100-kilohm ±10 percent load:

a.	Type signal	Dc analog
b.	Voltage amplitude	-12±0.3 Vdc to +12±0.3 Vdc continuously adjustable to 0.1 V or less increments
c.	Nominal range of adjustment	±1.95°
d.	Wiring	Shielded
e.	Polarity	(+) moves head up

3.3.2.17.10 TCS standby select. The TCS Standby Select signal is supplied from the Hand Control Unit TV power switch when either in the STBY or in the ON position. This signal shall be used by the TCS to operate relays in both the CPS and TCA and to provide the voltage source for the TCS Power Interlock Signal. The TCS shall respond to a signal having the following characteristics when terminated with a 76-ohm minimum impedance:

a.	Type signal	Switched dc
b.	Voltage amplitude	+28 Vdc, +5.2, -2.9 Vdc or open; +28 Vdc is the true state
c.	Wiring	Unshielded
d.	Remarks	See 3.3.2.16 for additional information. TCS Standby Select signal is TRUE whenever TCS On Select is TRUE

3.3.2.17.11 TCS slave select. The TCS shall respond to a slave select signal provided to the interface from the sensor control panel. The SLAVE switch in the TCS position shall command the TCS to slave to the radar when the radar is tracking or to the AWG-9 computer when the SLAC signal (see 3.3.2.17.16) is true. This signal shall have the following characteristics when terminated with a 10-kilohm ±10 percent load:

a.	Type signal	Switched dc
b.	Voltage amplitude	+12±0.5 Vdc or open +12 Vdc is TCS slave select
c.	Wiring	Unshielded

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.2.17.12 Radar tracking (RTG). The TCS shall receive a signal that indicates that the radar is tracking a target. This signal shall have the following characteristics:

a.	Type signal	Digital type A avionics (see Appendix B)
b.	Wiring	Shielded

3.3.2.17.13 104 Vrms, 400 Hz Ref. This reference voltage is supplied from the ARDP (084 unit). The TCS shall use this voltage for resolver excitation and as the demodulator reference for TCS resolver outputs. The characteristics of this signal shall be as follows:

a.	Type signal	Ac
b.	Maximum TCS load	75 kilohms resistive
c.	Voltage amplitude	104 Vrms ± 5 percent
d.	Peak-to-peak amplitude modulation distortion	Less than 3 percent about the steady state reference level measured over a bandwidth from 1 to 175 Hz
e.	Total harmonic distortion	Less than 6 percent
f.	Ac reference phase lock	Phase locked to the fundamental frequency of the phase A input line to within ±5 degrees of a fixed phase shift in the power subsystem. The fixed phase shift shall not deviate from the fundamental input line by more than ±25 degrees.
g.	Frequency	400±12 Hz
h.	Signal return	104 V 400 Hz reference return
i.	Wiring	Twisted shielded pair
j.	Remarks	104 Vrms, 400 Hz return is not connected to ground.

3.3.2.17.14 Rear video select. This signal shall be used by the TCS to select narrow or wide field of view video sent to the rear cockpit displays, and to the Sensor Control Panel for the video tape recorder.

a.	Type signal	Switched dc
b.	Voltage amplitude	+12±0.5 Vdc or open circuit +12 Vdc selects NFOV Open circuit selects WFOV

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.2.17.15 Front video select (option). To utilize this option, a jumper on Video Output card 339735 must be removed. This signal shall be used by the TCS to select narrow or wide field of view video sent to the Vertical Display Indicator (VDI) in the front cockpit.

a.	Type signal	Dc voltage supplied by the TCS is grounded or left open
b.	Voltage amplitude	5±0.2 Vdc from a 1 K ±25 percent source Open circuit selects NFOV Ground selects WFOV

3.3.2.17.16 SLAC (Slave to Computer). The TCS shall slave to computer generated LOS information J_c and $-K_c$ when SLAC is high, and the SLAVE switch on the sensor control panel is in the TCS position.

a.	Type signal	Digital type A avionics (see Appendix B)
b.	Wiring	Shielded. The AWG-9 SENSOR CONTROL PANEL SLAVE SWITCH is in the TCS position.

3.3.2.18 TCS analog inputs from Computer Signal Data Converters (CSDC). The CSDC will provide, to the TCS, three directional cosine signals which define the directional coordinates of the radar antenna. In the Auto-Acquisition mode, the target must appear within the auto-acquisition window, which encompasses not less than the center 50 percent of the field of view. This requires that the TCS be slaved to the target with an accuracy of ±2.72 mrad in each axis. The directional cosine signals shall have the characteristics specified in 3.3.2.18.1.

3.3.2.18.1 Antenna position. The TCS shall respond to the three-directional cosine signals from the CSDC when the TCS slave mode is selected and the radar is tracking a target (see Figure 12). The unit vector for the three direction cosine signals is defined by U = 7.5 Vrms (Secant Epsilon Sub s) Absolute Cosine Multiplier (ACM) where Epsilon Sub s (η_s) is the radar elevation angle measured from the local horizontal (up is positive).

ACM = 1,000,	$0^\circ \leq \lvert\epsilon_s\rvert \leq 29.6^\circ$,	$7.500 \leq U \leq 8.626$
ACM = 0.782,	$29.6^\circ \leq \lvert\epsilon_s\rvert \leq 51.3^\circ$,	$6.7.45 \leq U \leq 9.380$
ACM = 0.488,	$51.3^\circ \leq \lvert\epsilon_s\rvert \leq 63.9^\circ$,	$5.854 \leq U \leq 8.319$
ACM = 0.247,	$63.9^\circ \leq \lvert\epsilon_s\rvert \leq 76^\circ$,	$4.211 \leq U \leq 7.657$

U is expressed in Vrms. ϵ_s may have a tolerance of ±2 degrees with respect to the points at which ACM changes. The characteristics of the signals are defined in terms of i_s, j_s, $-k_s$ (space coordinates) and θ and ϕ. These terms are

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

defined as follows, where Eta Sub s (η_s) is the radar azimuth angle measured from the i_s vector to the projection of unit vector on the i_s j_s plane (Right is positive):

i_s = U Cos ϵ_s Cos η_s = 7.5 Vrms Cos η_s ACM

j_s = U Cos ϵ_s Sin η_s = 7.5 Vrms Sin η_s ACM

$-k_s$ = U Sin ϵ_s = 7.5 Vrms Tan ϵ_s ACM

θ = Aircraft pitch angle (Up is positive)

ϕ = Aircraft roll angle (Right wing down is positive)

The characteristics of the signals are described as follows:

a. i

(1)	Type signal	Ac analog
(2)	Voltage amplitude	i_s Cos θ - k_s Sin θ
(3)	Frequency	400±12 Hz
(4)	Source Impedance	Less than 800 ohms
(5)	Load Impedance	499 kilohms ±1 percent
(6)	Wiring	Shielded

b. j

(1)	Type signal	Ac analog
(2)	Voltage amplitude	i_s Sin θ Sin ϕ + j_s Cos ϕ + k_s Cos θ Sin ϕ
(3)	Frequency	400±12 Hz
(4)	Source Impedance	Less than 800 ohms
(5)	Load Impedance	499 kilohms ±1 percent
(6)	Wiring	Shielded

c. -k

(1)	Type signal	Ac analog
(2)	Voltage amplitude	-1_s Sin θ Cos ϕ + j_s Sin ϕ - k_s Cos θ Cos ϕ

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the currentversion before use.

(3)	Frequency	400±12 Hz
(4)	Source Impedance	Less than 800 ohms
(5)	Load Impedance	499 kilohms ±1 percent
(6)	Wiring	Shielded

NOTE: The i, j, -k voltage amplitudes may also be expressed in terms of the TCS Elevation and Azimuth gimbals (ϵ_g and η_g respectively) and ϵ_s and ACM.

$i = 7.5$ Vrms Cos ϵ_g Cos η_g Sec ϵ_s ACM

$j = 7.5$ Vrms Cos ϵ_g Sin η_g Sec ϵ_s ACM

$-k = 7.5$ Vrms Sin ϵ_g Sec ϵ_s ACM

3.3.2.19 TCS coolant input from F-14. The TCS shall perform as specified herein when provided with liquid coolant under the following conditions to the TCS system:

a.	Coolant	Coolanol 25 (Monsanto) or Oronite Flo-Cool 180 (Chevron)
b.	Inlet Temperature	50-85°F
c.	Flow rate	0.70 gal/min max TCA - 0.40 gal/min max CPS - 0.30 gal/min max
d.	Inlet Pressure Discharge Pressure	170 psig max (@ rated flow) 35 psia min (@ rated flow)
e.	Unit Pressure Drop	75 psi at specified flowrates and 65° coolant temperature.

3.3.2.20 Input electrical power.

3.3.2.20.1 Operating power. The equipment shall meet all applicable requirements of MIL-STD-704 and shall give specified performance when energized from the power sources specified in 3.3.2.20.2 through 3.3.2.20.4 having characteristics and limits as specified in MIL-STD-704, Category B. The power required shall be not greater than 600 VA when supplied with three-phase ac power at 115/200 volts in accordance with MIL-STD-704, Category B.

3.3.2.20.2 Lighting power. Input power for lighting shall not be required.

3.3.2.20.3 Degraded performance. Degraded performance will be permitted for voltage transients not exceeding 0.5 second during normal electric system opera-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

tion. Operation shall return to normal with no resulting damage to the equipment.

3.3.2.20.4 Standby power. A control shall be provided to activate the TCS internal blowers and heaters while the remainder of the system is off. Except for the associated heaters and blowers, voltages shall not be applied to other parts of the equipment. The standby power shall be not greater than 400 VA.

3.3.2.21 TCS temperature warning signal. This signal shall indicate that the TCS is operating in an over-temperature condition. The over-temperature signal shall be generated when the internal temperature of the TCA exceeds 140°F ±3.5 percent. This signal shall be provided to the interface for the hand control. The signal shall have the following characteristics when terminated with a 6.8-kilohm load to -12 Vdc.

a.	Type signal	Switched dc
b.	Voltage amplitude	+12±1 Vdc indicates over temperature and open circuit indicates normal temperature
c.	Wiring	Unshielded

3.3.2.22 Cabling and connections.

3.3.2.22.1 Cables and connectors. The equipment shall provide for the use of cables and connectors in accordance with MIL-E-5400 or MIL-C-83723.

3.3.2.22.2 Interconnecting cabling. The equipment shall be capable of prescribed operation using external wiring in accordance with the applicable requirements of MIL-W-5088. The external wiring shall be unshielded, except that a minimum number of the individual wires may be shielded when demonstrated as necessary to meet interference control requirements and provided the assembly of the cable to its plugs may be easily accomplished. External cables and that portion of the connectors attached to the cables shall not be supplied as part of the equipment.

3.3.3 Reliability. The contractor shall conduct a reliability program in accordance with MIL-STD-785 and the additional requirements of this document. Acceptance of the contractor's articles will not be made unless the reliability program plan is maintained and implemented by the contractor. On a reorder from a supplier who has previously produced the equipment, the program previously used may be continued unless otherwise indicated in the contract or order.

3.3.3.1 Operational stability. The equipment shall operate with prescribed performance, continuously or intermittently for a period of not less than 580 hours without the necessity for readjustment of any controls (with the exception of the vidicon grid voltage adjustments) which are inaccessible to the operator during normal use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.3.2 Operating life. The equipment shall have in indefinite operating life with minimal servicing and replacement of parts.

3.3.3.3 Reliability in Mean Time Between Failures (MTBF). The TCS shall have a specified θ_o (θ_o as defined in MIL-STD-781) MTBF of 290 hours and a minimum acceptable θ_1 MTBF of 193 hours when tested and accepted in accordance with the Quality Assurance Provisions, Section 4, of this specification.

3.3.3.4 Time totalizing meters. The CPS and TCA WRA's shall contain time totalizing meters in accordance with MIL-M-7793.

3.3.3.5 Parts reliability program. The contractor shall include in his Reliability Program Plan, a parts reliability program to assure part reliability throughout the program. To the extent possible, the contractor shall use his standard policies, practices and operating procedures. The parts reliability program shall:

a. Provide receiving test and inspection to assure uniform part quality as established and identified in the Program Plan.

b. Establish in-house and vendor surveillance over the application of parts, materials and processes during fabrication and assembly to ensure sources of degradation and variability are isolated and controlled.

c. Maintain visibility over failed parts analysis to ensure proper corrective action has been implemented.

d. Determine and evaluate program areas related to parts, materials, and processes, and initiate corrective action.

e. Review and analyze proposed changes in parts, materials, and processes resulting from test, manufacturing, and field experience.

3.3.3.6 Electronic/electrical/electro-mechanical parts screening. The contractor shall provide for a 100 percent screening of all Electronic/Electrical/Electro-mechanical (EEE) parts which are not standard high reliability parts such as Established Reliability (ER); MIL-S-19500 JAN TX (Joint Army Navy, Testing Extra) semi-conductor devices; MIL-M-38510 (Class B) microelectronics for EEE parts. Screening includes visual inspections, preconditioning and burn-in tests used to clarify discrepant parts. The contractor shall screen all non-standard parts to the requirements of the closest standard high reliability parts. All integrated and hybrid circuits shall be screened in accordance with MIL-STD-883 Class B requirements.

3.3.3.7 Failure data. The contractor shall implement a closed-loop failure reporting analysis and corrective action system for equipment failure in accordance with MIL-STD-785A (see 6.2.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the currentversion before use.

3.3.4 Maintainability. The Maintainability ($\overline{M}$) characteristics of the TCS system will be assured by a maintainability program using MIL-STD-470 as a guide. The program shall include maintenance concept, M prediction, and analysis. Actual maintainability shall be proven by comparing similarities to existing equipment.

3.3.4.1 Maintenance, ($\overline{M}$).

3.3.4.1.1 Maintenance concept. The maintenance concept for this equipment shall be divided into three categories; organization maintenance, intermediate maintenance, and depot maintenance. Organizational maintenance is described as that maintenance performed on equipment while installed in the aircraft, including maintenance performed during periodic inspections. This maintenance shall be limited to functional or operational checks to determine quality of performance and operational readiness. Periodic checks are also required to ensure, to the maximum possible extent, that the equipment will operate throughout the next periodic level. Intermediate maintenance is described as the maintenance required to isolate and repair faulty modules and subassemblies, adjustment, and alignment of components and equipments. Depot maintenance is the maintenance required to completely disassemble and perform detailed analysis and repair of equipment subassemblies and components.

3.3.4.1.2 Maintenance consideration. Maintenance consideration shall provide for the location of test points and the identification of procedures that will permit positive verification of equipment performance. These maintenance considerations and procedures shall provide for a quality of repair that will restore the equipment to an overall quality equal to or better than that required by the reliability and quality control requirements of this specification.

3.3.4.2 Repair cycle.

3.3.4.2.1 Repair time. Performance checks of equipment installed in the air vehicle shall not require more than 0.25 hour with two men, one a skilled mechanic (-5 level mechanic) and one an apprentice mechanic (-3 mechanic), using authorized flight line Peculiar Ground Support Equipment (PGSE) and the appropriate technical order. Shop maintenance following removal from aircraft at intermediate level, including necessary inspection and any subsequent repair required, shall not exceed 6.0 hours ($\overline{M}$ max ct) at 90th percentile using one skilled mechanic (-5 level mechanic). The equipment shall be repairable at field level by replacement of subassemblies, modules, or parts. Depot level maintenance on subassemblies or modules not repairable at field level shall not exceed 8 hours ($\overline{M}$ max ct), utilizing a technician, authorized depot PGSE, and technical information. Application of the foregoing numbers assumes the availability of adequate spare parts and facilities. The TCS system shall be designed to ensure that the Maintenance Manhour per Operating Hour (MMH/OH) will be 0.22 corrective and 0.01 preventive, and the Mean Time To Repair (MTTR) will be 2.0 hours at intermediate level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.4.2.2 Access and button-up time. The MMH/OH and MTTR will not include time to gain access to aircraft components and to button up aircraft.

3.3.4.2.3 Movement time. The MMH/OH and MTTR will not include time to move personnel, spares or support equipment to and from maintenance stations.

3.3.4.2.4 Inactive time. The MMH/OH and MTTR will not include inactive maintenance time, e.g., drying of conformal coating on circuit boards.

3.3.4.2.5 Service and access. The equipment layout shall be constructed to provide ready access to all subassemblies, modules, and parts. Access to replaceable subassemblies and modules shall require minimal removal of any other components, except the outer case. Access to other subassemblies, modules, and parts shall require minimum time and effort of maintenance personnel. All parts requiring replacement at field level shall be constructed into or be a part of a replaceable subassembly or module. Test points shall be chosen to provide a straightforward, logical, step-by-step, troubleshooting sequence, as well as provide a single end-to-end performance check. Maintenance considerations shall provide for the identification of where and how to break loop or feedback circuits to allow for proper signal injection with test equipment, and shall provide a step-by-step troubleshooting, adjustment, or alignment of the circuit. Test points, where practical, shall be located so that all are accessible without moving or rotating the equipment on the bench. Adequate spacing shall be provided between test points, and between test points and other components, to eliminate the possibility of arcing, faulty readings or signals, or damage to equipment or components.

3.3.5 Environmental conditions. The TCS shall be designed to perform in the environmental conditions listed in 3.3.5.1 through 3.3.5.8.3.

3.3.5.1 Standard conditions. The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

a.	Temperature	Room ambient ($25\pm10^{o}C$)
b.	Altitude	Normal Ground
c.	Vibration	None
d.	Humidity	Room ambient up to 90% relative humidity
e.	Input power voltage	115/200 Vac $400\pm3\%$ Hz, 4-wire, "Y" - connected

3.3.5.2 Service conditions. The equipment shall operate as prescribed under any of the environmental service conditions or reasonable combination of these conditions as specified in MIL-E-5400 for Class 2X equipment, except where aircraft installation location considerations exceed Class 2X levels.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.5.3 Vibration. The TCS shall operate as prescribed when subjected to the vibration profiles shown on Figures 15 through 20.

3.3.5.3.1 Vibration operating.

3.3.5.3.1.1 Random performance. The equipment shall meet the performance requirements specified in 3.3.1 while being subjected to the random vibration curve shown on Figure 15. The duration of the test shall be 10 minutes in each of three orthogonal axes. A longer time is permitted if required to verify system performance.

3.3.5.3.1.2 Sinusoidal endurance. The equipment shall meet the performance requirements specified in 3.3.1 after being subjected to the environment described by the sinusoidal vibration curve shown on Figure 16. The equipment shall be operated during the test although to no specified tolerance. The duration of the test shall be 30 minutes at each of three orthogonal axes, one sweep from 10 to 400 to 10 Hz.

3.3.5.3.1.3 Random endurance. This test consists of superimposing three narrow bands of high level random on a low level broadband random spectrum. The specified narrow bands comprise a set of 36 contiguous frequency bands, each bandwidth being approximately 1/6 octave of the center frequency over the range of 20 to 2000 Hz. The center frequencies are specified in Table VI. The duration of the test shall be one minute for each of the 36 steps specified in Table VII; a total of 36 minutes along each of three orthogonal axes. The equipment shall be on and operating throughout the test, although to no specified tolerance. After the test, the equipment shall meet the performance requirements of 3.3.1.

3.3.5.3.2 Vibration, nonoperating, simulated gunfire. The simulated gunfire test is based on a test method described in the Shock and Vibration Bulletin 41. The test environment simulates the complex wave periodic vibration impulses associated with rapid fire machine guns firing at nominal rates of 4000 and 6000 rounds per minute. The frequency content of these complex pulses is shown by the line spectra of Figures 19 and 20. The equipment shall operate satisfactorily after exposure to one minute of gunfire vibration at each of the 20 pulse rates given in Table VIII.

3.3.5.4 Temperature. The equipment shall meet the requirements of MIL-E-5400, Class 2X, except that the maximum nonoperating temperature shall be limited to 90°C.

3.3.5.5 Altitude. Both weapon replaceable assemblies shall be pressurized to approximately one atmosphere and shall meet requirements of 3.3.1 throughout the entire flight envelope of the F-14 aircraft.

3.3.5.6 Shock loads.

3.3.5.6.1 Shock, operating. The equipment shall meet the performance requirements of 3.3.1 after exposure to three 15 g, 11 ms half sine shock pulses

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

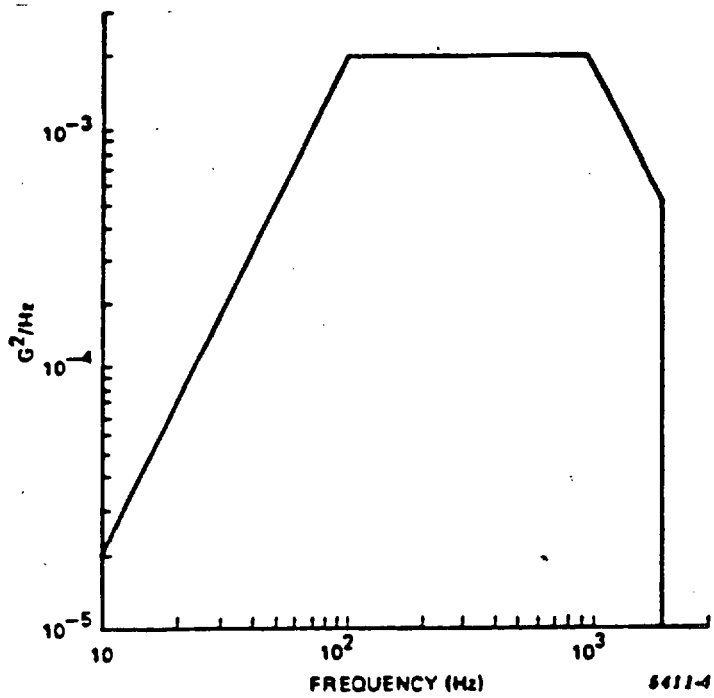


FIGURE 15. Random vibration performance test curve.

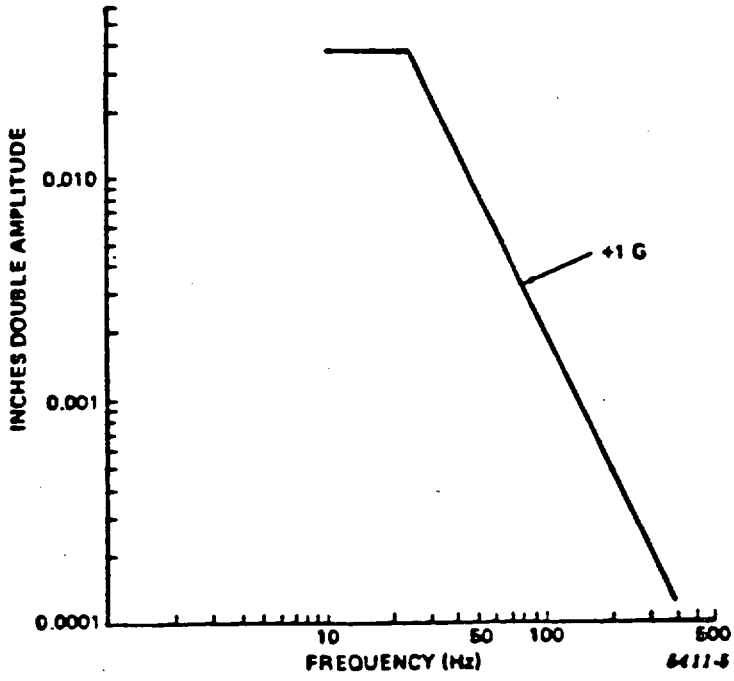


FIGURE 16. Endurance test curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

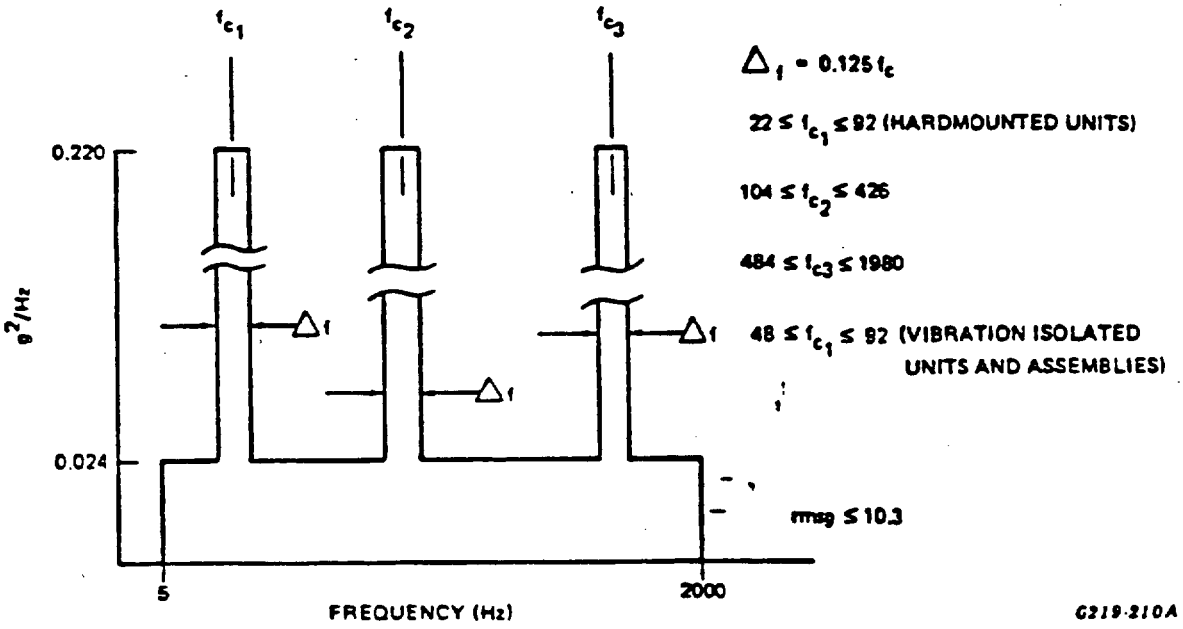


FIGURE 17. Acceleration spectral density, control-power supply (CPS).

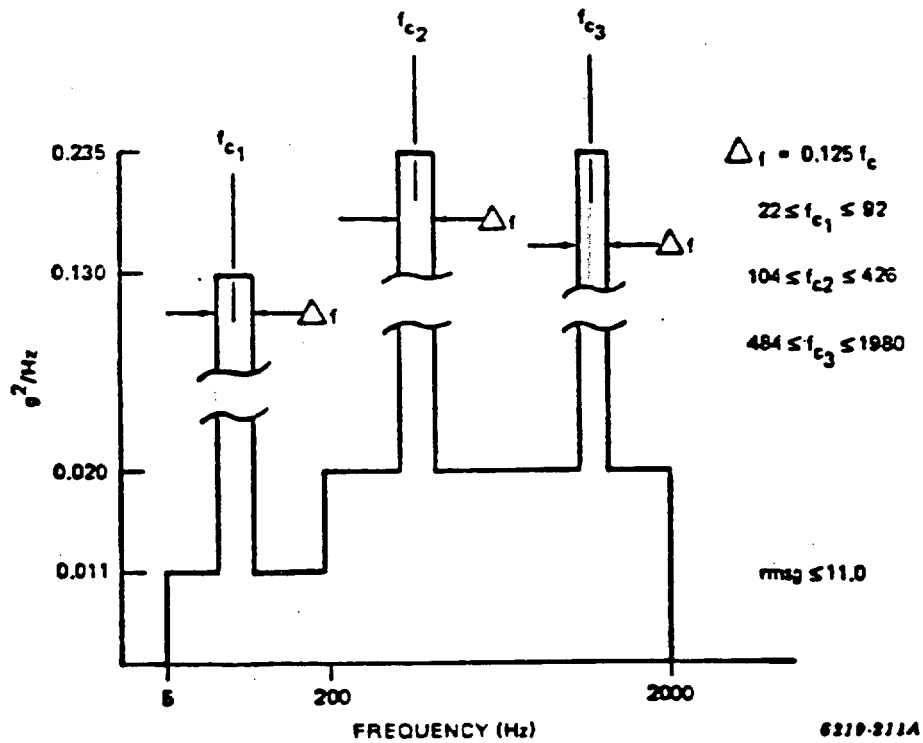


FIGURE 18. Acceleration spectral density, television camera assembly (TCA).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

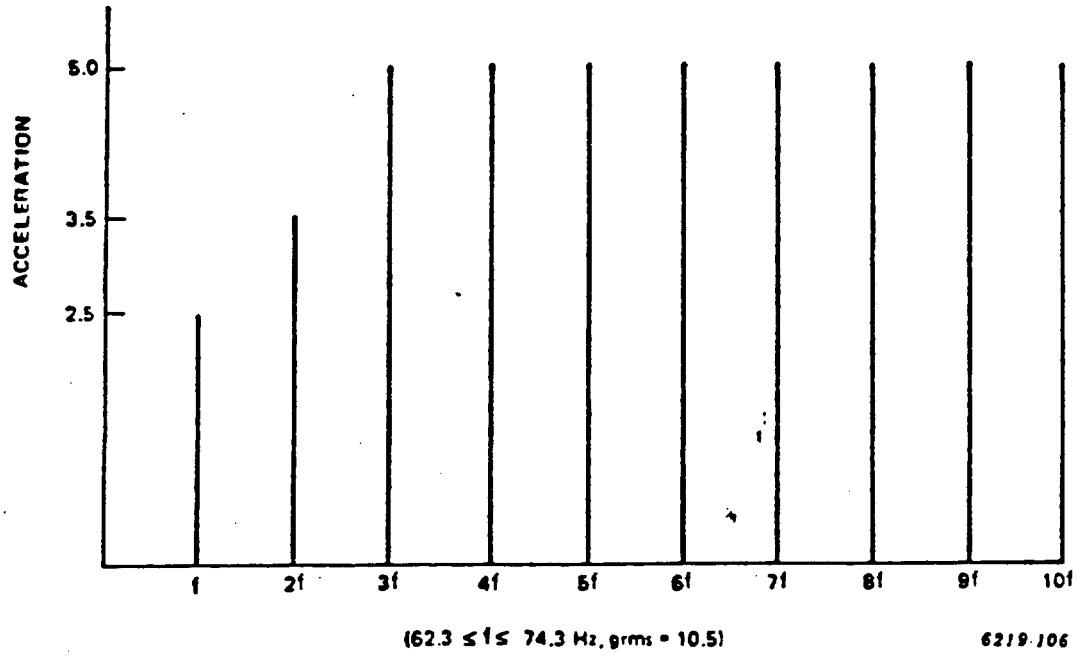


FIGURE 19. Gunfire vibration spectrum 4000 rpm nominal rate.

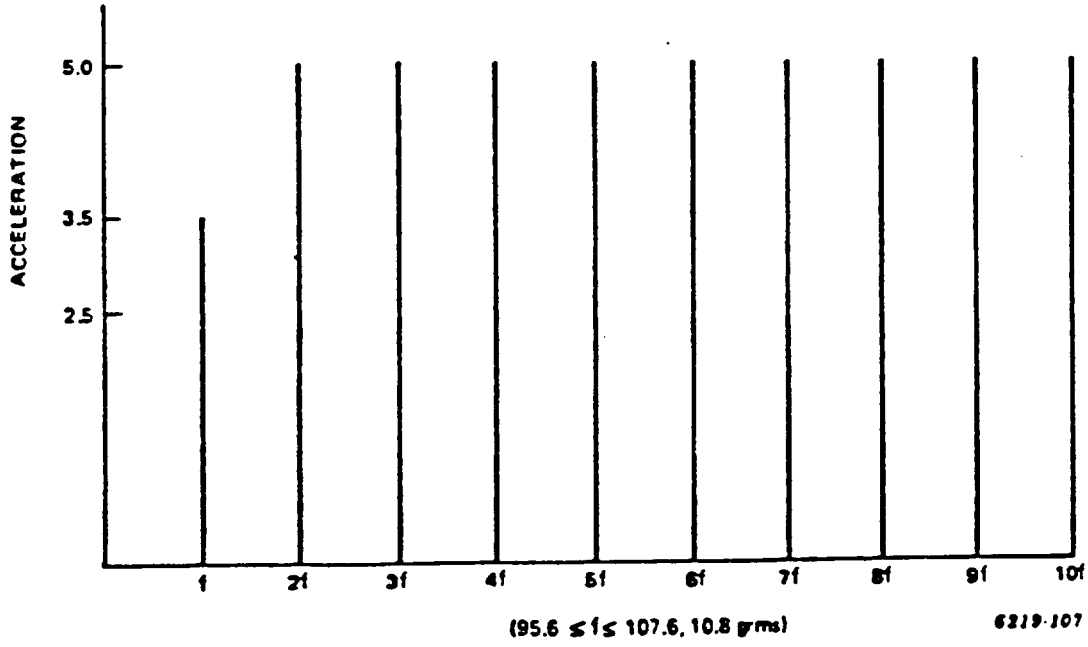


FIGURE 20. Gunfire vibration spectrum 6000 rpm nominal rate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE VI. Endurance random vibration, narrow band frequencies.

Frequency Band No.	Lower Frequency	Center Frequency	Upper Frequency
1	21	22	24
2	24	25	27
3	27	29	31
4	31	33	35
5	35	37	40
6	40	43	45
7	45	48	52
8	53	56	59
9	59	63	67
10	67	71	76
11	76	81	86
12	86	92	98
13	98	104	111
14	111	119	126
15	126	135	144
16	144	153	163
17	163	174	186
18	186	198	211
19	211	225	240
20	240	256	273
21	273	290	310
22	310	330	352
23	352	375	400
24	400	426	455
25	455	484	517
26	517	550	587
27	587	626	667
28	667	711	759
29	759	808	862
30	862	919	980
31	980	1044	1113
32	1113	1187	1265
33	1265	1349	1438
34	1438	1533	1634
35	1634	1742	1857
36	1857	1980	2110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE VII. Endurance random vibration, schedule of stepped frequency combinations.

Time Step No. (1 minute Vib./Step)	Frequency Band No. (Table V)			
	1/ f_{c_1}	2/ f_{c_1}	f_{c_2}	f_{c_3}
1	12	12	24	36
2	11	11	23	35
3	10	10	22	34
4	9	9	22	34
5	8	8	23	35
6	7	—	24	36
7	7	—	24	36
8	8	8	23	35
9	9	9	22	34
10	10	10	21	33
11	11	11	20	32
12	12	12	19	31
13	12	12	19	30
14	11	11	20	29
15	10	10	21	28
16	9	9	21	27
17	8	8	20	26
18	7	—	19	25
19	6	—	18	25
20	5	—	17	26
21	4	—	16	27
22	4	—	15	28
23	5	—	14	29
24	6	—	13	303
25	6	—	13	31
26	5	—	14	32
27	4	—	15	33
28	3	—	16	33
29	2	—	17	32
30	—	—	18	31
31	—	—	18	30
32	2	—	17	29
33	3	—	16	28
34	3	—	15	27
35	2	—	14	26
36	—	—	13	25

NOTES: 1/ Band numbers applicable to the TCA and hard-mounted units of the CPS. The dash (—) denotes f_{c_1} shall not be applied.

2/ Band numbers applicable to vibration isolated units of the CPS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE VIII. Pulse rates for gunfire vibration simulation.

Time Step No. (1 min Vib./Step)	Low Firing Rate (4000 rpm) Frequency	High Firing Rate (6000 rpm) Frequency
1	62.3±0.1	95.6±0.1
2	63.5±0.1	96.9±0.1
3	64.8±0.1	87.2±0.1
4	66.1±0.1	99.5±0.1
5	67.4±0.1	100.8±0.1
6	68.7±0.1	102.1±0.1
7	70.0±0.1	103.4±0.1
8	71.4±0.1	104.8±0.1
9	72.8±0.1	106.2±0.1
10	74.3±0.1	107.6±0.1

in each direction along each of three orthogonal axes for a total of 18 shocks. The equipment shall be on and operating during the test, although to no specified tolerance.

3.3.5.6.2 Shock, nonoperating. The equipment shall operate as prescribed after being subjected to two 25 g, 3 ms half sine shock pulses in each direction along each of three orthogonal axes for a total of 12 shocks. In addition, the units shall withstand a half sine crash safety shock of 30 g, 11 ms. The units shall be exposed to two shocks in each direction along each of three orthogonal axes for a total of 12 shocks. Bending and distortion are permitted but no parts shall become adrift.

3.3.5.7 Humidity. The TCS system equipment shall be designed to meet the humidity requirements of MIL-E-5400.

3.3.5.8 Maneuver loads.

3.3.5.8.1 Normal loads. The TCS equipment shall be designed to perform in accordance with 3.3.1 in a simulated mounting, while being subjected to the following loads:

a.	Vertical Down	4.0 g
b.	Vertical Up	1.5 g
c.	Horizontal	±3.0 g
d.	Forward	4.0 g
e.	Aft	4.0 g

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.5.8.2 Limit loads. The TCS equipment shall be designed to meet the performance requirements of this specification after application of limit load factors. The equipment shall operate during the application of the load factors. No physical distortion or permanent set of the equipment is permitted after application of limit load factors.

a.	Vertical Down	9.6 g
b.	Vertical Up	5.2 g
c.	Horizontal	±3.7 g
d.	Forward	4.0 g
e.	Aft	5.0 g

3.3.5.8.3 Ultimate loads. The equipment or equal dummy loads shall remain in place, without failure of the attaching points, when subjected to ultimate loads. Distortion and permanent set are permitted and equipment operation is not required during or after application of ultimate loads.

a.	Vertical Down	15.6 g
b.	Vertical Up	6.15 g
c.	Horizontal	±9.15 g
d.	Forward	4.0 g
e.	Aft	5.0 g

3.3.6 Transportability. The TCS system shall be suitable for air cargo transportation.

3.4 Design and construction. The equipment shall conform with all the applicable requirements of MIL-E-5400 for design, construction and workmanship, except as otherwise specified herein.

3.4.1 Parts and materials. In the selection of parts and materials, fulfillment of major design objectives shall be the prime consideration. In so doing, the following shall govern:

a. Microelectronic technology shall be considered and microelectronic items shall conform to requirements specified herein.

b. Other parts and materials requirements shall be in accordance with MIL-E-5400, Class 2X, Category III.

c. Nonrepairable subassemblies shall be used in accordance with MIL-E-5400.

d. When previously produced models of this equipment did not use nonrepairable subassemblies, the design shall not be changed to employ nonrepairable assemblies without the approval of the procuring activity.

e. Conformal coatings shall be approved types and meet the requirements of MIL-I-46058 and MIL-E-5400. Use of the insulating compound known as "Norcote," in accordance with WS-1308, shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.4.1.1 Modules. The electronic portions of the equipment shall be functionally modularized in accordance with MIL-E-5400.

3.4.2 Electromagnetic Interference (EMI) control. The contractor's equipment for the TCS system shall incorporate adequate Electromagnetic Interference (EMI) design in such a manner that the equipment complies with the EMI requirements of MIL-STD-461, for Class A-1 equipment, as follows: CE03, CE04, CS01, CS02, CS06, RE02 and RS03. Radiation susceptibility tests are applicable to that portion of the video sensor assembly exposed to the air stream. AFSC Design Handbook DH 1-4 shall be used as a design guide to control the EMI characteristics (emission and susceptibility) of the TCS equipments.

3.4.3 Nomenclature, nameplates and identification marking. Nomenclature and serial number assignment, nameplate approval and identification marking shall be in accordance with MIL-N-18307.

3.4.4 Interchangeability. The equipment shall meet the interchangeability requirements of MIL-E-5400. All Weapon Replaceable Assemblies (WRA's) with the same part or identification number shall be interchangeable as to form, fit, and function.

3.4.5 Safety.

3.4.5.1 Flight safety. The TCS system equipment shall meet the explosion requirements of MIL-E-5400.

3.4.5.2 Ground safety. The TCS system equipment shall meet the explosion requirements of MIL-E-5400.

3.4.5.3 Personnel safety. The TCS shall meet the personnel safety requirements of MIL-E-5400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Classification of tests. Items covered by this specification shall be subjected to the following tests to determine compliance with all applicable requirements.

a. First article inspection (see 4.4.2.4)
b. Acceptance tests (see 4.4)

4.2 Scope of tests. Production tests shall include all tests deemed necessary by the procuring activity to determine that the equipment meets all the requirements of this specification and the contract. Preproduction tests shall include environmental tests in accordance with the procedures of MIL-T-5422.

4.3 Performance requirements verification. The performance requirement is specified in Table IX.

4.4 Acceptance tests. The contractor shall furnish all samples and shall be responsible for accomplishing the acceptance tests. All inspection and testing shall be under the surveillance of the Government inspector. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product.

4.4.1 Individual tests. Each equipment submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of materials, workmanship, operational adequacy and reliability. As a minimum, each equipment accepted shall have passed the following tests:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IX. Performance requirement verification.

Paragraph	Requirement	Verified[1/]	Inspection[2/]	Analysis	Acceptance Test[3]
3.1.1	Major component list	X			
3.3.1.	Detail performance requirement	-	-	-	-
3.3.1.1	Television Camera Assembly (TCA)	-	-	-	
3.3.1.1.1	Function	X			
3.3.1.1.2	Form factor	X	X		
3.3.1.1.3	Weight	X	X		
3.3.1.1.4	Contents	-	-	-	-
3.3.1.1.5	Controls	-	-	-	-
3.3.1.1.6	Electrical connections	X	X		
3.3.1.1.7	Warmup time	X	X		
3.3.1.2	Control-Power Supply (CPS)	-	-	-	
3.3.1.2.1	Form factor	X	X		
3.3.1.2.2	CPS performance	X			
3.3.1.3	Television Camera Set (TCS)	-	-	-	-
3.3.1.3.1	Tracking mode	X			X
3.3.1.3.2	Acquisition modes	X			X
3.3.1.2.1	Manual acquisition	X		X	X
3.3.1.2.2	Automatic acquisition	X		X	X
3.3.1.2.3	Automatic acquisition with search	X			X
3.3.1.2.4	Search patterns	X			X
3.3.1.2.5	Semiautomatic acquisition	X			X
3.3.1.4	Instantaneous FOV	X			X
3.3.1.5	Cone of vision	X			X
3.3.1.6.1	Display centerline	X		X	
3.3.1.6.2	Track window alignment	X			X
3.3.1.6.3	Bench alignment accuracy	X			X
3.3.1.6.4	Bench boresight adjustments	X			X
3.3.1.7	Lines of sight	X			X
3.3.1.8	Sun sensor	X		X	X
3.3.1.8.1	Sun shutter triggering levels	X			X
3.3.1.8.2	Sun sensor cone of view	X			
3.3.1.8.3	Sun sensor shutter speed	X			
3.3.1.9	Gimbal slewing dynamics	X			X
3.3.1.10	Automatic video tracking target dynamics	X			
3.3.1.11	Base Motion Isolation	X			
3.3.1.12	Optical video tracker	X			X

1/ Verified by test and analysis during preproduction program
2/ Includes subsystem calibration
3/ Northrop Acceptance Test Procedure No. 336700 is used

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IX. Performance requirement verification. - Continued

Paragraph	Requirement	Verified 1/	Inspection 2/	Analysis	Acceptance Test 3
3.3.1.13	Static limiting resolution	X			X
3.3.1.14	Dynamic limiting resolution	X			
3.3.1.15	Square wave response	X			X
3.3.1.16	Gray scale rendition	X			X
3.3.1.17	Automatic light range	X			X
3.3.1.18	Scan failure protection	X		X	
3.3.1.19	TCS geometric distortion	X	X		
3.3.1.20	Television format	X			X
3.3.1.21	Display symbology				X
3.3.1.22	Angular accuracy				X
3.3.1.24	Radome refraction compensation				X
3.3.1.25	TCS reset				X
3.3.2.	TCS/F-14 interface	-	-	-	-
3.3.2.1	Video outputs	X			X
3.3.2.2	Horizontal sync signal	X			X
3.3.2.3	Vertical sync signal	X			X
3.3.2.4	TCS onboard signal	X			X
3.3.2.5	TCS Temperature warning signal	X	X		
3.3.2.6	TCS elevation gimbal	X			X
3.3.2.7	TCS optical position to radar	X			X
3.3.2.8	TCS optical position to AN/AWG-9 computer	X			X
3.3.2.9	TCS gimbal angle from AN/AWG-9 computer	X			X
3.3.2.10	Computer return #1	X	X		
3.3.2.11	SPATS (Search Pattern Size)	X			X
3.3.2.12	+10 Vdc analog reference	X			X
3.3.2.13	TCS track valid	X			X
3.3.2.14	TCS azimuth gimbal	X			X
3.3.2.15	Computer return #2	X	X		
3.3.2.16	TCS power interlock signal	X			X
3.3.2.17	TCS inputs from AN/AWG-9 and F-14	-	-	-	-
3.3.2.17.1	Hand control X	X			X
3.3.2.17.2	Hand control Y	X			X
3.3.2.17.3	Half action	X			X
3.3.2.17.4	Full action	X			X

1/ Verified by test and analysis during preproduction program
2/ Includes subsystem calibration
3/ Northrop Acceptance Test Procedure No. 336700 is used

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IX. Performance requirement verification. - Continued

Paragraph	Requirement	Verified[1/]	Inspection[2/]	Analysis	Acceptance Test[3]
3.3.2.17.5	TCS power on select	X			X
3.3.2.17.6	AUTO-ACQ	X			X
3.3.2.17.7	AUTO-SEARCH	X			X
3.3.2.17.8	RDR/TCS trim azimuth	X			X
3.3.2.17.9	RDR/TCS trim elevation	X			X
3.3.2.17.10	TCS standby select	X			X
3.3.2.17.11	TCS slave select	X			X
3.3.2.17.12	Radar tracking	X			X
3.3.2.17.13	104 Vrms, 400 Hz Ref.	X			X
3.3.2.17.14	Rear video select	X			X
3.3.2.17.15	Front video select	X			X
3.3.2.17.16	SLAC (Slave to Computer Command)	X			X
3.3.2.18	TCS analog input from Computer Signal Data Converters (CSDC)	-	-	-	-
3.3.2.18.1	Antenna position	X			X
3.3.2.19	TCS coolant input from F14	X	X		
3.3.2.20	Input electrical power	-	-	-	-
3.3.2.20.1	Operating power	X			
3.3.2.20.2	Lighting power	-	-	-	-
3.3.2.20.3	Degraded performance	X			
3.3.2.20.4	Standby power	X	X		
3.3.2.21	TCS temperature warning signal	X	X		
3.3.2.22.1	Cables and connectors	X	X		
3.3.2.22.2	Interconnecting cabling	X	X		
3.3.3.	Reliability	X		X	
3.3.3.1	Operational stability	X			
3.3.3.2	Operating life			X	
3.3.3.3	Reliability in Mean-Time-Between-Failure (MTBF)	X		X	
3.3.3.4	Time totalizing meter	X	X		
3.3.3.5	Parts reliability program	X		X	
3.3.3.6	Electronic/electrical/ electro-mechanical parts screening	X	X		
3.3.3.7	Failure data	-	-	-	-
3.3.4.	Maintainability			X	
3.3.4.1	Maintenance, (M)			X	
3.3.4.1.1	Maintenance concept			X	
3.3.4.1.2	Maintenance consideration	X			
3.3.4.2	Repair cycle	-	-	-	-

1/ Verified by test and analysis during preproduction program
2/ Includes subsystem calibration
3/ Northrop Acceptance Test Procedure No. 336700 is used

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T04:30Z
Check the source to verify that this is the current version before use.

TABLE IX. Performance requirement verification. - Continued

Paragraph	Requirement	Verified 1/	Inspection 2/	Analysis	Acceptance Test 3
3.3.4.2.1	Repair time	X			
3.3.4.2.2	Access and button-up time	-	-	-	-
3.3.4.2.3	Movement time	-	-	-	-
3.3.4.2.4	Inactive time	-	-	-	-
3.3.4.2.5	Service and access	X			
3.3.5	Environmental conditions	X			
3.3.5.1	Standard conditions	X	X		
3.3.5.2	Service conditions	X			
3.3.5.3	Vibration	X		X	
3.3.5.3.1	Vibration operating	-	-	-	-
3.3.5.3.1.1	Random performance	X		X	
3.3.5.3.1.2	Sinusoidal endurance	X		X	
3.3.5.3.1.3	Random vibration endurance	X		X	
3.3.5.3.2	Vibration, nonoperating, simulated gunfire	X		X	
3.3.5.4	Temperature	X		X	
3.3.5.5	Altitude	X		X	
3.3.5.6	Shock loads	X		X	
3.3.5.6.1	Shock, operating	X		X	
3.3.5.6.2	Shock, nonoperating	X		X	
3.3.5.7	Humidity	X		X	
3.3.5.8	Maneuver loads	-	-	-	-
3.3.5.8.1	Normal loads	X		X	
3.3.5.8.2	Limit loads	X		X	
3.3.5.8.3	Ultimate loads	X		X	

1/ Verified by test and analysis during preproduction program
2/ Includes subsystem calibration
3/ Northrop Acceptance Test Procedure No. 336700 is used

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

a. Examination of Product (see 4.4.1.1)
b. Operational Test (see 4.4.1.2)

4.4.1.1 Examination of product. Each equipment shall be examined carefully to determine that the material and workmanship requirements have been met.

4.4.1.2 Operational test. Each equipment shall be operated long enough to permit the equipment temperature to stabilize and to check sufficient characteristics and record adequate data to assure prescribed equipment operation.

4.4.2 Reliability assurance tests. The Reliability Assurance Tests shall consist of the following:

a. In Process Screening (see 4.4.2.1)
b. Preconditioning (Burn-In) (see 4.4.2.2)
c. Reliability Production Acceptance Test (see 4.4.2.3)
d. First Article Test (See 4.4.2.4)
e. Special Test (see 4.4.2.5)

4.4.2.1 In-process screens. The contractor shall perform lower level assembly screens (including inspection, test, or burn-in) consistent with good manufacturing practices and in the most cost-effective manner in order to permit detecting the maximum number of discrepancies prior to system tests. The establishment of production screening points is dependent on equipment design, quality level of parts, assembly flow, and critical fabrication points.

4.4.2.2 Preconditioning (burn-in). Each system shall be exposed to the thermal and vibration screening specified in 4.4.2.2.1 and 4.4.2.2.2.

4.4.2.2.1 Thermal screening. Each system shall be subjected to not less than 10 temperature cycles from -54°C to +71°C to -54°C at a minimum average rate of change of 5°C/minute (the contractor may adjust the temperature values provided the range from minimum to maximum is not less than 125°C). Dwell time at either end of temperature extreme shall be at option of contractor. Each system shall be operating and subjected to voltage cycling during periods of increasing temperature and nonoperating during decreasing temperature. The system shall be functionally tested once during operation and continuously monitored. Normal system cooling provisions shall be provided. The last test cycle shall be failure free.

4.4.2.2.2 Vibration. Each system shall be subjected to 10 minutes of random vibration. The equipment shall be hard mounted to a vibration table capable of reproducing random vibration having the power spectral density characteristics shown on Figure 21. A pseudo-random or synthetic vibration shaker capable of reproducing this power spectral density function will be an acceptable substitute for a true random vibration fixture. The equipment under tests should be oriented on the fixture such that the axis of vibration is perpendicular to the carrier boards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

4.4.2.3 Production reliability acceptance test. Following completion of preconditioning (burn-in), each system shall be subjected to a production reliability acceptance test. The test environment shall be the same as that described in 4.4.2.2.1 and 4.4.2.2.2. Each system shall accumulate 50 hours of operating time and shall be failure free in the last two cycles. The Production Reliability Acceptance Test Plan derived from Test Plan IIC, as shown on Figure C-11 of MIL-STD-781, shall be used to evaluate continuing MTBF acceptability.

4.4.2.3.1 Failure criteria. The failure criteria for the Production Reliability Acceptance Test shall be in accordance with Paragraph 6.0 inclusive of drawing 336241.

4.4.2.4 First article inspection. Two production systems randomly selected from the initial ten production units shall be subject to 600 operating hours (cumulative total) of the Reliability Qualification (Demonstration) Test environment (see drawing 336256) to assure the continued integrity of production hardware. No one system shall accumulate more than 350 hours. The test will be successfully completed if no failures requiring design modification are experienced, and the last 20 cycles are failure free. In the event that any failure requiring design modification occurs, the contractor shall implement the corrective action on the test hardware and all other production systems, and demonstrate the effectiveness of the corrective action by continuing the test for 200 hours without failure of the design modification. The test shall be extended beyond 600 hours if required to fulfill the 200-hour verification requirement.

4.4.2.4.1 Test details. The test details such as the length of the test cycle, the length of the heat portion of the cycle, the performance characteristics to be measured, special failure criteria, preventive maintenance to be allowed during the test, shall be part of the test procedures prior to the beginning of the Qualification Test Phase of the Reliability Assurance Tests.

4.4.2.5 Special tests. These shall be conducted when any class I design or material change affects the performance of the equipment.

4.4.2.5.1 Scope of test. Special tests shall consist of such tests as are acceptable to the procuring activity. Test procedures previously accepted shall be used where applicable.

4.4.2.6 Equipment failure. Should a failure occur during the above reliability assurance tests, the following action shall be taken:

a. Determine the cause of failure (see 6.2.2).

b. Determine if the failure is an isolated case or design defect.

c. Propose corrective action intended to reduce the possibility of the same failure occurring in future tests.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

d. Where practical, include a test in the individual test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been corrected.

4.5 Test procedures. The procedures used for conducting acceptance tests shall be developed by the contractor. The right is reserved by the procuring activity to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification or the contract. MIL-T-18303 shall be used as a guide for preparation of test procedures. When approved test procedures are available from previous contracts, such procedures may be used when their use is approved by the procuring activity. However, the right is reserved by the procuring activity to require modification of such procedures, including additional tests, when deemed necessary.

4.6 Spare equipment provisioning (WRA/SRA) acceptance. Unless otherwise specified by the contract (see 6.2.1), it is intended that the items covered by this specification shall be accepted at the system level of assembly, to ensure equipment compatibility and to ensure that the Maintainability requirements of 3.3.4 and the Interchangeability requirements of 3.4.4 are met. Acceptance of spare WRA's and SRA's may be performed at lower levels of assembly than the system level, provided that the interchangeability of spare items procured under the contract is adequately demonstrated by the contractor.

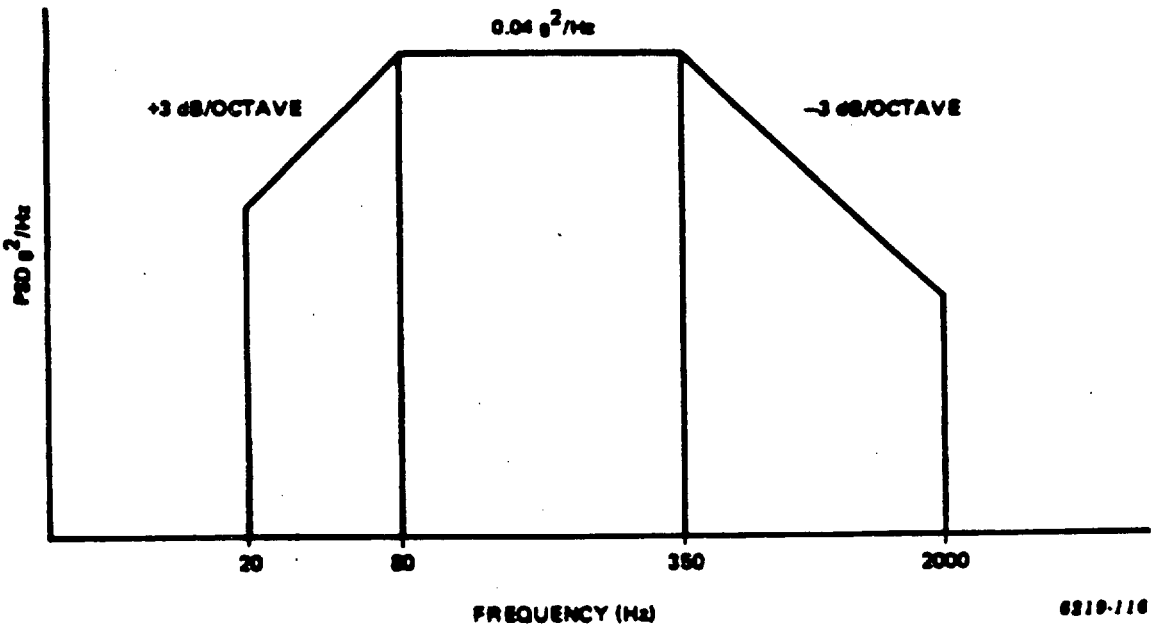


FIGURE 21 Random vibration spectrum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with MIL-E-17555 and MIL-STD-794. In the event the equipment is not covered in MIL-E-17555, the method of preservation for Level A shall be determined in accordance with the selection chart in Appendix D of MIL-STD-794.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The TCS is intended for installation on the F-14 aircraft to provide enhanced visual target identification and tracking.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of documents referenced (see 2.1.1).

c. Selection of applicable levels of packaging and packing (see 5.1).

d. Spares provisioning (see 4.6).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/ provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	Data Requirement	Applicable DID
3.3.3.2	Provisioning Parts List	DI-R-7079
3.3.3.7	Report, Failure Summary and Analysis	DI-R-7041
3.3.3	Reliability Program Plan	DI-R-7079
3.3.3.5	Reliability Program Plan	DI-R-7079
3.4.3	Request, Assignment of Nomenclature	UDI-E-21582
3.4.3	Request for Confirmation of Nomenclature	DI-CMAN-80194

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

Reference Paragraph	Data Requirement	Applicable DID
3.4.3	Request for Assignment of Serial Number and Serial Number Prefix Letters	DI-CMAN-80195
3.4.3	Request for Approval of Identification Plate Drawings	DI-CMAN-80196
4.4	Acceptance Test Reports	UDI-T-23967
4.4.2.4	First Article Test Procedure	UDI-T-21347
4.4.2.4.1	First Article Test Procedure	UDI-T-21347
4.4.2.6	Failure Report	DI-R-21598
4.5	Test Procedures	UDI-T-21347

6.4 Precedence of documents. When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence should apply:

a. Contract. The contract should have precedence over any specification.

b. This Specification. This specification should have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, should be specifically approved in writing by the procuring activity.

c. Referenced Specification. Any referenced specification should have precedence over all applicable subsidiary specification referenced therein. All referenced specifications should apply to the extent specified.

6.4 Performance objectives. Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of this specification are objectives which should be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified in MIL-E-5400, it is desired their use be investigated. When investigation shows advantages can be realized, a request for approval should be submitted to the procuring activity for consideration. Each request should be accompanied by complete supporting information.

6.5 Type designations. The type designations may be modified by the procuring activity upon application by the contractor for assignment of nomenclature in accordance with 3.4.3. The correct type number should be used on nameplates, shipping records, and instruction books, as applicable.

6.6 First article. When a first article is required, the item will be tested and should be a sample selected from the first ten production items. The first

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

article should consist of two units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the document's first article.

6.7 Glossary. A glossary of terms used herein is listed in Appendix C.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.9 Subject term (key word) listing:
Autotrack, video, target
Camera, television
Control, power supply
Identification system, visual, target
Television format

Preparing Activity
Navy-AS
(Project 5821-N233)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX A

CONTROL SWITCH MODE CHART.

Mode	Control Switch Inputs				Discrete Logic Inputs			Function/Comment
	SLV	ACQ	HCU	FOV	RTG	SLAC	SPATS	
1	IND	—	ZA	—	—	—	—	TCS is caged forward.
2	IND	MA	HA	—	—	—	—	Manual slew and manual target acquisition after FA.
3	IND	AA	HA	—	—	—	—	Manual slew and semiautomatic target acquisition after FA.
4	IND	AS	HA	—	—	—	—	Manual slew and semiautomatic target acquisition after FA.
5	TCS	MA	ZA	—	—	—	—	TCS slaves to RDR LOS.
6	TCS	MA	ZA	NAR	—	1	—	TCS slaves to CTR LOS.
7	TCS	MA	ZA	WID	—	1	—	TCS slaves to CTR LOS and enters GSS mode.
8	TCS	AA	ZA	—	0	0	—	TCS is caged forward.
9	TCS	AA	ZA	—	1	0	—	TCS slaves to RDR LOS and automatically acquires targets within AA window.
10	TCS	AA	ZA	—	—	1	—	TCS slaves to CTR LOS and automatically acquires targets within AA window.
11	TCS	AA	HA	—	—	—	—	Manual slew and semiautomatic target acquisition after FA.
12	TCS	AS	ZA	—	0	0	—	TCS is caged forward
13	TCS	AS	ZA	—	1	0	1	TCS slaves to RDR LOS and repeats 5x5 search pattern until target is automatically acquired.
14	TCS	AS	ZA	—	—	1	1	TCS slaves to CTR LOS and repeats 5x5 search pattern until target is automatically acquired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX A

CONTROL SWITCH MODE CHART. - Continued

Mode	Control Switch Inputs				Discrete Logic Inputs			Function/Comment
	SLV	ACQ	HCU	FOV	RTG	SLAC	SPATS	
15	TCS	AS	ZA	—	—	1	1—0	TCS will operate as in Mode 14, but a SPATS transition from a logic 1 to a logic 0 will reset the search pattern and return the TCS to the CTR LOS.
16	TCS	AS	EA	—	—	—	—	Manual slew and semiautomatic target acquisition after FA.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX B

DIGITAL TYPE A SIGNAL CHARACTERISTICS.

10.1 Digital type A avionics receiver characteristics. The TCS circuitry shall incorporate a digital Type A avionics receiver and shall respond to signals generated by a digital Type A transmitter. The digital Type A receiver shall be capable of receiving digital signals having the following characteristics:

a.	Logical "one"	+5 to +14 Vdc
b.	Logical "zero"	-2 to +2 Vdc or open circuit
c.	Pulse Width	6 microseconds minimum in either a logical "one" or "zero" state. This minimum may be reduced to 3 microseconds provided the total of rise and fall times does not exceed 0.5 microsecond.
d.	Receiver load	1500 ohms ±30 percent resistive and 100 pf capacitance maximum to ground for single loads, but is individually specified for multiple loads.
e.	Requirements	Receiver shall not be dependent on the transmitter accepting current on providing a minimum source resistance.

10.2 Digital type A avionics/transmitter characteristics. Performance of the TCS digital Type A receiver assumes that the AN/AWG-9 radar/computer incorporates a digital Type A transmitter. The assumed digital Type A transmitter will be capable of providing digital signals having the following characteristics when terminated in a resistive load of 1500 ohms +30 percent:

a.	Logical "one"	+6 to +13 Vdc
b.	Logical "zero"	-1 to +1 Vdc or open circuit
c.	Rise and fall times (measured between 10 and 90 percent points)	0.5 to 3 microseconds when resistance is in parallel with a 680 picofarad capacitance; 6 microseconds maximum when resistance is in in parallel with 3000 picofarads maximum (includes load and wiring capacitance)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX B

DIGITAL TYPE A SIGNAL CHARACTERISTICS. - Continued

d. Pulse width	Individually specified for each signal but shall be a minimum of 6 microseconds in either a logical "one" or "zero" state. Six microseconds minimum can be reduced to 3 microseconds provided the total of rise and fall times does not exceed 0.5 microsecond.
e. Short circuit	Any value of load including short circuit to ground shall not result in damage to the circuit components or affect any other channel.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX C

GLOSSARY.

Action Switch	- Three-position switch on rate stick. It is used to enable rate control, track initiation and system reset
AA	- Automatic Acquisition
AS	- Automatic Search (Auto-Search)
Break Lock	- To terminate a track mode of operation
Caged	- When the TCS is internally slaved to a fixed forward position
CPS	- Control-Power Supply
CSDC	- Computer Signal Data Converter
CTR	- Computer
DD	- Digital Display
DDD	- Detailed Data Display
EMI	- Electromagnetic Interference
FA	- Full Action
FOV	- Field of View
GACH	- Gimbal Angle Crosshair
Gimbal Limit	- The mechanical limit of travel of the TCS Az and El gimbals
GSS	- Gun Scoring System
HA	- Half Action
HCU	- Hand Control Unit
Horizontal Period	- Time required for one TV horizontal sweep and retrace
Horizontal Shading	- Distortion in the video of a horizontal sweep
IND	- Independent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX C

GLOSSARY. - Continued

LOS	- Line of sight
MA	- Manual Acquisition
MTBF	- Mean Time Between Failures
NFOV	- Narrow Field of View
PPLS	- Program Parts Selection List
PWB	- Printed Wiring Board
RACH	- Radar Angle Crosshair
RDR	- Radar
RIO	- Radar Intercept Officer
RTG	- Radar Tracking discrete logic signal
RTTS	- Real Time Training System
SLAC	- Slave to Computer Command discrete logic signal
SPATS	- Search Pattern Size
SRA	- System Replaceable Assembly
TCA	- Television Camera Assembly
TCS	- Television Camera Set
TID	- Tactical Information Display
TVL	- Television Line
TVSU	- Television Sight Unit
TW	- Track Window
TWS	- Track While Scan
VDI	- Vertical Display Indicator

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

APPENDIX C

GLOSSARY. - Continued

Vertical Period	- The time required for one TV vertical sweep and retrace
WFOV	- Wide Field of View
WRU	- Weapon Replaceable Unit
ZA	- Zero Action

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

FIGURES

Figure		Page
1	TCS flow diagram, manual acquisition (MA) and semi-automatic acquisition (SAA)	7
2	TCS flow diagram, automatic acquisition (AA)	8
3	TCS flow diagram, automatic acquisition with search (AS)	9
4	Center dimensions, automatic acquisition window	10
5	TCS search modes	12
6	TCS flow diagram - gunscore (GSS) mode	13
7	Gimbal rate for TCS versus input voltage	16
8	Video symbology of both fields of view	19
9	Symbology definition	20
10	TCS elevation correction for radome refraction	22
11	TCS clamped video format and external display synchronization signals	25
12	Coordinate transformation channel	26
13	Coordinate transformation channel	30
14	TCS synchronizing signal for TWS mode operation	33
15	Random vibration performance test curve	47
16	Endurance test curve	47
17	Acceleration spectral density, control-power supply (CPS)	48
18	Acceleration spectral density, television camera assembly (TCA)	48
19	Gunfire vibration spectrum 4000 rpm nominal rate	49
20	Gunfire vibration spectrum 6000 rpm nominal rate	49
21	Random Vibration Spectrum	62

TABLES

Table		Page
I	Major components list	4
II	Stick motion versus gimbal angle motion	17
III	Static resolution and square wave response	17
IV	Radome correction	23
V	Output destination	24
VI	Endurance random vibration, narrow band frequencies	50
VII	Endurance random vibration, schedule of stepped frequency combinations	51
VIII	Pulse rates for gunfire vibration simulation	52
IX	Performance requirement verification	56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

INDEX

Paragraph		Page
4.4	Acceptance tests	53
3.3.4.2.2	Access and button up time	43
6.2.1	Acquisition requirements	61
3.3.1.3.2	Acquisition modes	5
3.3.1.6	Alignment	13
3.3.5.5	Altitude	50
3.3.1.22	Angular accuraccy	20
3.3.2.18.1	Antenna Position	38
	Appendix A- Control Switch Mode Chart	63
	Appendix B- Digital Type A Signal Characteristics	65
	Appendix C-Glossary	67
2.	Applicable documents	1
3.3.1.3.3.1	Asynchronous search mode	10
3.3.2.17.6	Auto-Acq	35
3.3.2.17.7	Auto-Search	35
3.3.1.3.2.2	Automatic Acquisition	9
3.3.1.3.2.4	Automatic acquisition with search	9
3.3.1.17	Automatic light range	17
3.3.3.10	Automatic video tracking target dynamics	14
3.3.1.11	Base motion isolation	14
3.3.1.6.3	Bench alignment accuracy	13
3.3.1.6.4	Bench boresight adjustments	13
3.3.2.22	Cabling and connections	41
3.3.2.22.1	Cables and connectors	41
6.8	Changes from previous issue	62
3.3	Characteristics	4
4.1.1	Classification of tests	53
3.3.2.11	Computer return#1	31
3.3.2.15	Computer return#2	33
3.3.1.5	Cone of vision	10
3.3.1.1.4	Contents	4
3.3.1.1.5	Controls	4
3.3.1.2	Control power supply(CPS)	5
3.3.1.2.3	CPS performance	5
6.2.2	Data requirements	61
3.3.2.20.3	Degraded performance	40
3.4	Design and construction	51
3.3.1	Detail performance requirement	4
3.3.1.6.1	Display centerline	13
3.3.1.21	Display symbology	17
3.3.1.14	Dynamic limiting resolution	14
3.3.1.1.6	Electrical connections	5
3.3.3.6	Electronic/electrical/electro-mechanical parts screening	42
3.4.2	Electromagnetic Interference (EMI) control	52
3.3.5	Environmental conditions	43
4.4.2.6	Equipment failure	59
4.4.1.1	Examination of product	53
3.2	First article	4
6.6	First article	62

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

INDEX

4.4.2.4	First article test	59
4.4.2.3.1	Failure criteria	59
3.3.3.7	Failure data	42
3.4.5.1	Flight safety	52
3.3.2.17.16	Front video select(option)	37
3.3.1.1.2	Form factor	4
3.3.1.2.1	Form factor	5
3.3.2.17.4	Full action	34
3.3.1.1.1	Function	4
5.1	General	61
3.3.1.9	Gimbal slewing dynamics	13
6.7	Glossary	62
2.1	Government documents	1
3.3.1.16	Gray scale rendition	17
3.4.5.2	Ground safety	52
3.3.1.3.4	Gunscore mode	10
3.3.2.17.3	Half action	34
3.3.2.2	Horizontal synch signal	26
3.3.5.7	Humidity	50
3.3.4.2.4	Inactive time	43
4.4.1	Individual tests	53
4.4.2.1	In-process screens	58
3.3.2.20	Input electrical power	40
3.3.1.4	Instantaneous field of view	10
6.1	Intended use	61
3.4.4	Interchangeability	52
3.3.2.22.2	Interconnecting cabling	41
3.3.2.20.2	Lightning power	40
3.3.5.8.2	Limit loads	51
3.3.1.7	Lines of sight	13
3.3.4	Maintainability	42
3.3.4.1	Maintenance, (M)	42
3.3.4.1.1	Maintenance concept	42
3.3.4.1.2	Maintenance consideration	42
3.1.1	Major components list	4
3.3.5.8	Maneuver loads	50
3.3.1.3.2.1	Manual acquisition	5
3.4.1.1	Modules	52
3.3.4.2.3	Movement time	43
3.4.3	Nomenclature, nameplates and identification marking	52
3.3.5.8.1	Normal loads	50
6	Notes	61
3.3.2.20.1	Operating power	40
3.3.3.2	Operating life	41
3.3.3.1	Operational stability	41
4.4.1.2	Operational test	58
3.3.1.12	Optical video tracker	14
2.1.3	Order of precedence	3
6.2	Ordering data	61
2.1.2	Other Government documents, drawings, and publications	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

INDEX

2.2	Other publications	3
5	Packaging	61
3.4.1	Parts and materials	51
3.3.3.5	Parts reliability program	41
6.4	Performance objectives	62
4.3	Performance requirements verification	53
3.4.5.3	Personnel safety	52
4.4.2.2	Preconditioning(burn-in)	58
4.4.2.3	Production reliability acceptance test	58
4	Quality assurance provisions	53
3.3.1.23	Radome refraction compensation	20
3.3.2.17.12	Radar tracking(RTG)	36
3.3.5.3.1.2	Random endurance	44
3.3.5.3.1.1	Random performance	44
3.3.2.17.8	RDR/TCS trim azimuth	35
3.3.2.17.9	RDR/TCS trim elevation	35
3.3.2.17.14	Rear video select	37
3.3.3	Reliability	41
4.4.2	Reliability assurance tests	58
3.3.3.3	Reliability in Mean Time Between Failures(MTBF)	41
3.3.4.2	Repair cycle	43
3.3.4.2.1	Repair time	43
3	Requirements	4
4.1	Responsibility for inspections	53
3.4.5	Safety	52
3.3.1.18	Scan failure protection	17
1	Scope	1
4.2	Scope of tests	53
4.4.2.5.1	Scope of tests	59
3.3.1.3.3	Search modes	10
3.3.1.3.2.3	Semiautomatic acquisition	9
3.3.4.2.5	Service and access	43
3.3.5.2	Service conditions	44
3.3.5.6	Shock loads	50
3.3.5.6.2	Shock, nonoperating	50
3.3.5.6.1	Shock, operating	50
3.3.5.3.1.2	Sinusoidal endurance	44
3.3.2.17.16	SLAC (slave to computer)	38
4.6	Spare equipment provisioning(WRA/SRA) acceptance	60
3.3.2.12	SPATS (search pattern size)	31
4.4.2.5	Special tests	59
2.1.1	Specifications, standards, and handbooks	1
3.3.1.15	Square wave response	14
3.3.5.1	Standard conditions	44
3.3.2.20.4	Standby power	40
3.3.1.13	Static limiting resolution	14
3.3.1.8	Sun sensor	13
3.3.1.8.2	Sun sensor cone of view	13
3.3.1.8.3	Sun sensor shutter speed	13
3.3.1.8.1	Sun shutter triggering levels	13
3.3.1.3.3.2	Synchronous search mode	10

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:50Z
Check the source to verify that this is the current version before use.

3.1	System description	4
3.3.2.18	TCS analog inputs from computer signal Data converters(CSDC)	38
3.3.2.7	TCS azimuth gimbal	27
3.3.2.17	TCS control inputs from AN/AWG-9 and F-14	33
3.3.2.19	TCS coolant input from F-14	40
3.3.2.6	TCS elevation gimbal	27
3.3.1.19	TCS geometric distortion	17
3.3.2.10	TCS gimbal angle from AN/AWG-9 computer	31
3.3.2.17.1	TCS hand control X	34
3.3.2.17.2	TCS hand control Y	34
3.3.2	TCS/F14 interface	20
3.3.2.4	TCS onboard signal	27
3.3.2.9	TCS optical postion to AN/AWG-9 computer	30
3.3.2.8	TCS optical position to radar	28
3.3.2.16	TCS power interlock signal	33
3.3.2.17.5	TCS power on select	34
3.3.1.24	TCS reset	20
3.3.2.17.13	TCS slave select	36
3.3.2.17.10	TCS standby select	36
3.3.2.5	TCS temperature warning signal	27
3.3.2.21	TCS temperature warning signal	40
3.3.2.14	TCS track valid	33
3.3.1.1	Television camera assembly(TCA)	4
3.3.1.3	Television camera set(TCS)	5
3.3.1.20	Television format	17
3.3.5.4	Temperature	50
4.4.2.4.1	Test details	59
4.5	Test procedures	59
4.4.2.2.1	Thermal screening	58
3.3.3.4	Time totalizing meters	41
3.3.1.3.1	Tracking mode	5
3.3.1.6.2	Track window alignment	13
3.3.6	Transportability	51
6.5	Type designations	62
3.3.5.8.3	Ultimate loads	51
3.3.2.3	Vertical sync signal	26
3.3.5.3	Vibration	44
4.4.2.2.2	Vibration	58
3.3.5.3.2	Vibration, nonoperating, simulated gunfire	44
3.3.5.3.1	Vibration operation	44
3.3.2.3	video outputs	21
3.3.1.1.7	Warmup time	5
3.3.1.1.3	Weight	4
3.3.1.2.2	Weight	5
3.3.2.17.13	104 Vrms, 400Hz ref	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-85437B(AS)	CAMERA SET, TELEVISION, AN/AXX-1

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2020-10-26 04:30Z
Check the source to verify that this is the current version before use.