INCH - POUND

MIL-C-62747(AT)
28 February 1994

MILITARY SPECIFICATION

CARRIER-CARGO, TRACKED, 6 TON-M548A3

This specification is approved for use by the U. S. Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the interface, performance and inspection for a full-tracked, diesel powered vehicle designed for cross country operations.

1.2 Classification. Vehicles shall be of the following model, as specified:

Model	Army Drawing	Vehicle Type
M548A3	8750289	Carrier, Cargo, Tracked

Beneficial comments (recommendations, additions, deletions, and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, Michigan 48397-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 2350

DISTRIBUTION STATEMENT A. For public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (See 6.2).

SPECIFICATIONS

FEDERAL

VV-F-800	-	Fuel Oil, Diesel.

MILITARY

MIL-P-514	-	Plates, Identification, Instruction and Marking, Blank.
MIL-C-62015	-	Carriers, Cargo, Full-Tracked, M548 and M548A1; and Carrier, Electronic Warfare Systems, Full-Tracked, M1015 and M1015A1; Processing for Storage and Shipment of.
MIL-H-62315		Heater Assembly, Combustion Vehicular Compartment, 60,000 BTU/HR.
MIL-E-62541	-	Engine, Diesel, 6 Cylinder V-Type, 275 H.P, Turbocharged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-130	-	Identification Marking for U.S. Military Property.
MIL-STD-810	-	Climatic Extremes for Military Equipment.
MIL-STD-461A, Notice 4	-	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-462, Notice 3	-	Electromagnetic Interference Characteristics, Measurement of.
MIL-STD-642	-	Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-1275	-	Characteristics of 28 C Volt DC Electrical Systems in Military Vehicles.
MIL-STD-1472	-	Human Engineering Design Criteria.
MIL-STD-1474	-	Noise Limits for Army Materiel.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

10950025	-	Fixed Fire Extinguisher.
10950025	-	Fixed Fire Extinguisher.
12382381	-	Chart, Lubricant, Fuel, Coolant, M113A3.

PURCHASE DESCRIPTIONS

ATPD-2181	-	Transmission, Hydraulic: Automatic X200-4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article (Preproduction). The contractor shall furnish a sample unit for first article inspection and approval (4.4). First article sample shall be inspected by the contractor under the surveillance of the Government to determine conformance to the quality assurance provisions of this specification. The first article sample shall be fully representative of units to be supplied from production tooling and facilities.

3.2 Initial production vehicle. Vehicles manufactured at initiation of quantity production shall be inspected, and shall pass initial production inspection(4.2 and 4.4.2). Initial production vehicles shall be representative of vehicles to be furnished under this specification and shall include all current modifications. No modification shall be applied to subsequent vehicles without prior approval of the Government.

3.3 5,000 mile operational profile. The vehicle shall meet the operational requirements specified in 3.3.1 through 3.3.3 when operated for 5,000 miles, combat loaded (28770 ± 200 pounds (LB) gross vehicle weight (GVW)), and operated at speeds appropriate to the terrain as follows:

a. 20% hard-surfaced roads
b. 40% secondary roads
c. 40% cross-country

(See 4.7.2)

NOTE: During operation on hard-surfaced roads and cross-country, the vehicle shall be capable of towing a vehicle weighing 28770 ± 200 LB GVW for 20 miles in each mode.

3.3.1 Reliability. Reliability shall be not less than 850 mean miles between failure (MMBF) during the first 5,000 miles, when operated in accordance with the operational profile (See 3.3). For calculating MMBF, the definition in the M113A2 family 50 mile mission failure scoring criteria shall be used (See 4.7.2.1 and 6.9).

3.3.2 Durability. The vehicle, with rated payload (GVW 28770 ± 200 lb), shall complete the 5,000 test miles without replacement, rebuild, or major overhaul of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

engine, transmission, or final drives, and without repair or rebuild of the hull, when operated in accordance with the operational profile (See 3.3 and 4.7.2.2).

3.3.3 Maintainability. Total maintenance, excluding driver/crew checks and services, shall not exceed 175 man-hours during 5,000 miles of operation in accordance with the operational profile (See 3.3). This equates to a Maintenance Ratio (MR) of 0.35 at 10 operational miles, equivalent to one operational hour. The scheduled maintenance interval shall be three months or 750 miles, whichever comes first (See 4.7.2.3).

3.4 Materials. The materials shall be as specified herein and in referenced documents. The materials shall be uniform in quality and free from defects and imperfections that might affect the serviceability and reliability of the finished product (See 4.1.1).

3.5 Qualified products. The contractor shall be responsible for using parts and assemblies from Qualified Products Lists (QPLs) wherever specified (See 4.1.2).

3.6 Construction. The vehicle shall be constructed in accordance with applicable drawings, specifications and standards. Completed vehicles shall meet all requirements specified herein, and be of a quality that assures a vehicle free of defects that would compromise, limit, or reduce its performance (See 4.1.3).

3.7 Physical characteristics.

3.7.1 Bearing seals. When fording and operating in mud, sand or snow, seals shall prevent the entrance of foreign matter into the bearings that are exposed to contamination during these operations. Bearing seals shall restrict the leaking of lubricants from bearings. Lubricant leakage at static and dynamic seals shall not be in excess of a Class I (See 4.7.6).

3.7.2 Doors and tailgate. The cab and cargo doors and cargo compartment tailgate shall fit and function without interference or misalignment. All seals shall provide positive sealing surface for seal contact and seal adhesion (See 4.7.7).

3.7.3 Windows and covers. The cab side windows, windshield and cab and cargo compartment covers shall fit and function without interference or misalignment. All seals shall provide positive sealing surface for seal contact and seal adhesion (See 4.7.8).

3.7.4 Engine. The engine shall conform to MIL-E-62541 and when installed in the vehicle, shall operate throughout all speed ranges without evidence of coolant or fuel leakage. Lubricant leakage at static and dynamic seals shall not be in excess of a Class I (See 4.7.9 and 6.6.1).

3.7.5 Engine exhaust system. Engine exhaust leakage is permitted at connections provided clamping devices remain secure during vehicle operation (See 4.7.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.7.6 Fuel system. The fuel tank, lines and connections shall be internally clean prior to initial fueling of the vehicle. The fuel system shall be free of leakage. (See 4.7.11).

3.7.6.1 Fuel system, grades and slopes. During vehicle operation, the fuel system shall maintain a continuous supply of fuel to the engine when ascending and descending 60% grades in forward and reverse gear, and when the vehicle is being operated on 30% side slopes with either side of the vehicle up-slope (See 4.7.11.1).

3.7.6.2 Fuel tank. The fuel tank shall be capable of receiving fuel at the average rate of 25 gallons per 30 seconds and shall be free of leakage. (See 4.7.11.2).

3.7.7 Special Kits. Provisions shall be made for installation of special kits including winterization equipment. Special kits, when installed, shall fit properly without interference or misalignment and meet applicable environmental and performance requirements specified herein (See 4.7.12).

3.7.7.1 Winterization kit. When installed, the winterization kit shall supplement the personnel heater by providing insulation for the cab cover assembly to permit vehicle operation in ambient temperatures from minus 25° F to minus 65° F. The insulated soft cab cover shall resist the entrance of water, dust and snow. When installed, the engine coolant heater shall assure engine starting and operation in ambient air temperature from minus 25° F to minus 65° F. The engine coolant heater shall be capable of operating for a minimum of twelve hours on battery power alone without discharging the battery to a level that would preclude satisfactory starting of the engine (See 4.7.12.1).

3.7.7.1.1 Cab personnel heater kit (secondary). When installed, the (secondary) cab personnel heater kit shall supplement the (primary) cab personnel heater and insure for personnel and windshield defrosting during operations in ambient temperatures from minus 25° F to minus 65° F. The insulated soft top cab cover shall resist the entrance of water, dust and snow (See 4.7.12.1.1).

3.7.7.1.2 Cargo area personnel heater kit (primary). When installed, the (primary) cargo area personnel heater kit shall provide heat for personnel in the rear cargo area in ambient temperatures to minus 25° F (See 4.7.12.1.2).

3.7.7.1.3 Cargo area personnel heater kit (secondary). When installed, the (secondary) cargo area personnel heater kit shall supplement the (primary) cargo area personnel heater kit during operations in ambient temperatures from minus 25° F to minus 65° F. The insulated cargo cover shall provide protection for personnel and material in the cargo area in ambient air temperatures to minus 65° F. The insulated cargo cover shall be water, dust and snow proof (See 4.7.12.1.3).

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.7.7.1.4 Engine coolant heater kit. When installed, the engine coolant heater kit shall assure engine starting and operation in ambient air temperature from minus 25° F to minus 65° F. The engine coolant heater shall be capable of operating for a minimum of twelve hours on battery power alone without discharging the battery to a level that would preclude satisfactory starting of the engine (See 4.7.12.1.4).

3.7.7.2 Material handling kit. When installed, the material handling kit shall be capable of loading material weighing up to 1500 pounds into the storage area. This kit shall be capable of being mounted either left of center, right of center, or in a center location of cargo area without interference (See 4.7.12.2).

3.7.7.3 Machine gun kits (50 cal and 7.62mm). When mounted on vehicle, the machine gun kits shall be capable of supporting the machine gun when firing and allow the gun to rotate 360 degrees to the left and right without interference (See 4.7.12.3).

3.7.8 Transmission. The transmission shall conform to requirements of ATPD-2181. When installed in the vehicle, the transmission shall operate throughout all gear ranges without evidence of leakage in excess of a Class I at static and dynamic seals (See 4.7.13).

3.7.9 Electrical system.

3.7.9.1 Generating system. The generating system, with engine operating at 2,150 ± 100 rpm, shall provide 28.0 ± 0.5 volts (without load) and 27.3 ± 0.3 volts (with 180 ± 5 ampere load) at the vehicle batteries per se 4.7.14).

3.7.9.2 Lights. Internal and external lights shall operate, and all electrical contacts and connections shall maintain positive contact, under all vehicle operating conditions (See 4.7.15).

3.7.10 Heater. Personnel heater conforming to MIL-H-62315, when installed, shall start, operate and purge satisfactorily with the vehicle electrical system and diesel fuel conforming to VV-F-800 (See 4.7.16).

3.7.10.1 Heater exhaust system. The heater exhaust system, when installed, shall be free of leakage (See 4.7.16.1).

3.7.11 Communications and electrical circuits. Communication and electrical circuits shall maintain continuity from end to end, without shorts from pin to pin or from pin to connector shell. (See 4.7.17)

3.7.12 System voltage characteristics. Electrical system voltage characteristics shall fall within the limits for transient and steady state voltage requirements specified in MIL-STD-1275 (See 4.7.18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.7.13 Electromagnetic interference suppression. The vehicle, when operating, shall conform to the requirements for EMI/EMC suppression in accordance with emission requirements RE05 and CE07 of MIL-STD-461A, Notice 4. The vehicle horn and switching of headlights are excluded (See 4.7.19).

3.7.14 Winch system. When installed, the winch system shall withstand an increasing load with a 11 to 12 foot cable (total length) including three to four wraps of cable on a bare drum of up to 24,000 pounds. The load must exceed 14,000 pounds (See 4.7.20).

3.7.14.1 Winch operation. When installed, the winch system shall operate without binding and provide even distribution of cable until the cable is completely reeled in (See 4.7.20.1).

3.7.14.2 Winch structural integrity. When installed, the winch system shall be capable of withstanding a 20,000 pound load without loss of structural integrity (See 4.7.20.2).

3.7.14.3 Winch controls. When installed, the winch system cab-mounted controls shall engage the power take-off drive for operation of the winch. Manual operation shall permit free spooling of the winch drum (See 4.7.20.3).

3.7.15 Controls. All electrical and mechanical controls shall functionally operate throughout all ranges of operation under all operating conditions. (See 4.7.21)

3.7.16 Adjustment mechanisms. All adjustment mechanisms shall be operable and provide adjustment capability within specified ranges (See 4.7.22).

3.7.17 NBC system. The NBC system shall operate satisfactorily with the vehicle electrical system. With the precleaner assembly turned on, heated air (above ambient) shall be delivered to all stations at a flow rate of 3.0 to 4.5 cubic feet per minute (See 4.7.23 and 4.7.23.1).

3.7.18 Stowed equipment. All interior and exterior stowage items when stowed (combat loaded) on a completely assembled vehicle in the spaces provided, shall fit properly and not interfere with operation of the vehicle and components in any manner (See 4.7.24).

3.8 Performance. A complete vehicle, loaded with rated payload, serviced as specified in 3.8.1, and equipped for existing climatic conditions, shall operate as specified herein without special equipment. Performance shall be demonstrated on smooth, level, hard-surfaced roads free of loose material except as otherwise specified herein (See 4.7.4 and 4.7.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.8.1 Preparation. Except for equipment and component installation and servicing performed by the contractor as a final processing of vehicles for acceptance, the vehicle shall be completely assembled and all adjustments completed. The vehicle shall be serviced with coolant, lubricant and fuel as specified on drawing 12382381. Specific applications by grades or types for various expected seasonal temperature ranges shall be as specified.

3.8.2 Oil pressure and temperature. Prior to vehicle operation, the engine shall be operated at 600 to 800 rpm until lubricating oil is at operating pressure and temperature. If at any time during vehicle operation, the engine has been stopped for at least 15 minutes, the engine shall again be operated, as above, before continuing vehicle operation.

3.8.3 Break-in run. (See 4.7.1)

3.8.3.1 Break-in run (track). Prior to tests, each vehicle shall be given a break-in run as specified in table I on smooth, level, hard-surfaced roads or a test track, except a section of the road shall be as shown in figure 1. After each division of break-in run, the vehicle shall be stopped and, after allowing the engine to idle for not less than one minute, driven in reverse for a distance of not less than 50 feet (See 4.7.1.1).

Source: https://assist.dla.mil Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Break-in run (track)

Division of run	Speed (mph)	Distance (miles)
a	0 to 10	5
b	11 to 20	5
c	21 to 30	10
d	31 to maximum governed	10

3.8.3.2 Break-in run (simulated). When authorized, a partially simulated break-in run may be given in lieu of the run specified in 4.7.1.2, using the Army Skid Type Dynamometer as specified in table II. After completion of each division "a" through "d," the vehicle shall be operated in reverse for 15 second's minimum with engine rpm at 1,000 minimum (See 4.7.1.2).

TABLE II. Simulated break-in run.

Division of run	Speed (mph)	Distance (miles)	Run Conditions
a	0 to 10	5	Dynamometer
b	11 to 20	5	Dynamometer
c	21 to 30	5	Dynamometer
d	31 to maximum governed	5	Dynamometer
e	21 to 30	5	Track (road)
f	31 to maximum governed	5	Track (road)

3.8.3.3 Condition after run. After completion of the break-in run, there shall be no indication of damaged components, maladjustment, or loss of original adjustment that may cause faulty vehicle operation subsequent to Government acceptance.

3.8.4 Cooling systems.

3.8.4.1 Engine cooling. With the vehicle operating in an ambient temperature of 120°F measured at the inlet grille, and a tractive effort (TE) to gross vehicle weight ratio of .60 (17,262 LB TE/28,770 LB GVW) measured at the sprockets, the engine oil temperature not greater than 275 degrees F, the engine cooling system using water as coolant shall maintain the engine coolant at a temperature not greater than 230°F, measured at a point between the coolant outlet from the engine and the transmission oil cooler inlet. The radiator pressure cap shall relieve the cooling system operating pressure between 12 and 16 pounds per square inch gage (psig) (See 4.7.26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.8.4.1.1 Deaeration and clearing capacity. The cooling system using water as coolant shall perform as specified while ingesting air at rates up to 0.6 cfm, for not less than 12 minutes. The system shall purge itself of air within 1 hour after stopping air injection (See 4.7.26.1).

3.8.4.1.2 Draw down capacity. The cooling system shall perform as specified while operating with a coolant volume loss of up to 6 quarts. (See 4.7.26.2)

3.8.4.2 Transmission lubricant cooling. With the vehicle operating in an ambient temperature of 120°F measured at the inlet grille and a tractive effort ratio of 0.60 (17,262 LB TE/28,770 LB GVW) measured at the sprockets, the transmission lubricant cooling system shall maintain lubricant temperature at not greater than 305°F, measured from the transmission outlet into the cooler (See 4.7.27).

NOTE: Requirements cited in paragraph 3.8.4 are not applicable to conversion programs unless otherwise specified by contract.

3.8.5 Bilge pump. The bilge pump shall remove water from the vehicle at a rate of not less than 44 gpm with the pump motor operating on 28.0 volts maximum (See 4.7.28 and 4.7.28.1).

3.8.6 Speed and drift.

3.8.6.1 Speed. The vehicle shall sustain a speed of 38 mph on level ground after break-in, without damage to the power plant or suspension system (See 4.7.29).

3.8.6.2 Drift. With the vehicle traveling 25 mph ± 5 mph, drift shall not exceed three feet in 100 feet (See 4.7.30).

3.8.7 Acceleration. With the vehicle at a standstill position, the transmission in 1-4 range and the engine at idle speed, the vehicle shall accelerate from 0 to 20 mph in not more than 16.5 seconds (See 4.7.31).

3.8.8 Engine starting on slopes. The engine shall restart in not more than one minute when the vehicle is headed up or down a 60% slope, after sitting for a minimum of 1 minute. Similarly, the engine shall start when on a 30% side slope (See 4.7.32).

3.8.9 Braking.

3.8.9.1 Stopping and vehicle control. The vehicle shall stop within a distance of 40 feet from the point of service brake application when traveling at a speed of 20 mph ± 1 mph, on dry, smooth, level, hard-surfaced roads free of loose material. The drift shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

not exceed three feet in the stopping distance. Note: Steering action is permitted during braking (See 4.7.33).

3.8.9.2 Holding. The vehicle shall hold stationary when parked, headed up or headed down, on a 60% longitudinal slope with the brake locked for parking and with the transmission in neutral and the engine off (See 4.7.34).

3.8.10 Turning. With the transmission control in first range, the vehicle shall make continuous, full 360° turns to the right and to the left. At all times during the turns, the rear point of the outer edge of the vehicle shall be in contact with or within a 50 foot diameter circle (See 4.7.35 and 4.7.35.1).

3.8.10.1 Pivot steer. With the transmission control in pivot steer, the vehicle shall be capable of executing a 360° pivot turn within a 28 foot diameter circle in either direction (See 4.7.36 and 4.7.36.1).

3.8.11 Water operation.

3.8.11.1 Shallow water fording. The vehicle shall ford shallow , hard-bottom salt or fresh water channels up to a depth of 40 inches. Leakage of water into the hull shall not exceed 3 quarts per minute (See 4.7.37).

3.8.12 Trench crossing. The vehicle shall cross in a forward direction, trenches measuring up to 36 inches in depth and up to 66 inches in width without functional damage to the vehicle (See 4.7.38).

3.8.13 Vertical obstacles. The vehicle, operating in forward gear, shall cross vertical obstacles (walls) measuring up to 24 inches in height and, in reverse gear, obstacles up to 14 inches in height without functional damage to the vehicle (See 4.7.39).

3.8.14 Grade and slope operation. The vehicle shall ascend 60% dry grades in forward and reverse gear from a standstill position at the base of the grade without stalling or damage to the power plant or power train. The vehicle shall operate without malfunction or damage on 30% dry side slopes with either side of vehicle upslope. Proper oil pressure and temperature shall be maintained in the engine and transmission during all grade and slope operations. Oil pressure readings shall be made with the engine operating at 650 to 800 rpm (See 4.7.40).

3.8.15 Suspension. The vehicle suspension shall operate over not less than three 6 inch wide by 6 inch high obstacles, spaced 30 feet apart on a flat surface, at a speed of 18 to 22 mph, without the track drive sprockets or idler wheels impacting the hard surface (See 4.7.41).

3.9 Environmental conditions. The complete vehicle shall operate in ambient air temperatures of +120°F to -25°F without winterization equipment and with winterization

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

equipment installed, down to -65°F. The complete vehicle, when in storage, shall withstand climatic extremes as specified in MIL-STD-810 without deterioration that may cause failure of any component part of the vehicle (See 4.7.42).

3.10 Noise level. Vehicle noise shall be in accordance with MIL-STD-1474, for all occupied areas of the vehicle (See 4.7.43).

3.11 Toxic fumes concentration. Concentrations of toxic fumes shall be in accordance with MIL-STD-1472, for all occupied areas of the vehicle (See 4.7.44).

3.12 Fire extinguisher. The fixed fire extinguisher system shall be readily accessible for servicing and for internal and external operation. Maximum effort for externally discharging system shall not exceed value specified on drawing 10950025. (See 4.7.45 and 4.7.45.1).

3.13 Protective finish. Unless otherwise specified, protective finish for vehicle and component assemblies and parts shall be in accordance with applicable drawings (See 4.7.46).

3.14 Marking and data plates. The vehicle marking shall be in accordance with MIL-STD-642. Parts and components shall be marked in accordance with MIL-STD-130. Name, shipping and service data plates shall meet the requirements of MIL-P-514 or applicable drawings (See 4.7.47).

3.15 Welding repairs. Welding repairs of any type or class shall be made only when, and to the extent, specifically authorized by the applicable drawings, specifications or welding procedures that have been approved by the procuring activity.

3.16 Workmanship. Workmanship shall be of such quality as to assure that the vehicle and its components are free of defects that compromise, limit, or reduce capability of it's intended use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities or inspection equipment suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Materials. Materials inspection and certification records shall be maintained by the contractor. Records shall be subject to review by the Government and shall include

Source: https://assist.dla.mil Downloaded: 2026-04-26T04:24Z
Check the source to verify that this is the current version before use.

date, part or characteristic identification, inspection results, and disposition of lot (accepted or rejected). Corrective action taken on noted defects shall be subject to approval by the Government (See 3.4).

4.1.2 Qualified products. Contractor's inspection records shall specifically list all QPL items by number and date of the QPL, name of contractor and part or drawing number(s). When parts and assemblies are approved as qualified products, but not yet listed on the QPL, the contractor shall list the products by number and date of the approved document and name of contractor. (See 3.5)

4.1.3 Construction. Parts, components and assemblies shall be inspected in accordance with applicable drawings and specifications. (See 3.6)

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (See 4.4)
b. Initial production inspection (4.4.2)
c. Control test (See 4.4.3)
d. Quality conformance inspection (See 4.5)
e. Comparison production test (See 4.6)

4.3 Inspection conditions. Unless otherwise specified herein, all inspections shall be conducted under the conditions of temperature, barometric pressure, and humidity prevailing at the site of test or place of manufacture.

4.4 First article inspection(Preproduction). The first article inspection shall be performed on sample initial production vehicle(s) (See 3.1) which have been produced with equipment and procedures normally used in production. First article approval is valid only on the contract under which it is granted, unless extended by the Government to other contracts.

4.4.1 Preliminary Inspection and Acceptance. Preliminary Inspection and Acceptance shall include the inspections specified in 4.4.1.1 and 4.4.1.2.

4.4.1.1 Sample Size. A minimum of one vehicle shall be subjected to Preliminary Inspection and Acceptance inspection.

4.4.1.2 Government in-process examination. An in-process examination shall be conducted on a randomly selected preproduction vehicle by government quality representatives. Examination shall be made at the contractor's or subcontractor's facility during vehicle fabrication and prior to application of primer or paint to evaluate conformance of materials and workmanship to specified requirements. Processing and welding procedures, quality system and inspection records will be evaluated during this examination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.4.1.3 First article failure. Failure to pass First article inspection shall be cause for refusal to grant first article approval.(See 6.4.1)

4.4.2 Initial production inspection. The initial production inspection shall be performed on vehicles at random from the first month's production, or the first twenty vehicles produced. The government representative shall make the vehicle selection after all other contractor testing has been performed(See table III and 3.2).

TABLE III. Inspections and Tests

Title	Requirement Paragraph	Inspection Paragraph	Pre-Production 2/	Initial Production 1/	Acceptance 2/	Control 2/	CPT 1/
Break-in Run	3.8.3	4.7.1	X	X	X		
5,000 Mile Test	3.2, 3.3, 3.3.1,3.3.2, 3.3.3	4.4.2.1.4, 4.7.2	X	X			
2,000 Mile Test		4.7.3, 4.6.2					X
8 Mile Acceptance Test	3.7	4.7.4	X		X		
50 Mile Control Test	3.7	4.7.5	X	X		X	X
Bearing Seals	3.7.1	4.7.6	X	X	X		X
Doors and Tailgate	3.7.2	4.7.7	X	X	X		X
Windows and Covers	3.7.3	4.7.8	X	X		X	X
Engine	3.7.4	4.7.9	X	X	X		X

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Inspections and Tests (Cont.)

Title	Requirement Paragraph	Inspection Paragraph	Pre-production	Initial production	Acceptance	Control	CPT
Engine Exhaust System	3.7.5	4.7.10	X	X	X		X
Fuel System	3.7.6	4.7.11	X	X	X		X
Fuel System, Grades & Slopes	3.7.6.1	4.7.11.1	X	X	X		X
Fuel Tank	3.7.6.2	4.7.11.2	X	X		X	X
Special Kits	3.7.7	4.7.12	X				X
Winterization Kit	3.7.7.1	4.7.12.1	X				X
Cab Personnel Heater Kit (Secondary)	3.7.7.1.1	4.7.12.1.1	X				X
Cargo Area Personnel Heater Kit (Primary)	3.7.7.1.2	4.7.12.1.2	X				X
Cargo Area Personnel Heater Kit (Secondary).	3.7.7.1.3	4.7.12.1.3	X				X
Engine Coolant Heater Kit.	3.7.7.1.4	4.7.12.1.4	X				X

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Inspections and Tests (Cont.)

Title	Requirement Paragraph	Inspection Paragraph	Pre-production	Initial production	Acceptance	Control	CPT
Material Handling Kit.	3.7.7.2	4.7.12.2	X				X
Machine Gun Kits (50 cal and 7.62mm).	3.7.7.3	4.7.12.3	X				X
Transmission	3.7.8	4.7.13	X	X	X		X
Generating System Voltage	3.7.9.1	4.7.14	X	X	X		X
Lights	3.7.9.2	4.7.15	X	X	X		X
Heater	3.7.10	4.7.16	X	X	X		X
Heater Exhaust System	3.7.10.1	4.7.16.1	X	X	X		X
Commun-ications and Electrical Circuits	3.7.11	4.7.17	X	X	X		X
System Voltage Characteristics	3.7.12	4.7.18		X			X
Winch System	3.7.14	4.7.20	X	X			
Winch Operation	3.7.14.1	4.7.20.1	X	X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Inspections and Tests (Cont.)

Title	Requirement Paragraph	Inspection Paragraph	Pre-production	Initial production	Acceptance	Control	CPT
Winch Structural Integrity	3.7.14.2	4.7.20.2	X	X			
Winch Controls	3.7.14.3	4.7.20.3	X	X			
NBC System	3.7.17	4.7.23	X	X		X	
NBC System (Acceptance Inspection)	3.7.17	4.7.23.1	X	X	X		
Electro-magnetic Interference Suppression	3.7.13	4.7.19		X			X
Controls	3.7.15	4.7.21	X	X	X		X
Adjustment Mechanisms	3.7.16	4.7.22	X	X	X		X
Stowed Equipment	3.7.18	4.7.24	X	X		X	X
Engine Cooling	3.8.4.1	4.7.26		X			X
Deaeration and Clearing Capacity	3.8.4.1.1	4.7.26.1		X			X
Drawdown Capacity	3.8.4.1.2	4.7.26.2		X			
Transmission Lubricant Cooling	3.8.4.2	4.7.27		X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Inspections and Tests (Cont.)

Title	Requirement Paragraph	Inspection Paragraph	Pre-production	Initial production	Acceptance	Control	CPT
Bilge Pump	3.8.5	4.7.28	X	X		X	X
Bilge pump(acceptance test)	3.8.5	4.7.28.1			X		
Speed	3.8.6.1	4.7.29	X	X	X		X
Drift	3.8.6.2	4.7.30	X	X	X		X
Acceleration	3.8.7	4.7.31	X	X	X		X
Engine Starting on Slopes	3.8.8	4.7.32	X	X	X		X
Stopping and Vehicle Control	3.8.9.1	4.7.33		X	X		X
Holding	3.8.9.2	4.7.34	X	X	X		X
Turning	3.8.10	4.7.35	X	X		X	X
Turning (Acceptance Inspection)	3.8.10	4.7.35.1			X		
Pivot Steer	3.8.10.1	4.7.36	X	X		X	X
Pivot Steer (Acceptance Inspection)	3.8.10.1	4.7.36.1	X		X		
Shallow Water Fording	3.8.11.1	4.7.37	X	X	X		X

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Inspections and Tests (Cont.)

Title	Requirement Paragraph	Inspection Paragraph	Pre-production	Initial production	Acceptance	Control	CPT
Trench Crossing	3.8.12	4.7.38		X			X
Vertical Obstacles	3.8.13	4.7.39		X			X
Grade and Slope Operation	3.8.14	4.7.40		X			X
Suspension	3.8.15	4.7.41		X			X
Environmental Conditions	3.9	4.7.42		X			X
Noise Level	3.10	4.7.43		X			X
Toxic Fumes Concentration	3.11	4.7.44	X	X		X	X
Fire Extinguisher	3.12	4.7.45	X	X	X		X
Fire Extinguisher (Control Test)	3.12	4.7.45.1	X	X		X	X
Protective Finish	3.13	4.7.46	X	X	X		X
Marking and Data Plates	3.14	4.7.47	X	X	X		X
Packaging	5.1	4.7.48	X		X		

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

1/ INSPECTION TO BE PERFORMED BY THE GOVERNMENT AT A GOVERNMENT LABORATORY OR PROVING GROUND
2/ INSPECTION TO BE PERFORMED BY THE CONTRACTOR AT CONTRACTOR'S FACILITY

4.4.2.1 Contractor initial production inspection. The initial production sample vehicle, when completed, shall be inspected by the contractor. Inspection shall include examination as specified in 4.5.1.2. After inspection, the contractor shall submit the vehicle (and all inspection records and certifications) to the responsible Government representative at the contractor's plant for preliminary examination.

4.4.2.1.1 Government preliminary examination. The responsible Government representative shall conduct a preliminary examination of the production sample vehicle as specified in 4.5.1.2.

4.4.2.1.2 Government provisional inspection. Provisional inspection of the production sample vehicle shall be conducted jointly by contractor personnel, representatives of TACOM product assurance directorate and the cognizant Quality Assurance representative. The vehicle shall be tested as specified in 4.5. The contractor shall provide any required assistance and make available his inspection plan, inspection records and certifications pertinent to the vehicle and its components.

4.4.2.1.3 Vehicle disposition. When specified (See 6.2), the production sample vehicle shall remain at the manufacturing facility as a production sample and shall be released at the discretion of the Government. The vehicle shall be serviced and maintained under the vehicle contract during this period. It shall be the last vehicle shipped under contract.

4.4.2.1.4 Government. Government inspection shall include examination as specified in 4.5.1.2 and all Government initial production tests specified in table III. The 5000 mile test shall be performed after successful completion of all other tests at test site specified by the Government.

4.4.2.1.5 Sample size. A minimum of two vehicles shall be subjected to Government inspection.

4.4.2.1.6 Final approval and acceptance. Final approval and acceptance of Government inspection may be withheld until successful completion of preliminary inspection and acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.4.3 Control Test. Control test shall be conducted on one vehicle per month, and shall represent vehicles consecutively produced for that month. The vehicle shall be subjected to the control tests specified in table III. Control test vehicles shall be loaded to full combat weight (27,000 ± 200 LB GVW) (See 4.7.5 and 4.7.11.1)

4.4.3.1 Control test frequency. One of the first 10 vehicles produced , and thereafter one per month shall randomly be selected for control testing. The vehicle selected for testing shall be subjected to all control tests specified in table III.

4.4.3.1.1 Vehicle selection. Control test sample shall be randomly selected by authorized Government representative.

4.4.3.1.2 Control test failure. Failure of vehicle to pass any specified control test shall be cause for the Government to refuse acceptance of the production quantity represented until evidence has been provided by the contractor that corrective action has been taken to eliminate the condition that caused the failure.

4.5 Quality conformance inspection.

4.5.1 Acceptance inspection. After break-in run (See 4.7.1), the vehicle shall be subjected to examinations and tests as specified in 4.5.1.2 and 4.5.3.

4.5.1.1 100% inspection. The contractor shall perform acceptance inspection on every vehicle prior to submitting vehicle for Government acceptance.

4.5.1.2 Examination. Visual, dimensional and primary functional examinations of the vehicle shall be made to verify conformance with applicable drawings and this specification.

4.5.2 Acceptance tests. The vehicle shall be subjected to the acceptance tests specified in table III. The vehicle need not be loaded with rated payload.

4.5.2.1 Deficiency sheet. All defects encountered during inspection shall be enumerated on a deficiency sheet for each vehicle. Defects noted on the deficiency sheet shall contain sufficient description to enable the contractor to take corrective action for all defects.

4.5.2.2 Acceptance inspection failure. Failure of a vehicle to pass any specified acceptance test or examination may be cause for the Government to refuse acceptance of the vehicle until evidence has been provided by the contractor that corrective action has been taken.

4.5.3 Government verification of quality conformance. Government inspection to verify quality of vehicles offered for acceptance will be performed at scheduled and unscheduled intervals. The Government shall also verify that a thorough inspection of

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

each vehicle is performed by the contractor and that all defects encountered during inspection are enumerated on deficiency sheets and that all corrective action(s) have been taken.

4.5.3.1 Government inspection. Government shall have a in-plant quality program that meets the policy requirements of Federal Acquisition Regulation (FAR) part 46., Defense FAR Supplement (DFARS) part 246, Quality Assurance (QA).

4.6 Comparison test. The Government may select vehicles at any time during the production period and subject them to comparison test. Comparison test shall be conducted at Government laboratories or proving grounds designated by the contracting officer.

4.6.1 Sample size. Vehicle shall be selected on a spot check basis, in a quantity and at a time specified by the Government. Vehicles selected for comparison test shall not have been previously inspected for conformance to control tests.

4.6.2 Inspection routine. Sample vehicles will be subjected to examinations as specified in 4.5.1.2 and the comparison tests specified in table III. The 2,000 mile road test (4.7.3.) shall be performed after successful completion of all other tests.

4.6.3 Comparison test failure. Failure of a vehicle to comply with any of the requirements specified herein shall be cause for the Government to discontinue acceptance of vehicles. The contractor shall provide evidence that corrective action has been taken to eliminate the condition that caused the rejection.

4.7 Methods of inspection.

4.7.1 Break-in run. Each vehicle shall be given one of the following break-in runs. Prior to the break-in run, the vehicle shall be serviced, lubricated and operated as specified in 3.8 and 3.8.1.

4.7.1.1 Break-in run (track). The vehicle shall be run on smooth, level, hard-surfaced roads for the distance and speeds specified in table I and over an undulating section of the road as shown in figure 1. The undulating portion of the break-in run shall be accomplished twice in each direction at a speed between 5 and 10 mph during division "a" and at a speed between 11 and 15 mph during division "b". The vehicle shall be operated in reverse after each division as specified in 3.8.3.1. After the break-in run, the vehicle shall be inspected to determine conformance to 3.8.3.3.

4.7.1.2 Break-in run (simulated). In lieu of the break-in run specified in 4.7.1.1, a simulated break-in run shall be accomplished on the Army skid type dynamometer in accordance with table II. The final ten miles of the total break-in run shall be on smooth, level, hard-surfaced roads and over an undulating section of road conforming to figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

The undulating portion of the break-in run shall be accomplished twice in each direction at a speed between 5 and 10 mph during division "e" and at a speed between 11 and 15 mph during division "f". The vehicle shall be operated in reverse after each division "a" through "d" as specified in 3.8.3.2. After the break-in run, the vehicle shall be inspected to determine conformance to 3.8.3.3.

4.7.2 5,000 mile test. Sample vehicles shall be loaded with rated payload and road tested as specified in table IV and 4.4.2. Unless otherwise specified, the road test shall be performed by the Government at a Government proving ground. Test shall include verification of reliability, durability and maintainability requirements.

4.7.2.1 Reliability verification. A point estimate value equal to or greater than 850 miles shall be demonstrated during test. The point estimate value will be computed by dividing the total cumulative test mileage of all the test vehicles by the total cumulative chargeable failures experienced on these vehicles (See 3.3.1).

4.7.2.2 Durability verification. Durability shall be verified during test at or above a 50% confidence level. The durability requirement will be calculated using a binomial approach requiring a minimum test vehicle sample size of two vehicles (See 3.3.2).

4.7.2.3 Maintainability verification. A maintenance ratio (MR) equal to or less than that specified in 3.3.3 must be demonstrated during test. The MR will be based upon the total cumulative maintenance man-hours with the exceptions of human induced errors and driver/crew checks and services (See 3.3.3).

TABLE IV. 5,000 mile test.

Course	Mileage and Speeds
1/ Hard-surfaced roads	1,000 miles at varying speeds up to maximum
Gravel and dirt roads	2,000 miles at varying speeds up to maximum
Level cross-country	1,000 miles at varying speeds up to maximum
1/ Hilly cross-country	1,000 miles at varying speeds up to maximum
Amphibious operation	Not required

1/ NOTE: Hard-surfaced road and hilly cross-country mileage shall include 20 miles each with towed load approximately equal in weight (± 500 pounds) to the test vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.3 2,000 mile test. Sample vehicle(s) shall be loaded with rated payload and road tested as specified in table V. Unless otherwise specified, the road test will be performed by the Government at a Government proving ground.

TABLE V. 2,000 mile test.

Course	Mileage and Speeds
1/ Hard-surfaced roads	200 miles at varying speeds up to maximum
Gravel and dirt roads	500 miles at varying speeds up to maximum
Level cross-country	650 miles at varying speeds up to maximum
1/ Hilly cross-country	650 miles at varying speeds up to maximum

1/ NOTE: Hard-surfaced road and hilly cross-country mileage shall include 20 miles each with towed load approximately equal in weight (± 500 pounds) to the test vehicle.

4.7.4 8 mile acceptance test. The vehicle shall be operated for a distance of 8 miles or more over relatively smooth, hard-surfaced roads. Except for equipment and component installation and servicing performed during final processing of vehicle for acceptance, the vehicle shall be completely assembled and serviced with fuel, lubricants and fluids as specified. The equipment and component installation and servicing performed during final processing of vehicle for acceptance will allow omission of such items as floor plates, personnel seat cushions, stowage items, decals, etc. from the vehicle during testing operations. The vehicle need not be loaded with rated payload. During and subsequent to the 8 mile road test, as appropriate, the vehicle shall be subjected to the acceptance tests listed in table III (See 3.7).

4.7.5 50 mile control test. The vehicle shall be loaded to full combat weight and operated for a distance of 50 miles or more over relatively smooth, hard-surfaced roads. During and subsequent to the 50 mile road test, as appropriate, the combat weighted vehicle shall be subjected to acceptance and control tests listed in table III (See 3.7. and 4.4.3).

4.7.6 Bearing seals. The final drive and suspension system seals shall be visually examined for evidence of lubricant leaks in excess of a Class I, prior to and after fording and/or operating in mud, sand or snow. Lubricants shall be visually examined for water or foreign matter contamination after road testing that follows fording and/or operation in mud, sand or snow (See 3.7.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.6 Bearing seals. The final drive and suspension system seals shall be visually examined for evidence of lubricant leaks in excess of a Class I, prior to and after fording and/or operating in mud, sand or snow. Lubricants shall be visually examined for water or foreign matter contamination after road testing that follows fording and/or operation in mud, sand or snow (See 3.7.1).

4.7.7 Doors and tailgate. The cab and cargo doors and cargo compartment tailgate shall be inspected for completeness of assembly and functional requirements. All doors and tailgate shall be operated and examined for proper fit and positive latching in opened and closed positions. All door and tailgate seals shall be examined to verify positive sealing surface for seal contact and seal adhesion (See 3.7.2).

4.7.8 Windows and covers. The cab side windows, windshield and cover and cargo compartment covers shall be inspected for completeness of assembly and proper fit. Side windows shall be operated and examined for binding or interference and positive latching in the opened and closed positions. Window seals shall be examined for positive sealing surface for seal contact and seal adhesion (See 3.7.3).

4.7.9 Engine. The engine shall be inspected for completeness of assembly and proper installation, and examined for leakage of lubricant, fuel and coolant before and after operation. The engine shall be operated through all speed ranges and exhibit no evidence of low oil pressure, contaminated lubricant, overheating, fuel starvation or leakage of fuel or coolant, or leakage of lubricant at static and dynamic seals in excess of a Class I (See 3.7.4).

4.7.10 Engine exhaust system. The engine exhaust system shall be inspected for completeness of assembly. Tightness of clamping devices shall be examined before and after vehicle road testing. Engine exhaust leakage at connections is acceptable provided clamping devices remain secured (See 3.7.5).

4.7.11 Fuel system. Internal cleanliness of the fuel tank and lines shall be verified prior to initial fueling of the vehicle. The fuel system shall be inspected for completeness of assembly and proper installation. Connections and sealed items shall be examined for leakage before and after vehicle road testing. No leakage is permitted. (See 3.7.6).

4.7.11.1 Fuel system, grade and slopes. The fuel system shall provide a continuous supply of fuel to the engine and exhibit no fuel leaks while the vehicle is operating on specified grades and slopes. During test, the fuel tank shall be not less than 1/4 full. Control test vehicle fuel tank shall be filled to capacity (See 3.7.6.1).

4.7.11.2 Fuel tank. The fuel tank shall be filled to capacity at an average rate of 25 gallons per 30 seconds and checked for leakage before and after vehicle road testing (See 3.7.6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.12 Special kits examination. When special kits are furnished and installed, the kits shall be tested in accordance with 4.7.2.1 through 4.7.2.3, as applicable (See 3.7.7).

4.7.12.1 Winterization kit. Provisions for installation of winterization kit shall be examined for completeness. When specified, winterization kit shall be installed, the vehicle operated at the specified temperatures, and equipment evaluated for functional requirements (See 3.7.7.1).

4.7.12.1.1 Cab personnel heater kit (secondary). The (secondary) cab personnel heater kit shall be operated as in use at ambient temperatures to minus 25° F to minus 65° F (See 3.7.7.1.1).

4.7.12.1.2 Cargo area personnel heater kit (primary). The (primary) cargo area personnel heater kit shall be operated as in use at ambient temperatures to minus 25° F (See 3.7.7.1.2).

4.7.12.1.3 Cargo area personnel heater kit (secondary). The (secondary) cargo area personnel heater kit shall be operated as in use for the specified performance at ambient temperatures ranging from minus 25° F to minus 65° F (See 3.7.7.1.3).

4.7.12.1.4 Engine coolant heater kit. The engine coolant heater kit shall be operated as in use in ambient air temperatures between minus 25° F and minus 65° F. The engine coolant heater shall be operated on battery power alone for minimum of twelve hours. At the end of the twelve hours, the batteries shall have sufficient charge to start the engine (See 3.7.7.1.4).

4.7.12.2 Material handling kit. The material handling kit shall load and unload material as specified. Flexibility of mounting arrangements shall also be confirmed (See 3.7.7.2).

4.7.12.3 Machine gun kits (50 cal and 7.62mm). The machine gun shall be rotated 360 degrees to the right and left and subsequently test fired (See 3.7.7.3).

4.7.13 Transmission. The transmission shall be inspected for completeness of assembly and proper installation, and examined for fluid leakage before and after operation. The transmission shall be operated throughout all speed ranges and exhibit no evidence of overheating, low fluid pressure or fluid leakage at static and dynamic seals in excess of a Class I (See 3.7.8).

4.7.14 Generating system. After the engine has been operated for no less than 20 minutes with the headlights on, the regulator control shall be observed and adjusted if necessary. Voltage at the vehicle batteries shall be 27.3 ± 0.3 with engine operating at 2,150 ± 100 rpm and with a load sufficient to draw 180 ± 5 amperes. When the load is removed, voltage at the vehicle batteries shall be 28.0 ± 0.5 (See 3.7.9.1).

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.15 Lights. All internal and external lights shall be inspected for completeness of assembly and operated after vehicle break-in run and road testing to verify proper operation (See 3.7.9.2).

4.7.16 Heater. When heater is not installed, mounting provisions for heater kit installation shall be inspected for conformance to applicable drawings. The heater, when installed, shall be inspected for completeness of assembly and proper installation, and operated to verify functional requirements in MIL-H-62315. Heater controls and heater operation shall be verified in all positions. Care should be taken to assure that heater is allowed to purge itself within 3.5 minutes after operation (See 3.7.10).

4.7.16.1 Heater exhaust system. The heater exhaust system, when installed, shall be inspected for completeness of assembly. Secureness of clamping devices shall be examined before and after vehicle road testing. Heater operation to check for leaks shall be performed after vehicle road testing. The exhaust system shall exhibit no leakage during and after heater operation (See 3.7.10.1).

4.7.17 Communication and electrical circuits test. To determine conformance to 3.7.11 electrical circuits supplying current to vehicle equipment shall be tested at all points to assure continuity throughout the circuits. Previously tested circuits shall be functionally tested after installation.. Special kits and equipment, when installed, shall be functionally tested to verify continuity.

4.7.18 System voltage characteristics. System voltage characteristics shall be tested and evaluated in accordance with MIL-STD-1275 (See 3.7.12).

4.7.19 Electromagnetic interference suppression. The vehicle shall be tested for electromagnetic interference suppression in accordance with MIL-STD-462, Notice 3 (See 3.7.13).

4.7.20 Winch system. When installed, the winch system shall withstand an increasing load with a 11 to 12 foot cable (total length) including three to four wraps of cable on a bare drum. The load shall be gradually increased until the shear pin fails or the load reaches 24,000 pounds. The load must exceed 14,000 pounds. Failure load shall be recorded (See 3.7.14).

4.7.20.1 Winch operation. Starting with the fifth to tenth wrap on a bare drum, tension shall be applied to provide even distribution of the cable until the cable has been completely reeled in (See 3.7.14.1).

4.7.20.2 Winch structural integrity. The winch system structural integrity shall be verified by pulling the winch cable with a 20,000 pound load. During the test, the engine power take-off shall be disengaged. Three to six wraps of cable shall be wrapped on the bare drum. The rope length is optional (See 3.7.14.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.20.3 Winch controls. The cab-mounted controls shall be operated to verify engagement of the power take-off drive for operation of the winch. Verify that the manually operated device furnished permits free spooling of the winch drum (See 3.7.14.3).

4.7.21 Controls. All electrical and mechanical controls shall be operated before and after vehicle road testing to verify proper operation (See 3.7.15).

4.7.22 Adjustment mechanisms. All adjustment mechanisms shall be examined before and after vehicle road testing to verify proper operation, maintenance of adjustment settings and that there is adjustment capability within specified ranges. If any adjustment is required, the adjustment setting shall be rechecked to verify that adjustment capability is still within specified range. (See 3.7.16)

4.7.23 NBC system. The NBC system shall be inspected for completeness of assembly and proper installation and operated to verify functional requirements. Heater operation and an air flow of 3.0 to 4.5 CFM (2.0 to 4.7 inches of water) shall be verified at the quick disconnect end of each crew member's air hose (See 3.7.17).

4.7.23.1 NBC system (acceptance inspection). The NBC system shall be inspected as specified in 4.7.23 except quantitative measurements of air flow rates are not required (See 3.7.17).

4.7.24 Stowed equipment. The vehicle shall be completely assembled and equipped with stowage items to verify that all exterior and interior stowed equipment fits in the spaces provided and does not interfere with operation of the vehicle. The stowed equipment shall be of the latest configuration available to the contractor. The contractor shall be permitted to open and repackage equipment needed for the test. Unless otherwise specified, the stowed equipment shall be removed from the vehicle after test (See 3.7.18.).

4.7.26 Engine cooling. The vehicle shall be serviced as specified in 3.8.1 and operated under the specified conditions of ambient temperature and tractive effort. After stabilization of the cooling system, the engine coolant temperature shall be measured at a point between the coolant outlet from the engine and the transmission oil cooler inlet. Temperature shall not exceed 230°F. The radiator pressure cap shall be pressure tested to verify pressure relief between 12 and 16 psig (See 3.8.4.1).

4.7.26.1 Deaeration and clearing capacity. The engine cooling system shall be tested for deaeration and clearing capacity (See 3.8.4.1.1) as follows:

4.7.26.1.1 Initial test set up. Initial test set up shall be accomplished within the vehicle (See figure 2) to reflect the following:

a. Sight glasses, pressure pick-ups, flow meter and air injection provisions shall be installed in accordance with figure 2.

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

b. Thermostat shall be installed and blocked open.

c. Pressure cap shall be installed.

d. Coolant shall be fresh water.

4.7.26.1.2 Initial test conditions. Initial test conditions shall be as follows:

a. Engine speed shall be at maximum governed speed.

b. Engine shall be operated at no load.

c. Coolant flow shall be 70 gpm (min.).

d. Coolant temperature shall be 180°F ± 5°F.

e. Coolant level shall be 12 ± 0.5 gallons.

4.7.26.1.3 Data requirements. Prior to the test, determine the pressure rise across the water pump as a function of coolant flow. The coolant temperature shall be 180° ± 5°F with the pressure cap off. Excepting coolant loss, the following data shall be continuously recorded during test:

NOTE: The differential pressure across the pump shall be used to determine the coolant flow (turbine-type meters are not accurate in aerated mediums).

a. Engine speed.

b. Coolant flow.

c. Coolant temperature (radiator inlet).

d. Differential pressure across the water pump (water to pump - 0 to 30 psig) (water from pump - 0 to 60 psig).

e. Surge tank pressure.

f. Air injection rate.

g. Elapsed time.

h. Coolant loss shall be determined after test.

i. Air entrained in coolant from radiator. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

j. Air entrained in coolant make-up line. 1/

1/ Monitored visually using sight glass.

4.7.26.1.4 Test procedures. To insure that the cooling system is full, fill it with water and run the engine until the coolant temperature is 190°F. Stop the engine and allow the coolant temperature to fall below 120°F. Add water, as necessary, to the cold fill level (bottom of the fill neck extension). Start the engine and establish the initial operating conditions specified in 4.7.26.1.2. Visually insure that the coolant is free of air. Begin injecting air into the cooling system at 0.15 cfm and 15 psig. Continue for at least 12 minutes to insure stability. Increase the air injection rate in 0.15 cfm increments to 0.6 cfm. Inject air at each incremental change for not less than 12 minutes at the 0.6 air injection rate, shut off the air supply. Continue running the engine, until sight glass clears.

4.7.26.1.5 Test failure. The test is a failure, unless all of the following criteria are satisfied:

a. Coolant flow rate shall not fall below 50% of its initial value.

b. Coolant loss shall not exceed four quarts.

c. Cooling system clearing time (elapsed time required for coolant, as observed through a sight glass, to return to its initial clarity after air injection stops) shall not exceed 60 minutes.

4.7.26.2 Draw down capacity. The engine cooling system shall be tested for draw down capacity (See 3.8.4.1.2) as follows:

4.7.26.2.1 Initial test set-up and conditions. Set-up and initial test conditions shall be as specified in 4.7.26.1.1 and 4.7.26.1.2, except the air injection fitting shall be replaced with a hose and valve suitable for draining coolant during the test, and the pressure cap shall be removed.

4.7.26.2.2 Data requirements. Before the test, determine the pressure rise across the water pump as a function of coolant flow. The coolant temperature shall be 180°± 5°F with the pressure cap off. Excepting drained coolant volume, the following data shall be continuously recorded during test:

NOTE: Differential pressure across the pump shall be used to determine coolant flow (a turbine flow meter may not be accurate when the quantity of coolant is reduced).

a. Engine speed

b. Coolant flow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

c. Coolant temperature (radiator inlet).

d. Differential pressure across water pump.

e. Coolant volume drained from system (See 4.7.26.2.3).

f. Air entrained in coolant from radiator. 1/

g. Air entrained in coolant make-up line. 1/

1/ Monitored visually, using sight glass.

4.7.26.2.3 Test procedure. Insure that the cooling system is full as specified in 4.7.26.1.4. Start the engine and establish the initial operating conditions specified in 4.7.26.2.1. Insure visually that the coolant is free of air. Drain one quart of coolant from the system each minute (minimum) until six quarts have been drained.

4.7.26.2.4 Test failure. The test is a failure, unless the following criteria are satisfied:

a. Coolant flow rate shall not fall below 98% of its initial value.

b. There shall be no indication of entrained air in the coolant.

4.7.27 Transmission lubricant cooling. The vehicle shall be operated under the specified conditions of ambient temperature and tractive effort. After temperature stabilization of the transmission, the transmission lubricant temperature shall be measured at a point in the transmission outlet into the cooler. Temperature shall not exceed 305°F (See 3.8.4.2).

4.7.28 Bilge pump. The bilge pump shall be operated with sufficient water in the hull to fully submerse the pump and enable verification of the rate of water removal from the vehicle. The pump shall discharge water at a rate of not less than 44 gpm with the pump operating on 28.0 volts maximum (See 3.8.5).

4.7.28.1 Bilge pump (acceptance inspection) The bilge pump shall be operated with sufficient water in the hull to verify pump operation. Discharge of water from the pump outlet shall be visually verified.(See 3.8.5)

4.7.29 Speed. Prior to testing, the engine shall be warmed up to an operating temperature above 120°F. The vehicle shall then be operated at a speed of no less than 38 mph and exhibit no power plant or suspension malfunction. After testing, the power plant and suspension system shall be examined for damage (See 3.8.6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.30 Drift. The vehicle shall be operated on a dry, level, smooth, hard-surfaced road free of loose material at 25 mph ± 5 mph to check for vehicle drift. Vehicle drift shall not exceed three feet in 100 feet.

NOTE: Steering action to counteract drift is not permitted (See 3.8.6.2).

4.7.31 Acceleration. Prior to testing, the engine shall be warmed up to an operating temperature above 120°F. Then on a dry, level, hard-surfaced road free of loose material with transmission in 1-4 range, the vehicle shall be checked for acceleration. The vehicle shall accelerate from 0 to 20 mph in not more than 16.5 seconds (See 3.8.7).

4.7.32 Engine starting on slopes. With the vehicle parked on 30 and 60% slopes in the following positions, the engine shall be stopped and restarted to verify engine starting on slopes: (See 3.8.8)

a. Headed upgrade on 60% slope.

b. Headed downgrade on 60% slope.

c. Left side up on 30% slope.

d. Right side up on 30% slope.

NOTE: The engine shall restart within one minute after being stopped for not less than one minute after being operated for not less than two minutes under no load at 750 to 1,000 rpm. During test, fuel tank shall be not less than 1/4 full. Control test vehicle tank shall be filled to capacity.

4.7.33 Stopping and vehicle control. The vehicle shall be driven on a smooth, level, hard-surfaced road free of loose material at a speed of 20 ± 1 mph and stopped by fully applying the service brakes. Stopping distance shall not exceed 40 feet. During stopping test, vehicle drift shall not exceed 3 feet (See 3.8.9.1).

4.7.34 Holding. Ability of the vehicle service and parking brakes to hold the vehicle on a 60% slope shall be verified with the vehicle facing in both uphill and downhill directions. The vehicle shall in each case, remain stationary for one minute minimum with the transmission in neutral and the engine off (See 3.8.9.2).

4.7.35 Turning. With the transmission in "first" range and the vehicle on a smooth, level, hard-surfaced road free of loose material, the vehicle shall be turned a full 360° to the right and then to the left. The diameter described by the outermost edge of the vehicle, while it executes its sharpest possible turn, shall not exceed 45 feet (See 3.8.10).

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.35.1 Turning (acceptance inspection). Turning shall be inspected as specified in 4.7.35 except measurement of the turning diameter is not required (See 3.8.10).

4.7.36 Pivot steer. With the transmission in "pivot steer" (PV) and the vehicle on a smooth, level, hard-surfaced road free of loose material, the vehicle shall be turned a full 360° to the right and then to the left. The diameter described by the outmost edge of the vehicle, while it executes its sharpest possible turn, shall not exceed 28 feet (See 3.8.10.1).

4.7.36.1 Pivot steer (acceptance inspection). Pivot steer shall be inspected as specified in 4.7.36 except measurement of the pivot steer diameter is not required (See 3.8.10.1).

4.7.37 Shallow water fording. To determine conformance to 3.8.11.1, the vehicle shall be driven into water of 40 inches depth without special equipment. Water accumulation shall not exceed 3 quarts per minute after 15 minutes of test (See 3.8.11.1).

4.7.38 Trench crossing. The vehicle shall be operated at both a minimum and maximum forward speed over trenches measuring 36 inches deep and 66 inches wide. After trench crossings, the vehicle shall be examined to verify that there is no functional damage (See 3.8.12).

4.7.39 Vertical obstacles. The vehicle shall be slowly operated in forward and reverse gears over vertical obstacles (walls). Height of the obstacles shall be 24 inches for forward gear and 14 inches for reverse gear. After crossing vertical obstacles, the vehicle shall be examined to verify that there is no functional damage (See 3.8.13).

4.7.40 Grade and slope operation. The vehicle shall be operated on specified grades and side slopes and exhibit none of the following during and after test:(See 3.8.14)

a. Malfunction or damage to power train or suspension system components.

b. Overheating of engine or transmission.

c. Faulty lubrication or low oil pressure in transmission and engine.

[illegible]

4.7.35 Turning. With the transmission in "first" range and the vehicle on a smooth, level, hard-surfaced road free of loose material, the vehicle shall be turned a full 360° to the right and then to the left. The diameter described by the outermost edge of the vehicle, while it executes its sharpest possible turn, shall not exceed 45 feet (See 3.8.10).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.41 Suspension. The vehicle shall be operated at a speed of 18 to 22 mph and driven over no less than three 6 inch wide by 6 inch high obstacles, spaced 30 feet apart on a flat surface. During impact with the obstacles, there shall be no bottoming out of the track drive sprockets or idler wheels. After testing, the suspension system shall be examined to verify that there is no functional damage to components (See 3.8.15).

4.7.42 Environmental conditions. The vehicle, with and without winterization equipment, shall be operated in specified ambient temperatures and checked for proper performance. The vehicle shall also be stored and exposed to the climatic extremes specified in MIL-STD-810. After exposure to climatic extremes, the vehicles shall be operated and checked for proper performance and any evidence of deterioration that may lead to component failure (See 3.9).

4.7.43 Noise level. Vehicle interior noise level shall be measured while operating the vehicle at 30 mph in 1-4 gear range on a hard-surfaced, straight road with all doors and hatches closed. A sound level meter which meets the requirements of MIL-STD-1474 shall be located in the driver's compartment as specified. Measured sound level shall not exceed 119 decibels (dBA) (See 3.10).

4.7.44 Toxic fumes concentration. Toxic fumes concentration levels shall be measured in the driver and crew compartments per MIL-STD-1472. The vehicle shall be sealed (all hatches and doors closed and the engine access panels installed). The engine shall be operated at 900 to 1200 rpm and the personnel heater, when installed, shall be operated at high heat for a period of not less than 30 minutes. Toxic fumes concentration levels shall not exceed 50 ppm for carbon monoxide or 5 ppm for oxides of nitrogen. Under ambient or test conditions that exceed 55°F, the automatic shut-down of the heater before 30 minutes is acceptable (See 3.11).

4.7.45 Fire extinguisher. The fixed fire extinguisher system shall be inspected for proper charge, completeness of assembly and proper installation per drawing 10950025 (See 3.12).

4.7.45.1 Fire extinguisher (control test). The fixed fire extinguisher shall be activated from outside of the vehicle. Maximum effort to discharge system shall not exceed value specified on drawing (10950025) (See 3.12 and table III).

4.7.46 Protective finish. Protective finish of vehicle and components shall be visually inspected for proper color and coverage in accordance with applicable drawings (See 3.13).

4.7.47 Marking and data plates. Vehicle marking and data plates shall be visually inspected for proper location, legibility and text in accordance with applicable drawings (See 3.14).

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.7.47 Marking and data plates. Vehicle marking and data plates shall be visually inspected for proper location, legibility and text in accordance with applicable drawings (See 3.14).

4.7.48 Packaging. Inspection of processing for storage and shipment shall be performed on each vehicle in accordance with the applicable specification listed in 5.1 (See 5.1).

5. PACKAGING

5.1 Processing for storage and shipment. Processing of vehicles for storage and shipment shall be in accordance with MIL-C-62015 for model M548A3.

6.0 NOTES

6.1 Intended use. The vehicle model covered by this specification is intended for use as specified below:

6.1.1 M548A3 Carrier. The M548A3 Carrier is used as a cargo carrier.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, revision and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (See 2.1).

c. First article shall be required for initial production (See 3.1 and 4.4).

d. If partially simulated break-in run is authorized (See 3.8.3.2).

e. Level of processing for storage (See 5.1).

g. The procuring activity must identify the test parameters in MIL-STD-810 (See 3.9 and 4.7.44)

6.3 Safety precaution. Caution should be used in handling carbon dioxide extinguisher cylinders. Extreme care should be exercised during reinstallation to avoid tripping fire extinguisher control system since physical injury is highly probable.

6.4 Guidance for the contracting officer on applying first article. The first article sample shall be selected by the Government representative on a preproduction vehicle produced under the production contract for first article inspection. The first article sample should be inspected as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.4.1 First article inspection failure. Deficiencies found during, or as a result of first article inspection, should be cause for rejection of the items until evidence has been provided by the contractor that corrective action has been taken. Any deficiency found during, or as a result of, first article inspection shall be evidence that all items already produced prior to completion of first article inspection are similarly deficient unless contrary evidence satisfactory to the contracting officer is furnished by the contractor. The Government will not accept products until first article inspection is completed to the satisfaction of the Government.

6.5 Guidance for the contracting officer on applying QCI sampling/acceptance criteria.

6.5.1 QCI Tests. The preproduction vehicle(s) should meet the quality conformance tests specified in table III.

6.6 Definitions.

6.6.1 Leaks. The following definitions should be used with the classification of defects for leaks:

a. Class 1: Seepage of fluid (as indicated by wetness or discoloration) not great enough to form drop.

b. Class 2: Leakage of fluid great enough to form drops but not enough to cause drops to drip from item being checked /inspected.

c. Class 3: Leakage of fluid great enough to form drops that fall from the item being checked/inspected.

6.6.2. Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (See 6.6.3).

6.6.3 Solid waste. "Solid waste" means (a) any garbage, refuse or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under Section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, Section 23,402).

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.6.4 Stowed equipment. For the purpose of this specification, stowed equipment should be considered as all on vehicle equipment (OVE), basic issue items (BII), and all vehicle components which are not installed at time of shipment.

6.7 International standardization agreement. Certain provisions (See 3.7.11) of this specification are the subject of international standardization agreements, NATO STANAG 2805-A (Edition 3), and ABCA-ARMY-STD-151. When amendment, revision or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliatory action through international standardization channels, including standardization offices, if required.

6.8 Recycled materials. The use of recycled materials, which meet the requirements of the applicable material specification without jeopardizing the intended use of the item, is encouraged .

6.9 Mission failure scoring criteria. M113 Family Vehicle Failure Definition and Scoring Criteria may be obtained from Commander, U. S. Army Tank-Automotive Command (TACOM), ATTN: AMSTA-QRA, Warren, Michigan 48397-5000.

6.10 Vehicle rebuild or modification. Vehicles being rebuilt or modified to any of the vehicle model types should meet all requirements covered by this specification.

6.11 Subject term (Keyword) listing.

Cross country.
Diesel powered.
Cargo Carrier.

6.12 AMC policy on Acceptable Quality Levels/Lot Tolerance Percent Defectives (AQLs/LTPDs). This specification is certified to be in compliance with current Army Materiel Command (AMC) policy for elimination of AQLs/LTPDs from military specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


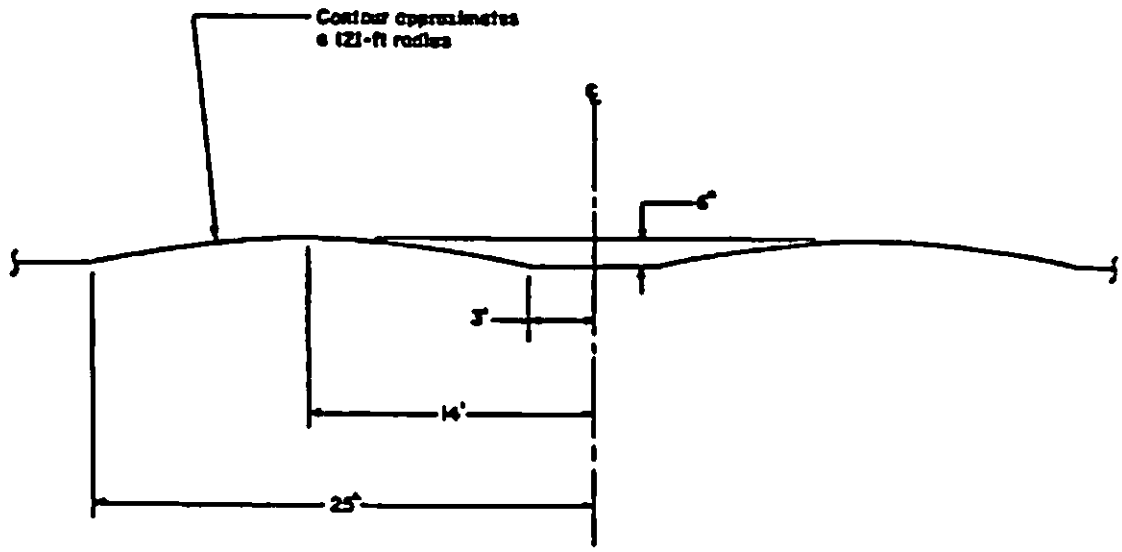


Figure 1. Profile of Test Track (Artificial Bump)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

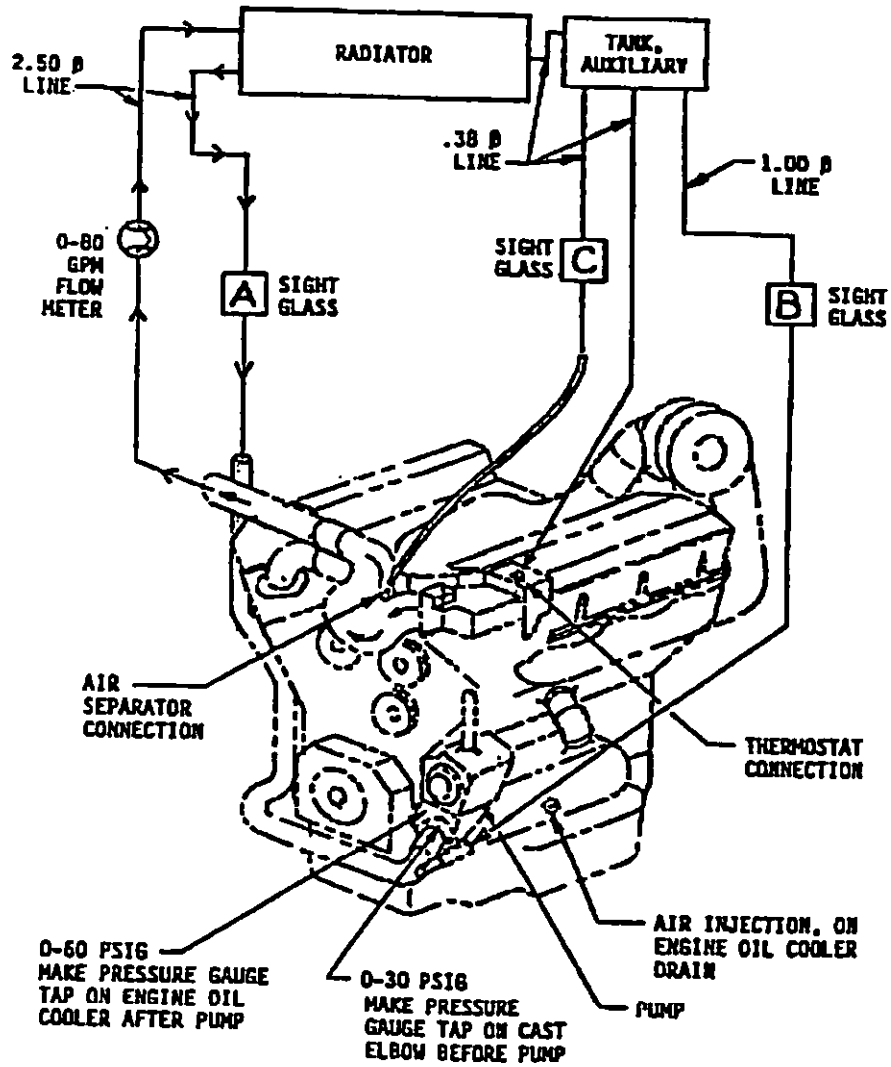

NOTE: Coolant lines need to be modified to accept gauges, flow meter, and sight glasses.

Figure 2. Coolant System Test Set Up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

CUSTODIAN:

Army - AT

PREPARING ACTIVITY

Army - AT

(Project 2350-A466)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-62747(AT)	940228

3. DOCUMENT TITLE

Carrier-Cargo, Tracked, 6 Ton - M548A3

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (*Include Area Code*) (1) Commercial: (810) 574-5954 (2) AUTOVON: 786-5954
c. ADDRESS (*Include Zip Code*) U.S. Army Tank-Automotive command ATTN: AMSTA-GDS Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.