MILITARY SPECIFICATION
DISPENSER, MINE, GROUND VEHICLE: M128

This specification is approved for use by the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the M128 Ground Vehicle Mine Dispenser, a towed mining device for the mass scattering of land mines.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-571	-	Solder; Soft (Tin, Tin-Lead and Lead Silver)

MILITARY

MIL-P-514	-	Plates; Identification, Instruction and Marking Blank.
MIL-B-7883	-	Brazing of Steels, Copper, Copper Alloys, Nickel Alloys, Alluminum and Alluminum Alloys.
MIL-E-11276	-	Engines, Diesel Industrial.
MIL-A-11755	-	Compound, Antifreeze, Artic-type.
MIL-C-13777	-	Cable, Special Purpose, Electrical: General Specification for.

FSC 1095

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

MIL-W-45205	-	Welding, Inert-Gas, Metal Arc, Aluminum Alloys, Readily Weldable for Structures, Excluding Armor.
MIL-S-45743	-	Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment.
MIL-S-46844	-	Solder Bath Soldering of Printed Wire Assemblies.
MIL-W-63150	-	Weapons and Support Material Standard Quality Assurance Provisions for.
MIL-D-63370	-	Dispenser, Mine, M128: Preparation for Shipment and Storage of.
MIL-C-63371	-	Circuit Card Assemblies, Mine Dispenser, M128: General Specification for.
MIL-M-63380	-	Mine, AT, Practice; MP: M79.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	-	Identification Marking of US Military Property.
MIL-STD-193	-	Painting Procedures Tactical Vehicles (Tracked and Wheeled).
MIL-STD-275	-	Printed Wiring for Electronic Equipment.
MIL-STD-642	-	Identification and Marking of Administrative, Combat, and Tactical Transportation Vehicles.
MIL-STD-1261	-	Welding Procedures for Constructional Steel.

DRAWINGS

US Army Armament Research and Development Center (ARDC)

9289847	-	Dispenser, Mine, Ground Vehicle: M128.
9290751	-	Overall Wiring Diagram, Electrical Installation.

TECHNICAL MANUALS

TM9-1095-205-10	-	Dispenser Mine, Ground Vehicle: M128 Operator's Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TM9-1095-205-20	-	Dispenser, Mine, Ground Vehicle: M128 Organization Maintenance Manual.
TM9-1095-205-34	-	Dispenser, Mine, Ground Vehicle: M128 Intermediate (Field) (Direct and General Support) Maintenance Manual.
LO9-1095-205-12	-	Lubrication Order, Dispenser, Mine, Ground Vehicle, M128.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS - Handbook H28 - Screw-Thread Standards for Federal Services. (Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402).

AMERICAN SOCIETY FOR TESTING AND MATERIALS, ASTM D 1796. Water and Sediment in Crude Oil and Fuel oil. (Application for copies should be addressed to American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103).

AMERICAN NATIONAL STANDARDS INSTITUTE, ANSI B93.28-1973. Method for Calibration, of Liquid Automatic Particle Counters Using "AC" Fine Test Dust.

ANSI B93.20-1973. Procedures for Qualifying and Controlling Cleaning Methods for Hydraulic Fluid Power Fluid Sample Containers. (Application for copies should be addressed to the National Fluid Power Association, 3333 N. Mayfair Road, Milwaukee, Wisconsin 53222).

SOCIETY OF AUTOMOTIVE ENGINEERS, (SAE) J429H-77) - Mechanical and Material Requirements for Externally Threaded Fasteners.

SAE J492-77	-	Rivets and Riveting.
SAE J995C-77	-	Mechanical and Quality Requirements for Steel Nuts.
SAE J1165-80	-	Reporting Cleanliness Levels of Hydraulic Fluid.

2.3 Order of precedence. In the event of a conflice between the text of this specification and the referewnces cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 First article (preproduction) inspection. A first article of the completed dispenser shall be produced by the contractor prior to manufacture or fabrication of dispensers in quantity. The dispenser shall be submitted to the Government for examination and tests to determine conformance to the requirements of this specification.

3.2 Initial production inspection. When specified in the contract, the contractor shall furnish to the Government one or more dispensers, which shall be fully representative of dispensers proposed to be furnished under the contract, with all current modifications included in and on the selected dispenser. This dispenser(s) shall be submitted to the Government for inspection and tests to determine conformance to this specification. If the dispenser(s) meets all requirements of this specification, no modifications shall be applied to subsequent dispensers to be produced under contract without prior approval by the Government.

3.2.1 Production dispenser. The dispenser with and without rated payload (See 6.9.7) shall complete the first 500 test miles (See Table VI) without change in the normal combat load center of gravity (See 3.5) and shall consist of the following:

a. 40% hard surface roads
b. 50% second
c. 10% cross country

3.3 Material. Materials shall be in accordance with the applicable drawings, specifications and standards.

3.3.1 Optional equipment. When required, optional equipment and its specific requirements shall be as specified (see 6.2). Where applicable, this equipment shall meet the requirements specified herein.

3.3.2 Repair parts. When required, such repair parts as are specified (see 6.2) shall be furnished.

3.4 Components and assemblies. Components, subassemblies, and assemblies shall be fabricated into a complete dispenser in accordance with drawing (dwg.) 9289847. All parts requiring identification shall be marked in accordance with MIL-STD-130, when not specified on drawings. Where no specific construction requirements are specified herein the manufacturer's best commercial practice shall apply. Construction shall be free from any characteristic or defect which would prevent the item from performing as specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

3.4.1 Procedures.

3.4.1.1 Welding. Welding of aluminum alloys, readily weldable for structures, shall be in accordance with MIL-W-45205. Metal-arc welding of structional steels and the procedures required for documentation prior to production welding, brazing, and soldering shall be equal to or better than the Government approved workmanship samples provided by the contractor or manufacturer. The welded workmanship specimen prepared for highly stressed joint shall be sectioned (cut) to determine the depth of weld penetration.

3.4.1.2 Capability of welder equipment and welder operators. The contractor shall be responsible for determining the capability of the welder equipment, and welder operators. The production welder operator shall perform the welding as prescribed in the contractor's manufacturer's welding procedure and meet the requirements established by the approved workmanship samples. The contractor shall have an accepted welding procedure and accepted workmanship samples in accordance with MIL-STD-1261 for each type of weld before any production welding can be accomplished.

3.4.1.3 Seals. When fording or operating in mud, sand, or snow, seals shall be capable of resisting the entrance of foreign matter into the bearings. All bearing seals shall restrict the leaking of lubricants from bearings.

3.4.2 Elements and assembly.

3.4.2.1 Mechanical and structural.

3.4.2.1.1 Drive assembly, magazine. The drive assembly shall operate smoothly without biding or audible chattering, grinding, squealing or other unusual noises. It shall be as specified with proper adjustment and lubrications.

3.4.2.1.2 Mine guides, launcher and magazines. The mine channels shall be free of any obstruction, distortion, dimensional errors or excessive surface friction which would interfere with smooth and uniform mine feed.

3.4.2.1.3 Launcher wheel. The wheel shall be free of damage, securely fastened and correctly aligned and balanced.

3.4.2.1.4 Launcher tire. The tire shall be of the type specified and inflated to the required pressure.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

3.4.2.2 Power system and accessories.

3.4.2.2.1 Coolant heater. The coolant heater shall provide engine coolant temperatures at heater inlet of 50°F (10°C) after one (1) hour continuous operation at minus 30°F ± 5° (minus 37°C ± 3°).

3.4.2.2.1.1 Coolant heater function. After the heater is activated, the heater indicator lamp shall illuminate within four (4) minutes, when the RUN/START/OFF switch is in the START position.

3.4.2.2.2 Cold start (ether injection) system function. The system shall activate and cycle at engine block temperatures between minus 25°F (minus 32°C) to 40°F (4°C) but not at temperatures above 60°F (15°C). The system shall not activate on engine restarts.

3.4.2.2.3 Engine. Engine shall conform to MIL-E-11276, Engines, Diesel, Industrial. When installed in the dispenser, engine shall operate throughout all speed ranges without evidence of leakage of the cooling system, lubricants, and fuels. (Maximum allowable leakage is a seep, see 6.9.2).

3.4.2.2.3.1 Engine cooling. With the dispenser operating in ambient temperatures up to 125°F (52°C), the engine cooling system shall maintain engine coolant at not more than 230°F (110°C), measured at a point in the engine outlet to radiator.

3.4.2.3 Fuel system. The fuel system (excluding injection pump and lines) shall accept and sustain a pressure of five (5) psi (.35 kg/cm^2), with no more than a five (5) percent total pressure variation within a fifteen (15) minute time period. The fuel system shall accept and sustain a vacuum of thirty (30) inches (76 cm) of water, with no more than a five (5) percent variation within a internal cleanliness of fuel system, prior to final assembly or initial fueling of dispenser.

3.4.2.3.1 Fuel tanks. Provisions shall be made to assure the internal cleanliness of the fuel tanks prior to initial fueling of the dispenser. The fuel tanks shall be free from leakage after installation and when tanks are filled to capacity. (Maximum allowable leakage is a seep, see 6.9.2).

3.4.2.3.1.1 Fuel tank gage. The fuel tank gage shall be capable of indicating ± 1/8 actual fuel tank contents.

3.4.2.3.2 Fuel lines. Provisions shall be made to assure internal cleanliness of fuel lines and connections prior to final assembly or initial fueling of dispenser. All fuel lines and connections shall be free from leakage. (Maximum allowable leakage is a seep, see 6.9.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

3.4.2.3.3 Fuel, lubricants, and coolants. The dispenser shall be tested and furnished with standard military service products of the type and grade specified (see 6.6) for the applicable ambient air temperature. The dispenser shall operate as specified, herein, when serviced with these products.

3.4.2.4 Hydraulic system.

3.4.2.4.1 Hydraulic system. The cleanliness of the dispenser hydraulic system shall be assured by performing a specified onboard filtering procedure. (See 4.6.2.6.1.2) This procedure shall be performed during the initial phase of the dispenser system check out and run-in. The hydraulic fluid filtering process will clense all hydraulic components (Pumps, motors valves, actuators, hoses, tube assemblies, reservoir, etc).

The level of particulate contaminant (roll-off cleanliness) in the hydraulic system shall meet the requirements of SAE J1165-80, ISO Code 19/16.

3.4.2.4.1.1 Reservoir. The internal surfaces of the reservoir shall be free of all visible foreign matter including weld slag spatter and flux, prior to connection to the hydraulic system.

3.4.2.4.2 Hydraulic system fluid leakage. Fluid leakage of the dispenser hydraulic system, shall be permissible in the form of a weep or seep (see 6.9.2). There shall be no evidence of fluid leakage in the form of a leak (droplet, drip) from the dispenser hydraulic control system other than the specified herein.

3.4.2.4.3 Magazine servo relief pressure. The magazine servo relief pressure shall be 230 $\pm$ 50 pounds per square inch (psi) (16.17 $\pm$ 3.52 kilograms per square centimeter (kg/cm^2)).

3.4.2.4.4 Pump inlet pressure. The inlet pressure of any pump shall not exceed ten (10) inches (254 millimeters) of Mercury vacuum at cold start (minus 25°F) (minus 32°C) and the inlet pressure shall not exceed five (5) inches (127mm) of Mercury vacuum after the dispenser engine has been brought to operating condition in an ambient temperature of minus 25°F (minus 32°C).

3.4.2.4.5 Launcher hydraulic relief valve setting. The valve shall be set for 3300 $\pm$ 100 psi (232.02 $\pm$ 7.03 kg/cm^2).

3.4.2.4.6 Magazine and oscillator loop relief valve settings. Oscillator relief valve settings shall be set for 1575 $\pm$ 110.1 psi (110.7 $\pm$ 7.7 kg/cm^2) and the magazine valve shall be set for 2400 $\pm$ 100 psi (168.74 $\pm$ 7.03 kg/cm^2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.4.2.4.7 Case drain return line pressure. Pressure in launcher pump and motor case drain lines shall not exceed twenty-five (25) psi (1.7 kg/cm^2). For magazine pumps and motors the pressure shall not exceed fifteen (15) psi (1.1 kg/cm^2).

3.4.2.5 Electrical system.

3.4.2.5.1 Voltage generation system (alternator). At an ambient temperature of 75°F (24°C), the alternator, when driven at 4,000 ± 100 revolutions per minute (RPM), shall deliver a regulated voltage output of 28 ± .3 volts. After fifteen (15) minutes of continuous running time, at 4,000 ± 100 RPM, the alternator shall be capable of delivering a minimum current output of 30 ± 1 amps. At an ambient temperature of minus 25°F (-32°C), the output voltage shall not exceed 31.2 volts. At an ambient temperature of 125°F (52°C) the output voltage shall not be less than 26.2 volts.

3.4.2.5.2 Electrical connections. Electrical connections shall be mechanically secured and soldered except connections on screw type terminals which shall be mechanically secured. Soldering acids, acid fluxes, and soldering salts shall not be used. Rosin base fluxes shall be used. Electrical soldering connections shall conform to MIL-S-45743 or MIL-S-46844, Solderbath Soldering of PW Assembly.

3.4.2.5.3 Electrical cable. Low voltage electrical cable not covered by component specifications shall conform to MIL-C-13777.

3.4.2.5.4 Electrical circuits. The electrical circuits shall be capable of maintaining continuity from end to end, without any shorts from one pin to another, and from each pin to the connector shell.

3.4.2.5.5 Built-in test equipment (BITE). The test equipment shall be capable of demonstrating dispenser functions/detecting malfunctions, when tested as specified in 4.6.2.7.3.

3.4.2.5.6 Transmitter assembly power supply (TAPS). During dispenser operation, the TAPS voltage measured between ground and the various pins of connector P10 (Ref. Dwg. 9290751) shall be:

Normal Self Destruct

(1) Between pin A and ground, 28 ± 0.3 volts.

(2) Between pin B and ground, 0 volts.

(3) Between pin C and ground, 100 ohms or greater.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

Long Self Destruct

(1) Between pin A and ground, 28 ± 0.3 volts.

(2) Between pin B and ground, 0 volts.

(3) Between pin C and ground, less than or equal to 20 ohms.

During application of 28 ± 0.3 volts to pin D and pin E of connector P10, the TAPS malfunction indicator lights, right and left respectively, shall not be illuminated.

3.4.2.5.7 Controls. When installed in accordance with applicable drawings, all electrical, mechanical, and hydraulic controls shall operate without malfunction throughout all ranges of operation under all dispenser operating conditions.

3.4.2.5.7.1 Control panel malfunction warning and automatic shut down system. Malfunction lamp (red) on the Control Panel shall illuminate when the following malfunctions occur:

a. High Coolant Temperature-Dispenser shut down temperature shall occur between 206 and 219°F (97 and 104°C) inclusive. Malfunction lamp shall illuminate before shut down at not lower than 197°F (92°C).

b. Low Engine Oil Pressure, less than 6.0 ± 2.0 psi (0.42 ± 0.14 kg/cm^2).

c. Low fluid level in the reservoir.

d. TAPS malfunction - In addition, the individual magazines shall shut down depending on which coil of the TAPS failed.

e. "Runaway" Magazine Shutdown. In addition to the affected magazine(s) stopping 1.5 ± 0.3 sec. after the "FIRE" switch is returned to the "OFF" position, the TAB failure light on the BITE/ALARM panel shall illuminate, indicating which magazine (right or left) is not sending a TAB sensor signal. Magazine(s) shall not "creep" when the "FIRE" switches are in the "OFF" position.

NOTE: The dispense mode will shut down when the launcher wheel speed falls below 800 RPM.

3.4.2.5.8 Lights and accessories. The internal and external lights and electrical accessories, including cables and receptacles, shall function throughout all dispenser operating conditions. All electrical contacts and connections shall maintain positive contact under all dispenser conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.4.2.5.9 Circuit card assemblies (CCA). The CCA(s) shall be inspected and tested in accordance with MIL-C-63371.

3.4.2.6 Dispenser and systems assembly and adjustments. The components of the various systems and their controls shall be installed and adjusted to assure performance as specified herein. All adjusting mechanisms shall operate without interference and shall maintain adjustment settings under all operating conditions. Unless otherwise specified, procedures shall be established and supplied to the Government to cover initial lubrication, brake bleeding, linkage adjustment, valve adjustment, bolt torques, modifications of commercial components and any other procedure or adjustments required to obtain the dispenser performance as specified herein. Final line reaming, if used, shall only be done with jigs and fixtures to assure close tolerance and round holes.

3.4.2.7 Chassis.

3.4.2.7.1 Brake adjustment. The service brake system shall be bled of all air. The linkage shall be adjusted to assure correct operation.

3.4.2.7.2 Leveling jacks. The manually operated jacks shall be capable of raising and supporting the fully loaded dispenser (see 3.5) and shall provide adjustment to permit placing the jack bases to the ground and leveling the dispenser.

3.4.2.8 Equipment.

3.4.2.8.1 Stowed equipment. All on vehicle equipment (OVE) items shall be capable of being stowed (combat loaded) in the space provided. All OVE shall be furnished in accordance with Government approved list when specified (see 6.2).

3.5 Performance. (See 6.9.7). Dispenser(s) shall meet the performance requirements of this specification when fully equipped, loaded with applicable payload, serviced and coupled with tactical, prime mover (see 6.2).

3.5.1 Break-in-run.

3.5.1.1 Preparation. Prior to break-in run, except for equipment, component installation and servicing performed by the contractor as a final processing of dispensers for acceptance, the dispensers shall be completely assembled and all adjustments completed. The dispenser, including all components requiring lubrication, shall be lubricated and serviced with fuel as directed (see 6.2). Lubricants, fuel and fluids shall be as specified in Lube Order LO9-1095-205-12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.5.1.2 Oil pressure and temperature. Prior to the start of the break-in run, the engine shall be run until lubricating oil is at operating pressure and temperature. If at any time during the break-in run the engine has been stopped for at least thirty (30) minutes, the engine shall again be operated, as above, before continuing break-in run. Proper oil pressure and temperature shall be maintained during operation on level ground, fifteen (15) degree grades and fifteen (15) degree side slope. With engine operating at 2000 to 2100 RPM, oil pressure shall be 50 ± 10 psi (3.52 ± .7 kg/cm^2) at angles of operation.

3.5.1.3 Operation and distance. Prior to tests, each dispenser shall be given a break-in run, with the engine, launcher (position 3, max.) and magazine (dispense mode) operating. The dispenser shall be towed, by a tactical prime mover (See 6.2) on a level, hard surface at speeds and distances as specified in Table I and over the undulating section (See Fig. 1) in a. and b. Break-in run distance shall be equally divided in both directions over hump for the purpose of observing the function and performance of various parts, assemblies, and controls.

TABLE I - Speeds and Distances for Break-in Run

Division of Run	Speed mph	(kmph)	Distance miles	(km)
a.....	0 to 10	(0-16)	10	(16.1)
b.....	11 - 20	(17.7 - 32.2)	25	(40.2)
c.....	21 - 35	(33.8 - 56.3)	5	(8.1)

3.5.1.4 Braking.

3.5.1.4.1 Parking. Before start of break-in run, the dispenser and payload shall be capable of being parked on a eleven (11) degree slope facing up or down slope and be held by parking brakes only.

3.5.1.4.2 Stopping. The dispenser, with full payload, shall be capable of being controlled, stopped, and held without damage or distortion within one hundred (100) feet upon application of the brake.

3.5.1.4.3 Inertia brake application test. The inertia brake actuator shall activate the chassis service brakes when a rearward force is applied by the prime mover.

3.5.1.4.4 Inertia brake actuator. Actuator shall automatically apply dispenser service brakes upon breakaway or separation from towing vehicle and shall maintain application of these brakes, holding dispenser chassis stationary under full payload for not less than fifteen (15) minutes.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

3.5.1.5 Reverse operation. After each division of the break-in run, dispenser towing shall be stopped, and the dispenser pushed in reverse (using tactical, prime mover) for a distance of not less than fifty (50) feet (15.3 meters). The dispenser shall then be operated in the download mode for a period of at least fifteen (15) minutes with the towing vehicle and dispenser stationary.

3.5.1.6 Road speed. The dispenser shall be capable of being towed up to a speed of thirty-five (35) mph (56.3 kmph).

3.5.1.7 Trailing ability. When coupled to a prime mover the dispenser shall trail within full alignment.

3.5.1.8 Condition after run. After completion of the break-in run, the engine shall idle between 600 and 900 RPM. Prior to dispenser being submitted to the Government for acceptance, all suspension wheel bearings shall be checked to determine if adjustments are correct and readjusted as required. There shall be no defects indicative of damaged components, (i.e. wheels, tires-launcher, and chassis), or maladjustments that may cause faulty dispenser operation.

3.5.2 Operation.

3.5.2.1 Operating. Dispensers shall be capable of operating without malfunction or unserviceable parts. Dispensers shall operate using M79 practice mines which shall be in accordance with MIL-M-63380(AR).

3.5.2.2 Loading. A full complement of M79 practice mines shall be capable of being loaded into respective magazines without unintentional operational interruption. The count as indicated on the operator control panel shall correspond with the number of mines loaded within plus or minus five ($\pm$5).

3.5.2.3 Magazine reel rates. With an engine speed of 2000 to 2100 RPM, the dispenser system warmed up as defined in 6.9.4, and a minimum of 300 mines (see 3.5.2.1) per magazine, the left and right magazine reels shall complete a revolution in 16.0 $\pm$ 1.6 seconds during load advance, unload modes, and at the maximum dispense rate. The magazine shall remain in a stationary position unless loading, unloading or dispensing operations are in progress.

3.5.2.4 Launcher sweep rate. Each full launcher sweep cycle duration (Pattern 3) shall be three to five (3.0 to 5.0) seconds after warmup operation as defined in 6.9.4.

3.5.2.5 Launcher oscillation angle, full sweep. The launcher oscillation angle shall be 45 $\pm$ 2.5^{o} right, and 45$\pm$ 2.5^{o} left of central position (see 6.9.9).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the currentversion before use.

3.5.2.6 Launcher wheel speed. With the wheel free spin set at 1090 ± 30 RPM, the wheel velocity shall not be less than 890 RPM when dispensing at max density while the dispenser is in the stationary mode (see 4.6.2.13.1).

3.5.2.7 Launch range. The launch range distance from launcher assembly pivot centerline to impact midpoint of ten (10) mine cluster shall not be less than one hundred five (105) feet (32.0 meters) when the wheel free spin is set in accordance with 3.5.2.6.

3.5.2.8 Pattern width and launcher alignment. No mines shall impact more than one hundred and twelve (112) feet (34.0 meters) to full right or full left of the dispenser centerline but no less than seventy-two (72) feet (22.0 meters) when the wheel free spin is set in accordance with 3.5.2.6.

3.5.2.9 Automatic shutdown systems.

3.5.2.9.1 Jam mine arrest (within launcher). After a mine has passed the input sensor and 200 milliseconds (ms) has elapsed without a signal from the output sensor, the launcher wheel brake shall activate, stopping the launcher wheel within an additional 390 ms. (Total elapsed time from sensing an incoming mine to launcher wheel stoppage shall not exceed 590 ms.)

3.5.2.9.2 Magazine shutdown. Launch wheel velocity decay below 800 RPM shall cause both magazines to shut down.

3.5.2.10 Pattern selections. The dispenser shall be capable of operating in five (5) distinct patterns and two (2) jog positions, using as a minimum dispersion configuration, groups D, E and F (see 3.5.3.1.2). The resulting mine field patterns shall be within tolerance as specified in Table II:

NOTE: Launch distance, terrain and weather conditions may affect the rest position of launched mines.

TABLE II - Pattern Spread

Pattern Selection	Oscillator Angle	Description
1	40° ± 2.5°	From Left Reversal Point Established at 3.5.2.5
2	50° ± 2.5°	From Left Reversal Point Established at 3.5.2.5
3	90° ± 2.5°	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

4	50° ± 2.5°	From Right Reversal Point Established at 3.5.2.5
5	40° ± 2.5°	From Right Reversal Point Established at 3.5.2.5
Jog Left		Any Position Between Center & Left Mechanical Stop
Jog Right		Any Position Between Center & Right Mechanical Stop 3.5.2.11

Downloading. Mines remaining in the magazine (a minimum of 300 mines) shall be capable of being unloaded without unintentional interruption. The count as indicated on the operator control panel shall correspond with the number of mines downloaded within plus or minus five (± 5).

3.5.3 Dispenser functioning. The complete dispenser, with a simulated pay load (Practice Mines), and serviced, shall function as specified, herein. Dispenser serviced (see 3.5.1.1) and equipped for existing climatic conditions, shall function as specified without malfunction, unserviceable parts and special equipment.

3.5.3.1 Mine dispersion.

3.5.3.1.1 Mission profile. The mission shall consist of uploading and dispensing on a four hundred and ninety-two (492) feet (150 meters) long mine-field, one hundred and ninety-seven (197) feet (60 meters) wide, approximately. Operator will perform before, during and after operational checks with each mission in accordance with Operators Manual TM9-1095-205-10.

3.5.3.1.2 Dispersion configurations (DC). The dispenser shall be capable of dispensing mines in any of the dispersion configurations specified in TABLE III as evidenced by mine field scatter. (See 3.5.3.1.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE III - Dispersion Configuration

GROUP	TEST NO.	DENSITY	PATTERN
A	1	Max. (2 mines per sec)	1
A	2	Max. (2 mines per sec)	2
A	3	Max. (2 mines per sec)	3
A	4	Max. (2 mines per sec)	4
A	5	Max. (2 mines per sec)	5
A	6	Max. (2 mines per sec)	Jog Right
A	7	Max. (2 mines per sec)	Jog Left
A	8	0.025	1
A	9	0.025	2
A	10	0.025	3
A	11	0.025	4
B	12	0.025	5
B	13	0.025	Jog Right
B	14	0.025	Jog Left
B	15	0.010	1
B	16	0.010	2
B	17	0.010	3
B	18	0.010	4
B	19	0.010	5
C	20	0.010	Jog Right
C	21	0.010	Jog Left
C	22	0.007	1
C	23	0.007	2
C	24	0.007	3
C	25	0.007	4
D	26	0.007	5
D	27	0.007	Jog Right
D	28	0.007	Jog Left
D	29	0.005	1
D	30	0.005	2
D	31	0.005	3
D	32	0.005	4
D	33	0.005	5
E	34	0.001	Jog Right
E	35	0.001	Jog Left
E	36	0.001	1
E	37	0.001	2
E	38	0.001	3
E	39	0.001	4
F	40	0.001	5
F	41	0.001	Jog Right
F	42	0.001	Jog Left

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.5.3.1.3 Density selections. The dispenser shall be capable of providing six (6) distinct densities as specified in TABLE IV.

TABLE IV - Mine Densities

SELECTION			DENSITY
1	0.001	-	One (1) mine per thousands square meters.
2	0.005	-	Five (5) mines per thousands square meters.
3	0.007	-	Seven (7) mines per thousands square meters.
4	0.010	-	Ten (10) mines per thousands square meters.
5	0.025	-	Twenty-five (25) mines per thousands square meters.
6	Max.	-	Maximum reel rate at two (2) mines per second.

NOTE: A tolerance of +75% - 10% is allowed on density selection Number 1. The other density selections are allowed a ± 10% tolerance.

3.5.3.1.4 Jog mine spacing. The dispenser shall be capable of providing six (6) density selections in jog position as follows:

TABLE V - Mine Separations

SELECTION	DENSITY	SEPARATION (Meters between mines)
1	0.001	10
2	0.005	9
3	0.007	8
4	0.010	7
5	0.025	6
6	Max.	2 Mines/Second

NOTE: A ± 10% tolerance is allowed on the above separation requirements.

3.5.4 Environmental. An environmental test shall be performed on selected dispensers as specified in Table VIII. (See 6.2).

3.5.4.1 Temperature. Utilizing components permanently mounted and furnished with the dispenser, the engine shall start within five (5) minutes and the dispenser shall operate under full-load conditions within fifteen (15) minutes after engine start in any ambient temperature from minus 25°F (minus 30°C) to +125°F (52°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.5.4.1.1 High-temperature test conditions. The dispenser shall be located in an area with an ambient temperature of 125°F (52°C). The change in the ambient temperature in the area selected shall not be more than five (5)°F (3°C) during a four (4) hour period. Wind velocity in the area shall not exceed one (1) mph (1.61 km/m). The dispenser shall be serviced with military oils and greases designated for use in the ambient temperatures at which the test is to be run. (See Lubrication Order LO9-1095-205-12). The coolant system shall be serviced with anti-freeze.

3.5.4.1.2 Low-temperature test conditions. The dispenser shall be located in an area with an ambient temperature of minus 25°F (minus 32°C), unless otherwise stated. The change in the ambient temperature in the area selected shall not be more than five (5)°F (3°C) during a four (4) hour period. Wind velocity in the area shall not exceed one (1) mph (1.6. km/hr). The dispenser shall be serviced with military oils and greases designated for use in the ambient temperatures at which the test is to be run. (See Lubrication Order LO9-1095-205-12).

3.6 Painting, marking and data plates.

3.6.1 Painting. Unless otherwise specified, the exterior and interior of the dispenser, components, assemblies, subassemblies, and parts that require painting, shall be prepared and painted in accordance with MIL-STD-193.

3.6.2 Marking. Each dispenser shall be clearly marked in accordance with the applicable drawings and MIL-STD-642. (See 6.2).

3.6.3 Name, shipping, and service data plates. All plates shall be in accordance with the applicable drawings and MIL-P-514.

3.7 Servicing and adjustment. Prior to delivery the contractor shall service and adjust each dispenser and its mounted material for specified use (See MIL-D-63370, Preparation for Shipment and Storage) including the following: adjustment of brake system, inflation of all tires, complete lubrication of chassis, suspensions and axles, with proper grade of lubricant (per Lube Order LO9-1095-205-12) for the climatic condition at the delivery point.

3.8 Workmanship.

3.8.1 General. Workmanship shall be in accordance with the requirements herein and any requirements of the detail equipment specifications applicable to soldering, marking of parts and assemblies, wiring, welding and brazing, plating, painting, finishes, riveting, machine screw assemblies, machine operations, freedom from parts with blemishes, burrs, sharp edges, or any other damage or defect that could make the part (or equipment) unsatisfactory for the purpose intended, accuracy of dimensions, radii of fillets, alignment of parts and tightness of assembly screws and bolts, etc.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

3.8.2 Riveted connections. Rivet-holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivets. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member, and shall be in accordance with SAE J492-77 or Industrial Fastener Institute Standard No. 114 for Break Mandrel Blind Rivets.

3.8.3 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts conforming to SAE J429H-77 or capscrews shall be of sufficient strength to withstand the tensile strength to permit the bolt or capscrew to be torqued to its required stressed condition. All fasteners shall be torqued in accordance with SAE J429H-77 and SAE J995C-77, and shall have full thread engagement.

3.8.4 Threaded parts or devices. Screws, pins, nuts and bolts shall show no evidence of cross threading, mutilation, detrimental burrs or loss of tightness. Tightness means that the screw shall be firmly secured without damage or injury to screw, bolt and threads and that there shall be no relative movement possible between the attached parts.

3.8.5 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease and other foreign matter other than mill scale that can be removed by chipping and wire brushing. All welds shall be free of harmful defects such as cracks, porosity, undercuts, voids and gaps. There shall be no burn through. Fillets shall be uniform and smooth. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 0.1875 inch (4.76mm), unless approved bridging techniques are used. Angular or thickness misalignment, warpage, or dimensional change due to heat from the welding operation shall be within permitted tolerances. There shall be no damage to adjacent parts resulting from the welding. Straightening of material before or after welding shall be done by methods that will not cause weakening or injury to the dispenser. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to test proof and service loading. Parent materials, weld filler metals, and fabrication techniques shall be required to enable the dispenser to conform to the examination and test requirements specified in Section 4.

3.8.6 Brazing. All brazed joints shall be in accordance with MIL-B-7883, Brazing of Stainless, Copper, Copper Alloys, etc, and shall be of ample size to meet the individual requirements of the parts concerned.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the currentversion before use.

3.8.7 Soldering. Only class Sn60 or Ns63 solder in accordance with QQ-S-571 shall be used for electrical connections. Soldering processes shall conform to the requirements specified in MIL-S-45743 and MIL-STD-275, Printed Wiring. The soldering shall be free from scratches, roughness, sharp edges, dullness, looseness, blistering, foreign matter and other evidence of poor workmanship that will render the assemblies unsuitable for the purposes intended. Defects in quality of workmanship as detailed in MIL-S-45743 paragraphs 3.10 and the paragraphs thereof shall be considered as failure at some point in the process and one in which the part shall be rejected unless it can be reworked prior to final inspection.

3.8.8 Bearing assemblies. Bearing assemblies shall be free from rust, discoloration, and imperfections of ground, honed, or lapped surfaces. Contacting surfaces shall be free of tool marks, gouge marks, nicks, or other surface-type defects. There shall be no detrimental interference, binding, or galling.

3.8.9 Gears. Gear assemblies shall be properly aligned and meshed and shall be operable without interference, tight spots, loose spots, or other irregularities that could cause unsatisfactory operation. Where required for accurate adjustments, gear assemblies shall be free from excessive backlash as required by the pertinent drawings or specifications.

3.8.10 Metal fabrication. Metal used in the fabrication of the dispenser shall provide original quality surface finish and shall be free from erosion, kinks and sharp bends. Metal having eroded surface is not acceptable. The forming of the material shall be done by methods that will not cause damage to the metal. All bends of a major character shall be made with metal dies or fixtures to insure uniformity of size and shape. Straightening of material before or after welding will not be done by methods that will cause weakening or injury to the dispenser. External surfaces and burned surfaces of flame-cut material shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are detrimental to safety. Specified corners shall be square and true, and all sharp edges and burrs shall be removed. Shearing, punching, and chipping shall be done uniformly, neatly and accurately. Flame cutting, using tips suitable for the thickness of the metal may be employed instead of shearing and sawing. Precautions shall be taken to avoid overheating of the metal. Heated metal shall be allowed to cool slowly, except where heat treatment is required. The burned surfaces of flame-cut material shall be free of burrs, slag, and sharp edges.

3.8.11 Castings and forgings. All parts, components, and assemblies of the dispenser including castings, forgings, molded parts, stampings, seals, and machined surfaces, shall be sound, clean and free from patching, misplaced coring, warping, sand, dirt, fins, pits, sprues, scale, flux and other harmful extraneous

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

material. External surfaces shall be free of burrs, sharp edges, and corners except when sharp edges or corners are required. Repair shall be limited to procedures which do not reduce mechanical properties or affect function. Castings with fastener holes shall provide for correct seating of fasteners such as bolt, lockwasher and nut assemblies and capscrews.

3.8.12 Mounting of parts. Parts, or hardware shall be assembled and secured or mounted in the specified manner to satisfactorily accomplish the purpose for which intended, and shall, wherever practicable, be so mounted that values and part numbers containing values are visible. The use of automatic insertion equipment is an example where control of part visibility and orientation may not be practicable. Terminal designations of transformers, inductors, relays, etc. shall be visible to facilitate repair. Electronic equipment having missing, inoperative, defective, bent, broken, or otherwise damaged parts will not be acceptable.

3.8.13 Mounted hardware installation. The installation of hardware parts, such as hinges, catches, handles, or knobs shall be accomplished in such a manner as to avoid damaging the hardware or the mounting surface. Hardware or mounting surfaces damaged in this way shall be touched up to provide a continuous protective coating. A color match between the surface touched up and the original finish shall be provided.

3.8.14 Hydraulic and fuel circuits. All hydraulic components shall be free from foreign matter, damage or defect(s) that could make the part (or equipment) unsatisfactory for the purpose intended. Hydraulic and fuel lines shall be free from kinks, dents or unspecified bends.

3.8.15 Preparation of liquid and air systems. The hydraulic and water systems shall all be purged to remove any foreign material in the lines or components after the assembly of the dispenser is complete.

3.8.16 Electrical.

3.8.16.1 Cables. Cabling or wiring harnesses shall be anchored to avoid damage to conductors or adjacent parts, excluding umbilical cable(s).

3.8.16.2 Insulation. There shall be no evidence of burns, abrading, or pinch marks in the insulation that could cause short circuits or leakage.

3.8.16.3 Dressing. Wire dress or cabling of wires shall not result in improper electrical operation or interference with mechanical operation that will lead to subsequent damage of the wire or cable. Wires and cables subject to flexing shall be protected to minimize abrasion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.8.16.4 Lacing. Lacing of cabling shall be neat in appearance. The lacing shall be applied firmly, yet not with excessive pressure which could cut into conductor insulation.

3.8.16.5 Shielding. Shielding on wires and cables shall be secured in a manner that will prevent it from contacting or shorting exposed current carrying parts. The shielding shall terminate at sufficient distance from the exposed conductors of the cable to prevent shorting or arcing between cable conductor and the shielding. The ends of the shielding or braid shall be secured against fraying.

3.8.16.6 Splicing. Wires in a continuous run between two terminals shall not be spliced during the assembly of the equipment, except where a stranded conductor is spliced to a solid conductor and the two are supported at the splice.

3.8.17 Painting. All paint coats shall be evenly applied, smooth, continuous and adherent, and shall cover only the surface specified. Precautions shall be taken to avoid contamination of surfaces after cleaning, preparation and painting, to insure compliance with the specification. All sliding parts and operating contact surfaces shall be free of paint.

3.8.18 Cleaning. After fabrication, parts and assembled equipment shall be cleaned of smudges; loose, splattered or excess solder; weld metal; metal chips; mold release agents, stray bolts, and nuts, pipe compound, rust, stray gasket material or any other foreign material which might detract from the intended operation, function, or appearance of the equipment. (This would include any particles that could loosen or become dislodged during the normal expected life of the equipment). All corrosive material shall be removed. Whenever possible, this cleaning shall take place before tha parts are assembled into the equipment. All assembled equipment shall be cleaned of contaminants such as lubricating oils, mold release agents, waxes, sand, corrosion products, solder fluxes, finger prints, dust, etc. The nature of the contaminant must be determined to the extent that a suitable cleaning solvent can be selected for its removal. The inertness of the materials of construction to the solvent must be determined to prevent damage to electrical and mechanical properties. After cleaning, moving parts should be relubricated and the assembly allowed to dry to remove trapped or soaked cleaning fluid. Cleaning processes shall have no deleterious effect on the equipment or parts.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-W-63150(AR) shall apply and are hereby made a part of this detail specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) First Article (Preproduction) Inspection (See 4.3).

(b) Initial Production Inspection (See 4.4).

(c) Quality Conformance Inspection (See 4.5).

4.3 First article (preproduction) inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of one (1) complete dispenser assembly (dwg. 9289847).

4.3.2 Inspections to be performed. First article sample may be subjected by the Government (see 6.2) to any or all of the examinations, QAP's and tests specified in Tables VII & VIII herein and to any requirements of the applicable drawings.

4.3.3 Rejection. If the first article sample fails to comply with any of the applicable requirements, the sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component, or test specimen in the sample to comply with any of the stated requirements.

4.4 Initial production inspection. When specified (see 3.2), one or more initial production dispensers will be selected at random by the Government from dispensers produced from production tooling and will be examined as specified herein to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of an initial production dispenser shall not exclude the remaining dispensers from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the initial production test, the Government reserves the right to conduct any or all other tests contained in this specification as part of the initial production test and failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

4.4.1 Inspections to be performed. The initial production dispenser may be subjected by the Government to any or all of the examinations and tests specified in Tables VII and VIII.

4.4.2 Inspection failure. Failure of an initial production dispenser to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for refusal by the Government to continue acceptance of production

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

dispensers until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on dispensers previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facia evidence that all dispensers accepted prior to the completion of initial production inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.4.3 500 mile test (see 6.2). After completion of the first dispenser inspection, in accordance with 4.4.1, the dispenser shall be subjected to the five hundred (500) mile (804.5 km) test specified in TABLE VI, at sites approved by the Government. The contractor shall pre-position on test site(s) minimum essential repair parts to include all anticipated wear-out and service parts for the five hundred (500) mile (804.5 km) test. The list shall be approved by the Government (see 6.2). The contractor shall also expeditiously furnish additional repair parts, as required, to adequately support the test.

TABLE VI

500 MILE TEST

(804.5 Kilometer)

COURSE	MILEAGE & TOWING SPEEDS	FUNCTIONS
Hard Surface	200 miles (322 km) at avg. speed of thirty-five (35) mph. (56.3 kmph)	a. Normal or average stops twenty (20) times. b. Quick stops from a speed of at least twenty (20) mph (32.2 kmph) by instantaneous application of full service (prime mover) braking power, ten (10) times. c. Sharp right and sharp left turns, ten (10) times each
Secondary Roads	250 miles (402 km) at speeds applicable to conditions of terrain.	
Off-Road	50 miles (80 km) at speeds applicable to conditions of terrain.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the currentversion before use.

NOTE: Ninety (90) percent of the mileage specified for each course shall be performed with payload. The remaining ten (10) percent of the mileage shall be performed without payload.

4.4.3.1 Test failure. Failure of the dispenser to comply with any of the requirements specified, or any deficiency of a workmanship or materials nature found on the dispenser during, or as a result of the five hundred (500) mile (804.5 Km) test, shall be cause for rejection of the dispenser. Where the failure is attributable to a deficiency of a workmanship or materials nature, the Government will discontinue acceptance of production dispenser until evidence has been provided by the manufacturer that corrective action has been taken to eliminate the deficiency.

4.5 Quality conformance (acceptance) inspections. Acceptance inspection shall be performed and shall be in accordance with 4.5.4.

4.5.1 Inspection lot formation. As applied to Government inspection of units of product, the term "lot" shall be in accordance with MIL-STD-105.

4.5.2 Break-in run. The dispenser shall be lubricated and serviced prior to the break-in run which shall be performed on smooth, level, hard-surfaced roads specified in TABLE I. The dispenser shall be backed-up in reverse after the divisions as specified in 3.5.1.5. The undulating portion (See Fig. 1) of the test shall be accomplished twice in each direction at speeds of five and ten (5 and 10) mph (8.1 and 16.1 kmph) during division "a" and between eleven and fourteen and one half (11 and 14.5) mph (17.7 and 23.4 kmph) during division "b".

4.5.2.1 Stopping. The dispenser with full payload, shall be towed at twenty (20) mph (32 kmph) on dry smooth level hard surfaced roads free of loose material, and stopped within one hundred (100) feet (30.5m) upon steady dispenser brake application (in prime mover with air brake capability), to insure compliance with 3.5.1.4.2.

4.5.2.2 Road speed. To determine conformance to 3.5.1.6, the dispenser shall meet the specified requirements.

4.5.2.3 Trailing ability. To determine conformance to 3.5.1.7, when dispenser is coupled to the prime mover and operated it shall be observed for trailing ability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.5.2.4 Parking. The dispenser, with payload, shall be towed to a smooth, dry, hard surface, free of loose material, which is inclined at an angle of eleven degrees (11°). When parked on this inclined surface, the dispenser shall be capable of being held stationary, facing up or down, by the parking brake only.

NOTE: The dispenser/chassis braking system air reservoir must be vented to release residual pressure. The dispenser towing vehicle must not influence the dispenser during this test. Leveling jacks may be used to stabilize, but not support, the dispenser.

4.5.2.5 Condition after run. After the break-in run, the dispenser shall be inspected to determine conformance to 3.5.1.8 which shall include checking the complete suspension system.

4.5.2.6 Inertia brake application test. To determine conformance to 3.5.1.4.3, back the prime mover and dispenser chassis until the stroke of the inertia brake master cylinder causes the wheels to lock. After a sustained rearward force is applied for ten to twenty (10-20) seconds, the brakes will fully release, permitting rearward movement of the dispenser chassis. Observation shall be made to determine compliance with the applicable requirement.

4.5.2.7 Inertia brake actuator test. To determine conformance to 3.5.1.4.4, separation of the fully loaded dispenser from the prime mover shall be simulated by pulling the lanyard while the chassis is stationary. After the specified time, an attempt shall be made to move the dispenser chassis. Then, the actuator release cable shall be pulled, releasing the ratchet.

Evidence of the following defects shall constitute failure of this test:

a. Failure of the chassis wheels to lock upon activation of the brake actuator.

b. Free movement of the dispenser wheels resulting from a force applied by the prime mover, fifteen minutes after activation of the service brakes.

c. Failure of the actuator ratchet to fully release the service brakes when the release cable is pulled.

4.5.3 Inspection and test equipment. The contractor is responsible for providing all standard measuring and test equipment required. The contractor shall submit for approval inspection and test equipment designs, as required, in accordance with the terms of the contract and para. 6.8 and 6.2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.5.3.1 Practice mines. Unless otherwise specified in procurement documents (see 6.2), M79 practice mines shall be used for operation and functioning tests.

4.5.3.2 Inspection standards. Inspection standards shall be utilized for those characteristics requiring inspection decisions by visual (eyesight) means. Items selected as visual comparison standards shall be mutually agreed to by the contractor and the Government, within drawing and specification requirements, and shall be used to assist in determining configuration and minimum acceptance criteria. The visual comparison standards selected shall be subject to approval by the responsible technical agency. Each comparision or inspection standard shall be kept under the control of the contractor's inspection element and be positively identified as to the characteristic or condition the standard represents, date established as the standard, number of the standard, and identity of the contractor and Government inspection personnel establishing the standard.

4.5.4 Examinations.

a. Unless otherwise specified, and when applicable, the sampling plans and procedures shall be in accordance with MIL-STD-105. When Acceptable Quality Levels (AQL's) are specified, the AQL's shall be individually applied in accordance with MIL-STD-105.

b. Visual, dimensional and primary functional inspection shall consist of examination of the dispenser for conformance to the applicable drawings and this specification. Examination shall be performed against the classification of defects and with the AQL's shown therein. See Table VII.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the currentversion before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63303A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 8		DRAWING NUMBER
4.5.4.1	Dispenser, Mine, Ground Vehicle: M128				9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Special					
	a. Fuel system (components, lines) defective, damaged, improperly assembled or any evidence of leakage (See 6.9.2)		100%	3.4.2.3	Visual & Functional
Major					
101	Material; not as specified, not of same quality as used on preproduction model (Section 3)		1.0%	3.3	Visual
102	Qualified products; Nonconformance		1.0%	3.4	Visual
103	Optional equipment; damaged, missing, or malfunction		1.0%	3.3.1	Visual & functional
104	Repair parts; damaged, missing, or not as specified		1.0%	3.3.2	Visual & functional
105	Dimensions, final assembly; not as specified		1.0%	3.4	Gage(s)
106	Fasteners; missing, improper or insecure		1.0%	3.4	Visual & functional

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63303A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 8		DRAWING NUMBER
4.5.4.1	Dispenser, Mine, Ground Vehicle: M128				9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
107	Welding repairs; without authorization or beyond scope of authorization		1.0%	3.4.1.2	Visual
108	Structural and welding; defective or damaged		1.0%	3.4.1.2	Visual
109	Seals; leaks (See 6.9.2)		1.0%	3.4.1.3	Visual
110	Drive assembly, magazine; not as specified, malfunction		1.0%	3.4.2.1.1	Visual & functional
111	Mine guides, launcher or magazines; damaged, obstructed, worn or deformed		1.0%	3.4.2.1.2	Visual & functional
112	Launcher wheel; damaged, unbalanced, or insecure		1.0%	3.4.2.1.3	Visual & functional
113	Launcher tire; not as specified		1.0%	3.4.2.1.4	Visual
114	Coolant heater; damaged, missing, or malfunction		1.0%	3.4.2.2.1	Visual & functional
115	Power plant; malfunction, drip (see 6.9.2), damage, mounting improper		1.0%	3.4.2.2.3	Visual & functional
116	Cooling system; malfunction, damage improper coolant levels, leaks, seeps (See 6.9.2)		1.0%	3.4.2.2.3.1	Visual
117	Fuel tank gages; malfunction or damage		1.0%	3.4.2.3.1.1	Visual & functional
118	Fuel, lubricants, and coolants; not as specified		1.0%	3.4.2.3.3	Visual & functional
119	Hydraulic system; not as specified		1.0%	3.4.2.4	Visual & functional

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63303A(AR)

PARAGRAPH	TITLE		SHEET 3 OF 8	DRAWING NUMBER
4.5.4.1	Dispenser, Mine, Ground Vehicle: M128			9289847
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
120	Hydraulic reservoir and lines; defective or improper clearance, drip (See 6.9.2)		1.0%	3.4.2.4.1 3.4.2.4.2	Visual & functional
121	Electrical system; malfunction or damage *components, lights (includes wiring and instrumentation)		1.0%	3.4.2.5	Visual & functional
122	Controls, electronic, hydraulic and mechanical; adjustments, malfunction or damage		1.0%	3.4.2.5.7	Visual & functional
123	Installation or assembly of subsystems; improper or incomplete		1.0%	3.4.2.6	Functional
124	Safety Chains, intervehicular hose, electrical cables, tubing wiring and ground strap; improper lengths and/or routing; component damage; insecure fastenings		1.0%	3.4	Visual & functional
125	Lunette eye; casting defects, size, improper application of welded hard coats, cracks		1.0%	3.4	Visual
126	Brakes or chassis; malfunction, non-conformance		1.0%	3.4.2.7.1	Functional

NOTES:

*Filament failures are not to be classified as major or minor defects unless attributable to wiring defects. All filament failures must be corrected prior to acceptance.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63303A(AR)

PARAGRAPH	TITLE		SHEET 4 OF 8		DRAWING NUMBER
4.5.4.1	Dispenser, Mine, Ground Vehicle: M128				9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
127	Leveling jacks; malfunction, binding or incomplete		1.0%	3.4.2.7.2	Visual & functional
128	Stowed equipment; malfunction		1.0%	3.4.2.8.1	Visual & functional
129	Preparation (lubrication and fuel); inadequate or improper for seasonal temperature range		1.0%	3.5.1.1	Visual
130	Towing speed (highway); nonconformance		1.0%	3.5.1.6	Functional
131	Trailing ability; nonconformance		1.0%	3.5.1.7	Functional
132	Condition after run (suspension system, tires and wheels, brake system); damage, improper clearance or alignment, welding defects, bolt and nut torque, seep (See 6.9.4) and loose bearings		1.0%	3.5.1.8	Visual & functional
133	Paint; not as specified, missing, or color improper		1.0%	3.6.1	Visual
134	Marking; missing or improper color		1.0%	3.6.2	Visual
135	Identification and data plates; improper installation or damage		1.0%	3.6.3	Visual & functional
Minor					
201	Material; deteriorated or damaged		2.5%	3.3	Visual
202	Optional equipment; improper assembly, installation or clearance		2.5%	3.3.1	Visual & functional

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63303A(AR)

PARAGRAPH 4.5.4.1	TITLE Dispenser, Mine, Ground Vehicle: M128		SHEET 5 OF 8		DRAWING NUMBER 9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
203	Repair parts; improper		2.5%	3.3.2	Visual & functional
204	Mine guides, launcher and magazine; improper assembly or installation		2.5%	3.4.2.1.2	Visual & functional
205	Fasteners; damaged		2.5%	3.4	Visual & functional
206	Welding repairs; slag, undercut, splatter and porosity		2.5%	3.4.1.1	Visual
207	Structural and welding; supports and brackets insecure		2.5%	3.4.1.1	Visual & functional
208	Seals; improper assembly or installation		2.5%	3.4.1.3	Visual
209	Doors, grilles, panels, ducts, storage brackets, boxes, racks and stops; improper assembly or installation		2.5%	3.4	Visual & functional
210	Drive assembly, magazine; improper assembly or installation		2.5%	3.4.2.1.1	Visual & functional
211	Mine guides, launcher and magazines; defective weldment assembly or clearance		2.5%	3.4.2.1.2	Visual & functional
212	Launcher wheel; improper assembly or installation		2.5%	3.4.2.1.3	Visual & functional

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63303A(AR)

PARAGRAPH	TITLE		SHEET 6 OF 8		DRAWING NUMBER
4.5.4.1	Dispenser, Mine, Ground Vehicle: M128				9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
213	Launcher tire; improper assembly or installation		2.5%	3.4.2.1.4	Visual & functional
214	Coolant heater; improper assembly or installation		2.5%	3.4.2.2.1	Visual & functional
215	Power plant; improper assembly or installation		2.5%	3.4.2.2.3	Visual & functional
216	Cooling system; improper assembly or installation		2.5%	3.4.2.2.3.1	Visual & functional
217	Fuel system (components); improper assembly installation or clearance		2.5%	3.4.2.3	Visual & functional
218	Fuel tank gages; improper assembly of installation		2.5%	3.4.2.3.1.1	Visual & functional
219	Fuel lines; improper assembly or installation		2.5%	3.4.2.3.2	Visual & functional
220	Fuel, lubricants, and coolants; contaminated		2.5%	3.4.2.3.3	Visual & functional
221	Hydraulic System; improper assembly or installation		2.5%	3.4.2.4	Visual & functional
222	Hydraulic reservoir and lines; improper assembly or installation		2.5%	3.4.2.4.1 3.4.2.4.2	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63303A(AR)

PARAGRAPH 4.5.4.1	TITLE Dispenser, Mine, Ground Vehicle: M128		SHEET 7 OF 8		DRAWING NUMBER 9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
223	Electrical system components, lights (includes wiring and instrumentation); improper assembly or installation, circuit identification, clearance or protection		2.5%	3.4.2.5	Visual & functional
224	Controls, electronic, hydraulic and mechanical adjustments; improper assembly, installation, circuit identification, clearance or protection		2.5%	3.4.2.5.7	Visual & functional
225	Brakes or chassis; improper assembly or installation		2.5%	3.4.2.7.1	Functional
226	Leveling jacks; improper assembly or installation		2.5%	3.4.2.7.2	Visual & functional
227	Stowed equipment; defective weldment, improper assembly or installation		2.5%	3.4.2.8	Visual & functional
228	Preparation (lubrication and fuel); lubrication improper, fittings missing, defective or improperly installed		2.5%	3.5.1.1	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VII. Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-D-63303A(AR)

PARAGRAPH	TITLE		SHEET 8 OF 8		DRAWING NUMBER
4.5.4.1	Dispenser, Mine, Ground Vehicle: M128				9289847
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
229	Condition after run (suspension system tires wheels and brake system); improper installation or assembly		2.5%	3.5.1.8	Visual
230	Paint; improper coverage, application or materials		2.5%	3.6.1	Visual
231	Marking; improper location or size		2.5%	3.6.2	Visual
232	Identification and data plates; incorrect data, size or location		2.5%	3.6.3	Visual
233	Workmanship; not as specified		4.0%	3.8	Visual & functional

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VIII

CLASSIFICATION AND LOCATION
OF
INSPECTIONS AND TESTS

TITLE	REQUIREMENT PARAGRAPH	FIRST ARTICLE INSPECTION (Gov't. Proving Ground (GPG))	INITIAL PRODUCTION INSPECTION (Gov't. Proving Ground (GPG))	ACCEPTANCE TEST (PLACE OF MFG.)	COMPARISION TEST (GPG)
First Article Model	3.1	4.3			
Initial Production Dispenser	3.2				
500 Mile Test	3.2.1	4.4.3	4.4.3		4.4.3
Break-In-Run Test	3.5.1	4.5.2	4.5.2	4.5.2	4.5.2
Acceptance Test	3.4			4.6.2	
Seals	3.4.1.3	4.6.2.2	4.6.2.2	4.6.2.2	4.6.2.2
Launcher Tire	3.4.2.1.4	4.6.2.3	4.6.2.3	4.6.2.3	4.6.2.3
Engine	3.4.2.2.3	4.6.2.4	4.6.2.4	4.6.2.4	4.6.2.4
Fuel System	3.4.2.3	4.6.2.5	4.6.2.5	4.6.2.5	4.6.2.5
Fuel Tanks	3.4.2.3.1	4.6.2.5.2	4.6.2.5.2	4.6.2.5.2	4.6.2.5.2
Fuel Lines	3.4.2.3.2	4.6.2.5.1	4.6.2.5.1	4.6.2.5.1	4.6.2.5.1
Hydraulic System	3.4.2.4.1	4.6.2.6.1	4.6.2.6.1	4.6.2.6.1	4.6.2.6.1
Water Content of Hydraulic Fluid	3.4.2.4.1		4.6.2.6.1.1		4.6.2.6.1.1
Particulate Containment	3.4.2.4.1		4.6.2.6.1.2		4.6.2.6.1.2
Hydraulic Reservior & Line Leakage	3.4.2.4.1.1 3.4.2.4.2	4.6.2.6.2	4.6.2.6.2	4.6.2.6.2	4.6.2.6.2
Magazine Servo Relief Pressure	3.4.2.4.3	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3
Pump Inlet Pressure	3.4.2.4.4	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3
Launcher Hydraulic Relief Value Setting	3.4.2.4.5	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3
Magazine & Oscillator Loop Relief Value Setting	3.4.2.4.6	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3
Case Drain Line Pressure	3.4.2.4.7	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3	4.6.2.6.3
Voltage Generating System (Alternator)	3.4.2.5.1	4.6.2.7.1	4.6.2.7.1	4.6.2.7.1	4.6.2.7.1
Electrical Connections	3.4.2.5.2	4.6.2.7.2	4.6.2.7.2	4.6.2.7.2	4.6.2.7.2
Built-In-Test-Equipment	3.4.2.5.5	4.6.2.7.3	4.6.2.7.3	4.6.2.7.3	4.6.2.7.3
Transmitter Assembly Power Supply Levels	3.4.2.5.6	4.6.2.7.4	4.6.2.7.4	4.6.2.7.4	4.6.2.7.4

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

TITLE	REQUIREMENT PARAGRAPH	FIRST ARTICLE INSPECTION	INITIAL PRODUCTION INSPECTION (GPG)	ACCEPTANCE TEST (PLACE OF MFG.)	COMPARISION TEST (GPG)
Controls	3.4.2.5.7	4.6.2.7.5	4.6.2.7.5	4.6.2.7.5	4.6.2.7.5
Control Panel Malfunction Warning & Automatic Shut-down System	3.4.2.5.7.1	4.6.2.7.5.1	4.6.2.7.5.1	4.6.2.7.5.1	4.6.2.7.5.1
Lights & Accessories	3.4.2.5.8	4.6.2.7.6	4.6.2.7.6	4.6.2.7.6	4.6.2.7.6
Circuit Card Assemblies	3.4.2.5.9	4.6.2.7.7	4.6.2.7.7	4.6.2.7.7	4.6.2.7.7
Adjustment Mechanisms	3.4.2.6	4.6.2.8.1	4.6.2.8.1	4.6.2.8.1	4.6.2.8.1
Brake Adjustment	3.4.2.7.1	4.6.2.9.1	4.6.2.9.1	4.6.2.9.1	4.6.2.9.1
Leveling Jacks	3.4.2.7.2	4.6.2.9.2	4.6.2.9.2	4.6.2.9.2	4.6.2.9.2
Painting	3.6.1	4.6.2.10.1	4.6.2.10.1	4.6.2.10.1	4.6.2.10.1
Marking	3.6.2	4.6.2.10.2	4.6.2.10.2	4.6.2.10.2	4.6.2.10.2
Instructions & Data Plates	3.6.3	4.6.2.10.3	4.6.2.10.3	4.6.2.10.3	4.6.2.10.3
Servicing & Adjustment	3.7	4.6.2.11	4.6.2.11	4.6.2.11	4.6.2.11
Operational Tests	3.5.2	4.6.2.13	4.6.2.13	4.6.2.13	4.6.2.13
Loading	3.5.2.2	4.6.2.13.2	4.6.2.13.2	4.6.2.13.2	4.6.2.13.2
Magazine Reel Rate	3.5.2.3	4.6.2.13.3	4.6.2.13.3	4.6.2.13.3	4.6.2.13.3
Launcher Sweep Rate	3.5.2.4	4.6.2.13.4	4.6.2.13.4	4.6.2.13.4	4.6.2.13.4
Launcher Oscillation Angle, Full Sweep	3.5.2.5	4.6.2.13.5	4.6.2.13.5	4.6.2.13.5	4.6.2.13.5
Launch Wheel Speed	3.5.2.6	4.6.2.13.6	4.6.2.13.6	4.6.2.13.6	4.6.2.13.6
Launch Range	3.5.2.7	4.6.2.13.7	4.6.2.13.7	4.6.2.13.7	4.6.2.13.7
Pattern Width & Launcher Alignment	3.5.2.8	4.6.2.13.8	4.6.2.13.8	4.6.2.13.8	4.6.2.13.8
Automatic Shutdown Systems	3.5.2.9	4.6.2.13.9	4.6.2.13.9	4.6.2.13.9	4.6.2.13.9
Pattern Selections	3.5.2.10	4.6.2.13.10	4.6.2.13.10	4.6.2.13.10	4.6.2.13.10
Downloading	3.5.2.11	4.6.2.13.11	4.6.2.13.11	4.6.2.13.11	4.6.2.13.11
Stowed Equipment	3.4.2.8.1	4.6.3	4.6.3		4.6.3
Dispenser Functioning	3.5.3				4.6.4
Density and Pattern Selections	3.5.3.1.2 3.5.3.1.3	4.6.4.2.1	4.6.4.2.1		4.6.4.2.1
Environmental	3.5.4	4.6.4.3			4.6.4.3
Examination for Defects		4.5.4	4.5.4	4.5.4	4.5.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.6 Classification of tests.

a. Acceptance tests. (See 4.6.2)

b. Comparison tests (CT). (See 4.6.4)

c. Final acceptance. (See 4.6.5)

4.6.1 Test conditions.

4.6.1.1 Preparation for test. All dispensers submitted for test shall contain all specified components and shall be completely assembled and properly prepared for operation. The dispenser, including all components, shall be correctly adjusted, lubricated, and serviced for use in the ambient temperature at the place of the test; and all equipment which has been ordered shall be mounted for immediate operation. Fuel and fluid tanks shall be full unless otherwise specified for a particular test. The dispenser shall operate as specified herein, without maintenance other than the recommended maintenance in accordance with a maintenance schedule prepared and submitted by the supplier prior to test.

a. Towing equipment required for the tests specified herein but not included as Government-loaned equipment, shall be furnished by the supplier.

b. Practice mines shall be furnished by the Government unless otherwise specified in the procurement documents (see 6.2).

c. The dispenser shall be checked prior to and during the tests to determine the following:

(1) Insure that coolant and lubrication systems are full.

(2) Check that fuel tank and hydraulic reservoir are maintained between full and half-full level throughout these tests.

4.6.1.2 Test observations. Throughout all tests specified herein, the dispenser shall be closely observed for the following conditions which shall be considered cause for rejection.

a. Failure to conform to design and performance specified, herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

b. Spillage or leakage (droplets) of any liquids including coolants, fuels, hydraulic fluid, and lubricants under all operating conditions, excluding refilling hydraulic reservior and fuel tank.

c. Structural failure of any part, i.e. permanent distortion.

d. Interference between dispenser components as demonstrated by abnormal or excessive wear patterns.

e. Misalignment of parts and components.

f. Overheating of the dispenser engine or any component of the dispenser.

4.6.1.2.1 Safety hazards. Throughout all tests specified herein, the dispenser shall be closely observed for those conditions which produce safety hazards. All observed safety hazards shall be reported, and those due to departure from the dispenser design and/or specification shall be considered cause for rejection of the dispenser under test.

4.6.1.3 Data. During the tests specified herein, at least the following data, as applicable, shall be recorded at intervals not greater than fifteen (15) minutes or as otherwise indicated.

Additional data may be required and recording intervals decreased for tests of short duration or as otherwise dictated by test of objectives:

a. Time started and completed.

b. Ambient temperature and atmospheric pressure.

c. Engine speed (RPM).

d. Engine coolant temperature (from main control panel).

4.6.1.4 Dispenser Acceptance Test Failure. Unless otherwise specified herein, all tests shall be conducted on a complete dispenser. If test requirements cited herein are not met, acceptance of the dispenser shall be deferred and the contractor shall accomplish, as applicable, the following actions:

a. Conduct a failure analysis study performing a dimensional, physical, and visual examination of the components which are suspected to be the cause of failure or malfunction.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the currentversion before use.

b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.

c. Examine dispensers, partially assembled dispensers, and components (including components and subassemblies at in-process or final assembly) to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.

d. Submit the results of the failure analysis and corrective actions taken to the Government for review and approval prior to submitting a reconditioned lot or dispenser for retest.

4.6.2 Acceptance tests. To determine conformance to 3.5.2 after break-in run (see 3.5.1) each dispenser shall be examined as specified in 4.5.4 and subjected to acceptance tests specified at the place of manufacture in TABLE VIII. Except for equipment and component installation and servicing performed by the contractor as a final processing of dispensers for acceptance, dispensers shall be completely assembled. After the tests, the dispenser shall be examined for evidence of fuel or lubricant leakage, or other deficiencies.

NOTE: All acceptance tests shall be classified as major defects unless otherwise specified.

4.6.2.1 Acceptance test failure. If a dispenser fails to pass any acceptance test specified, herein, the government inspector shall stop the test until evidence has been provided by the contractor that corrective action has been taken to eliminate the cause of failure.

4.6.2.2 Seals. To determine compliance with 3.4.1.3, after testing, the bearings shall be checked for dirt contamination and lubricant leakage.

4.6.2.3 Launcher tire. To determine conformance to 3.4.2.1.4, the tire pressure shall be checked for proper inflation.

4.6.2.4 Engine. To determine conformance to 3.4.2.2.3, the engine shall be checked for proper installation and any leaking of lubricants, fuel and coolants.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

4.6.2.5 Fuel system. To determine conformance with 3.4.2.3, the fuel system (exluding injection pump and lines) shall be pressurized with filtered air at the specified pressure prior to initial fueling of the dispenser and checked for leaks at the fittings, lines and fuel tank seals. The system shall be evacuated until the specified vacuum is attained and observation shall be made for compliance with applicable requirements.

4.6.2.5.1 Fuel lines. To determine conformance to 3.4.2.3.2, the fuel lines shall be inspected for leaks. (See 6.9.2).

4.6.2.5.2 Fuel tanks. To determine conformance to 3.4.2.3.1, the fuel tanks are subjected to an air pressure/submersion test. Each tank shall be pressurized to 3 PSIG while submersed in water. Maintaining this tank pressure for one minute shall not result in evidence of leakage.

4.6.2.5.2.1 Fuel tank gages. The fuel tanks shall be filled, and subsequently drained, in one quarter tank increments while observing fuel gage for conformance with 3.4.2.3.1.1. The tanks, lines and connections shall be checked for leaks. (See 6.9.2).

4.6.2.6 Hydraulic system tests.

4.6.2.6.1 Hydraulic system. To determine conformance to 3.4.2.4.1, prior to initial operation of the hydraulic system the components shall be checked for leaks (see 4.6.2.6.2) and cleanliness.

4.6.2.6.1.1 Water content of hydraulic fluid. Extract a sample of fluid from the hydraulic reservoir and test the sample for water content in accordance with ASTM D 1796. Non-compliance with 3.4.2.4.1 shall constitute failure of this test. (See Table VIII).

4.6.2.6.1.2 Hydraulic system cleanliness. To assure cleanliness of the dispener hydraulic system, the following procedure shall be performed:

a. Install 10 micron filter elements in the hydraulic reservoir.

b. Fill the system with the appropriate hydraulic fluid (see MIL-D-63370).

c. Conduct all adjustments, break-in run, acceptance test, etc. at the contractor's plant using the 10 micron filters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

d. Prior to shipment of the Dispenser, drain system of all hydraulic fluid. Install 25 micron filters (per Dwg. 9291082, Hydraulic Reservoir Assembly) in the hydraulic reservoir. Prepare hydraulic system for shipment and storage in accordance with MIL-D-63370.

e. After the tests have been run at the contractor's plant using 10 micron filters, drain the hydraulic fluid from the system, replace the 10 micron filters with 25 micron filters (per Dwg. 9291082), and refill the system with fluid filtered through a 10 micron filter. Note: It will be necessary to flush the hydraulic system, including components, if another fluid, which is not compatible with the drained fluid, is used.

f. Perform roll-off cleanliness test through analysis of hydraulic fluid sample obtained from the suction line after the hydraulic system has been warmed up (6.9.4) and all hydraulic system components have been operated for a minimum of 20 minutes.

4.6.2.6.2 Hydraulic system leakage. To determine compliance with 3.4.2.4.2, the hydraulic system shall be wiped clean and dry. The system operated and lines checked for leaks (see 6.9.2).

4.6.2.6.3 Pressure and vacuum. Connect applicable test equipment (see 4.5.3) to respective hydraulic lines and/or test points (TP) to verify pump and valve settings. Start the engine and after warm up (see 6.9.4), read instruments for compliance with 3.4.2.4.3 through 3.4.2.4.7.

4.6.2.6.3.1 Relief pressures, inlet pressures and case drain pressures. The inlet pressure of the pumps (4), the case drain pressure of the pumps (3) and motors (2) and the relief pressures shall be measured using gauges accurate to within plus or minus five percent (5%) of full scale. The gauges selected shall have a full scale that is no more than 150 percent of pressure reading required in 3.4.2.4, unless previously accepted by government inspection equipment personnel. The gauges shall be inserted into the hydraulic system at gauge test points provided by the technical design. Pressure readings shall be taken after the dispenser has been conditioned at minus $25^{o} \pm 5^{o}F$ ($-32^{o} \pm 2.78C$) for twenty-four (24) hours. Non-conformance to para. 3.4.2.4 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

4.6.2.6.3.2 Servo relief setting. Measure the servo relief setting as follows:

a. Connect a gauge, accurate to within plus or minus five percent (±5%) of full scale, to the servo inlet port. The full scale of the gauge selected shall not exceed 150 percent of the required servo relief setting (see para. 3.4.2.4).

b. Plug the servo outlet port.

c. Run the dispenser at maximum governed speed and record the servo relief pressure.

d. This test shall be conducted when the hydraulic system is warmed up, as defined in 6.9.4.

e. Non-conformance to 3.4.2.4 shall constitute failure of this test.

4.6.2.7 Electrical system tests.

4.6.2.7.1 Voltage generating system (alternator). To determine conformance with 3.4.2.5.1, the generator voltage shall be checked for functional requirements.

4.6.2.7.2 Electrical connections. To determine conformance to 3.4.2.5.2 and 3.4.2.5.4 the connections shall be observed for all the applicable functional and physical requirements.

4.6.2.7.3 Built-in Test Equipment (BITE). The BITE panel checkout and malfunction detection shall be performed as follows:

4.6.2.7.3.1 BITE ALARM CONTROL PANEL SET-UP.

a. Move Switch 1 (S1) to TEST position. Close S2, S3, S4 and S5. Set S6 to UP, then push S9. Set 14 thru S20 to the left and S21 to NORMAL.

b. Turn S13 to the right. Set S22 thru S25 to the right. Move the master power switch to ON. The following lamps should come on: L28, L63, L64, L65, L66, L70, L71 and L72.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

c. Move the operator control panel (OCP) engine switch to START, - the following lamps should come on: L50, L51, L60, L67. Lamp L66 should go off. The OCP Engine Running lamp should come on.

d. Release the OCP engine switch to the FUEL-ON position. Lamp L51 should go off.

4.6.2.7.3.2 TEST OF ENGINE TEMPERATURE CIRCUITS.

a. Complete Bite Alarm Control Panel (BACP) set-up. Move S20 to the right; move S21 to WARNING. The following lamps should come on: L29 and L59. On the OCP, the malfunction lamp should come on.

b. Move S21 to SHUTDOWN; L66, L59 and L29 should come on and L67 and L60 should go off. On the OCP, the Engine Running lamp should go off.

c. Move S21 to NORMAL; L65, L66 should come on and L59, L67 should go off. On the OCP, the malfunction lamp should go off. Depress reset S9; L29, L66 should go off and L67 should come on.

d. On the OCP, move the engine switch to START; L60 and L51 should come on. On the OCP, the engine running lamp should come on. Release the OCP engine switch; L51 should go off.

4.6.2.7.3.3 TEST OF ENGINE OIL CIRCUITS.

a. Complete the BACP set-up.

b. Move S19 to the right. Move S19 to the left. Move S20 to the right. Move S19 to the right; (wait 10-15 seconds) L66, L58 and L30 should come on. L64, L67 and L60 should go off. The Engine Running lamp on the OCP should go off. The Malfunction lamp should come on.

c. Move S19 to the left. L64 should come on and L58 should go off. The Malfunction lamp on the OCP should go off.

d. Push S9. L66 and L30 should go off and L67 should come on. Move the engine switch on the OCP to START; L51 and L60 should come on. The Engine Running lamp on the OCP should come on.

e. Release the Engine switch on the OCP. L51 should go off.

4.6.2.7.3.4 TEST OF RIGHT TAPS/XMTR CIRCUITS.

a. Complete the BACP set-up. Move S15 to the right. Move S23 to the left. Move S15 to the left. Move S15 to the right. Move S15 to the left. Then move S25 to the left. L71 and L72 should go off and L32 and L68 should come on.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the currentversion before use.

b. Move S25 to the right. L71 and L72 should come on and L68 should go off.

c. Push S9; L32 should go off.

4.6.2.7.3.5 TEST OF LEFT TAPS/XMTR CIRCUITS.

a. Complete the BACP set-up. Move S14 to the right. Move S22 to the left. Move S14 to the left. Move S14 to the right. Move S14 to the left. Then move S24 to the left. L70 and L72 should go off and L68 and L31 should come on.

b. Move S24 to the right. L70 and L72 should come on and L68 should go off.

c. Push S9; L31 should go off.

4.6.2.7.3.6 TEST OF LEFT TAB CIRCUITS.

a. Complete the BACP set-up. Move S15 to the right. Move S22 to the left. Move S14 to the right. Move S14 to the left. Move S16 to the right; L61 should come on. Move S14 to the right; (wait 10 seconds) L61 should go off, L34 should come on. The Malfunction lamp on the OCP should come on.

b. Move S14 and S16 to the left. Push S9. L34 should go off; the Malfunction lamp on the OCP should go off.

4.6.2.7.3.7 TEST OF RIGHT TAB CIRCUITS.

a. Complete the BACP set-up. Move S14 to the right. Move S23 to the left. Move S15 to the right. Move S15 to the left. Move S17 to the right. L62 should come on. Then move S15 to the right (wait 10 seconds). L62 should go off, L35 should come on. The Malfunction lamp on the OCP should come on.

b. Move S15 and S17 to the left. Push S9. L35 should go off; the Malfunction lamp on the OCP should go off.

4.6.2.7.3.8 TEST OF RIGHT MAGAZINE BYPASS CIRCUITS.

a. Complete the BACP set-up. Move S17 to the right; L62 should come on. Then move S17 to the left; L62 should go off.

4.6.2.7.3.9 TEST OF LEFT MAGAZINE BYPASS CIRCUITS.

a. Complete the BACP set-up. Move S16 to the right; L61 should come on. Then move S16 to the left; L61 should go off.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.6.2.7.3.10 TEST OF CONTROL LOGIC AND HYDRAULIC CIRCUITS.

a. Complete the BACP set-up. Set the Pattern switch on the OCP to 1. Then set the Mode switch on the OCP to DISPENSE. L1, L4, L6, L38 and L43 should come on.

b. Move S18 to the right. L63, L67 and L60 should go off. L33, L57 and L66 should come on. The Engine Running lamp on the OCP should go off, the Malfunction lamp should come on.

c. Move S18 to the left. L63 should come on and L57 should go off. The Malfunction lamp on the OCP should go off.

d. Push S9. L33 and L66 should go off and L67 should come on.

e. Set the Mode switch on the OCP to OFF.

f. Move the Engine switch on the OCP to START. L60 and L51 should come on. The Engine Running lamp on the OCP should come on.

g. Release the Engine switch. L51 should go off.

4.6.2.7.3.11 TEST OF LEFT LOAD CIRCUITS.

a. Complete the BACP set-up. Set the Mode switch on the OCP to LOAD/UNLOAD. L39 should then come on.

b. Set the Left Magazine switch on the OCP to LOAD. L24, L44 and L74 should come on.

c. Press S26. L73 should come on.

d. Press S32. L73 should go off.

4.6.2.7.3.12 TEST OF RIGHT LOAD CIRCUITS.

a. Set the Right Magazine switch on the OCP to LOAD. L26, L47 and L82 should come on.

b. Press S27. L81 should come on. Press S33. L81 should go off.

c. Turn off Load/Unload switches and Mode Select switch on OCP.

4.6.2.7.3.13 TEST OF DISPENSE CIRCUITS.

a. Complete BACP set-up. Set Pattern Selector on OCP to 1. Set the Mode switch on the OCP to DISPENSE; L1, L4, L6, L38 and L43 should come on.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

b. Move the Launcher switch on the OCP to START. (Hold until the Launcher ready lamp comes on). L39, L52, L53, and L69 should come on. L54 and L55 should cycle ON and OFF alternately. The Launcher Ready Lamp on the OCP should be on. A click should be heard each time L54 and L55 change.

c. Release the Launcher switch. L39 should go off. L56 should come on. Set the Pattern Selector switch on the OCP to 2. L42 and L7 should come on; L43 and L6 should go off.

d. Set the Pattern Selector switch on the OCP to 3. L8 and L41 should come on; L7 and L42 should go off.

e. Set the Pattern Selector switch on the OCP to 4. L9 and L42 should come on; L8 should go off.

f. Set the Pattern Selector switch on the OCP to 5. L10 and L43 should come on; L9 and L42 should go off.

g. Set the Pattern Selector switch on the OCP to J. L43, L54, L55, L10, and L41 should go off; L11 should come on.

h. Hold the Jog switch on the OCP to the left. L43, L54, L42 and L41 should come on; L11 should go off.

i. Release the Jog switch. L43, L54, L42 and L41 should go off; L11 should come on.

j. Hold the Jog switch on the OCP to the right. L43, L55 and L42 should come on; L11 should go off.

k. Release the Jog switch. L43, L55 and L42 should go off; L11 should come on.

4.6.2.7.3.14 TEST OF LEFT DENSITY CIRCUITS.

a. Complete the BACP set-up. Remove the Launcher Gate Pin. Set 200 on the left mine counter. On the OCP set the Pattern Selector switch to 1.

b. Set the Mode switch on the OCP to DISPENSE. L1, L4, L6, L38 and L43 should come on.

c. Set the Left Density switch on the OCP to .001. Hold the Launcher switch to START. L52, L53, L69 and L39 should come on. L54 and L55 should cycle on and off alternately. A click should be heard each time L54 and L55 change. The Launcher Ready lamp on the OCP should come on.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

d. Release the Launcher switch. L39 should go off; L77, L79 and L56 should come on.

e. Set the Left Magazine switch on the OCP to FIRE. L45, L46, L12 and L2 should come on. Depress Dispenser Countdown push button S32 when run lamp L73 comes on. Each blink of L87 should reduce by one the number on the OCP counter. The speed will increase with the density.

f. Set the Left Magazine Density switch to .005. L87 should blink with each reduction of the count on the OCP. L44 and L13 should come on; L45 and L12 should go off.

g. Set the Left Magazine Density switch to .007. L87 should blink with each reduction of the count on the OCP. L46 and L14 should come on; L44 and L13 should go off.

h. Set the Left Magazine Density switch to .01. L45, L44 and L15 should come on; L46 and L14 should go off.

i. Set the Left Magazine Density switch to .025. L44 and L15 should go off. L16 should come on.

j. Set the Left Magazine Density switch to MAX. L87 should stay lit constantly; L44, L17 and L78 should come on and L45 should go off.

k. Replace Launcher Gate Pin.

4.6.2.7.3.15 TEST OF RIGHT DENSITY CIRCUITS.

a. Complete the BACP set-up. Remove the Launcher Gate Pin. Set 200 on the right mine counter. Set the Pattern Selector switch on the OCP to 5. Set the Mode switch to DISPENSE. L40, L41, L1, L4, L10 and L38 should come on.

b. Set the OCP Right Density switch to .001. Hold the Launcher switch to start, (Hold until the OCP Launcher Ready lamp lights). L39, L52, L53 and L69 should come on; L54 and L55 should cycle on and off alternately. A click should be heard each time L54 and L55 change. The Launcher Ready lamp on the OCP should come on.

c. Release the Launcher switch. L39 should go off; L77, L56 and L79 should come on.

d. Set the Right Magazine switch on the OCP to FIRE. L48, L49, L18 and L3 should come on. Depress Dispenser countdown button S33 when Run lamp L81 comes on. Each blink of L91 should reduce by one, the number of the OCP mine counter. The speed will increase with density.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the currentversion before use.

e. Set the Right Magazine switch to .005. L91 should blink with each reduction of the count on the OCP. L19 and L49 should come on; L18 and L48 should go off.

f. Set the Right Magazine Density switch to .007. L19 and L47 should go off; L20 should come on.

g. Set the Right Magazine Density switch to .01. L47, L48 and L21 should come on; L20 and L49 should go off.

h. Set the Right Magazine Density switch to .025. L47 and L21 should go off; L22 should come on.

i. Set the Right Magazine Density switch to MAX. L91 should stay on constantly. L47, L23 and L80 should come on; L48 and L22 should go off.

j. Replace Launcher Gate Pin.

4.6.2.7.3.16 TEST OF LEFT JAMMED MINE CIRCUITS.

a. Complete the BACP set up. Hold S11 to the left. L36 and L37 should come on. The Malfunction lamp on the OCP should come on.

b. Release S11.

c. Press "Reset" S9. L36 and L37 should go off. Hold S12 to the left; hold S11 to the left. Release S11, then release S12. L36 and L37 should not come on. The Malfunction lamp on the OCP should not come on.

d. Press S9.

4.6.2.7.3.17 TEST OF RIGHT JAMMED MINE CIRCUITS.

a. Complete the BACP set-up. Hold S11 to the right. L36 and L37 should come on. The Malfunction lamp on the OCP should come on.

b. Release S11.

c. Press "Reset" S9. L36 and L37 should go off. Hold S12 to the right; hold S11 to the right. Release S11, then release S12. L36 and L37 should not come on. The Malfunction lamp should not come on.

d. Press S9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.6.2.7.3.18 TEST OF THE LEFT UNLOAD CIRCUIT.

a. Complete the BACP set-up. Set the Mode Select switch on the OCP to LOAD/UNLOAD. L39 should come on. Set the Left Magazine switch to UNLOAD. L25, L45, L73, L75 and L76 should come on.

b. Set the Left Magazine switch on the OCP to OFF.

4.6.2.7.3.19 TEST OF THE RIGHT UNLOAD CIRCUIT.

a. Complete the BACP set-up. Set the Mode Select switch on the OCP to LOAD/UNLOAD. L39 should come on. Set the Right Magazine switch to UNLOAD. L48, L81, L83, L84 and L27 should come on.

b. Set the Right Magazine switch on the OCP to OFF.

4.6.2.7.3.20 TEST OF THE SELF DESTRUCT TIME LONG CIRCUIT.

a. Complete the BACP set-up. Set S14, S15, S22, S23, S24 and S25 to the Left. L70, L71 and L72 should go off; L31, L32 and L68 should come on. Set OCP dispense sequence to Pattern #3. Hold the Self Destruct Time switch on the OCP to LONG. L1, L5, L8, L38, L40 and L41 should come on; L4 should go off.

b. Release the Self Destruct Time switch. The switch should return to NORMAL. L5 and L40 should go off. L4 should come on.

c. Set S24 to the right. L70 should come on.

d. Hold the Self Destruct Time switch on the OCP to LONG. Release the Self Destruct Time switch. The switch should remain in the LONG position.

e. Set S25 to the right. L71 and L72 should come on.

f. Set S24 to the left. L70 and L72 should go off; L68 should come on. L4 should come on.

g. Set S25 to the left. L71 should go off. The Self Destruct Time switch on the OCP should return to NORMAL. L5 and L40 should go off.

h. L31 and L32 should be on.

i. Set S24 and S25 to the right. L68 should go off; L70, L71 and L72 should come on.

j. Press "Reset" S9. L31 and L32 should go off.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.6.2.7.3.21 END OF TEST.

a. Turn all switches on OCP to OFF.

b. Turn master power switch to OFF.

c. On BACP, turn Run/Test switch to RUN.

4.6.2.7.4 Transmitter assembly power supply (TAPS) levels and indicators.

a. Procedures for testing signal levels to TAPS:

(1) Disconnect power supply to TAPS.

(2) At operator's control panel set self-destruct time to NORMAL.

(3) Using certified multimeter with adequate ground to dispenser, test the power supply at connector P10 (Ref: Dwg. 9290751) and record the following:

(a) Voltage at Pin A.

(b) Voltage at Pin B.

(c) Resistance at Pin C.

(4) At operator's control panel, set self destruct time to LONG.

(5) Repeat Step 3.

NOTE: When performing this test, do not use instrument probes which can enlarge connector hole size.

b. Procedures for testing TAPS malfunction indicator lights.

(1) At operator's control panel, set self destruct time to NORMAL.

(2) Using 28V power supply at connector P10 (Ref: Dwg. 9290751) apply 28 $\pm$ 0.3V to Pin D.

(3) Observe and record the state of the TAPS right fail malfunction light.

(4) Using 28V power supply at connector P10, apply 28 $\pm$ 0.3V to Pin E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(5) Observe and record the state of the TAPS left fail malfunction indicator light.

(6) Remove 28 ± 0.3V power supply from connector P10.

(7) Observe and record the states of the right and left TAPS fail malfunction indicator lights.

(8) Reconnect all electrical connections to the proper configuration.

The data shall be observed for compliance with requirements of 3.4.2.5.6.

4.6.2.7.5 Controls. To determine conformance with 3.4.2.5.7, all controls shall be operated, adjusted, and checked for functional requirements.

4.6.2.7.5.1 Control panel malfunction warning and automatic shut-down system. With the engine running, check function as follows:

a. Coolant overheat. Remove coolant sensor and immerse in radiator coolant as used in the system and observe malfunction lamp on operator control panel for compliance with requirement of 3.4.2.5.7.1(a).

b. Engine oil pressure. Insert sensor in external adjustable pressure source and observe pressure gage on main panel and malfunction light on operator control panel for compliance with requirement of 3.4.2.5.7.1(b).

c. Low fluid level in reservoir. Drain sufficient hydraulic fluid from reservoir so level is below sensor and attempt to start engine. Observe red warning light on operator control panel for compliance with requirements of 3.4.2.5.7.1(c). Refill reservoir and again observe warning light on operator control panel for no light.

d. TAPS malfunction. Disconnect right TAPS coil and observe red warning light on "BITE" panel and attempt to run right magazine in launch mode for compliance with the requirements of 3.4.2.5.7.1(d). Reconnect right TAPS coil, observe red warning light on operator control panel and right TAPS light on BITE panel. Repeat for left TAPS coil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

e. Runaway magazine shutdown. Unload all mines. Disconnect wiring harness connector to the right infeed conveyor TAB sensor and attempt to launch mines from the right magazine. Return "FIRE" switch to the "OFF" position and observe for compliance with 3.4.2.5.7.1.e. Reconnect TAB sensor. With the "FIRE" switch in the "OFF" position, verify that the magazine will not "creep" by actuating the right servo manual override in each direction (forward and reverse), when in the dispense and load/unload modes.

NOTE:

1. Prior to, during and after 4.6.2.7.5, activate "BITE" lamp test switch to insure all lights operational.

2. To clear red warning lights on "BITE" panel after detecting "faults", push reset button on "BITE" panel.

3. The original sensors on the dispenser should be used for these tests. If not possible due to extreme environmental conditions, extra sensors may be temporarily substituted provided they experience the same environmental conditioning as the dispenser under test and are installed in place of the original sensors as soon as conditions permit.

4.6.2.7.6 Lights. To determine conformance to 3.4.2.5.8, all lights shall be operated during and after the break-in run, throughout all stages of operation, and checked for functional requirements.

4.6.2.7.7 Circuit card assemblies (CCA). To determine conformance to 3.4.2.5.9, the CCA(s) shall be inspected for compliance with the applicable requirements.

4.6.2.8 Dispenser and systems assembly and adjustments.

4.6.2.8.1 Adjustment mechanism checks. To determine compliance with 3.4.2.6, all adjustment mechanisms requiring adjustment shall be checked for proper adjustment.

4.6.2.9 Chassis.

4.6.2.9.1 Brake adjustment check. To determine conformance to 3.4.2.7.1, the brakes shall be checked for trapped air and for proper adjustments.

4.6.2.9.2 Leveling jacks. To determine conformance to 3.4.2.7.2, the dispenser shall be fully loaded as specified (See 3.5.2.2) and shall be observed for compliance with the applicable functional and physical requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the current version before use.

4.6.2.10 Painting, marking and data plates.

4.6.2.10.1 Painting. To determine conformance to 3.6.1, preparation and painting shall be observed during and after application for compliance with requirements as specified.

4.6.2.10.2 Marking. To determine conformance to 3.6.2, the dispenser markings will be observed for compliance, installation and location as specified.

4.6.2.10.3 Instruction and data plates. To determine conformance to 3.6.3, all data plates shall be observed for compliance, installation and location as specified.

4.6.2.11 Servicing and adjustment. To determine conformance to 3.7, the dispensers shall be observed for compliance with the applicable requirements.

4.6.2.12 Workmanship. To determine conformance to 3.8, workmanship shall be observed for compliance with the specified requirements.

4.6.2.13 Operational tests. When specified in the contract (see 6.2) or when the contractor deems it more advantageous, a Government approved computer aided test and inspection equipment may be used in additon to or instead of methods specified herein.

4.6.2.13.1 Preparation. Set up vehicle for mine dispensing while stationary as follows:

a. Jack up dispenser wheel which is connected to encoder.

b. Attach variable speed drive motor and revolution counter to wheel.

c. Mark with high visibility paint the oscillation pattern angles on oscillator base and pointer on launcher.

d. Attach certified tachometer to launcher wheel and record wheel speed.

e. Conduct preoperational check, start engine and allow it warm up (See 6.9.4).

4.6.2.13.2 Loading. After dispenser warm-up, set controls as follows:

a. Mode selector switch in LOAD.

b. Left magazine switch in LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

c. Right magazine switch in LOAD.

Load 300 practice mines into each magazine marking one set of 300 to differentiate from the other 300. Loading shall be in compliance with 3.5.2.2.

4.6.2.13.3 Magazine reel rates test. While loading, check magazine reels for compliance with the requirements of 3.5.2.3. While downloading, check magazine reels for compliance with the requirements of 3.5.2.3.

4.6.2.13.4 Launcher sweep rate test. During dispenser warm-up, check launch sweep rate as follows:

a. Mode selector switch in DISPENSE.

b. Left magazine switch in OFF.

c. Right magazine switch in OFF.

d. Launcher in READY.

e. Pattern selector switch in 3.

The rate shall be observed for compliance with 3.5.2.4 and shall be the average of ten (10) cycles (after a minimum of fifteen (15) cycles).

4.6.2.13.5 Launcher oscillation angle, full sweep test. Test the oscillation sweep as follows:

a. Mode selector switch in DISPENSE.

b. Pattern selector switch in 3.

Without dispensing practice mines, perform test in accordance with paragraph 3.5.2.5. Visual observation of travel of launcher pointer with respect to the angle markings on oscillator base is acceptable as a minimum.

4.6.2.13.6 Launcher wheel speed test. After loading, check wheel speed as follows:

a. Mode selector switch in DISPENSE.

b. Left magazine switch in OFF.

c. Right magazine switch in OFF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

d. Launcher switch in READY.

e. Pattern selector switch in JOG-CENTER.

Check wheel speed setting in accordance with the requirements of 3.5.2.6.

Check wheel speed under load as follows:

a. Mode selector switch in DISPENSE.

b. Density selector seitch in MAXIMUM.

c. Pattern selector switch in JOG-CENTER.

Launch eighty (80) practice mines from each magazine simultaneously and check wheel speed for compliance with applicable requirement.

4.6.2.13.7 Launch range test. Test launch range as follows:

a. Mode selector switch in DISPENSE.

b. Density selector switch MAX.

c. Pattern selector switch in JOG-CENTER.

Launch ten (10) practice mines from each magazine. The distance for mines launched, shall be observed for compliance with 3.5.2.7 when using a tape measure.

4.6.2.13.8 Pattern width and launcher alignment test. Test for pattern width as follows:

a. Mode switch in DISPENSE.

b. Density selector switch in MAX.

c. Pattern selector in jog mode.

d. Position launcher at the left reversal point of the pattern 3 travel (See 3.5.2.10).

e. With variable speed motor driving dispenser wheel at a simulated 4 to 6 mph (6.4 to 9.7 kmph), launch twenty-five (25) practice mines from each magazine.

f. Position launcher at the right reversal point of the pattern 3 travel (See 3.5.2.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

g. With variable speed motor driving dispenser wheel at a simulated 4 to 6 mph (6.4 to 9.7 kmph), launch twenty-five (25) practice mines from each magazine.

The pattern width shall be observed for compliance with 3.5.2.8.

4.6.2.13.9 Automatic shut-down systems test. (Critical defect)

4.6.2.13.9.1 Jam arrest. Check launcher brake operation as follows:

a. Mode selector switch in DISPENSE.

b. Density selector switch in MAX.

c. Pattern selector switch in JOG-CENTER.

Launch fifty (50) practice mines simultaneously from each magazine and verify sensors are operational. Disconnect output sensor and launch six (6) practice mines, one at a time, three (3) from each magazine. Record the time required to stop launch wheel. Continue running dispenser engine for thirty (30) minutes, then launch four (4) additional mines, two (2) from each magazine with output sensors disconnected, recording time necessary to stall launcher wheel. The time for braking action shall be observed for compliance with 3.5.2.9.1.

4.6.2.13.9.2 Magazine shut-down. Start dispenser and operate magazines in FIRE mode. Let launcher RPM decay to 790 by decreasing engine throttle. Observe magazine for compliance with 3.5.2.9.2. In addition, launcher up to speed light on OCP shall be off when magazines stop.

4.6.2.13.10 Pattern selections test. Test for pattern selections as follows:

a. Mode selector switch in DISPENSE.

b. Density and pattern selector switches set for each dispersion configuration in "D", "E", and "F" groups as required. (See 3.5.3.1.2).

c. With variable speed motor (see paragraph 4.6.2.13.1) driving dispenser wheel at a simulated 2.5 mph (4 kmph) max. launch twenty-five (25) practice mines from each magazine as specified in (b) above for each pattern selection in the groups, for compliance with 3.5.2.10.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.

NOTE: In each of the tests specified in 4.6.2.13.8 and 4.6.2.13.10, count the dispenser wheel revolutions required to launch twenty-five (25) mines. This will provide the equivalent pattern length which combined with pattern width will provide the necessary data to calculate mine density for each of the density selector positions for static variation.

4.6.2.13.11 Downloading. Test downloading as follows:

a. Mode selector switch in OFF.

b. Left magazine selector switch in UNLOAD.

c. Right magazine selector switch in UNLOAD.

Download remaining mines in both magazines and observe for compliance with 3.5.2.11.

4.6.3 Stowed equipment. To determine conformance to 3.4.2.8.1, all manufacturer and depot installed Basic Issue Items (BII) shall be stored (combat loaded) on the selected dispenser. All interior and exterior items shall fit in the spaces provided. The equipment shall be removed after the test. The BII used shall be of the latest production available to the contractor. The contractor shall be permitted to unpackage and repackage equipment used for test.

4.6.4 Comparison tests. The Government may select dispensers anytime during a production contract period and subject dispensers to any or all of the inspections and tests of TABLE VII and VIII to determine defects of a workmanship or material nature that may reduce the effectiveness of these items in the field, and compare existing quality with previous standards. All tests specified shall be conducted at Government laboratories or proving grounds designated by the contracting officer. Comparison test dispensers shall be combat loaded with all OVE stored in place. The Government may elect to conduct comparison tests of less than 500 miles.

4.6.4.1 Test failure. Failure of the selected dispenser to comply with any of the requirements specified above, or any major defects of a workmanship or materials nature occuring during or as a result of the test cycle, shall be cause for refusal to continue acceptance of dispensers by the Government until objective evidence has been provided by the manufacturer that corrective action has been taken to eliminate the cause of failure.

4.6.4.2 Mine dispersion. When specified in the contract (see 6.2) or when the testing agency deems it more advantageous, a computer aided test and inspection equipment approved by the developing agency may be used in addition to or instead of test methods specified, herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:26Z
Check the source to verify that this is the currentversion before use.

4.6.4.2.1 Density and pattern selections. With dispenser warmed up and loaded with 800 practice mines; the following density and pattern selections shall be used as a minimum.

a. Dynamic verification of Pattern and Density selection, three (3) runs.

(1) Run 1 - Pattern selector in No. 1, Density selector in 0.025 mines/sq. m.

(2) Run 2 - Pattern selector in No. 3, Density selector in 0.007 mines/sq. m.

(3) Run 3 - Pattern selector in No. 4, Density selector in 0.001 mines/sq. m.

Vehicle speed not to exceed maximum specified speed for each operation. Vehicle speed "TOO FAST" light may be used if proof of calibration is provided.

On the test area (see 3.5.3.1.1), for each run launch mines continuously from both magazines for a minimum of 328 feet (100m).

Resulting data shall be observed for compliance with the applicable requirements of 3.5.3.1.2 and 3.5.3.1.3.

b. Dynamic verification of mine spacing in jog.

(1) Mode selector switch in DISPENSE.

(2) Pattern selector swith in JOG.

Vehicle speed not to exceed maximum speed for each operation. Vehicle speed unacceptable light on operator's control box may be used instead, if proof of calibration is provided.

On a test area (see 3.5.3.1.1), launch ten (10) practice mines from each magazine at each density setting of 0.025, 0.010, 0.007, 0.005 and 0.001, respectively. The launcher may be positioned at jog-left, jog-half-left, jog center, jog half right and jog-right respectively; complete all runs before recording mine spacing data.

Resulting data shall be observed for compliance with the applicable requirements of 3.5.3.1.4.

4.6.4.2.1.1 Density and pattern data. Data shall be collected and recorded as follows:

a. Dynamic verification of Pattern and Density selection:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(1) Vehicle speed in miles per hour.

(2) Elapsed time.

(3) Pattern setting.

(4) Density setting.

(5) No. mines launched from left magazine - actual and counter.

(6) No. mines launched from right magazine - actual and counter.

(7) Actual pattern width (meters).

(8) Actual pattern length (meters).

(9) Plot of mine pattern.

b. Dynamic verification of mine spacing in jog:

(1) Run number.

(2) Vehicle speed in miles per hour.

(3) Elapsed time in seconds.

(4) Pattern setting.

(5) Density setting.

(6) No. mines launched - actual and counter.

(7) Mine specing - meters.

(8) Plot of mines.

c. Recorder-computer input of dynamic verification of mine spacing, Density and Patterns:

(1) Vehicle Speed in miles per hour.

(2) Dispenser Engine RPM.

(3) Elapsed time in seconds.

(4) Oscillator Angle in degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(5) Launcher Wheel RPM.

(6) Left hand Magazine feed.

(7) Right hand Magazine feed.

(8) Mine separations.

4.6.4.3 Environmental test. The complete dispenser, properly serviced and equipped, shall be subjected to the temperatures specified, and observed for compliance with operational requirements.

4.6.4.3.1 Thermocouple location. The dispenser shall have not less than the following thermocouples installed prior to the environmental temperature test:

a. Engine coolant temperature: One (1) in the engine-cooling-jacket discharge pipe and one (1) in the coolant inlet to the engine.

b. Fuel temperature: In the tank.

c. Battery temperature: In the two center cells of each battery between the plates and at mid-depth of the electrolyte.

d. Ambient temperature measured at an angle of 45 degrees and not less than three (3) feet (91 cm) from each corner of the dispenser at engine crankshaft level.

e. Engine oil gallery.

4.6.4.4.3.2 High-temperature operation. After preparation (see 4.6.2.6.3 and 4.6.4.3.1) check specific gravity of each battery and subject the dispenser to an ambient temperature of 125°F (52°C) until the temperature of the dispenser has stabilized. Once stabilized, subject the dispenser to the operational tests of 4.6.2.13 and observe for compliance with requirements of 3.4.2.2.3.1 and 3.5.2. On completing the tests, stop the engine; restart the engine after five (5) minutes and operate for ten (10) minutes with launching system OFF. Failure of the engine to start and operate within the limits of applicable engine specifications, failure of any component to function, out of specification thermocouple readings, or failure to meet test requirements shall constitute failure of the test.

4.6.4.3.3 Low temperature operation. The following test procedure shall apply and all data shall be recorded for the low temperature operation (minus 25°F, minus 32°C). The dispenser

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

shall have installed prior to the test, thermocouples as stated in 4.6.4.3.1 and temperatures shall be recorded prior to engine starting, and at fifteen (15) minute intervals during engine warm-up and cycling.

a. Prepare dispenser for operational tests (see 4.6.2.6.3).

b. Check the specific gravity of each battery to insure full charge.

c. Subject the dispenser to an ambient temperature of minus 25°F (minus 32°C) until all parts, lube oil, coolant, fuel, fluid and batteries have stabilized at the specified temperature.

d. Maintain an ambient temperature of minus 25°F (minus 32°C) throughout steps (a) through (m).

e. Begin operational tests (see 4.6.2.13).

f. Start the dispenser engine. Engine should run on diesel fuel in not more than five (5) minutes after beginning of first cranking (see 3.4.2.2 and 3.4.2.3).

g. One (1) operator wearing artic clothing, including mittens, shall perform all primary and starting operations.

h. Crank the engine using batteries that were cold soaked and stabilized at minus 25°F (minus 32°C).

i. Substitute or supplementary batteries or other electrical cranking energy shall not be used.

j. Glow plugs or other accessories working off the cranking batteries and auxiliary fluid priming systems which are permanently mounted on the dispenser and normally used in starting the engine may be used.

k. Smooth engine running without unnatural or continued control manipulation and without use of primers and priming fluids should be obtained within fifteen (15) minutes after initial starting.

l. When started, run engine fifteen (15) minutes. After completion of the fifteen (15) minutes operation, operate the engine as follows:

(1) Ten (10) minutes idling.

(2) Ten (10) minutes half throttle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(3) Five (5) minutes full throttle.

Perform the twenty-five (25) minute cycle three (3) times.

m. After engine cycling and while wearing artic clothing, continue with operational tests (see e).

n. Upon completion of the operational tests, reduce ambient temperature to minus 35°F (minus 37.2°C) and allow all parts, lube oil, coolant, fuel, fluid and batteries to stabilize at the specified temperature.

o. Activate the coolant heater and allow one (1) hour to complete heating cycle. Observe for compliance with 3.4.2.2.1.

p. Start the dispenser engine. Engine should run on diesel fuel within not more than five (5) minutes after beginning of first cranking. Immediate use of NATO slave receptacle to provide standby power is permissible if the dispenser batteries are discharged beyond engine cranking ability, for steps (n) through (p) only. Failure of the engine to start and operate within the limits of applicable engine specifications, failure of any component to function, out of specification thermocouple readings, or failure to meet specified test requirements shall constitute failure of this test.

4.6.4.3.3.1 Cold starting and operating. The dispenser shall be tested in accordance with 4.6.4.3.3. One or more of the following shall constitute failure of this test.

a. Diesel engine does not start within five (5) minutes.

b. Engine does not run smoothly within fifteen (15) minutes after starting without unnatural or continued control manipulation and without the use of primers and priming fluids.

c. Engine coolant temperature at heater inlet lower than plus 50°F (10°C) prior to engine starting, when using coolant heater.

d. Lubricating oil temperature not stabilized in the engine lubricating oil gallery within the range of 130°F (54°C) to 230°F (110.0°C) within one (1) hour after starting and remain within this range throughout the test period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

e. Coolant temperature not stabilized in the engine-cooling jacket discharge pipe within the range of 140°F (60°C), to 230°F (110°C) within one (1) hour after starting and remain within this range throughout the test period. (see 3.4.2.2.3.1).

4.6.5 Final acceptance. The contractor shall perform inspection for acceptance upon completion of all manufacturing and in-process inspection operations, prior to preservation and packing. Inspection for acceptance shall include, but not be limited to, inspection for workmanship, protective finish, missing features (missing operations), and characteristics that may have been altered or changed as a result of subsequent operations after prior inspections were completed.

5. PACKAGING

5.1 Disassembly. Each dispenser shall be disassembled to the extent that economy in packing and shipping shall be obtained, in accordance with MIL-D-63370(AR).

5.2 Preservation, packaging, packing, and marking. The dispensers, components and attachments shall be preserved, packaged, packed and marked for shipment in accordance with MIL-D-63370(AR).

6. NOTES

6.1 Intended use. Dispensers covered by this specification are intended for use by the armed forces in scattering both AT/AV and AP mines simultaneously while being towed by a standard tracked or wheeled cargo vehicle.

6.2 Ordering data. Procurement documents should specify the following:

a. Title and date of this specification.

b. List of drawings, specifications and publications not listed, herein.

c. Preproduction model if required, number and time frame required for submission (see 3.1).

d. Preproduction inspection, if different (see 3.1).

e. Location and conditions for preproduction testing (see 3.1).

f. Shipping instructions for preproduction model (see 3.1, 4.3 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

g. If computer analysis is mandatory (see 4.6.2.13 and 4.6.4.2).

h. Optional equipment required (see 3.3.1).

i. Applicable list of repair parts (see 3.3.2).

j. List OVE (see 3.4.2.8).

k. Special marking required (see 3.6.2).

l. Recondition test dispenser when required (see 4.5.2.5).

m. Listed preposition repair parts (see 4.4.3).

n. List of acceptance inspection equipment to be furnished or loaned to the contractor (see 4.5.3, 4.6.2, 4.6.4.2, 6.7 and 6.8) and responsibilities for other Government property to be furnished to the contractor.

o. Responsibilities for furnishing practice mines (see 4.5.3.1).

p. List of fuel, lubricants and coolants (see 3.4.2.3.3, 3.5.1.1, and 6.6).

q. When the Government will conduct any or all of the production model examination and tests. When the Government will conduct some but not all of the preproduction examinations and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examinations and tests shall be conducted by the contractor (see 4.4.3).

6.2.1 When dispensers are procured separately from the chassis on which they will be mounted, procurement documents should include make, model, and serial number of trailer on which the dispenser will be mounted.

6.2.2 Lubricants. The contracting officer should furnish a list of lubricants applicable to the dispenser; covered by this specification as contained in the Federal Supply Catalog, Department of Defense Section, Identification List C9100-IL, for FSC Group 91.

6.2.3 Drawings. Drawings listed in Section 2 of this specification under the heading of US Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as, Edgewood Arsenal, U.S. Army Armament Research and Development Command, (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

6.3 Preproduction model. Any changes or deviations of production dispensers from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish dispensers conforming to this specification.

6.4 Initial Production Dispenser. A initial production vehicle is one (1) of the first ten (10) vehicles produced under manufacturing methods to be used in normal production.

6.5 Government furnished property. The contracting officer shall arrange to furnish the contractor any applicable property as specified in the contract.

6.6 Submission of inspection equipment for design approvals. See 3.6.6 of MIL-W-63150. Submit designs as required to: Commander, US ARDC, ATTN: DRSMC-QAT-I (D), Dover, New Jersey 07801.

6.7 Definitions.

6.7.1 Definitions of unlisted defects, recurring major and minor defects. The Government Representative will verify that a thorough inspection of each dispenser is performed by the contractor not only for the listed characteristics, but also for any other departures from good workmanship. The Government Representative will assure that all deficiencies encountered during the inspection are enumerated on the Deficiency Sheet for the dispenser. The defects noted on the Deficiency Sheet shall contain sufficient description to enable the Government Representative and the contractor's representative to classify the deficiency in accordance with the classification of defects of the dispenser specification and definitions in MIL-STD-105. Corrective action shall be taken for all deficiencies.

6.7.1.1 Unlisted defects. All defects having no bearing on function, safety, interchangeability or life, but are considered departures from good workmanship will be noted in writing. Workmanship deficiencies falling within this category will be added to the minor classification with no increase in AQL's.

6.7.1.2 Recurring major deficiency. A major defect is recurring when the same major defect occurs more than once in the same sample or when the major defect occurs in two successive lots. A major defect may be considered recurring when the historical Inspection Records reflect such a condition. Recurring major deficiencies shall be cause for the entire lot or lots to be inspected for the recurring defect. The deficiencies shall be corrected when found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

6.7.1.3 Recurring minor deficiencies. A minor defect is recurring when the same defect occurs more than twice in the same sample or when the defect occurs in four successive lots. Recurring minor deficiencies shall be cause for the entire lot and/or lots to be inspected for those recurring defects. Correction of all deficiencies shall be accomplished prior to acceptance.

6.7.2 Fluid leaks. The following shall be used to define the classification of defects for leaks:

a. Weep: Any evidence of fluid beyond the seal.

b. Seep: Any evidence of fluid beyond the seal that does not result in formation of a droplet.

c. Droplet: Any evidence of fluid beyond the seal that results in formation of a droplet.

d. Drip: Any evidence of fluid beyond the seal where droplet forms and falls.

6.7.3 Cold start. Cold start refers to the hydraulic system, specifically to the vacuum and case drain pressures. The allowable cold start values are the maximum values which the system will see and will typically occur when the engine is first brought to full governed speed.

6.7.4 Warm up. The engine is considered to be warmed up when the thermostat opens, which nominally occurs at 180°F (82.2°C), or when the engine temperature stabilizes at some lower value. The hydraulic system is considered to be warmed up when all vacuum and case drain pressures are within the operation (See 3.4.2.4). The engine and hydraulic system should both be warmed up before dispensing mines. The oscillator (rotary actuator) is considered to be warmed up after fifteen (15) complete cycles in pattern three (3) following the accomplishment of engine and hydraulic system warm up.

6.7.5 Continuous operation. Continuous operation is the use of hydraulic powered devices (magazines, oscillator, launcher wheel) after they are warmed up.,

6.7.6 Load, combat load, payload. Useful component of live or inert ammunition and on vehicle equipment (OVE) needed to carry out a mission. Generally, for test purposes a full complement of practice mines.

6.7.7 Performance. To carry out mission operations by dispensing mines/practice mines at specified ranges, pattern and densities under specified environmental conditions on specified terrains for specified distances.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.


6.7.8 Provisioning. The Contracting Officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of dispensers. A suggested paragraph is as follows:

"Shipment of dispensers shall include repair parts, maintenance tools, operational instructions, and accessories, unless exceptions are provided elsewhere in the contract."

6.7.9 Central position. Shall be defined as the ability of the launcher to dispenser mines directly behind the line of travel when in the JOG Mode, and the launcher in center position. The impact area (when unaffected by side wind) shall be within a four (4) meter wide spread, i.e. two (2) meters to each side of the dispenser center during straight line travel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

PROFILE OF TEST TRACK
(Artificial Bump)
Figure 1

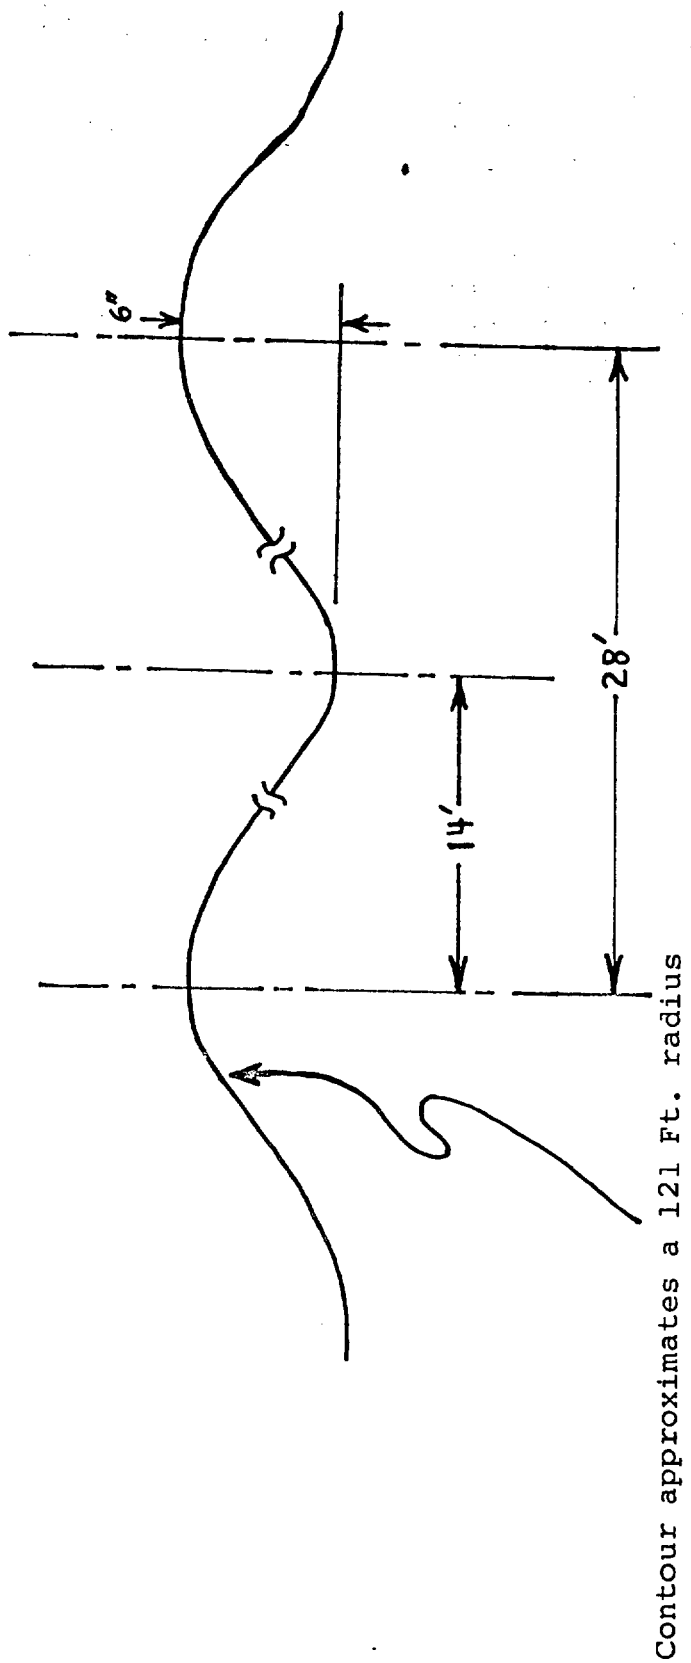

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Research &
Development Center
ATTN: DRSMC-QA
Dover, NJ 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-D-63303A (AR)	Dispenser, Mine, Ground Vehicle: M128

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:26Z
Check the source to verify that this is the current version before use.